
MINIATURE CERAMIC SMD CRYSTAL



Pb in glass (exempt per RoHS 2002/95/EC Annex (5))

RoHS Compliant



ABM3

Smaller package alternative for ABM7 series

> FEATURES:

- AT-cut fundamental or 3rd OT mode
- Suitable for RoHS reflow profile
- Tight Stability available ± 10
- Ceramic package hermetically glass sealed assures high precision and reliability.

> APPLICATIONS:

- · Cellular telephones, pagers
- Communication and test equipment
- PCMCIA and wireless applications


STANDARD SPECIFICATIONS:

| Parameters | Minimum | Typical | Maximum | Units | Notes |
|--|---|---------|---------|-------|--|
| Eraguanay Banga | 8.000 | | 54.000 | MHz | Fundamental |
| Frequency Range | 54.100 | | 80.000 | | 3 rd Overtone |
| Operation Mode | Fundamental or 3 rd Overtone | | | | |
| Operating Temperature | -10 | | +60 | °C | See options |
| Storage Temperature | -40 | | +90 | °C | |
| Frequency Tolerance @+25°C | -50 | | +50 | ppm | See options |
| Frequency Stability over the Operating Temperature (ref. to +25°C) | -50 | | +50 | ppm | See options |
| Equivalent series resistance (R1) | See table 1 below | | Ω | | |
| Shunt capacitance (C0) | | | 7 | pF | |
| Load capacitance (CL) | | 18 | | pF | Standard (See options if other than STD) |
| Drive Level | | 10 | 100 | μW | |
| Aging | -5 | | +5 | ppm | @25°C±3°C First year |
| Insulation Resistance | 500 | | | ΜΩ | @ $100 \text{Vdc} \pm 15 \text{V}$ |

Table 1 - Standard ESR

| Table 1 – Standard ESK | | | | | | | |
|------------------------|-------------|--------------------------|--|--|--|--|--|
| Frequency (MHz) | ESR(Ω) max. | Operation Mode | | | | | |
| 8.000 - 8.999 | 500 | Fundamental | | | | | |
| 9.000 - 9.999 | 200 | Fundamental | | | | | |
| 10.000 - 15.999 | 60 | Fundamental | | | | | |
| 16.000 - 54.000 | 50 | Fundamental | | | | | |
| 54.100 - 80.000 | 60 | 3 rd Overtone | | | | | |

OPTIONS AND PART IDENTIFICATION: (Left blank if standard)

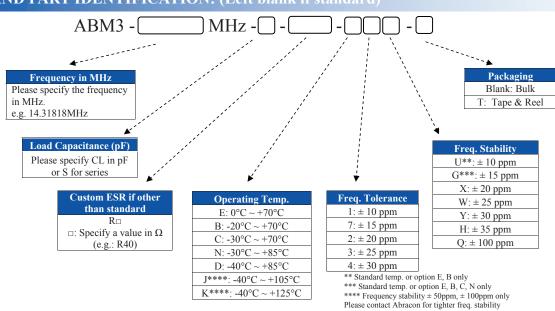





Visit www.abracon.com for Terms & Conditions of Sale Revised: 12.28.10 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

MINIATURE CERAMIC SMD CRYSTAL


ABM3

Pb in glass (exempt per RoHS 2002/95/EC Annex (5))

RoHS Compliant




OUTLINE DRAWING:

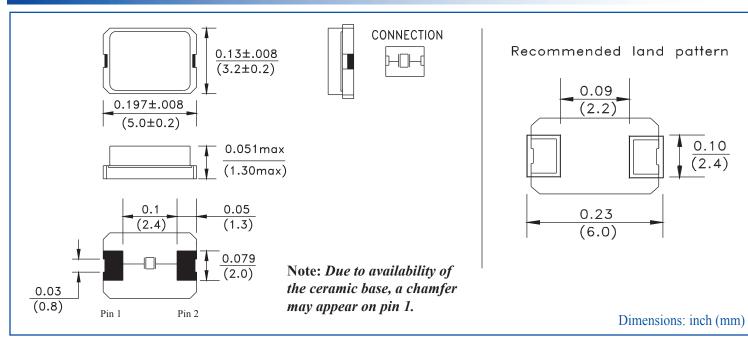

► TAPE & REEL:

> REFLOW PROFILE

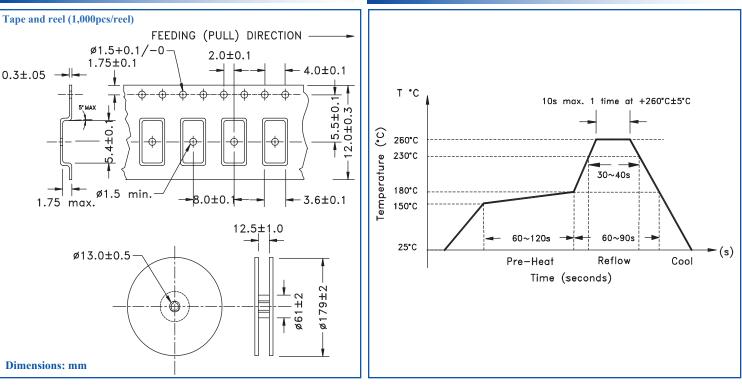



Need a test socket for the ABM3 Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, **click here. P/N: AXS-5032-02-06**

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



