

HADRONS

ELECTRICALS

Reliable Connections. Complete Safety.

ABOUT HADRONS

Hadrans Modular Switches and Circuit Boards are precision engineered using high grade flame retardant materials and advanced manufacturing technology. They ensure maximum safety, reliability and long life with elegant design for residential, commercial and industrial applications.



MATERIAL PROPOSITION

Front Cover / Rocker	Outer Plate	Base / Housing	Terminals	Springs	Screws
Polycarbonate (PC) – Fire Retardant	Polycarbonate (PC) – Fire Retardant	Polycarbonate (PC) – High Impact	Brass (CuZn) – Silver Plated	High Tensile Steel	Mild Steel – Nickel Plated



PAGE 1

MODULAR SWITCHES & CIRCUIT BOARDS

DESIGNED FOR SAFETY. BUILT FOR PERFORMANCE.



KEY FEATURES

- ✓ High conductivity silver alloy contacts
- ✓ Flame retardant & heat resistant material
- ✓ Smooth operation with soft tactile feel
- ✓ Strong terminals for secure connection
- ✓ Long life performance – 40,000+ operations
- ✓ Sleek design with elegant finish
- ✓ Easy installation & maintenance
- ✓ Available in multiple plates, colors & configurations



MODULAR SWITCH & CIRCUIT BOARD RANGE (WITH SWITCH – 6A & 16A)

6 AMP CIRCUIT BOARD (WITH SWITCH)

	2 MODULE	3 MODULE	4 MODULE	6 MODULE	8 MODULE
Rating	6A	6A	6A	6A	6A
Voltage	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz
Max. Load	1380W	1380W	1380W	1380W	1380W
Switch	1 Way	1 Way	1 Way	1 Way	1 Way
Size (mm)	86 x 86	118 x 86	146 x 86	202 x 86	258 x 86
Color	White	White	White	White	White

16 AMP CIRCUIT BOARD (WITH SWITCH)

	2 MODULE	3 MODULE	4 MODULE	6 MODULE	8 MODULE
Rating	16A	16A	16A	16A	16A
Voltage	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz	240V~ 50Hz
Max. Load	3680W	3680W	3680W	3680W	3680W
Switch	1 Way	1 Way	1 Way	1 Way	1 Way
Size (mm)	86 x 86	118 x 86	116 x 86	202 x 86	258 x 86
Color	White	White	White	White	White

Available in White, Ivory, Grey, Black & Gold Colors | Custom Icon Printing Available on Request

PAGE 2


MODULAR SWITCH TYPES (6A)

 Ideal for door bell applications	 Indicator light for power status	 Smooth speed control for fans	 For dimming lights with smooth control	 Double pole switch for extra safety	 Heavy duty switch for high load applications
--------------------------------------	--------------------------------------	-----------------------------------	--	---	--

OUTER PLATE OPTIONS – COLORS & FINISHES



PLATE CONFIGURATIONS

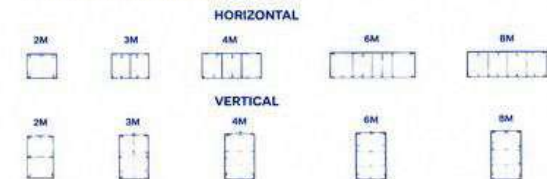

TECHNICAL SPECIFICATIONS

Parameter	Specification
Voltage Rating	240V~ 50Hz
Current Rating	6A / 16A (As per model)
Max. Load	6A – 1380W, 16A – 3680W
Contact Material	Silver Alloy
Terminal Material	Brass (CuZn) Silver Plated
Housing Material	Polycarbonate (PC) High Impact
Flammability Rating	UL 94 V-0
Operating Temperature	-10°C to +70°C
Life	40,000+ Operations
IS Standard	IS 3854:1997



PAGE 3

CONSTRUCTION DETAILS



QUALITY GATES – ASSURED PERFORMANCE

- RAW MATERIAL INSPECTION**
Incoming material checked for grade, flame retardancy & dimensions.
- IN-PROCESS QUALITY CHECK**
Online dimensional check, assembly & component verification.
- CONTACT & TERMINAL TESTING**
Silver contact test, terminal grip & torque strength verification.
- ELECTRICAL SAFETY TEST**
Hi-Pot Test, Insulation Resistance & Continuity Test.
- FUNCTIONAL TESTING**
100% operational test for smooth mechanism & performance.
- FINAL VISUAL INSPECTION**
Surface finish, color consistency, printing & overall aesthetics.
- PACKAGING & DISPATCH CHECK**
Final packing verification & secure packaging for safe delivery.

IDEAL APPLICATIONS



CERTIFICATIONS & COMPLIANCE



PACKAGING

- Individual Polybag Packing
- Inner Box Packing
- Master Carton Packing
- Custom Branding Available



PAGE 4