



HADRONS

— ELECTRICALS —

Reliable Connections. Complete Safety.

ELECTRICAL EXTENSION BOARDS

POWERING EVERY CONNECTION, EVERYDAY.



SAFE &
RELIABLE



PREMIUM
QUALITY



FIRE
RETARDANT



STURDY &
DURABLE



CHILD
PROTECTION



MADE IN INDIA
TRUSTED GLOBALLY

ABOUT HADRONS EXTENSION BOARDS

Hadrans Extension Boards are designed with a perfect blend of safety, durability and performance. Built using high quality materials and advanced manufacturing processes, our boards ensure reliable power supply for homes, offices and industrial use.



IS 694:2010
Compliant



High Grade
Materials



100% Tested
for Safety



Modern
Design



Long Life
Performance



KEY FEATURES

- ✓ High conductivity brass contacts
- ✓ High impact, flame retardant & UV stabilized body
- ✓ Shuttered sockets for child safety
- ✓ Heavy duty power cord (6A / 16A as per model)
- ✓ Secure & durable connections
- ✓ Elegant design with smooth finish
- ✓ 100% product testing – Hi-Pot, Continuity, Polarity
- ✓ Available in multiple sizes & configurations

MATERIAL PROPOSITIONS

Body / Top Cover	Polycarbonate (PC) Fire Retardant
Inner Body	Polypropylene (PP) High Impact
Terminal	Brass (CuZn) Nickel Plated
Spring	High Tensile Steel
Power Cord	Copper Conductor, PVC Insulation
Screws	Mild Steel Nickel Plated

OUR EXTENSION BOARD RANGE

3 SOCKET – 6A



Ideal for TV, Set Top Box,
Chargers, Small Appliances

Current Rating	6A
Voltage Rating	240V~ 50Hz
Max. Load	1380W
Power Cord	6A, 3 Core, 1.5 Sq.mm (Length: 1.5m)
Dimensions (mm)	210 (L) x 60 (W) x 35 (H)
Color	White / Blue
IS Standard	IS 694:2010

4 SOCKET – 6A



Ideal for Computers, Printers,
Audio Systems, Home Appliances

Current Rating	6A
Voltage Rating	240V~ 50Hz
Max. Load	1380W
Power Cord	6A, 3 Core, 1.5 Sq.mm (Length: 1.5m)
Dimensions (mm)	255 (L) x 60 (W) x 35 (H)
Color	White / Blue
IS Standard	IS 694:2010

5 SOCKET – 6A



Ideal for Home, Office &
General Purpose Use

Current Rating	6A
Voltage Rating	240V~ 50Hz
Max. Load	1380W
Power Cord	6A, 3 Core, 1.5 Sq.mm (Length: 1.5m)
Dimensions (mm)	305 (L) x 60 (W) x 35 (H)
Color	White / Blue
IS Standard	IS 694:2010

6 SOCKET – 6A



Ideal for Multiple Appliances
at Home & Office

Current Rating	6A
Voltage Rating	240V~ 50Hz
Max. Load	1380W
Power Cord	6A, 3 Core, 1.5 Sq.mm (Length: 1.5m)
Dimensions (mm)	305 (L) x 60 (W) x 35 (H)
Color	White / Blue
IS Standard	IS 694:2010

3 SOCKET – 16A HEAVY DUTY



Ideal for Geysers, Heaters,
Microwave, Heavy Appliances

Current Rating	16A
Voltage Rating	240V~ 50Hz
Max. Load	3680W
Power Cord	16A, 3 Core, 1.5 Sq.mm (Length: 1.5m)
Dimensions (mm)	240 (L) x 75 (W) x 35 (H)
Color	White / Grey
IS Standard	IS 694:2010

SPECIALTY & UTILITY EXTENSION BOARDS

SURGE PROTECTED BOARD (6A)



Protects your valuable
devices from power surges

Current Rating	6A
Surge Protection	Yes (275 Joules)
Indicators	Power On, Surge On
Power Cord	6A, 3 Core, 1.5 Sq.mm
Sockets	4 Universal
IS Standard	IS 694:2010

USB CHARGING BOARD (6A)



Charge your devices quickly
with dual USB ports

Current Rating	6A
USB Output	5V = 2.4A (Max)
USB Ports	2 Nos.
Power Cord	6A, 3 Core, 1.5 Sq.mm
Sockets	3 Universal
IS Standard	IS 694:2010

INDIVIDUAL SWITCH BOARD (6A)



Individual control switch for
each socket

Current Rating	6A
Switch	Individual Switch
Indicators	Neon Indicator
Power Cord	6A, 3 Core, 1.5 Sq.mm
Sockets	4 Universal
IS Standard	IS 694:2010

WALL MOUNT / FIXED BOARD (6A)



Can be fixed on wall for
permanent installation

Current Rating	6A
Mount Type	Wall Mount
Power Cord	Without Cord
Sockets	4 Universal
Dimensions (mm)	255 x 60 x 35
IS Standard	IS 694:2010


EXTENSION BOARD WITH NEON INDICATOR (6A)



Neon indicator for
power status

Current Rating	6A
Indicator	Neon Indicator
Power Cord	6A, 3 Core, 1.5 Sq.mm
Sockets	3 / 4 / 5 / 6 (Options)
IS Standard	IS 694:2010

CONSTRUCTION DETAILS

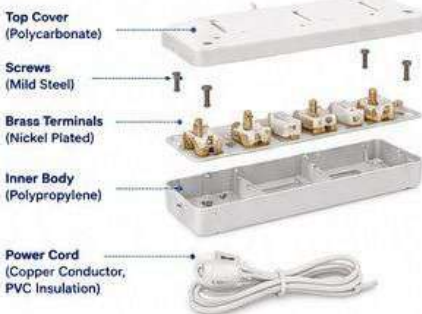

SAFETY FEATURES



SHUTTERED SOCKETS
Protects children from
electric shock



FIRE RETARDANT MATERIAL
High grade material resists
fire & high temperature



HI-POT TESTED
Tested at high voltage to
ensure insulation safety



POLARITY INDICATOR
Ensures correct live,
neutral & earth connection



STRONG CORD GRIP
Prevents wire pull-out &
ensures durability

TECHNICAL SPECIFICATIONS

Voltage Rating	240V~ 50Hz
Current Rating	6A / 16A (As per model)
Max. Load	1380W (6A) / 3680W (16A)
Body Material	Polycarbonate (PC) Fire Retardant
Inner Body	Polypropylene (PP) High Impact
Terminal Material	Brass (CuZn) Nickel Plated
Power Cord	PVC Insulated Copper Conductor
Cord Length	1.5 Meter (Standard)
Operating Temperature	-10°C to +70°C
IS Standard	IS 694:2010
Testing	Continuity, Hi-Pot, Polarity, Insulation Resistance, Visual

AVAILABLE COLOURS



IDEAL APPLICATIONS



Homes



Offices



Educational
Institutions



Shops &
Retail



Industrial
Use



PACKAGING

Individual Polybag + Sticker
Master Carton Packing
Custom Branding Available



SAFE POWER.
TOTAL PROTECTION.



PREMIUM QUALITY.
BUILT TO LAST.



POWERING CONNECTIONS.
EVERYDAY.



MADE IN INDIA.
TRUSTED GLOBALLY.



+91 124 436 9700



info@hadrons.co.in



www.hadrons.co.in