



SINCE 1909
JAPAN



WALL-MOUNT TYPE **VENTILATING FAN**



KDK Company, Division of PES
4017, Takaki-cho, Kasugai, Aichi, Japan
<http://kdk.jp>

• Actual colors may vary slightly from those shown.
• Specifications are subject to change without prior notice.

Wall Mount Type Ventilation Fan




Features

Smart Design

The new flat design creates a feeling of floating upon installation on wall. Meanwhile, slim louver is designed for the louver series. Such minimalistic elements integrate seamlessly with the interior space.

Only applicable for model:
20AUA/25AUA/30AUA
20ALA/25ALA/30ALA

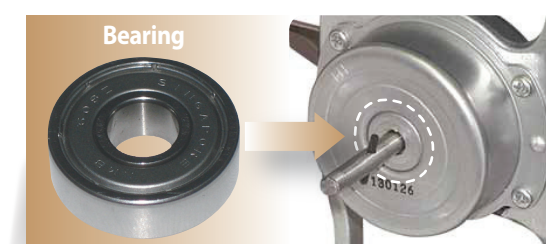

Half Pitch Motor & Bearing

All models adopt half pitch capacitor induction motor and long life bearing that prolongs the product durability, with average 30,000 hours life. They also enable energy saving by reducing power consumption down to average 13%.

Thermal Fuse Equipped

All motors are equipped with thermal fuses which would stop when they are overheated. It can prevent further temperature rise and minimize the risk of fire hazard.



Only applicable for model:
20AUA/25AUA/30AUA
20ALA/25ALA/30ALA

Silent Stream Fan

New Blade design applies advanced aerodynamic principle that optimizes the blade shape.



3D Sickle Blade

New Blade design adopts an increased blade size and airfoil curve optimization. It can increase the air volume by the adjusted blade shape which can match the airflow. Furthermore, it can lower the noise by evening the airflow velocity with the silent wing.

*Features above are only applicable to some of the models

Metallic Series

Usage: Bathroom Toilet Office / Retail Store

20ASB / 25ASB / 30ASB
20ASB 05 / 25ASB 05 / 30ASB 05

Metallic Structure




- Condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- High performance propeller fan adopted
- Automatic shutter
- Powder painted metallic orifice, blade and oil cup
- Detachable oil cup
- Motor insulation Class E
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Installation Space [mm]
			[CMH]	[CFM]				
20ASB 20ASB 05	220	50	516	304	17	37.5	3.3	250 x 250
		60	612	360	21.5	40.6		
	230	50	528	311	18.1	38.1		
25ASB 25ASB 05	220	50	540	318	19.5	38.4	3.8	300 x 300
		60	858	505	25	39.1		
	230	50	954	562	30.5	40.6		
		60	864	509	27.3	39.3		
		50	888	523	29.5	39.7		
30ASB 30ASB 05	220	50	1,182	696	29.5	39.2	4.4	350 x 350
		60	1,164	685	34.5	39		
	230	50	1,248	735	31.7	40.6		
		50	1,290	759	34	41.3		

- Note:
- 1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
 - 2.The value of air volume is the mean value which is measured by our company.
 - 3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
 - 4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Installation

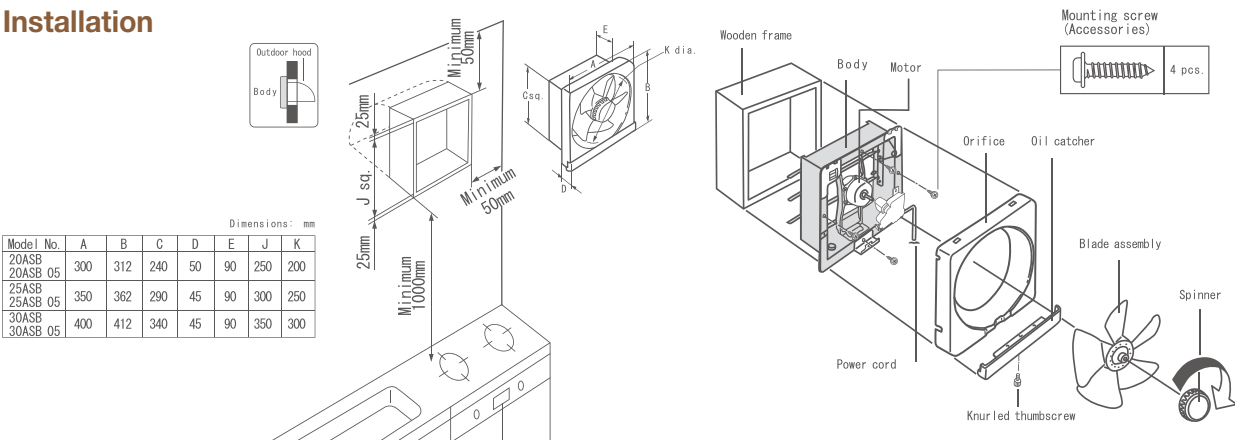

Automatic Shutter Series

Usage: Bathroom Toilet Office / Retail Store

15AAQ1

Metallic Structure

Orifice Equipped with Oil Cup




- Condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- High performance propeller fan adopted
- Automatic shutter with plastic cushions
- Orifice equipped with oil cup
- Motor insulation Class E
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Installation Space [mm]
			[CMH]	[CFM]				
15AAQ1	220	50	288	170	15	31	1.4	175 x 175
		60	306	180	19	34		
	230	50	294	173	17	33		
		50	306	180	19	33		

- Note:
- 1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
 - 2.The value of air volume is the mean value which is measured by our company.
 - 3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
 - 4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Installation

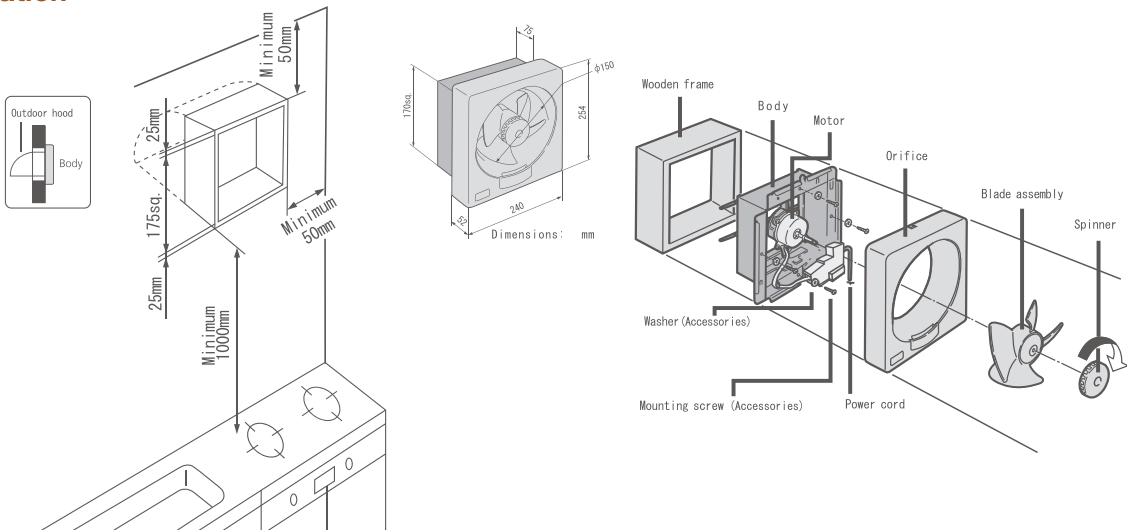

Automatic Shutter Series

Usage: Bathroom Toilet Office / Retail Store


20AUA / 25AUA / 30AUA

Dimension
Unit : mm

- Silent Stream Fan
- Flat Surface Design
- Automatic Shutter



Model	A	B	C	D	E	F	G
20AUA	223	302	302	240	30	90	85
25AUA	273	352	352	290	32	90	67
30AUA	317	402	402	340	32	90	83

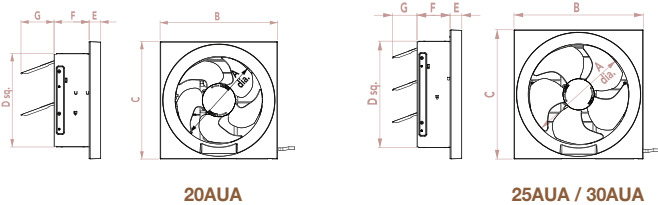


- Flat surface design
- Silent stream fan
- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Automatic shutter
- Motor insulation Class B
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Intallation Space [mm]
			[CMH]	[CFM]				
20AUA	220-230	50	590-610	347-359	18-19.5	36-36.5	1.9	250 x 250
	220-240	50	590-620	347-365	18-21.5	36-37		
	220	60	680	400	22	39		
	230	60	710	418	23.5	40		
25AUA	220-230	50	950-970	559-571	25-27	38-38.5	2.3	300 x 300
	220-240	50	950-990	559-571	25-27	38-39		
	220	60	990	571	31	39		
	230	60	1,040	612	35	41		
30AUA	220-230	50	1,200-1,250	706-736	28-30	37-38	2.6	350 x 350
	220-240	50	1,200-1,300	706-765	28-32.5	37-38		
	220	60	1,200	706	33	37		
	230	60	1,300	765	36	39		

Note:
1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
2.The value of air volume is the mean value which is measured by our company.
3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Wiring Diagram

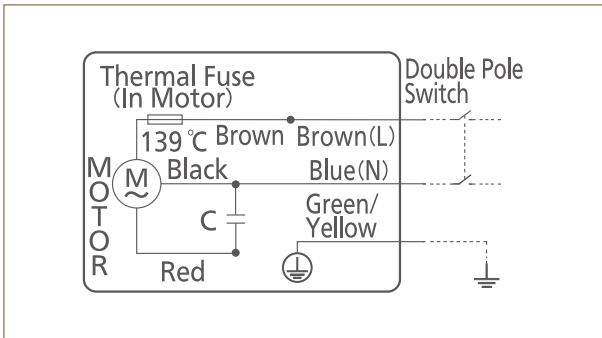

Automatic Shutter Series

Usage: Bathroom Toilet Office / Retail Store


20AUH / 25AUH / 30AUH 11

Dimension
Unit : mm

- Advanced Blade Design
- Automatic Shutter
- Single Speed



Model	A	B	C	D	E	F	G	H
20AUH	200	306	260	302	240	52	90	80
25AUH	250	356	310	352	290	38	90	63
30AUH 11	300	406	360	402	340	38	90	78

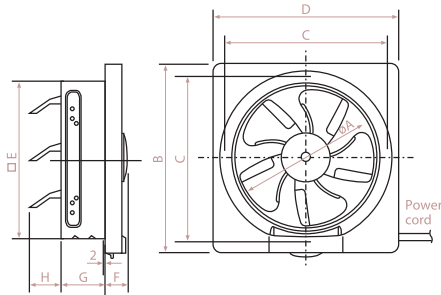


- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Propeller fan incorporated with advanced blade design (except 30AUH 11)
- Automatic shutter
- Motor insulation Class E
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Intallation Space [mm]
			[CMH]	[CFM]				
20AUH	220	50	580	341	22	38	2.0	250 x 250
		60	650	383	29	42		
25AUH	220	50	920	541	29	39	2.4	300 x 300
		60	940	553	33	39		
30AUH 11	220	50	1,200	706	29	39	2.7	350 x 350
		60	1,140	671	33	38		

Note:
1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
2.The value of air volume is the mean value which is measured by our company.
3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Wiring Diagram

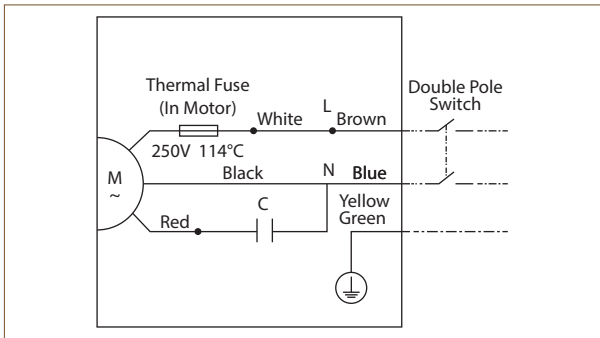

Automatic Shutter Louver Series

Usage: Bathroom Toilet Office / Retail Store


20ALA / 25ALA / 30ALA

Dimension
Unit : mm

- Louver for Safety Protection
- Silent Stream Fan
- Automatic Shutter



Model	A	B	C	D	E	F	G
20ALA	223	302	302	240	60	90	85
25ALA	273	352	352	290	62	90	67
30ALA	317	402	402	340	62	90	83

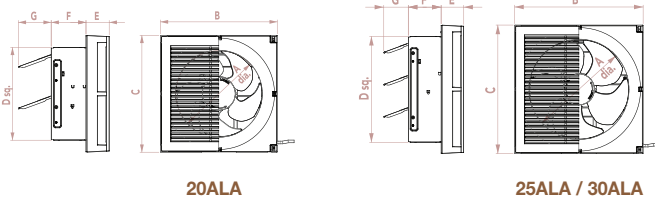


- Slim louver design
- Silent stream fan
- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Automatic shutter
- Motor insulation Class B
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Intallation Space [mm]
			[CMH]	[CFM]				
20ALA	220-230	50	550-555	324-327	18-19.5	38-38.5	2.0	250 x 250
	220-240	50	550-560	324-330	18-21.5	38-39		
	220	60	610	359	22	42.5		
	230	60	630	371	23.5	44		
25ALA	220-230	50	840-860	494-506	25-27	40.5-42	2.5	300 x 300
	220-240	50	840-880	494-518	25-30	40.5-43		
	220	60	860	506	31	42		
	230	60	910	536	34	45		
30ALA	220-230	50	1,000-1050	589-618	28-30	39-40	2.9	350 x 350
	220-240	50	1,000-1,100	589-647	28-32.5	39-41		
	220	60	1,000	589	33	40		
	230	60	1,050	618	36	41		

Note:
1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
2.The value of air volume is the mean value which is measured by our company.
3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Wiring Diagram

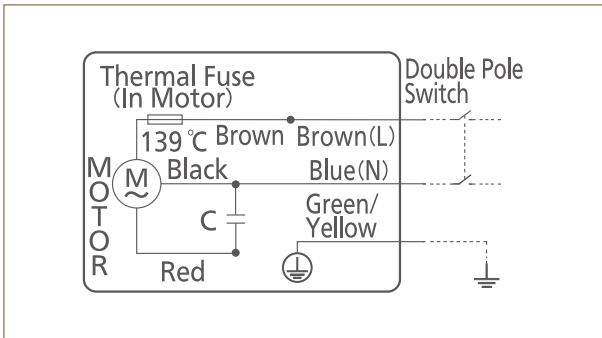

Automatic Shutter Louver Series

Usage: Bathroom Toilet Office / Retail Store


20ALH / 25ALH / 30ALF 11

Dimension
Unit : mm

- Louver for Safety Protection
- Advanced Blade Design
- Single Speed



Model	A	B	C	D	E	F	G	H
20ALH	200	306	260	302	240	68	90	80
25ALH	250	356	310	352	290	63	90	63
30ALF 11	300	406	360	402	340	63	90	78

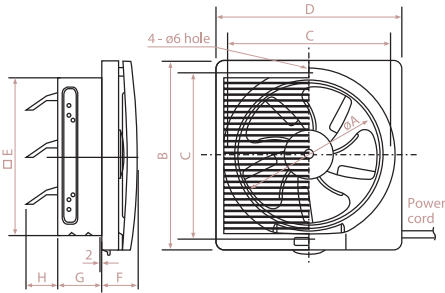


- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Propeller fan incorporated with advanced blade design (except 30ALF 11)
- Automatic shutter
- Motor insulation Class E
- IP protection: IPX4 (outside)

Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	Noise [dB(A)]	Weight [kg]	Intallation Space [mm]
			[CMH]	[CFM]				
20ALH	220	50	546	321	22	40	2.2	250 x 250
		60	600	353	29	44		
25ALH	220	50	835	491	29	43	2.7	300 x 300
		60	846	498	33	43		
30ALF 11	220	50	935	550	29	43	3.1	350 x 350
		60	915	539	33	43		

Note:
1.The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa.
2.The value of air volume is the mean value which is measured by our company.
3.The value of noise level is measured at 1m apart from the left, the right and the front of product, then get the average of three values.
4.The value of noise level is A weight average sound pressure level, the mean value is measured by our company.

Wiring Diagram

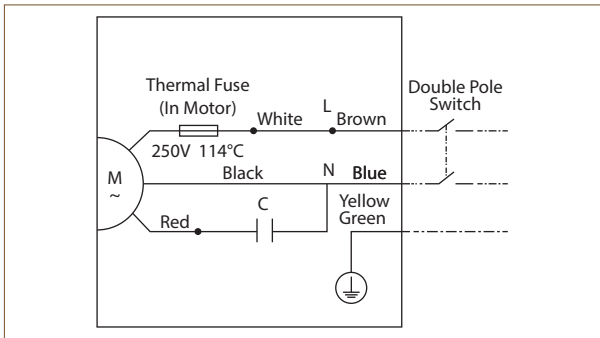

Automatic Shutter Louver Series

Usage: Bathroom Toilet Office / Retail Store

10BAQ1

- Powerful Sirocco Fan
- Louver for Safety Protection
- Long Life Operation




- Condenser motor with thermal cut-off
- Lubricated sintered brush for long life operation
- Highly efficient sirocco fan
- Blind shutter louver to enhance privacy and safety
- Plastic frame, blade and louver
- Motor insulation Class E
- IP protection: IPX4 (outside)

Specification


Model	Voltage [V]	Frequency [Hz]	Air Volume		Consumption [W]	RPM	Noise [dB(A)]	Weight [kg]	Installation Space [mm]
			[CMH]	[CFM]					
10BAQ1	220	50	76.3	45	15	1,250	40.1	1.7	155 x 205
		60	72.9	43	17	1,200	39.8		
	230	50	80.3	47	16	1,300	41.2		
	240	50	84.9	50	17.5	1,385	42		

Note: RPM data is for reference only, values may vary subject to different conditions
Test Condition
- Air volume, electric characteristic and noise are specified at the static pressure of 0 Pa
- The values of noise level is A weighted average sound pressure level, the mean values are measured by our company, within +3 to -7 dB tolerance
- The values of noise level are measured at 1 m apart from the side of fan body when ducts are connected on outlet side
- The values of air volume are the mid-points of results measured by our company, within ±10% tolerance

Installation

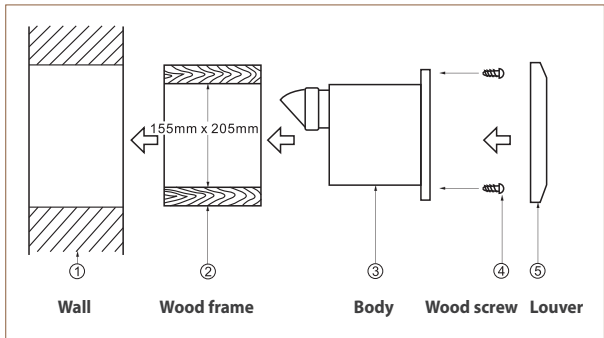


Wiring Diagram

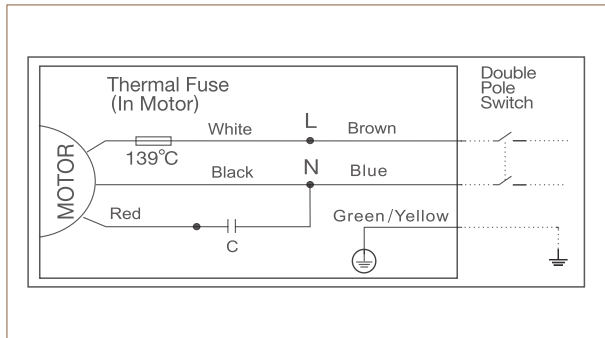

Feature of Bathroom Series

Easy Installation - Pipe Hood Series

With the supplied accessories, it only takes a few steps to complete the installation.

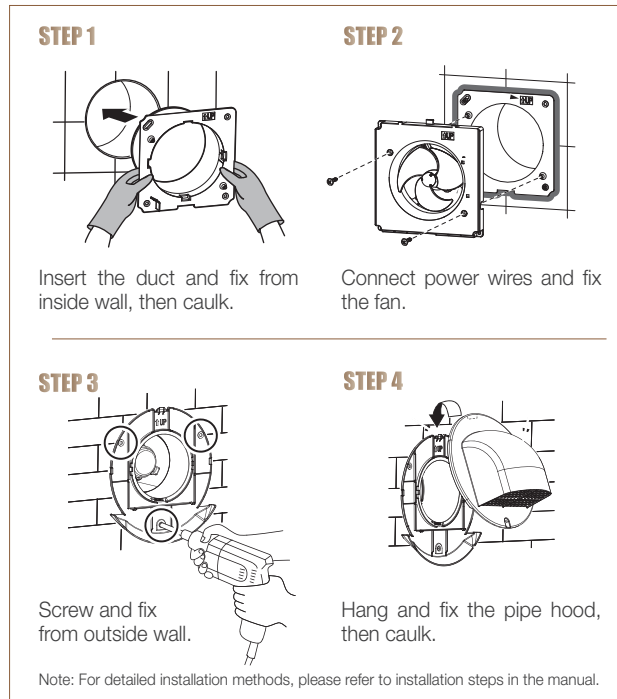

All Accessories Included


The product comes bundled with all required accessories. It conveniently saves the hassle of seeking necessary accessories around.



Trace-prevention

Pipe Hood Series Only


When it rains, rainwater dripping along the side of pipe hood may cause trace marks on wall. The exclusively designed duct ring catches and drains the water away to avoid forming trace marks.

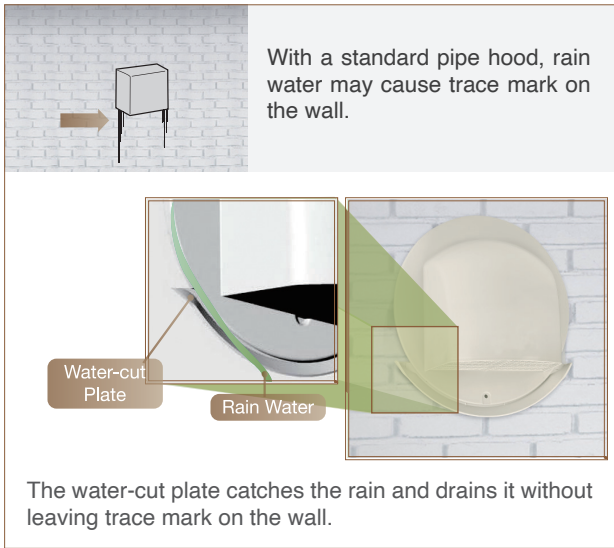

Back Draft Shutter

Shutter Series (For Vertical Shaft) only


Wind from outside may come indoor through the duct when the fan is not operating. The back draft shutter is designed to cover the duct hole to block wind and water.

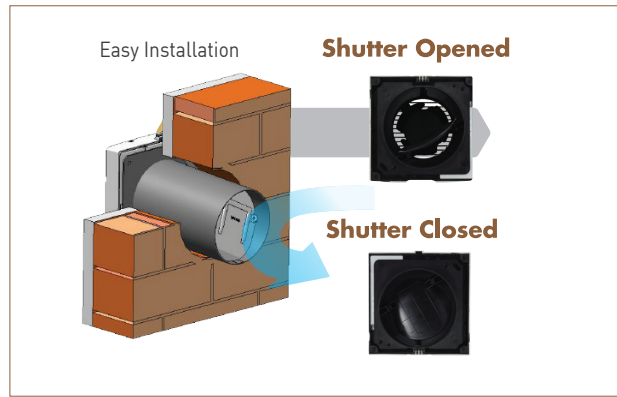

Bathroom



Toilet

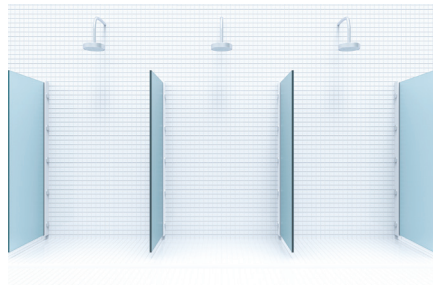

Shower Room

Bathroom Series

Usage: Bathroom Toilet

10EGKB / 15EGKB

- Advanced Blade Design
- Easy Installation
- Pipe Hood Equipped



- Pipe hood series
- Powerful exhaust of excessive moisture and odour
- Prevent rain water trace by water-cut plate at duct ring
- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Motor insulation Class E
- IP protection: IPX4 (outside)


Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume [CMH]	Consumption [W]	RPM	Noise [dB(A)]	Weight [kg]	Wall Installation		Ceiling Installation
								Hole Size [mm]	Wall Thickness [mm]	Hole Size [mm]
10EGKB	220	50	76	4.3	2,660	33	1.0	Ø130~140	100~150	Ø130~140
	230	50	77	4.6	2,675	33				
	240	50	77	5.0	2,690	33				
15EGKB	220	50	162	5.7	2,265	36	1.3	Ø175~185	100~150	Ø175~185
	230	50	165	6.1	2,330	37				
	240	50	165	6.5	2,390	37				

Note: RPM data is for reference only, values may vary subject to different conditions
Test Condition

- Air volume, electric characteristic and noise are specified at the static pressure of 0 Pa
- The values of noise level is A weighted average sound pressure level, the mean values are measured by our company, within +3 to -7 dB tolerance
- The values of noise level are measured at 1 m apart from the side of fan body when ducts are connected on outlet side
- The values of air volume are the mid-points of results measured by our company, within ±10% tolerance

Wiring Diagram

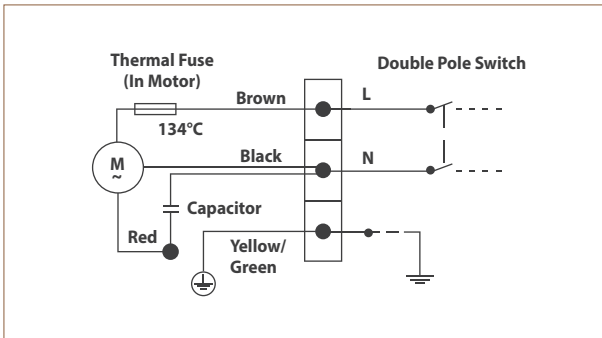

Bathroom Series

Usage: Bathroom Toilet

10EGSB / 15EGSB

- Advanced Blade Design
- Automatic Shutter
- Shutter Equipped



- Shutter series (for vertical shaft)
- Powerful exhaust of excessive moisture and odour
- Half pitch condenser motor with thermal cut-off
- Well-lubricated ball bearing for long life operation
- Motor insulation Class E
- IP protection: IPX4 (outside)


Specification

Model	Voltage [V]	Frequency [Hz]	Air Volume [CMH]	Consumption [W]	RPM	Noise [dB(A)]	Weight [kg]	Wall Installation		Ceiling Installation
								Hole Size [mm]	Duct Space [mm]	Hole Size [mm]
10EGSB	220	50	76	4.3	2,665	35	0.8	Ø120-125	>205	Ø130~140
		60	87	4.7	3,140	37.5				
	230	50	77	4.6	2,670	35				
15EGSB	240	50	77	5.0	2,685	35	1.0	Ø165-170	>240	Ø175~185
	220	50	155	5.7	2,130	36				
		60	180	6.1	2,470	40				
	230	50	160	6.1	2,230	37				
	240	50	165	6.5	2,240	37				

Note: RPM data is for reference only, values may vary subject to different conditions
Test Condition

- Air volume, electric characteristic and noise are specified at the static pressure of 0 Pa
- The values of noise level is A weighted average sound pressure level, the mean values are measured by our company, within +3 to -7 dB tolerance
- The values of noise level are measured at 1 m apart from the side of fan body when ducts are connected on outlet side
- The values of air volume are the mid-points of results measured by our company, within ±10% tolerance


Wiring Diagram

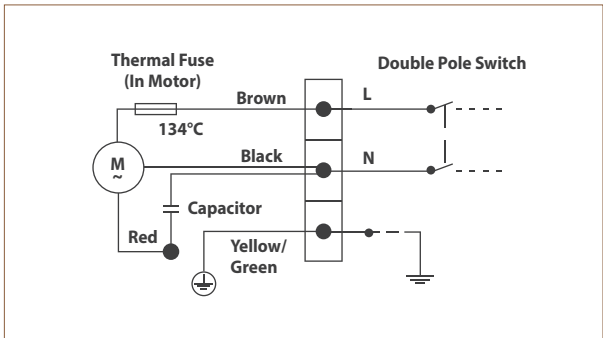

Performance Data Summary


Wall Mount Type Ventilation Fan

Automatic Shutter Series: 20AUA

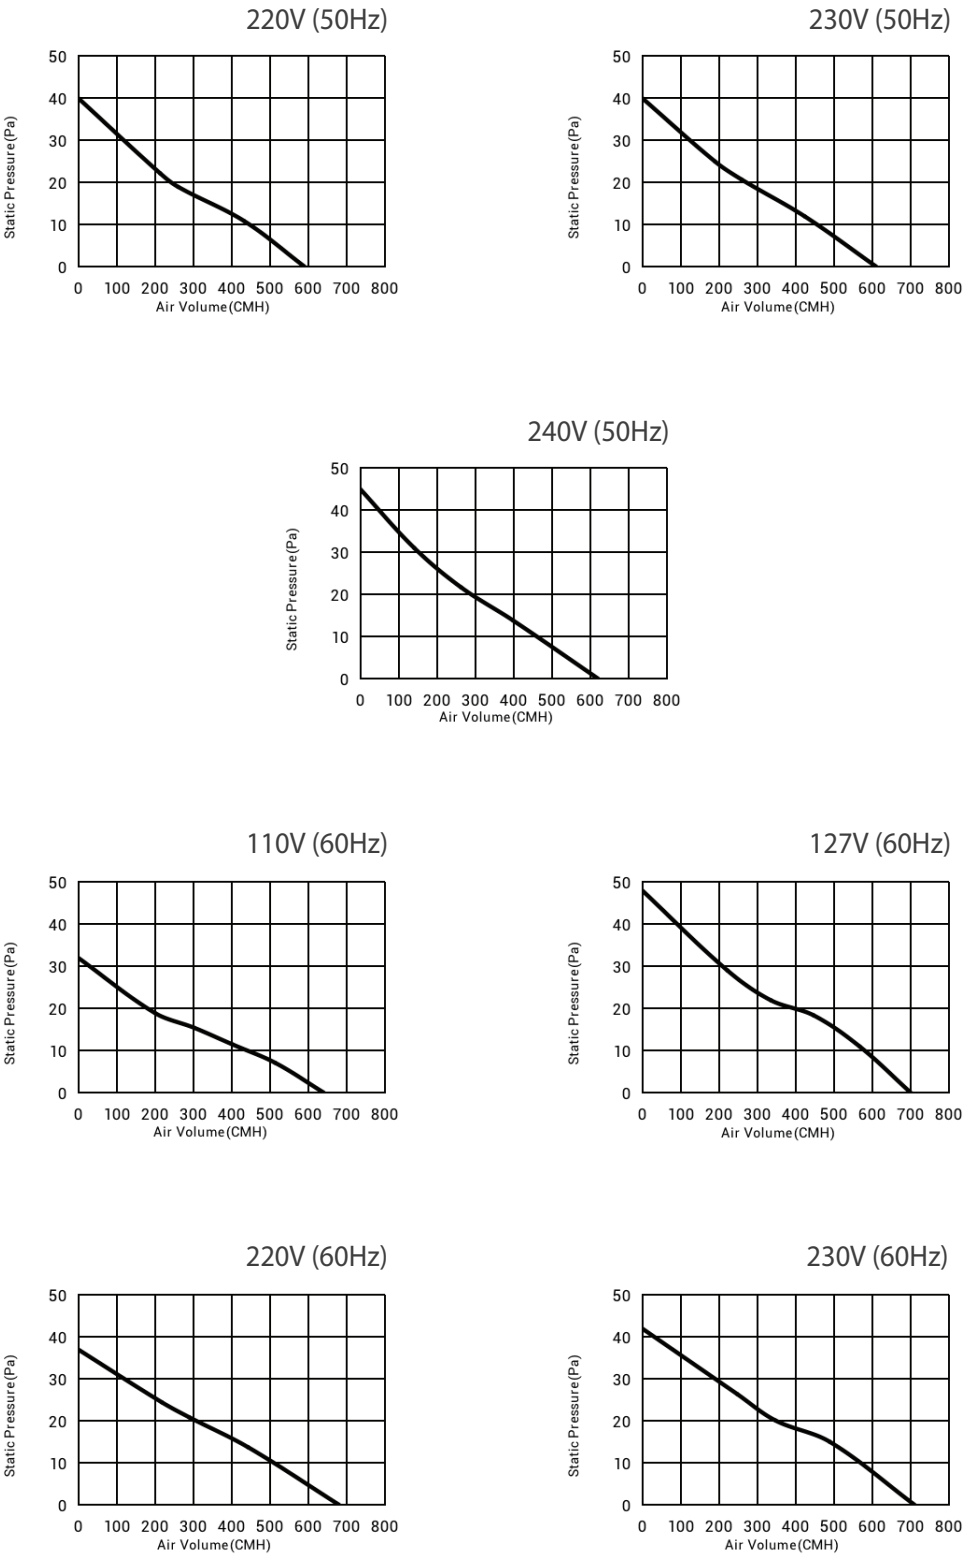

Wall Mount Type Ventilation Fan


Automatic Shutter Series: 25AUA

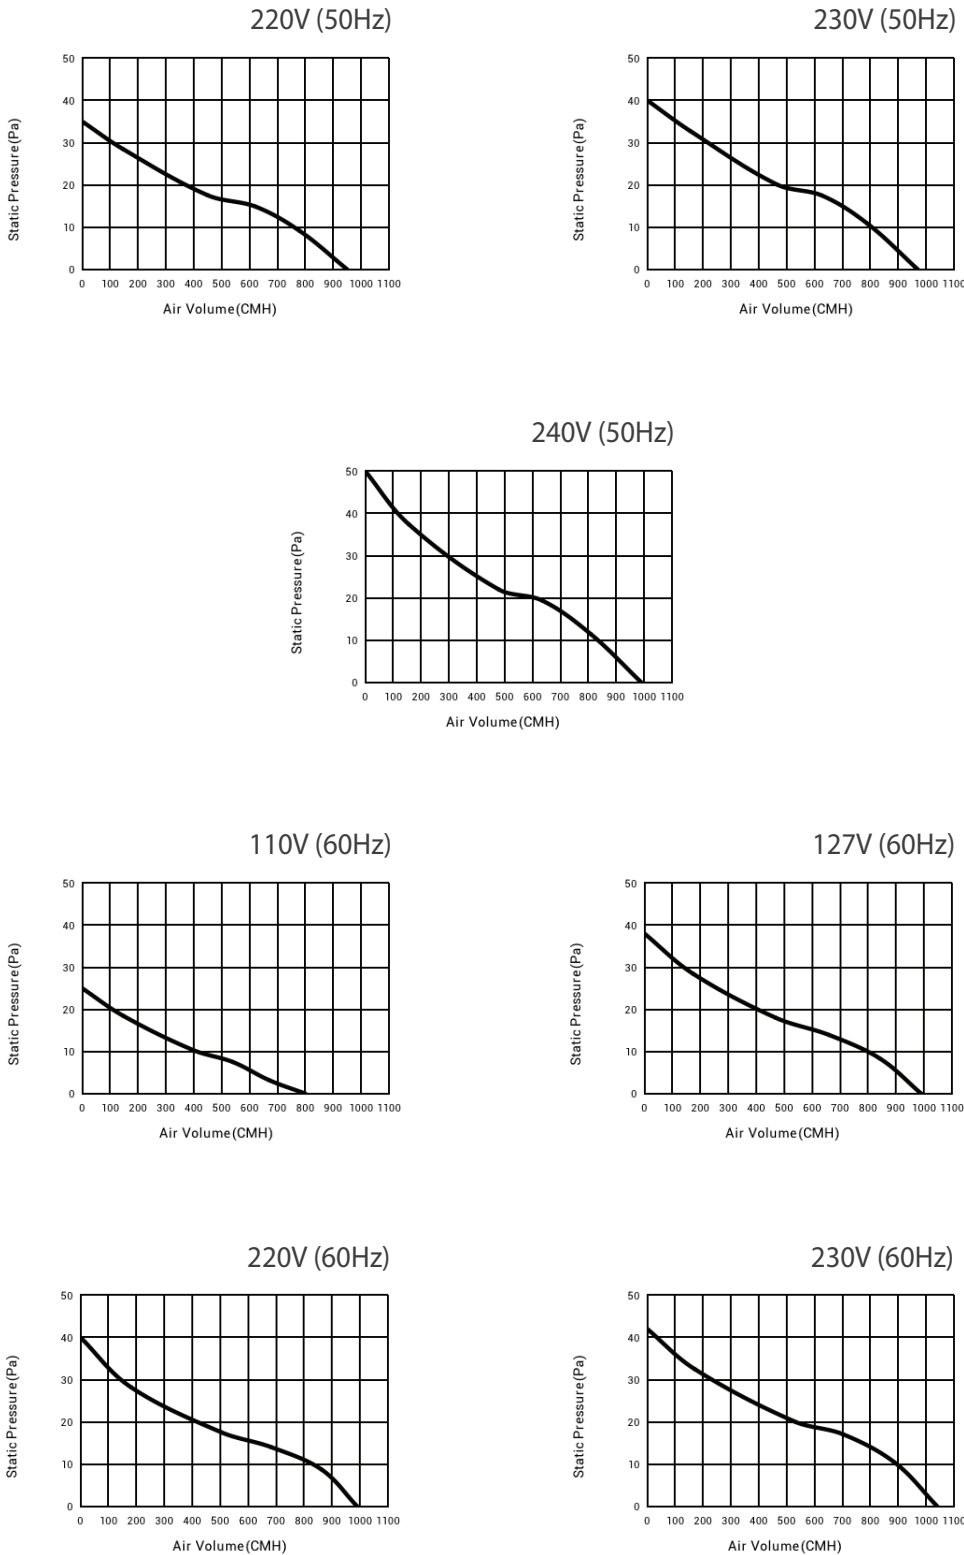


Performance Data Summary

Wall Mount Type Ventilation Fan

Automatic Shutter Series: 30AUA

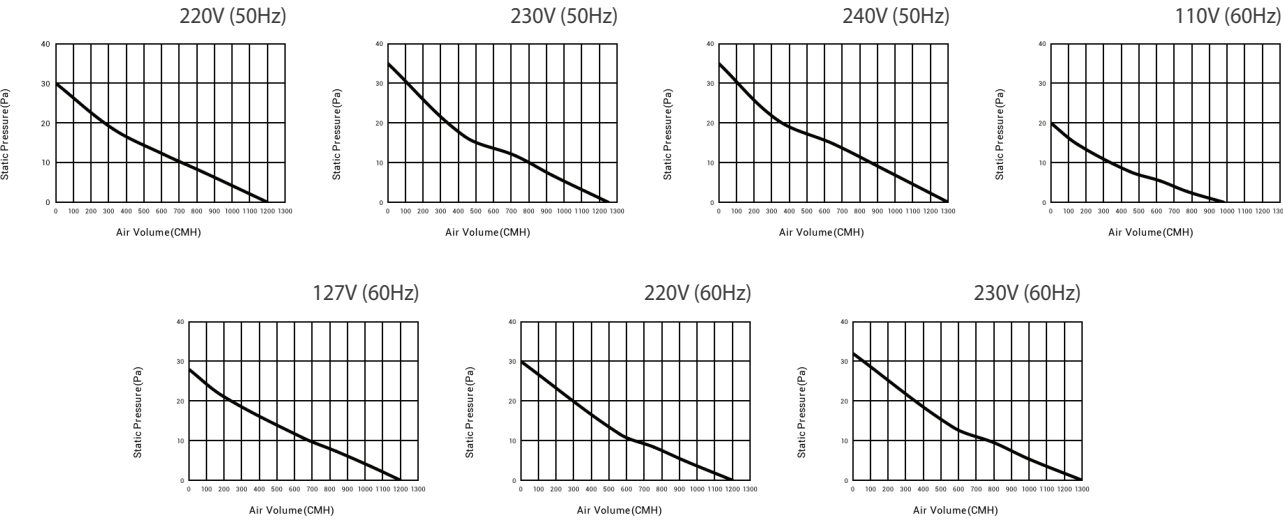


Automatic Shutter Louver Series: 20ALA

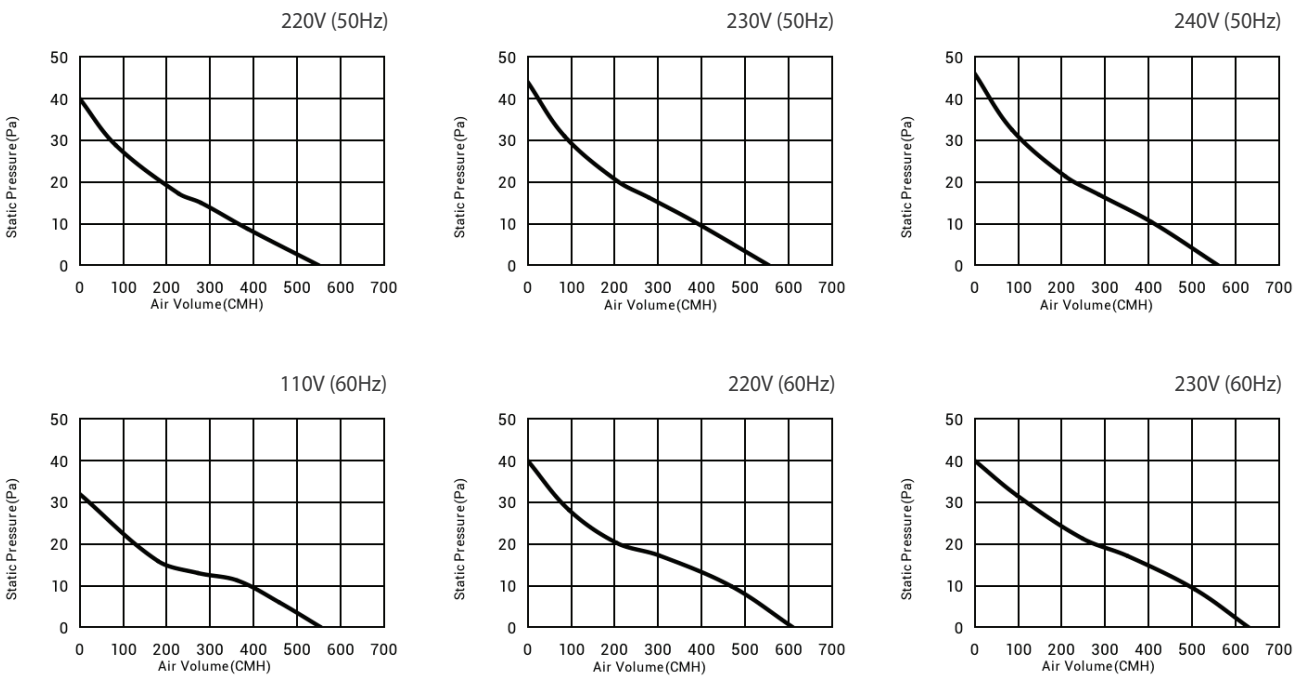

Wall Mount Type Ventilation Fan

Automatic Shutter Louver Series: 25ALA

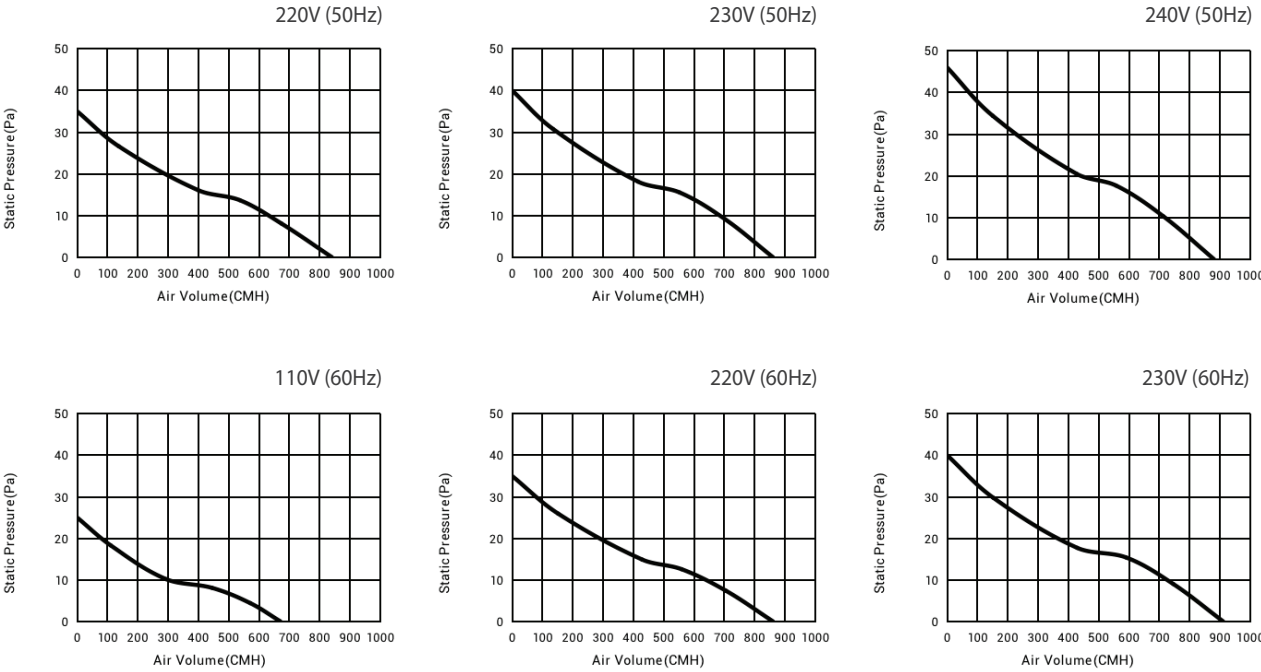

Automatic Shutter Louver Series: 30ALA

