


AUDIO MODULE: I2S from J24 -> 2x PCM5102A (front + rear) -> line out back through J24 to ISO C1 on the main board

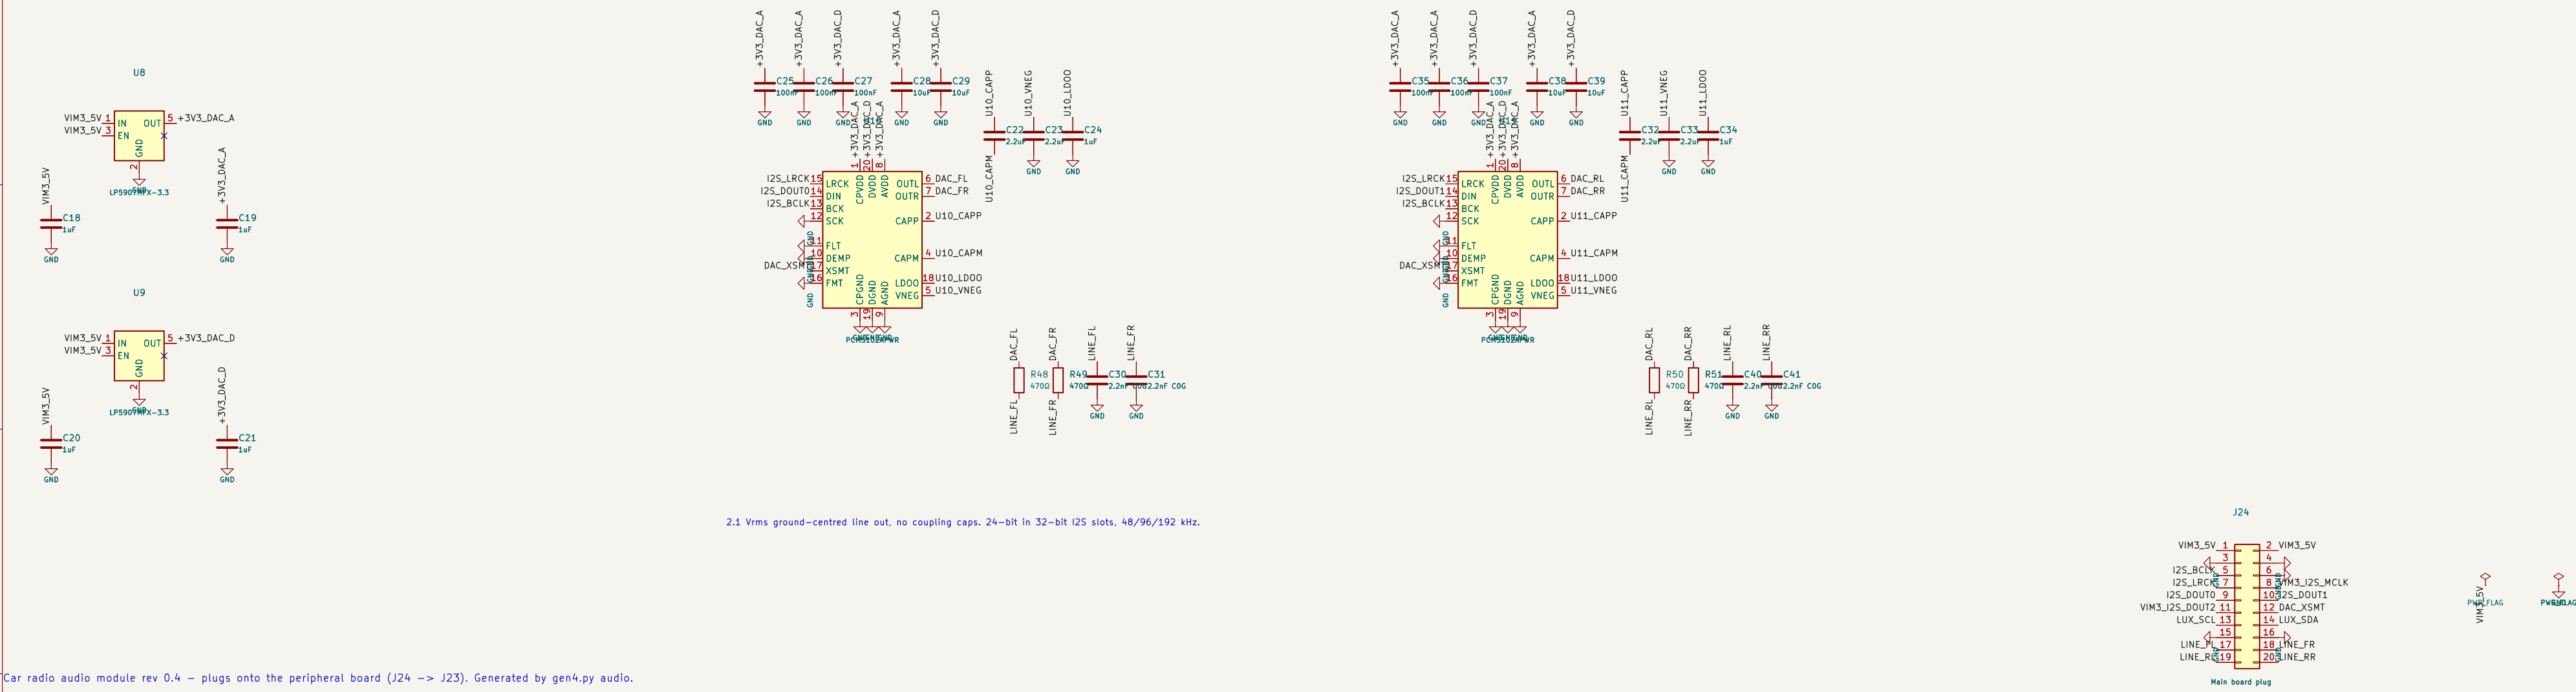

2x 100nF ground-coupled line out, no coupling caps, 24-bit to 52-bit (52 bits, 48/96/192 kHz)

Car radio audio module rev 0.0 - plugs onto the peripheral board (J24 -> J23). Generated by gen4lay audio.