

Button bar strip for the rev 0.6 case: 9 buttons on J12 only (diode-coded)

Single-line buttons pull one J12 line to GND. Combo buttons pull two lines low through BAT85 Schottky diodes (1N4148 is too high with the 1k series + 10k pull-up on the main board). Firmware decodes the 4-line pattern after ~30 ms.

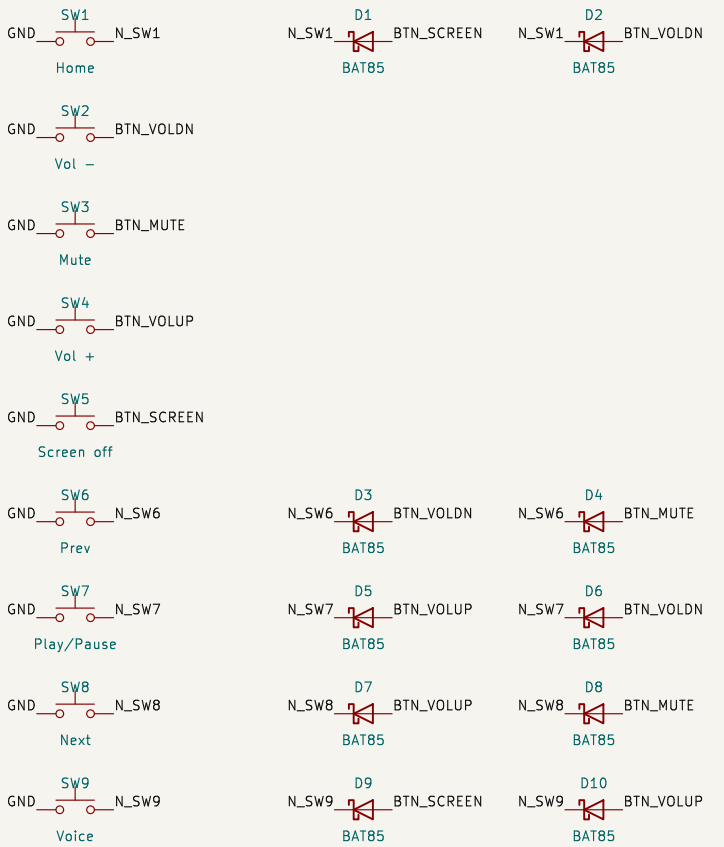



J12 on main board rev 0.6: 1 S=GPIO18 (screen off), 2 U=GPIO17 (vol+), 3 D=GPIO22 (vol−), 4 M=GPIO16 (mute), 5 GND

Case rev 0.6, front button bar

Sheet: /
File: buttonbar.kicad_sch

Title: Button bar strip

Size: A4	Date: 2026-11-04	**Rev: 1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1