




1. VEHICLE CONNECTOR, PROTECTION, ALWAYS-ON 5V FOR PICO

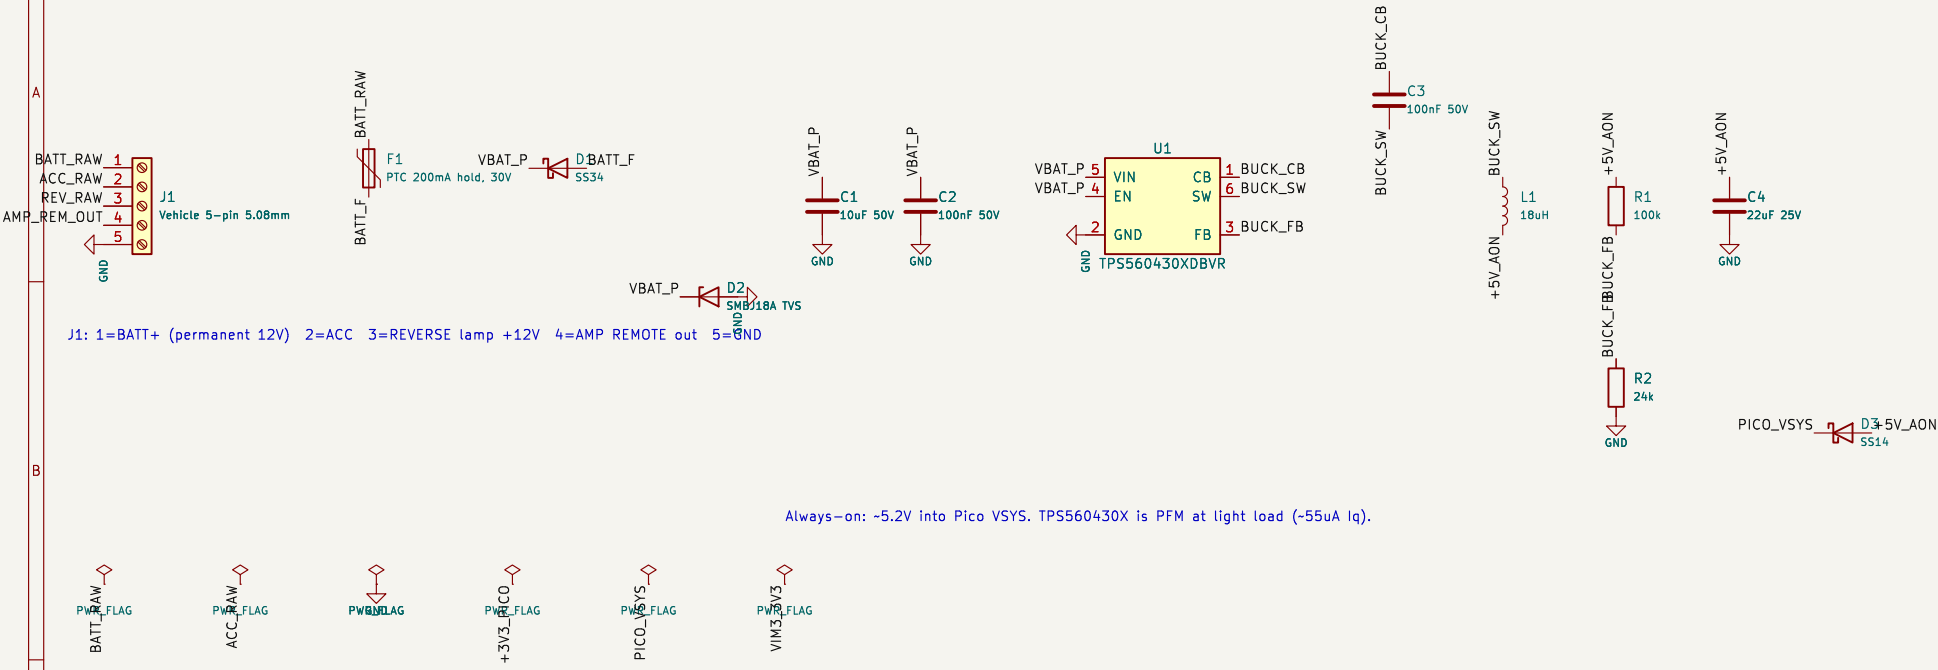


2. ACC + REVERSE INPUTS (opto-isolated, active-high)

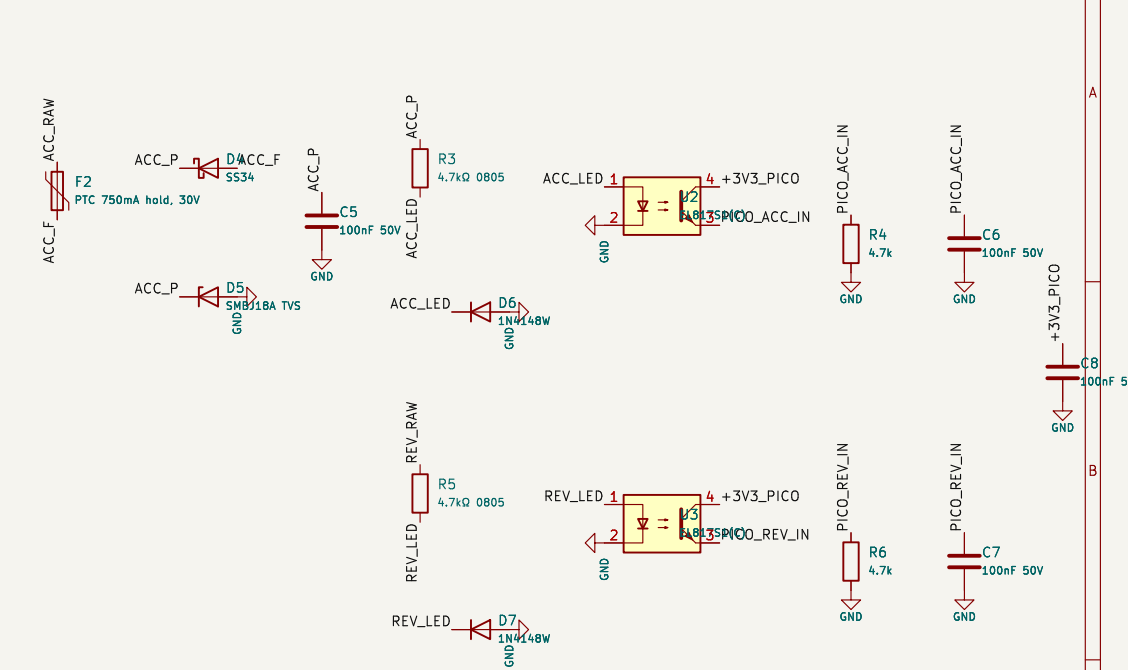

3. AMPLIFIER REMOTE-ON (+12V high-side, switched from ACC)

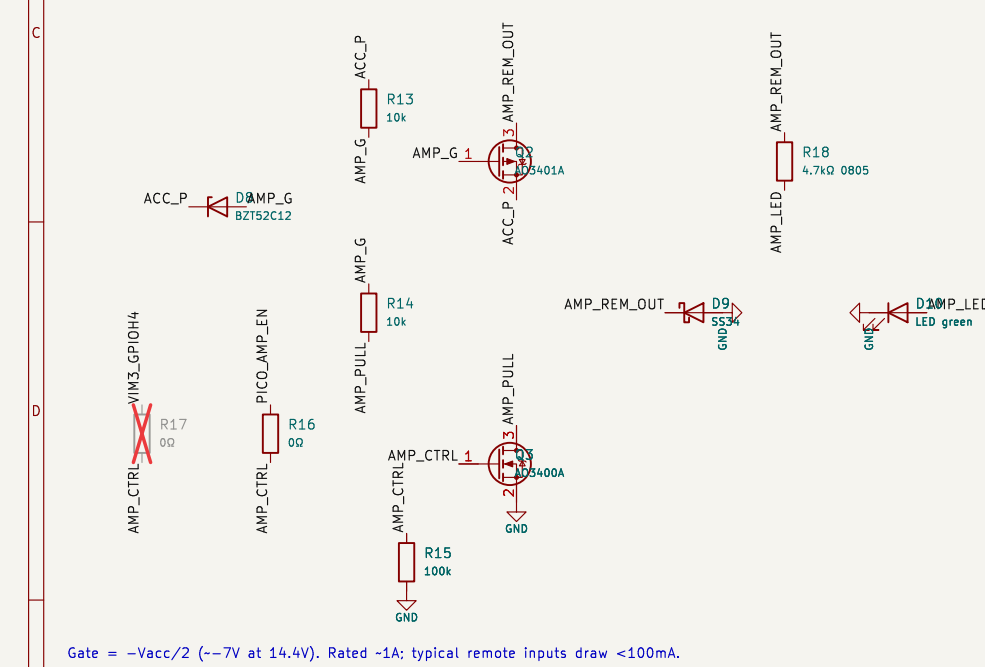

4. PICO 2 (on two 1x20 female headers, 17.78mm apart)

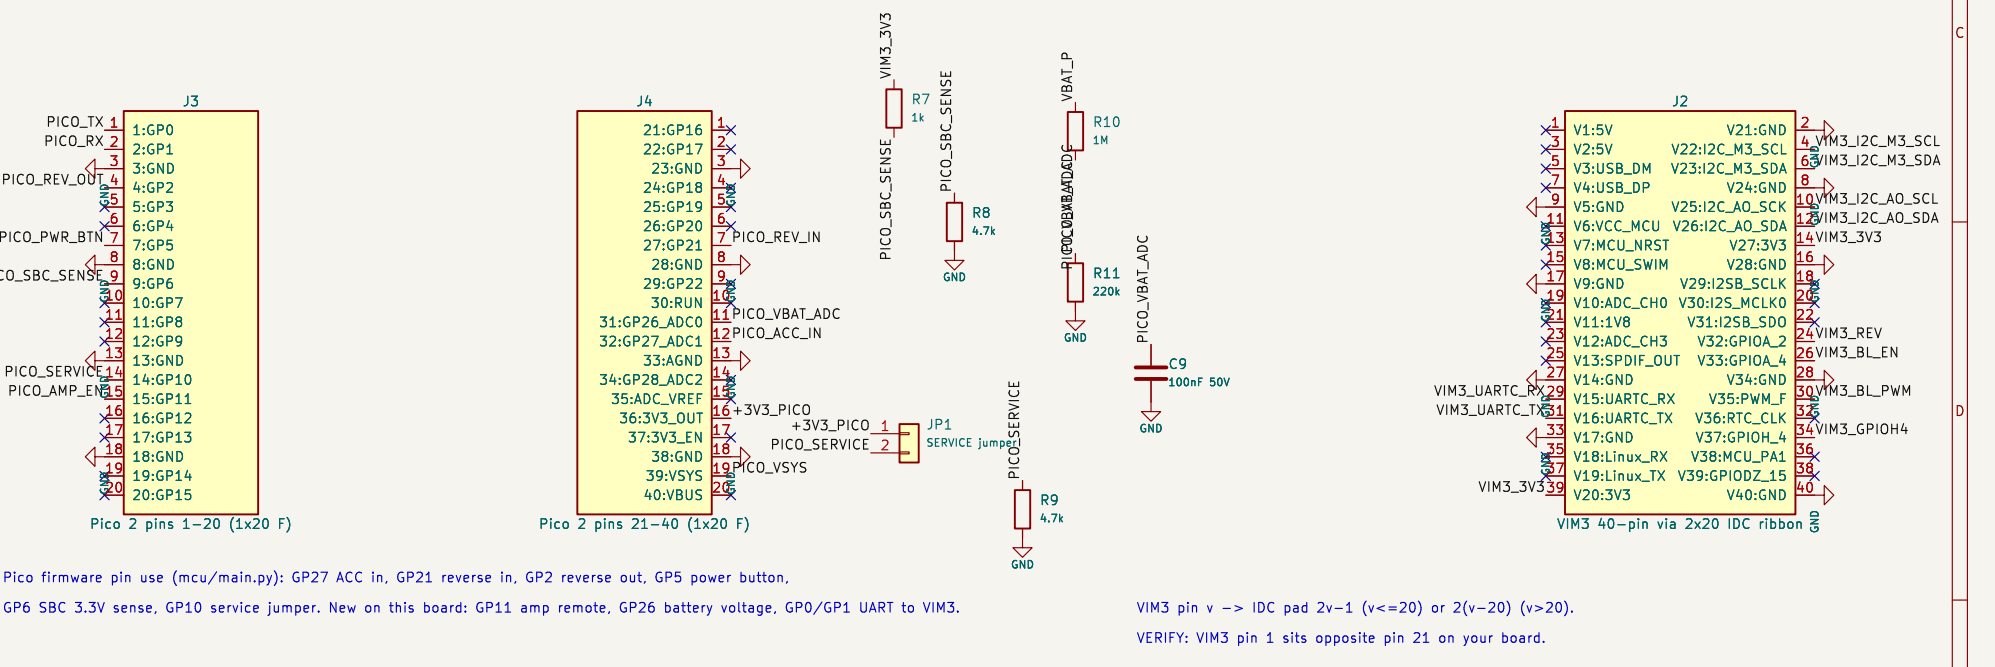

5. VIM3 INTERFACE (power key, reverse, backlight, light sensor, UART)

