


Car radio USB module rev 0.4 - phone ports, hub 2, their 5V/3A supply and the RTL-SDR socket: plugs onto the peripheral board (J26 -> J25). Generated by gen4.py vsh.

12. EXTERNAL USB PORTS (phone etc.): second hub + dedicated 5V/3A supply, 1.5A current-limited per port



Ports are powered only while the VMS supply is on. All USB shares the VMS board's USB 2.0 line (480 Mbit/s). RTL-SDR needs ~10 Mbit/s.

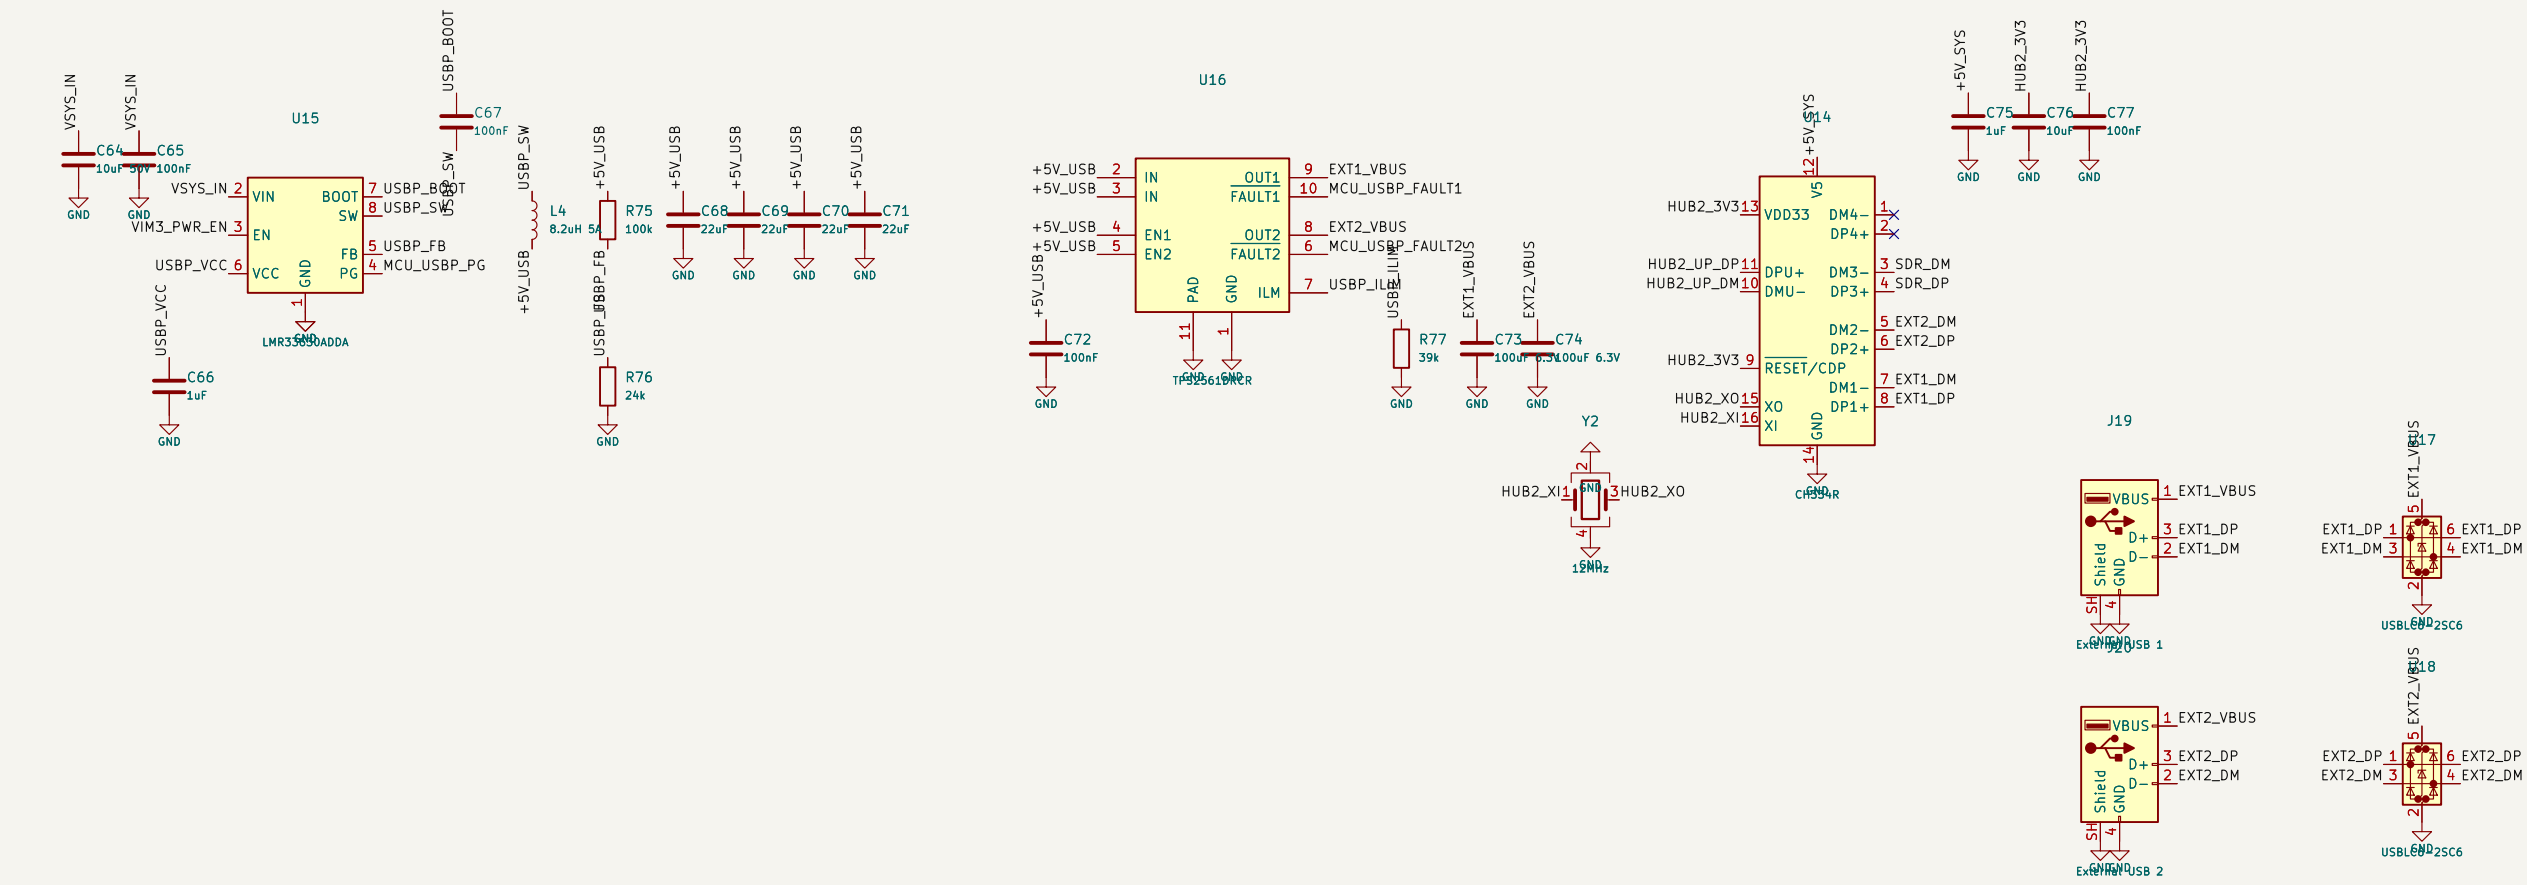