


SHEET 1 - OUTER SHELL - FLAT PATTERN, OUTER FACE (DIE LINE)

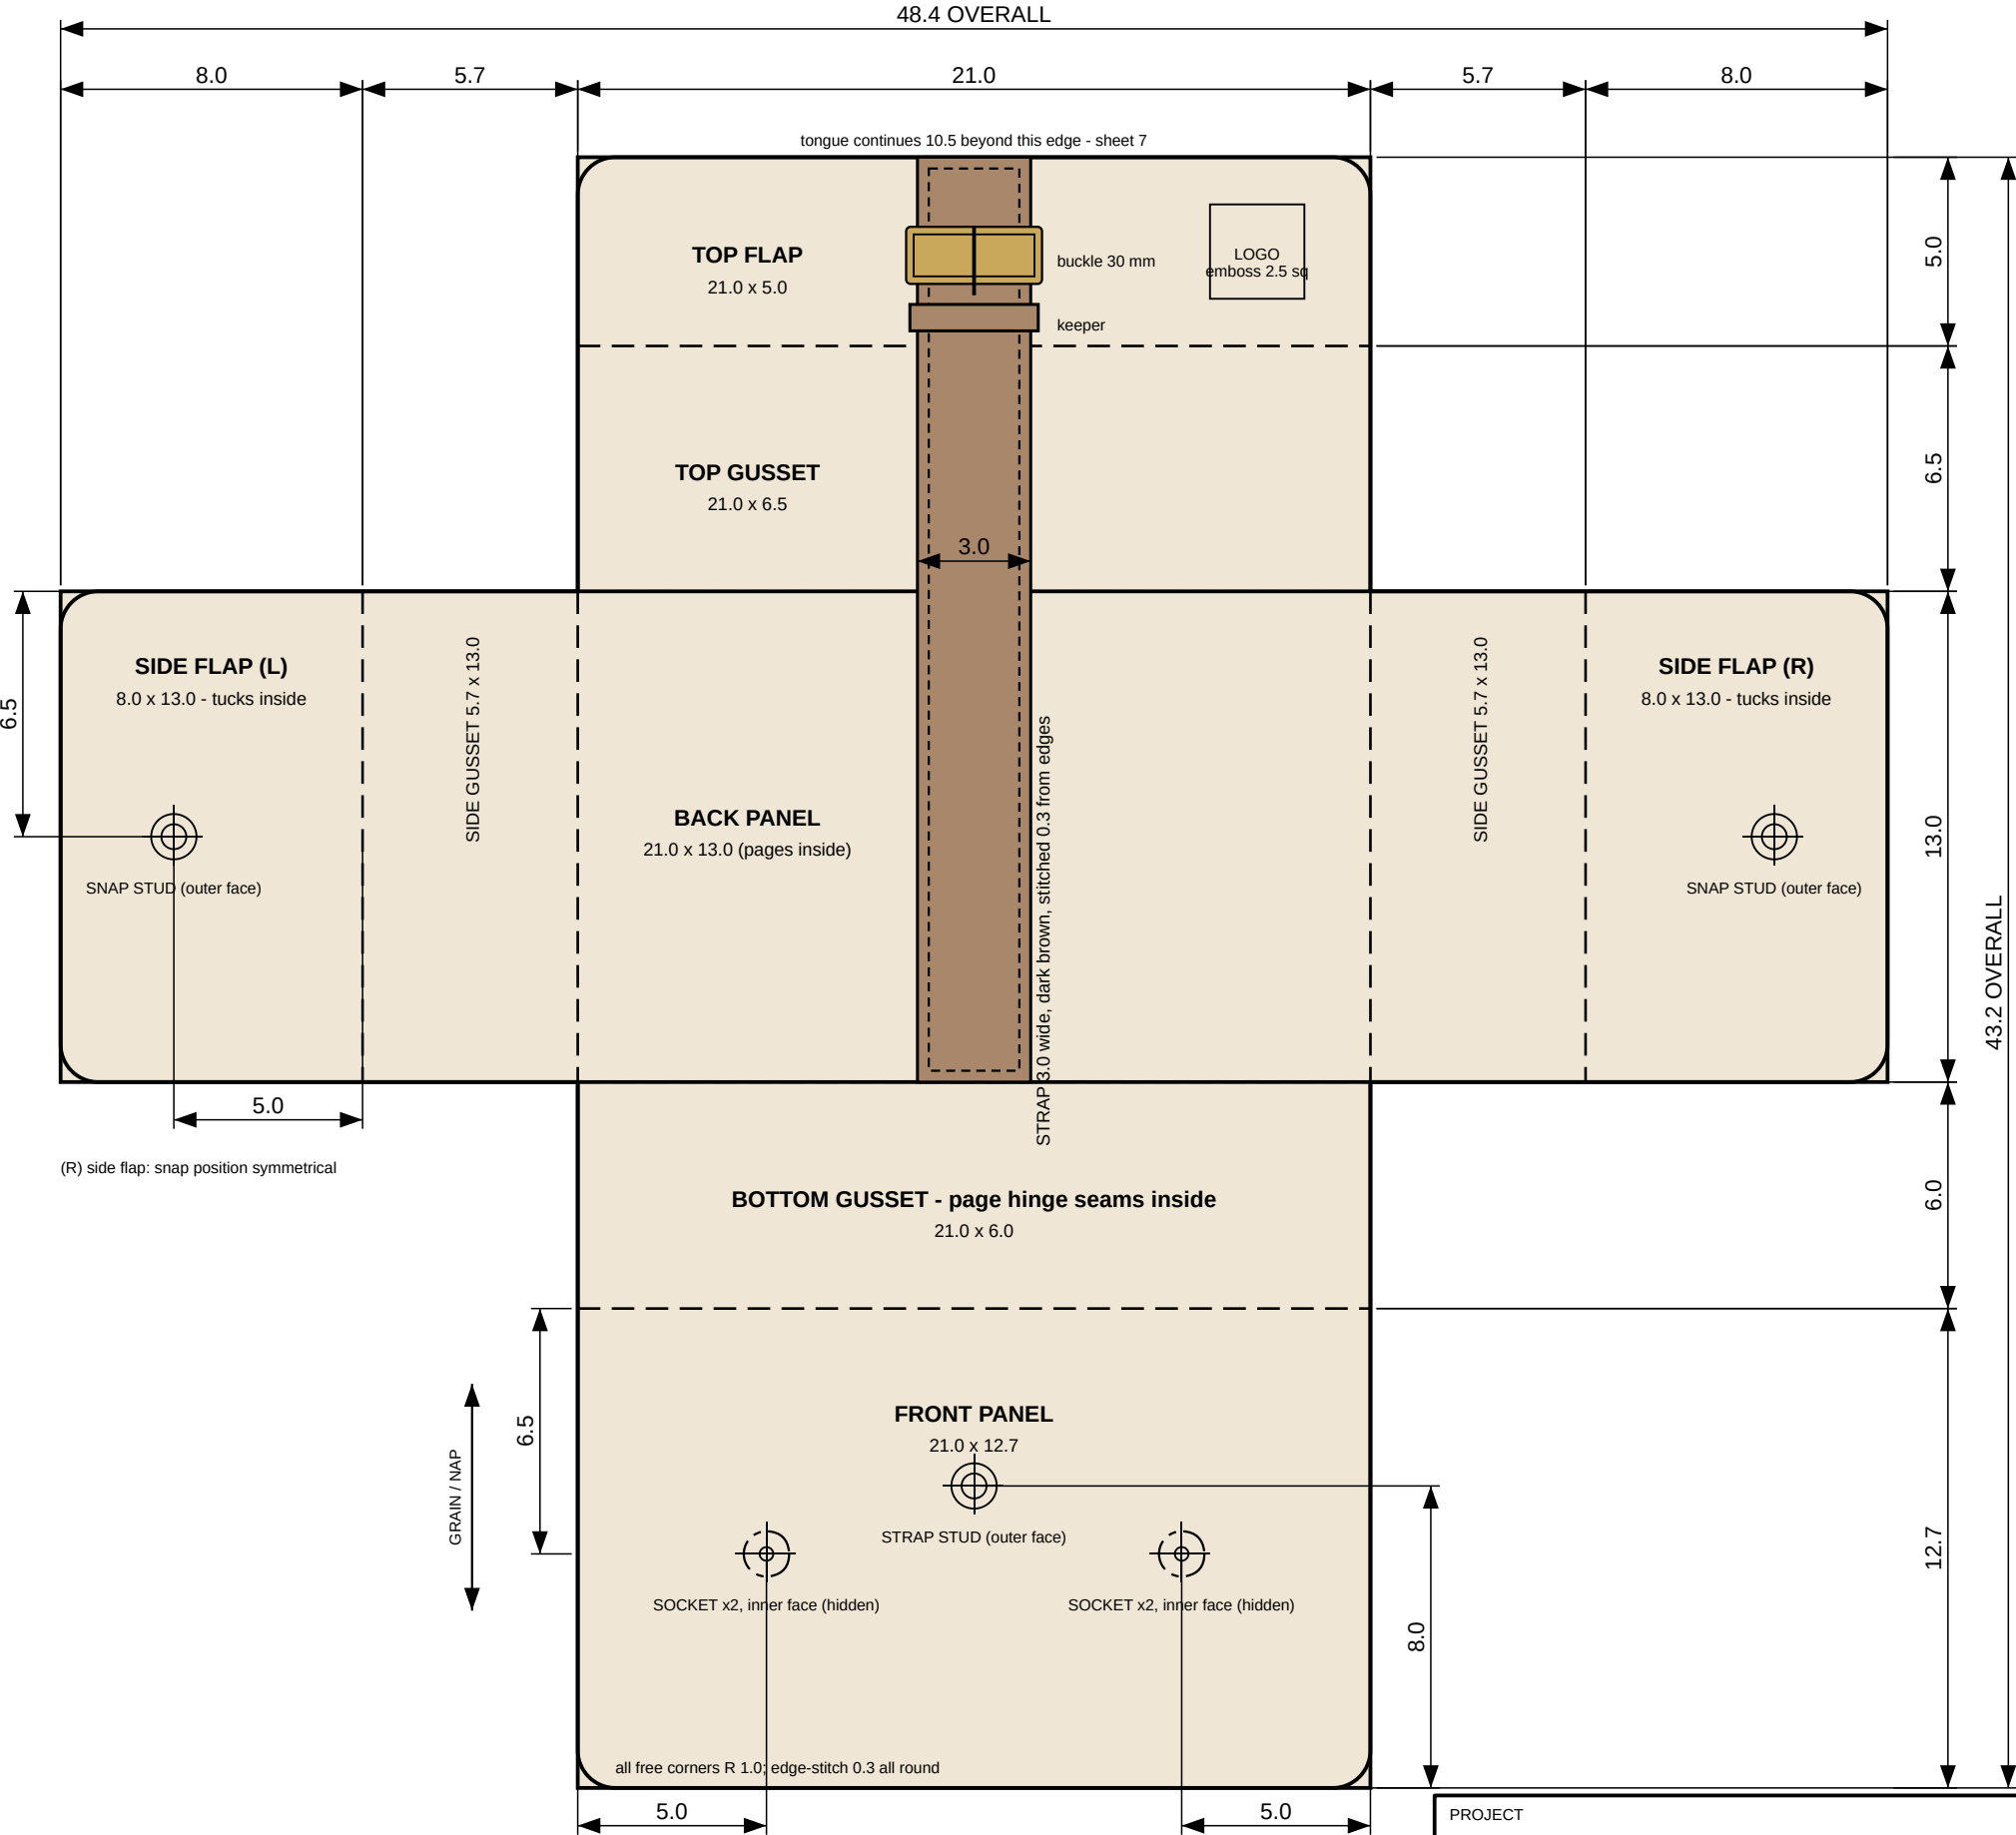

LEGEND

- Cut line (net finished size)
- Fold / score line
- Hidden (feature on far face)
- Stitch line
- Snap on this face
- Snap on far face

NOTES




- All dimensions in cm, finished (net) sizes as measured on the cardboard prototype. No seam allowance included: add 0.8 for turned seams, 0 for bound / edge-painted edges (reference shows edge-stitched, turned edges).
- Drawn with the OUTER face up (strap, buckle, logo side). Pattern assumed symmetrical about its vertical centre line; left side measured equal to the right (5.7 / 8.0).
- Construction: trifold clutch (reference photos). Side flaps fold in and tuck inside, front panel folds up over them, top flap folds down, strap tongue snaps to the front panel. Pages are sewn into the bottom gusset.
- Gusset depths as measured: 5.7 (sides), 6.0 (bottom), 6.5 (top). Top 6.5 gives the flap room over the front panel; keep as measured (Q1, sheet 2).
- Snap: 12.5 mm (line 20) spring snaps: 2 on the side flaps, 1 strap tongue, 1 accessory pocket. Set the front-panel sockets and strap stud from a dry fold.
- Outer: faux leather (PU) 1.0-1.2 mm, tan; strap dark brown. Stiffen back and front panels with 1.0 mm board. Lining: faux leather 0.6 mm, same tan (reference).
- Reference photos show a deeper top flap (about 9-10) and the buckle lower down; prototype gives 5.0 - confirm (Q2).

SHEET INDEX

- Outer shell - flat pattern (this sheet)
- Assembly - closed views, section, open layout, fold sequence
- Page 1: 10 cm tips 2.0-5.0 mm (11 pairs)
- Page 2: 10 cm tips 5.5-10 mm (6 pairs)
- Page 3: 5 cm tips 2.0-5.0 mm (11 pairs)
- Page 4: 5 cm tips 5.5-8 mm (4 pairs) + accessory pocket
- Details: strap, cable pocket, hinge section, elastic section
- Contents checklist, bill of materials, construction

PROJECT	CLIENT	
INTERCHANGEABLE KNITTING NEEDLE CASE	gsumano7 / ziqmac	
SHEET TITLE	SCALE	UNITS
Outer shell - flat pattern, outer face (die line)	1:2	cm (page A3)
SOURCE	DATE / REV	SHEET
Cardboard prototype (photos 1-5) + client reference photos (Rev B)	2026-10-01 Rev B	1 of 8

SHEET 2 - ASSEMBLY - CLOSED VIEWS, SECTION, OPEN LAYOUT, FOLD SEQUENCE

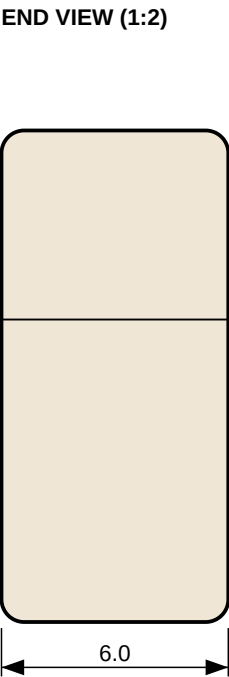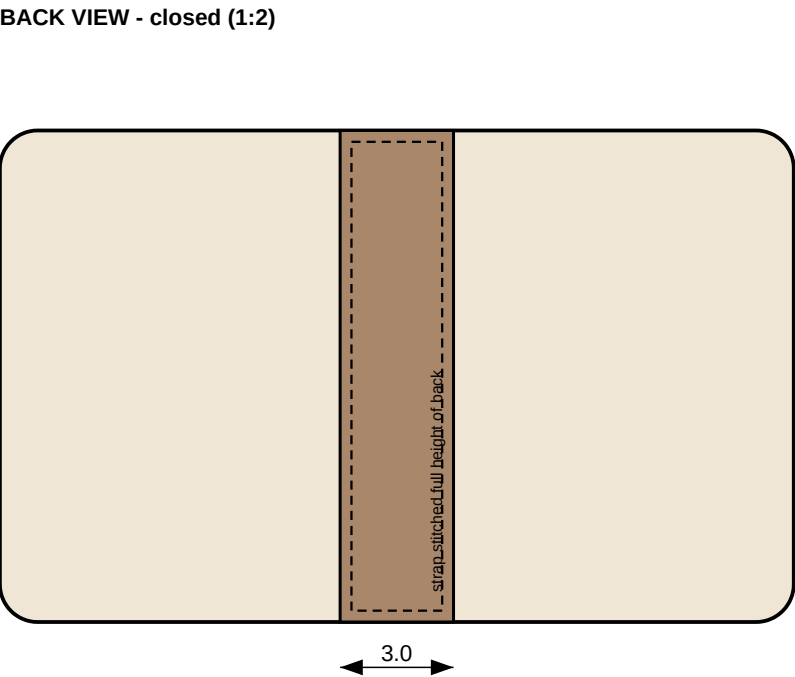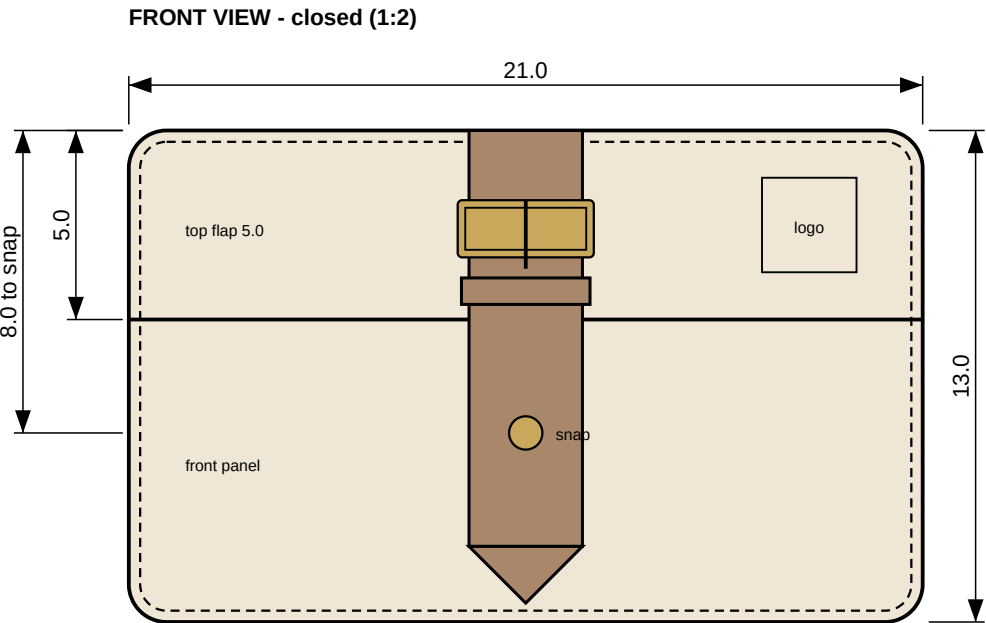

FOLD / CLOSING SEQUENCE

1. Pages stand up from the bottom gusset.
2. Fold both side flaps in over the pages; they tuck inside the front panel.
3. Fold the front panel up; its inner-face sockets snap onto the side-flap studs.
4. Fold the top gusset + flap over the front.
5. Pass the strap tongue through the buckle and keeper; snap it to the front-panel stud.

STACK-HEIGHT CHECK (depth 6.0)


- P1 2 x 5 mm tips + page 0.7
- P2 2 x 10 mm tips + page 1.2
- P3 2 x 5 mm tips + page 0.7
- P4 2 x 8 mm tips + pocket 1.2
- cable pocket, 5 coils 1.2
- back + front panel 0.5
- TOTAL 5.5 (OK)

OPEN QUESTIONS (confirm before cutting)


- Q1 Keep gussets 5.7 / 6.0 / 6.5 as measured?
- Q2 Top flap 5.0 (prototype) vs ~9 in the reference photos?
- Q3 Strap: working buckle, or fixed buckle with snap closure only (drawn)?
- Q4 Side-flap snaps: spring snaps (drawn) or hidden magnetic snaps?
- Q5 Cables in the back-panel pocket (drawn) or in page 4's accessory pocket?
- Q6 Confirm real cap / key / connector sizes against the pocket on sheet 6.

SECTION A-A - vertical through the centre, closed (1:1)

Pages fan from staggered hinge seams in the bottom gusset. P1 (back): 10 cm 2.0-5.0; P2: 10 cm 5.5-10; P3: 5 cm 2.0-5.0; P4 (front): 5 cm 5.5-8 + pocket.

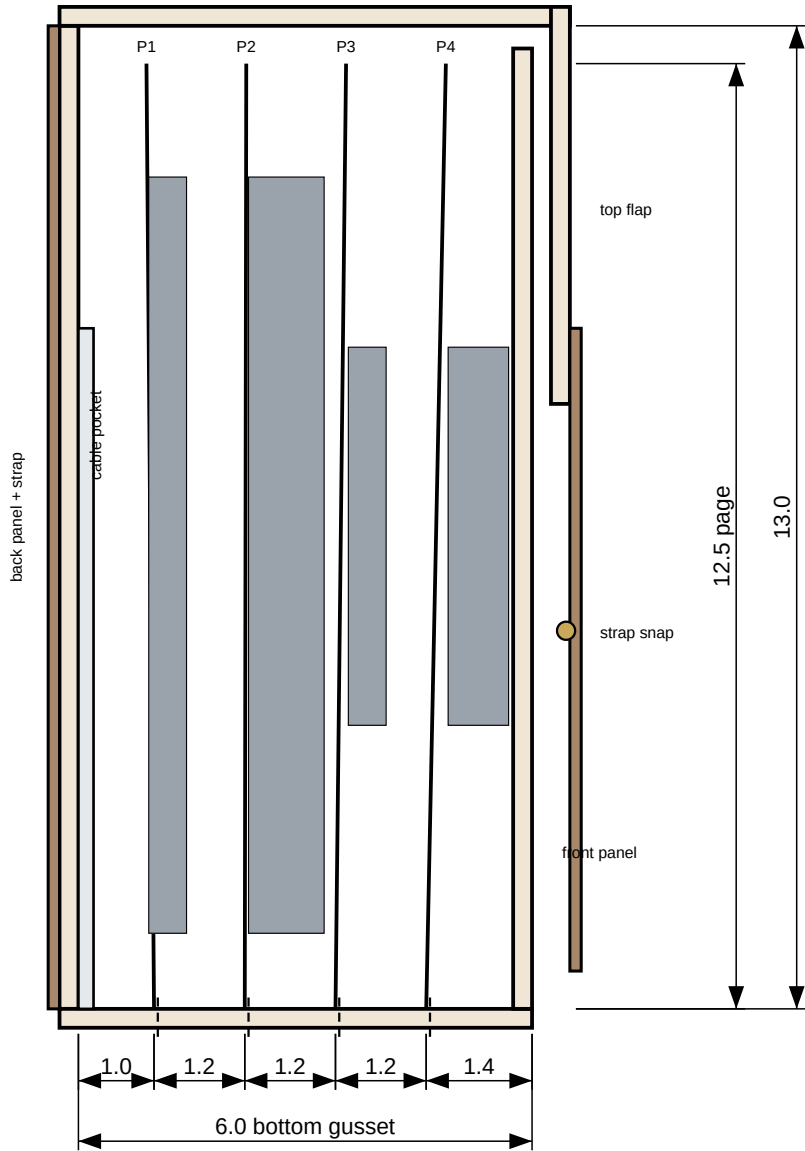


OPEN LAYOUT - inner face up, flaps flat (1:4)

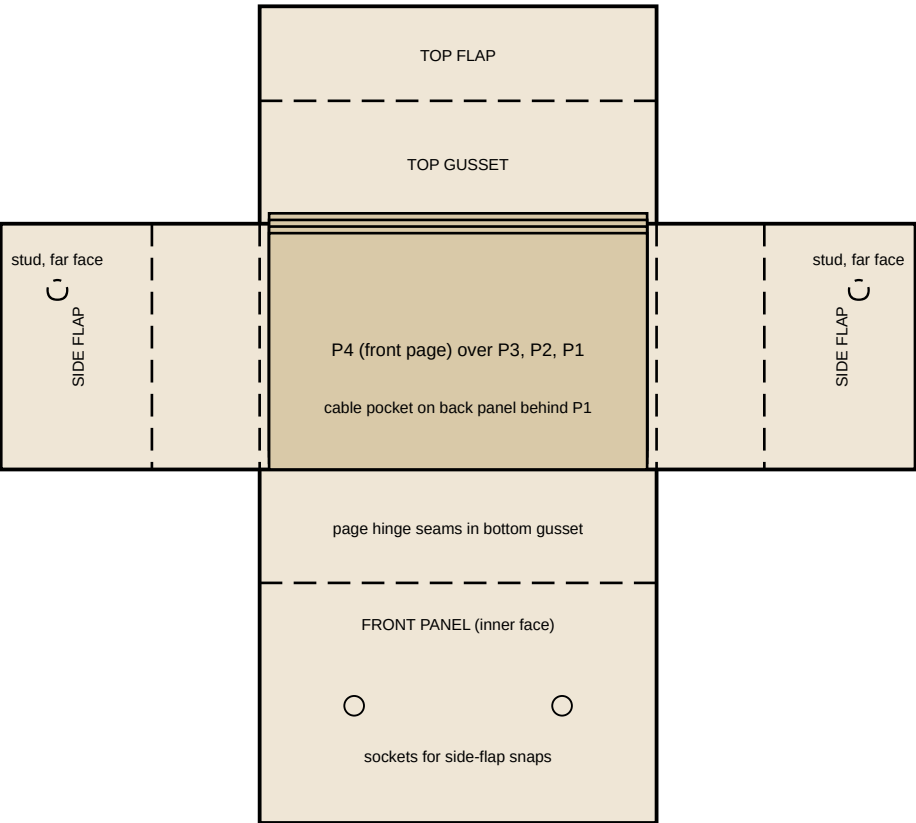


PROJECT INTERCHANGEABLE KNITTING NEEDLE CASE	CLIENT gsumano7 / ziqmac	
SHEET TITLE Assembly - closed views, section, open layout, fold sequence	SCALE 1:2 / 1:1 / 1:4 as noted	UNITS cm (page A3)
SOURCE Cardboard prototype (photos 1-5) + client reference photos (Rev B)	DATE / REV 2026-10-01 Rev B	SHEET 2 of 8

SHEET 3 - PAGE 1: 10 CM TIPS 2.0-5.0 MM (11 PAIRS)

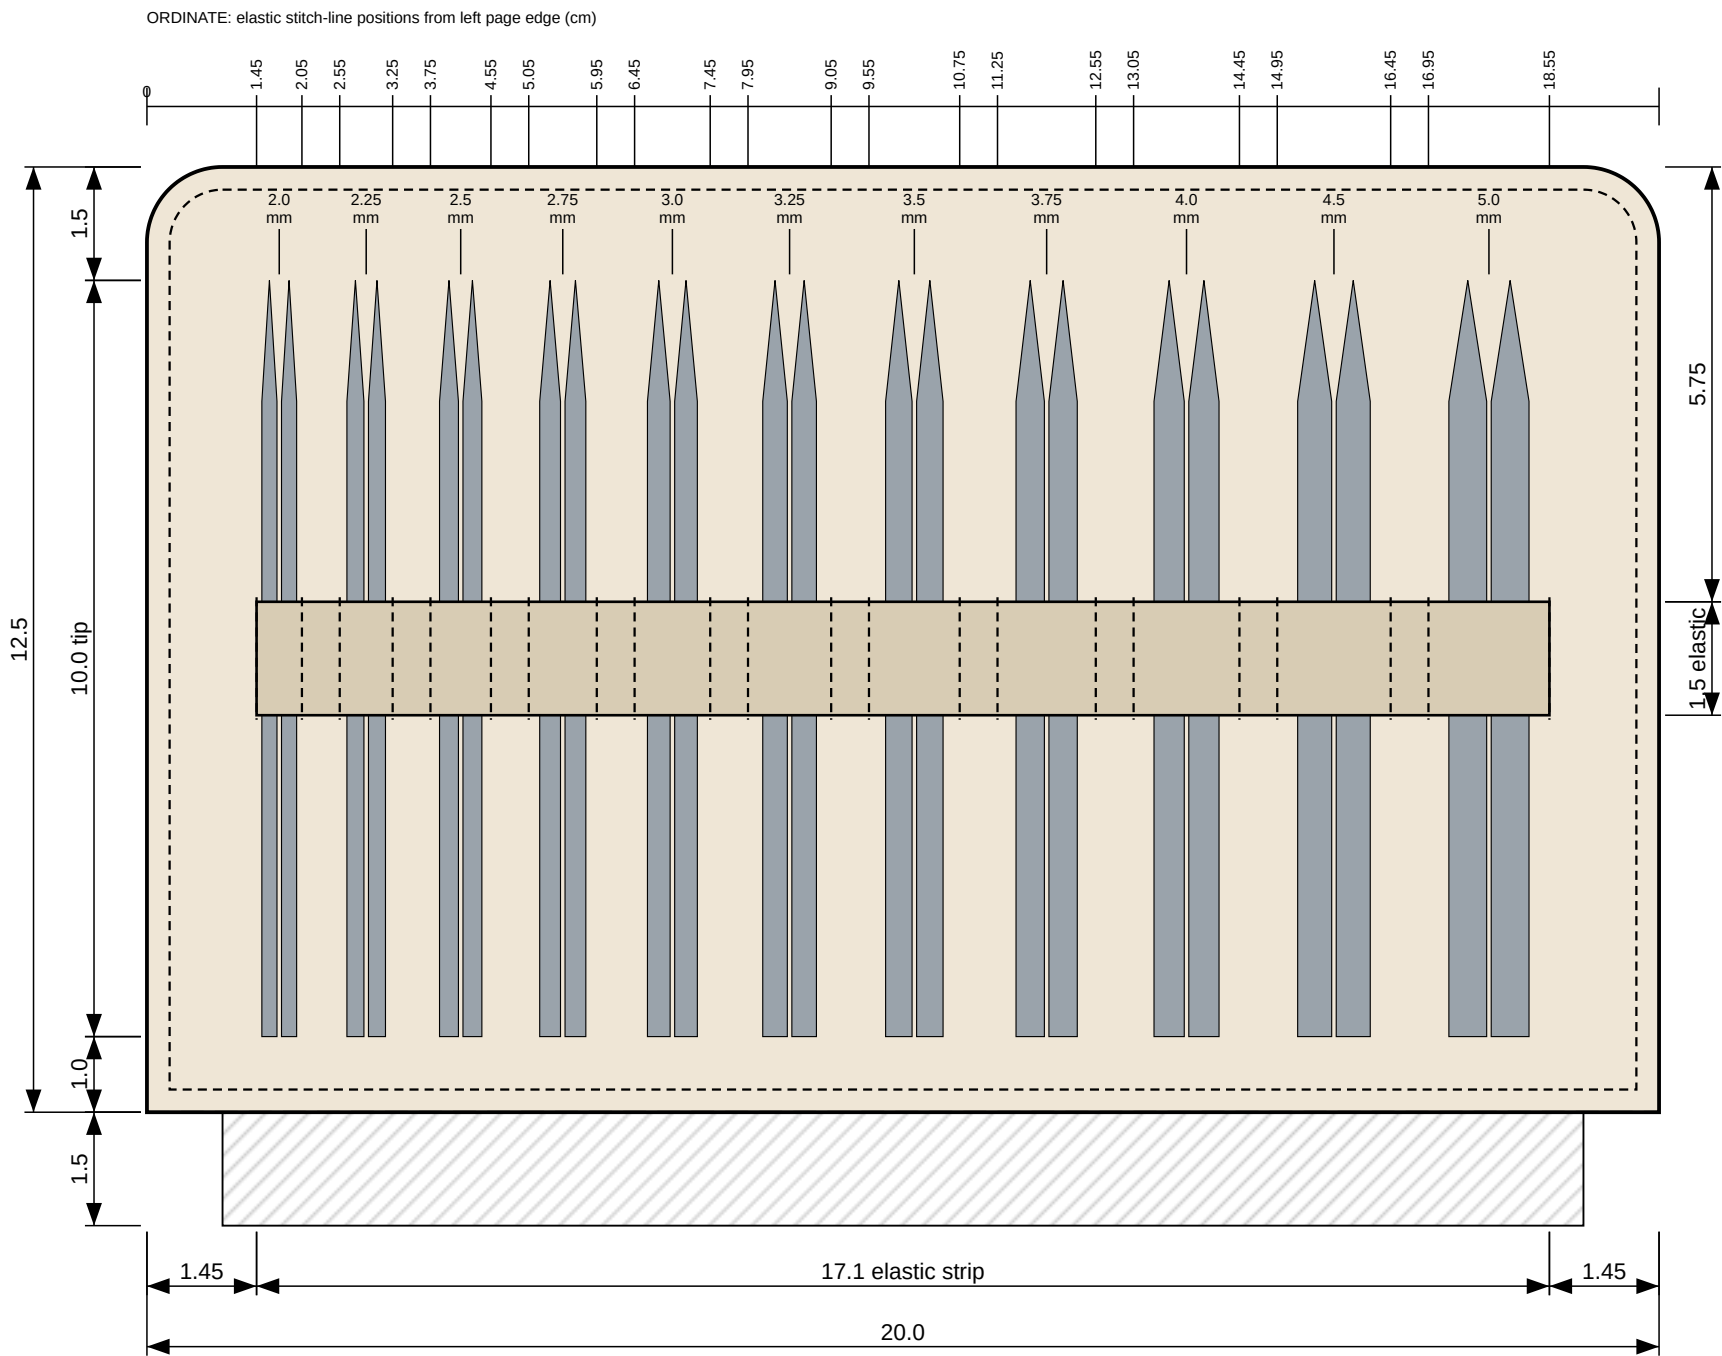

PAGE 1 - 20.0 x 12.5 + 1.5 hinge tab. Full size 1:1 - use as pattern.

DETAIL A - elastic slot section, 2:1 (same on all pages)

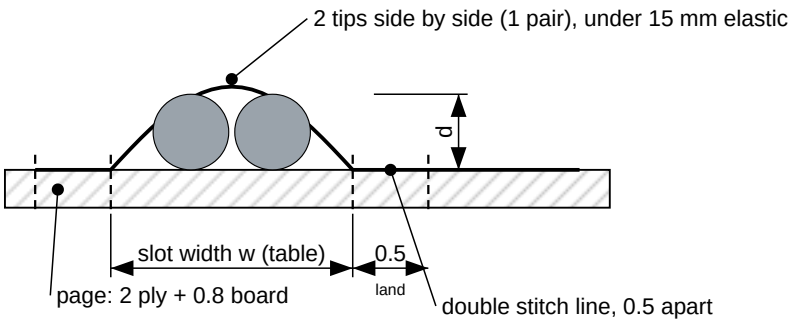

SLOT TABLE - page 1 (positions from left page edge, cm)


#	Size	Slot w	From	To	Holds
1	2.0 mm	0.6	1.45	2.05	2 x 10.0 cm
2	2.25 mm	0.7	2.55	3.25	2 x 10.0 cm
3	2.5 mm	0.8	3.75	4.55	2 x 10.0 cm
4	2.75 mm	0.9	5.05	5.95	2 x 10.0 cm
5	3.0 mm	1.0	6.45	7.45	2 x 10.0 cm
6	3.25 mm	1.1	7.95	9.05	2 x 10.0 cm
7	3.5 mm	1.2	9.55	10.75	2 x 10.0 cm
8	3.75 mm	1.3	11.25	12.55	2 x 10.0 cm
9	4.0 mm	1.4	13.05	14.45	2 x 10.0 cm
10	4.5 mm	1.5	14.95	16.45	2 x 10.0 cm
11	5.0 mm	1.6	16.95	18.55	2 x 10.0 cm

PAGE CONSTRUCTION (all four pages)

- Page = 2 plies faux leather 1.0 mm over 0.8 mm board stiffener, 20.0 x 12.5, R 1.0 top corners, edge-stitched 0.3 in contrast thread (as reference photos).
- Elastic: 15 mm knit elastic in matching colour, laid flat and stitched on every line shown. Slot widths are the prototype's: 0.6 for 2.0 mm, +0.1 per size step, to 2.2 for 10 mm. One slot holds one PAIR, side by side.
- Stitch lines in pairs 0.5 apart between slots (the 'land'); bar-tack both ends of each line.
- Size labels heat-stamped / printed above each slot with a 0.5 leader line to the tip (reference photo).
- Hinge tab 1.5 below the page is sewn into the bottom gusset - pages are not removable (sheet 7, detail C).
- Tip points up; 1.5 clear above the points (prototype).

PROJECT	CLIENT	
INTERCHANGEABLE KNITTING NEEDLE CASE	gsumano7 / ziqmac	
SHEET TITLE	SCALE	UNITS
Page 1: 10 cm tips 2.0-5.0 mm (11 pairs)	1:1	cm (page A3)
SOURCE	DATE / REV	SHEET
Cardboard prototype (photos 1-5) + client reference photos (Rev B)	2026-10-01 Rev B	3 of 8

SHEET 4 - PAGE 2: 10 CM TIPS 5.5-10 MM (6 PAIRS)

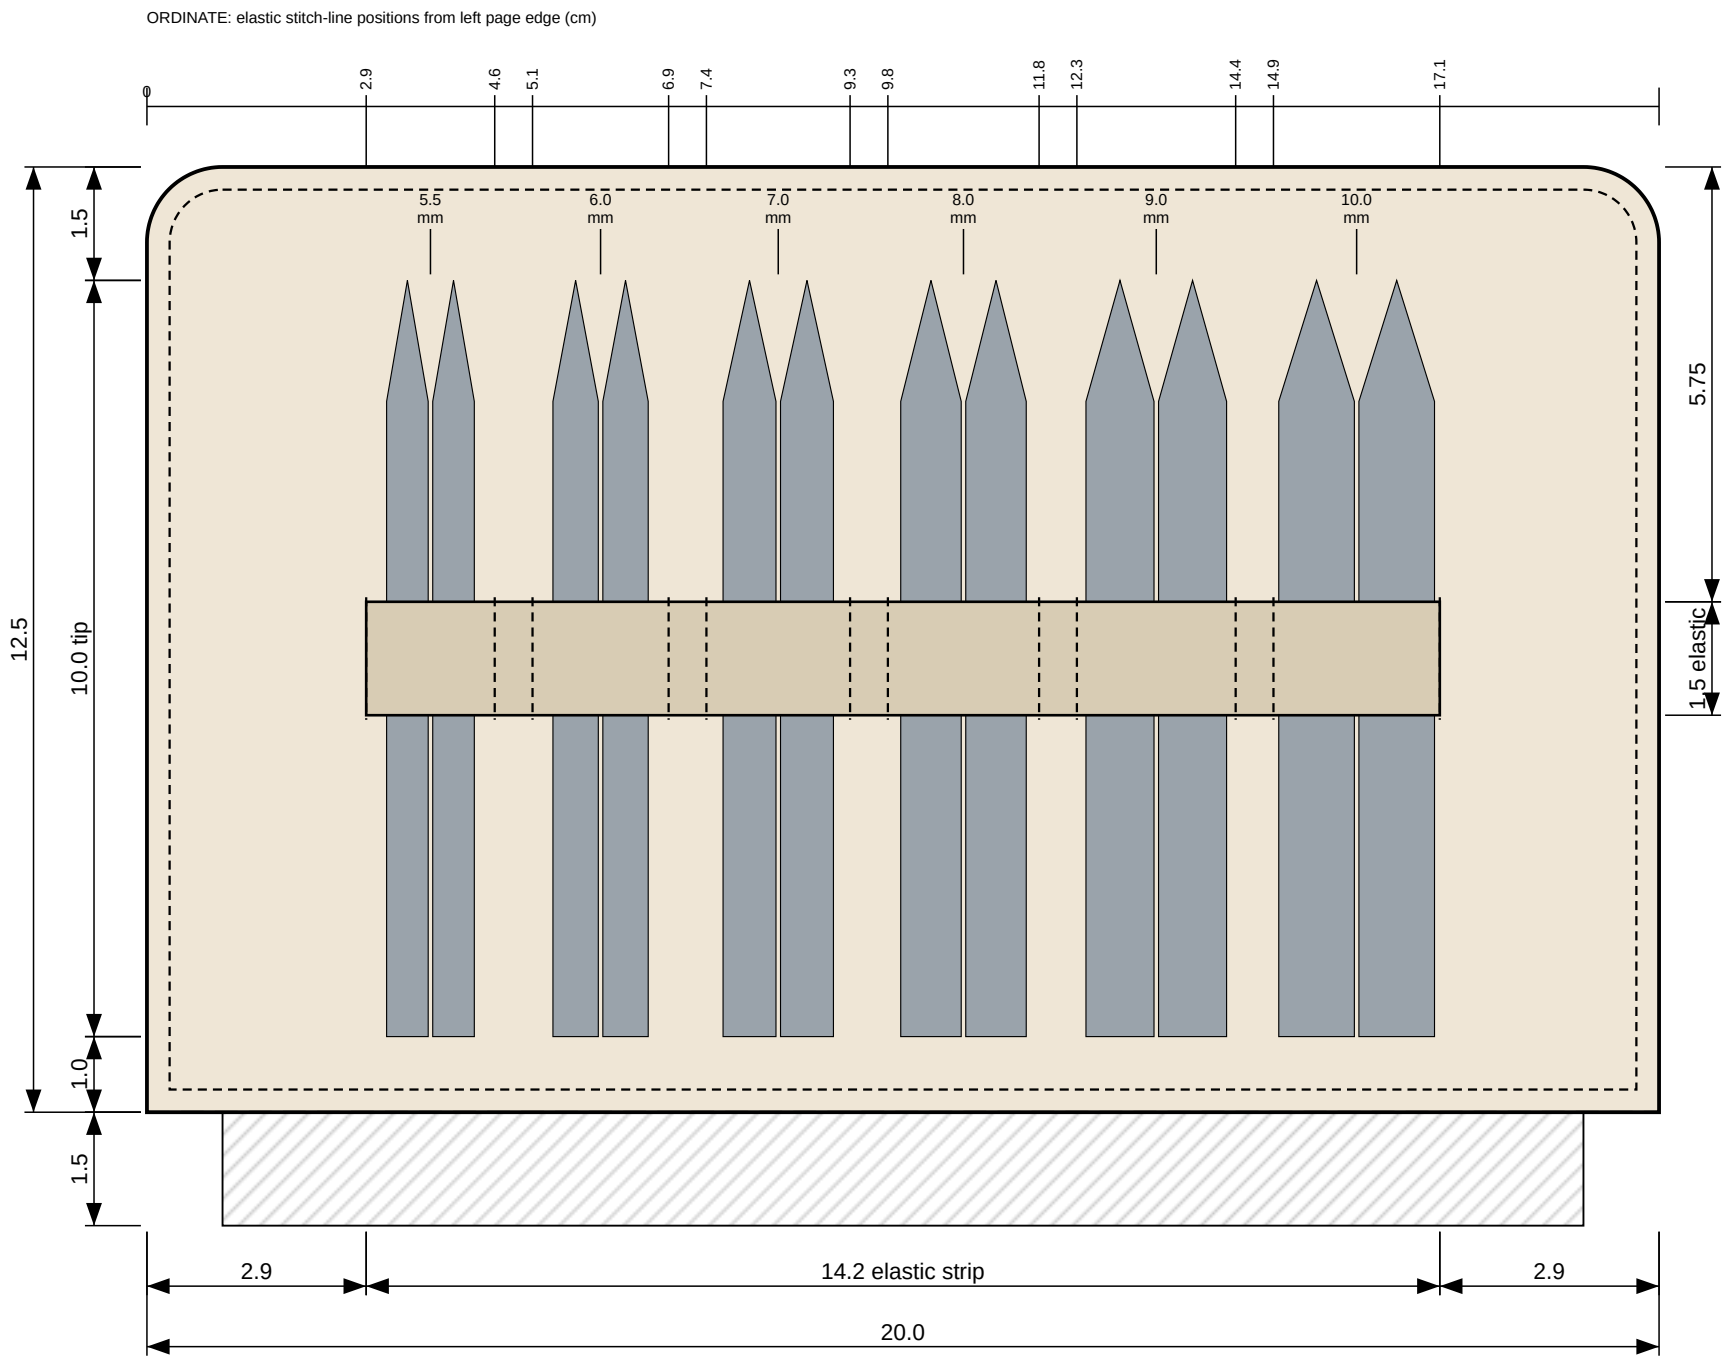

PAGE 2 - 20.0 x 12.5 + 1.5 hinge tab. Full size 1:1 - use as pattern.

SLOT TABLE - page 2 (positions from left page edge, cm)

#	Size	Slot w	From	To	Holds
1	5.5 mm	1.7	2.9	4.6	2 x 10.0 cm
2	6.0 mm	1.8	5.1	6.9	2 x 10.0 cm
3	7.0 mm	1.9	7.4	9.3	2 x 10.0 cm
4	8.0 mm	2.0	9.8	11.8	2 x 10.0 cm
5	9.0 mm	2.1	12.3	14.4	2 x 10.0 cm
6	10.0 mm	2.2	14.9	17.1	2 x 10.0 cm

PAGE CONSTRUCTION (all four pages)


- Page = 2 plies faux leather 1.0 mm over 0.8 mm board stiffener, 20.0 x 12.5, R 1.0 top corners, edge-stitched 0.3 in contrast thread (as reference photos).
- Elastic: 15 mm knit elastic in matching colour, laid flat and stitched on every line shown. Slot widths are the prototype's: 0.6 for 2.0 mm, +0.1 per size step, to 2.2 for 10 mm. One slot holds one PAIR, side by side.
- Stitch lines in pairs 0.5 apart between slots (the 'land'); bar-tack both ends of each line.
- Size labels heat-stamped / printed above each slot with a 0.5 leader line to the tip (reference photo).
- Hinge tab 1.5 below the page is sewn into the bottom gusset - pages are not removable (sheet 7, detail C).
- Tip points up; 1.5 clear above the points (prototype).

PAGE 2 NOTE

- 6 slots use 14.2 of the 20.0 width; the strip is centred (2.9 margins). The 10 mm pair is the thickest item in the case (1.0) - see stack check, sheet 2.

PROJECT INTERCHANGEABLE KNITTING NEEDLE CASE	CLIENT gsumano7 / ziqmac	
SHEET TITLE Page 2: 10 cm tips 5.5-10 mm (6 pairs)	SCALE 1:1	UNITS cm (page A3)
SOURCE Cardboard prototype (photos 1-5) + client reference photos (Rev B)	DATE / REV 2026-10-01 Rev B	SHEET 4 of 8

SHEET 5 - PAGE 3: 5 CM TIPS 2.0-5.0 MM (11 PAIRS)

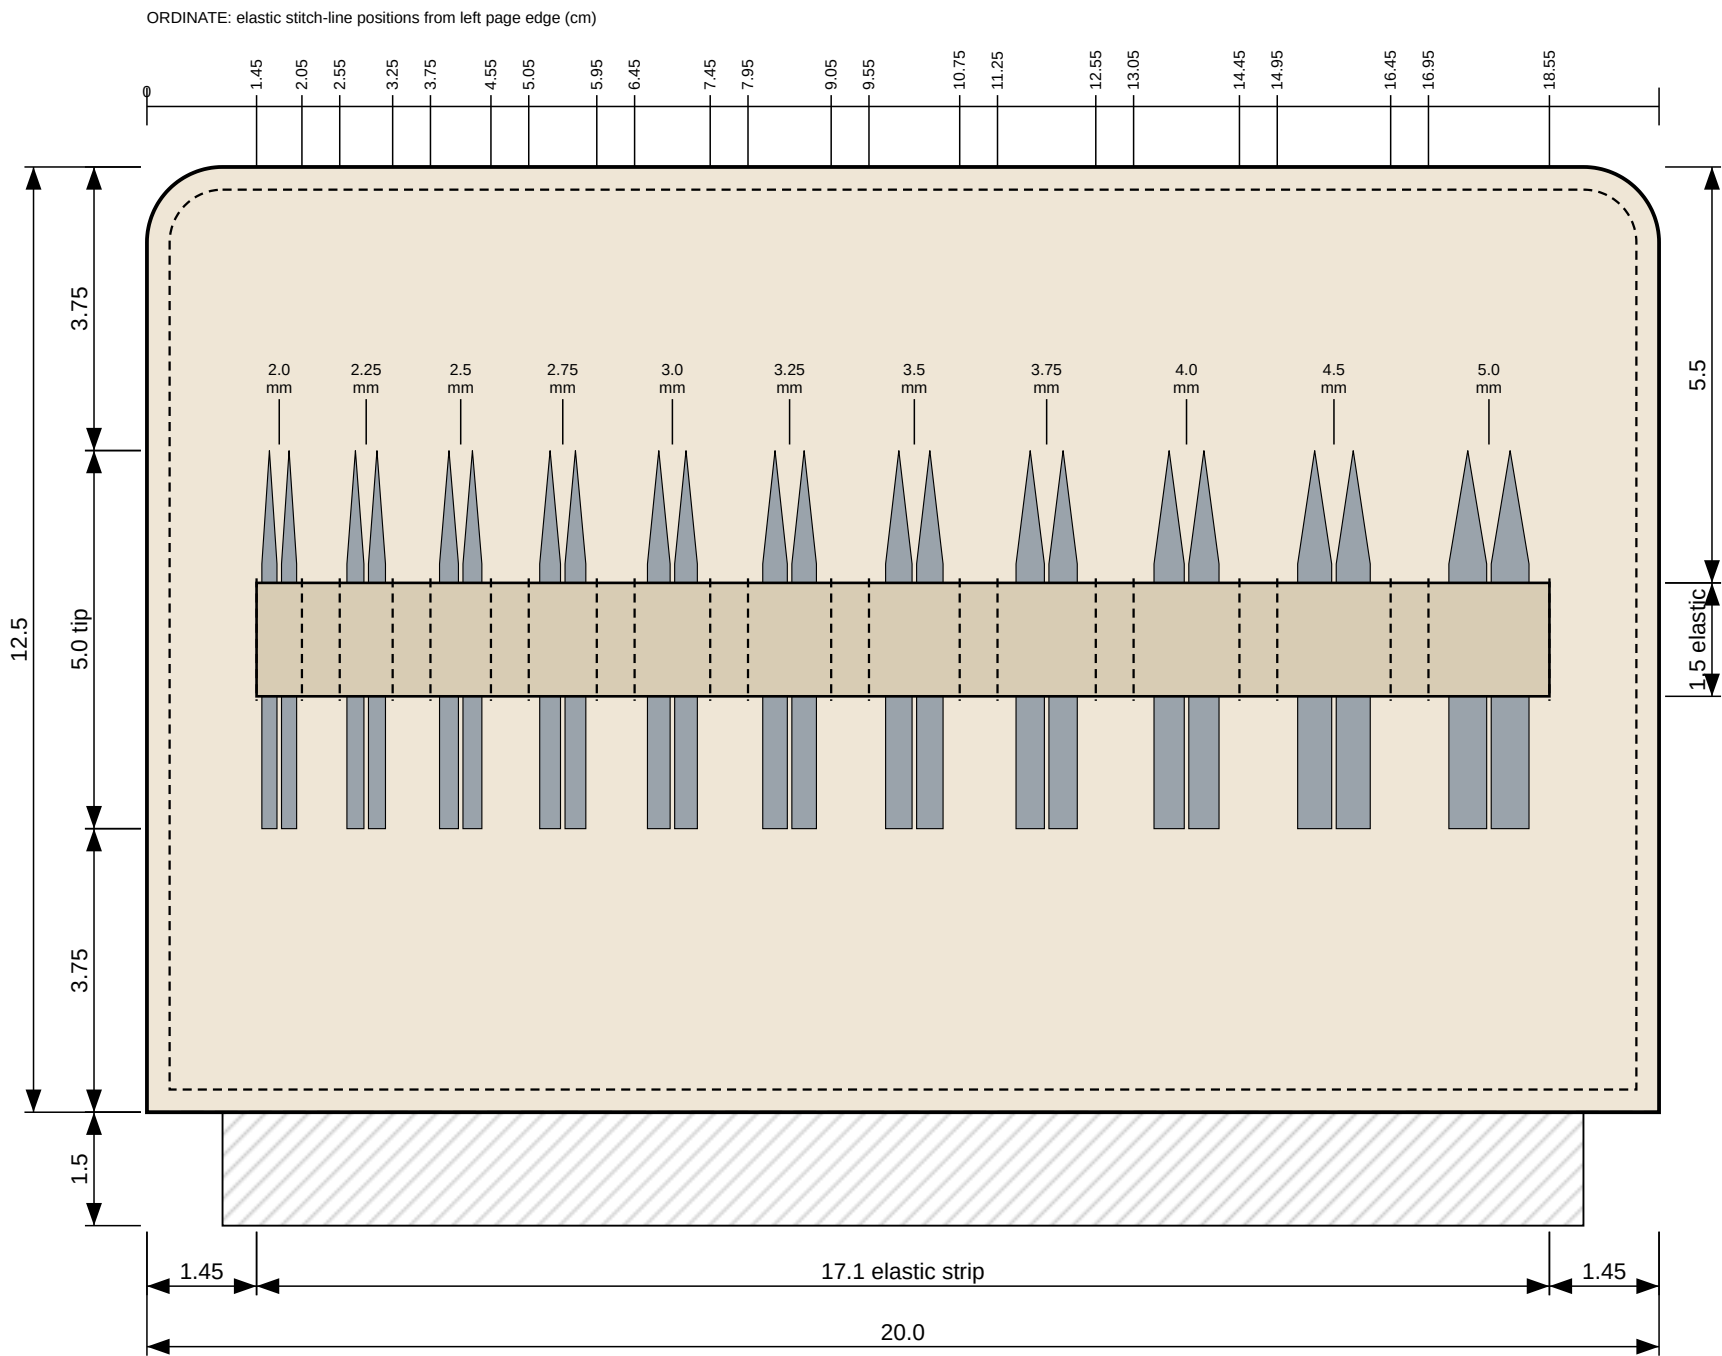

PAGE 3 - 20.0 x 12.5 + 1.5 hinge tab. Full size 1:1 - use as pattern.

SLOT TABLE - page 3 (positions from left page edge, cm)

#	Size	Slot w	From	To	Holds
1	2.0 mm	0.6	1.45	2.05	2 x 5.0 cm
2	2.25 mm	0.7	2.55	3.25	2 x 5.0 cm
3	2.5 mm	0.8	3.75	4.55	2 x 5.0 cm
4	2.75 mm	0.9	5.05	5.95	2 x 5.0 cm
5	3.0 mm	1.0	6.45	7.45	2 x 5.0 cm
6	3.25 mm	1.1	7.95	9.05	2 x 5.0 cm
7	3.5 mm	1.2	9.55	10.75	2 x 5.0 cm
8	3.75 mm	1.3	11.25	12.55	2 x 5.0 cm
9	4.0 mm	1.4	13.05	14.45	2 x 5.0 cm
10	4.5 mm	1.5	14.95	16.45	2 x 5.0 cm
11	5.0 mm	1.6	16.95	18.55	2 x 5.0 cm

PAGE CONSTRUCTION (all four pages)


- Page = 2 plies faux leather 1.0 mm over 0.8 mm board stiffener, 20.0 x 12.5, R 1.0 top corners, edge-stitched 0.3 in contrast thread (as reference photos).
- Elastic: 15 mm knit elastic in matching colour, laid flat and stitched on every line shown. Slot widths are the prototype's: 0.6 for 2.0 mm, +0.1 per size step, to 2.2 for 10 mm. One slot holds one PAIR, side by side.
- Stitch lines in pairs 0.5 apart between slots (the 'land'); bar-tack both ends of each line.
- Size labels heat-stamped / printed above each slot with a 0.5 leader line to the tip (reference photo).
- Hinge tab 1.5 below the page is sewn into the bottom gusset - pages are not removable (sheet 7, detail C).
- Tip points up; 1.5 clear above the points (prototype).

PAGE 3 NOTE

- Same slot widths and stitch positions as page 1, so the two pages share one stitching template.
- 5 cm tips sit centred on the page (reference photo): points 3.75 from the top, elastic centred at 6.25.

PROJECT	CLIENT	
INTERCHANGEABLE KNITTING NEEDLE CASE	gsumano7 / ziqmac	
SHEET TITLE	SCALE	UNITS
Page 3: 5 cm tips 2.0-5.0 mm (11 pairs)	1:1	cm (page A3)
SOURCE	DATE / REV	SHEET
Cardboard prototype (photos 1-5) + client reference photos (Rev B)	2026-10-01 Rev B	5 of 8

SHEET 6 - PAGE 4: 5 CM TIPS 5.5-8 MM (4 PAIRS) + ACCESSORY SNAP POCKET

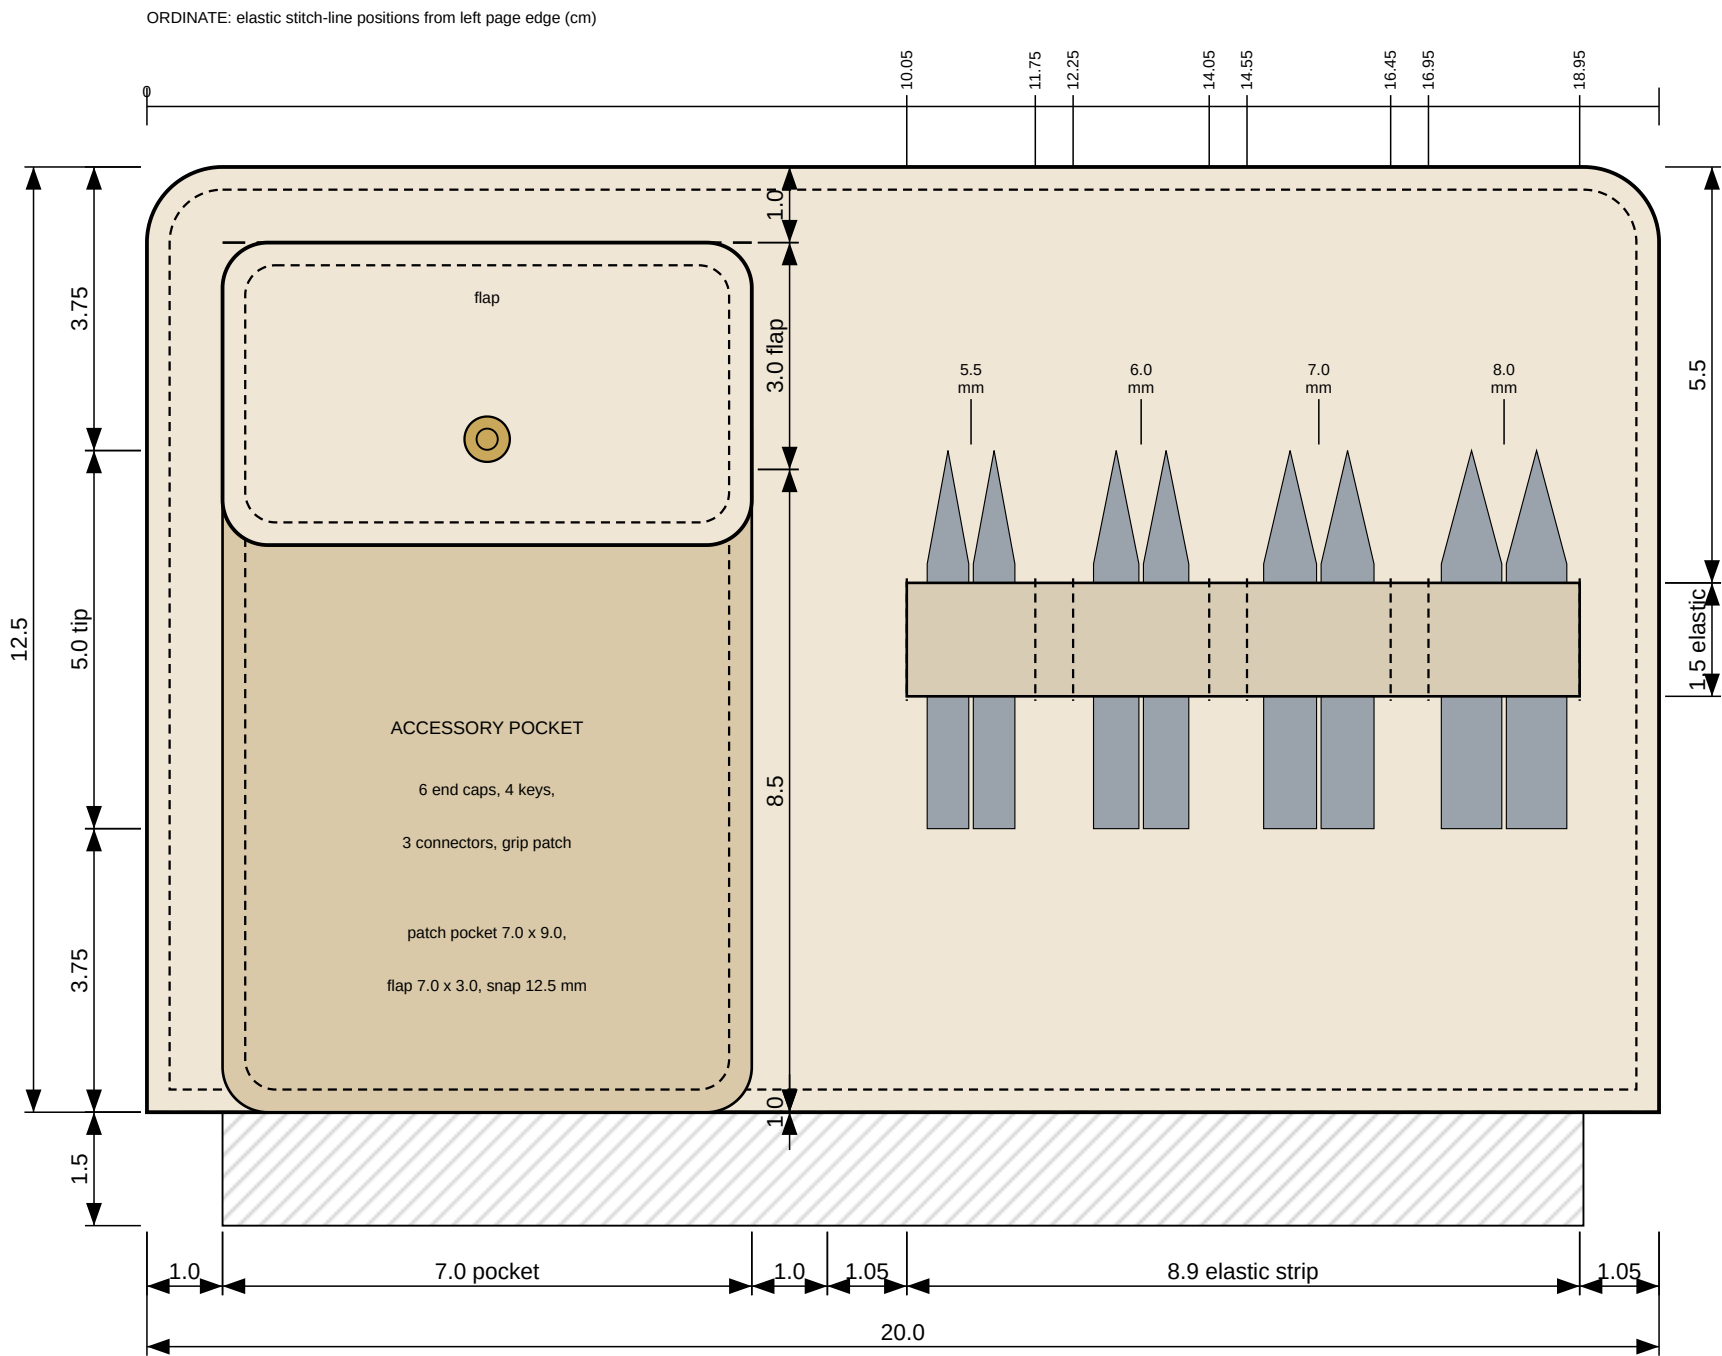

PAGE 4 - 20.0 x 12.5 + 1.5 hinge tab. Full size 1:1 - use as pattern.

SLOT TABLE - page 4 (positions from left page edge, cm)

#	Size	Slot w	From	To	Holds
1	5.5 mm	1.7	10.05	11.75	2 x 5 cm
2	6.0 mm	1.8	12.25	14.05	2 x 5 cm
3	7.0 mm	1.9	14.55	16.45	2 x 5 cm
4	8.0 mm	2.0	16.95	18.95	2 x 5 cm

PAGE 4 LAYOUT (reference photo 5)

- Accessory pocket at left: patch pocket 7.0 x 9.0 with a 3.0 flap and 12.5 mm brass snap, edge-stitched. Body cut 7.0 x 9.5 (0.5 under the flap).
- Holds the 6 screw-on end caps, 4 cable keys, 3 connectors and the leather grip patch.
- Needle zone 11.0 wide: 4 pairs 5.5 / 6 / 7 / 8 mm, slot widths 1.7-2.0, strip centred (1.05 margins).

LEATHER GRIP PATCH (replaces the rubber grip disc)


- Veg-tan leather 1.8-2.0 mm, 6.0 x 4.0, R 0.5 corners, suede side out. Fold round the tip when tightening.

PAGE CONSTRUCTION (all four pages)


- Page = 2 plies faux leather 1.0 mm over 0.8 mm board stiffener, 20.0 x 12.5, R 1.0 top corners, edge-stitched 0.3 in contrast thread (as reference photos).
- Elastic: 15 mm knit elastic in matching colour, laid flat and stitched on every line shown. Slot widths are the prototype's: 0.6 for 2.0 mm, +0.1 per size step, to 2.2 for 10 mm. One slot holds one PAIR, side by side.
- Stitch lines in pairs 0.5 apart between slots (the 'land'); bar-tack both ends of each line.
- Size labels heat-stamped / printed above each slot with a 0.5 leader line to the tip (reference photo).
- Hinge tab 1.5 below the page is sewn into the bottom gusset - pages are not removable (sheet 7, detail C).
- Tip points up; 1.5 clear above the points (prototype).

PROJECT INTERCHANGEABLE KNITTING NEEDLE CASE	CLIENT gsumano7 / ziqmac	
SHEET TITLE Page 4: 5 cm tips 5.5-8 mm (4 pairs) + accessory snap pocket	SCALE 1:1	UNITS cm (page A3)
SOURCE Cardboard prototype (photos 1-5) + client reference photos (Rev B)	DATE / REV 2026-10-01 Rev B	SHEET 6 of 8

SHEET 7 - DETAILS - STRAP, CABLE POCKET, PAGE HINGE SECTION, ELASTIC SECTION

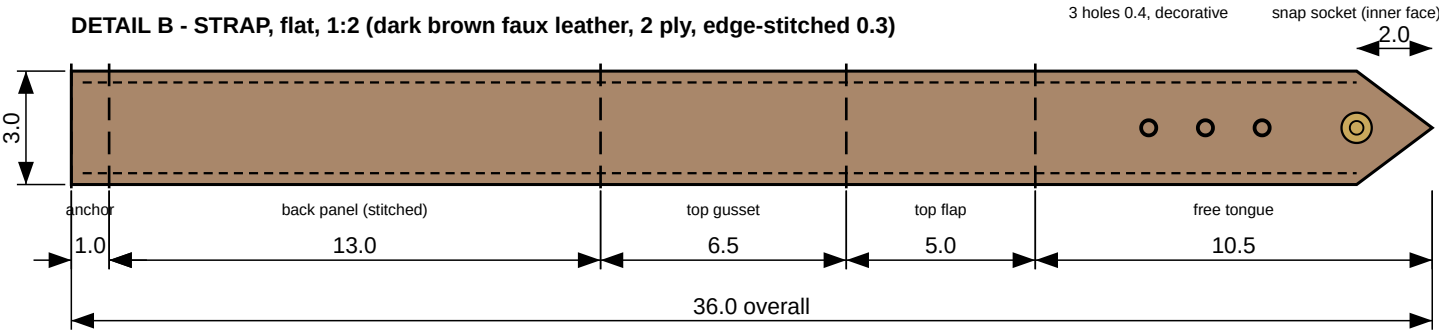


BUCKLE PIECE - 3.0 x 8.0 loop round the 30 mm buckle bar, stitched to the top flap under the strap with the bar 2.6 below the flap edge; keeper 3.4 x 0.7 stitched 1.3 below the buckle

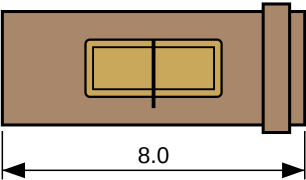

Buckle: 30 mm (1 1/4 in) antique brass, roller or plain; prong engages the strap holes.


Closure is the snap: the buckle is decorative unless Q3 (sheet 2) says otherwise.

DETAIL D - CABLE POCKET on the inner face of the back panel, behind page 1 (1:2)

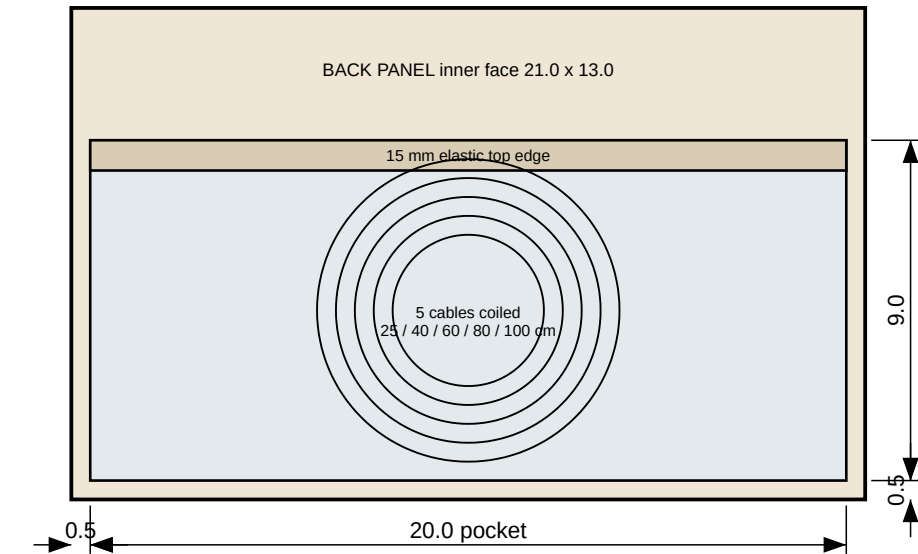


- Slip pocket, faux leather lining 0.6 mm, sides and bottom stitched to the back-panel lining before the shell is assembled; 15 mm elastic in the top hem keeps the coils in.
- Alternative (Q5): put the cables in page 4's pocket and use this pocket for a pattern card.

DETAIL C - PAGE HINGE, section through the bottom gusset, 2:1

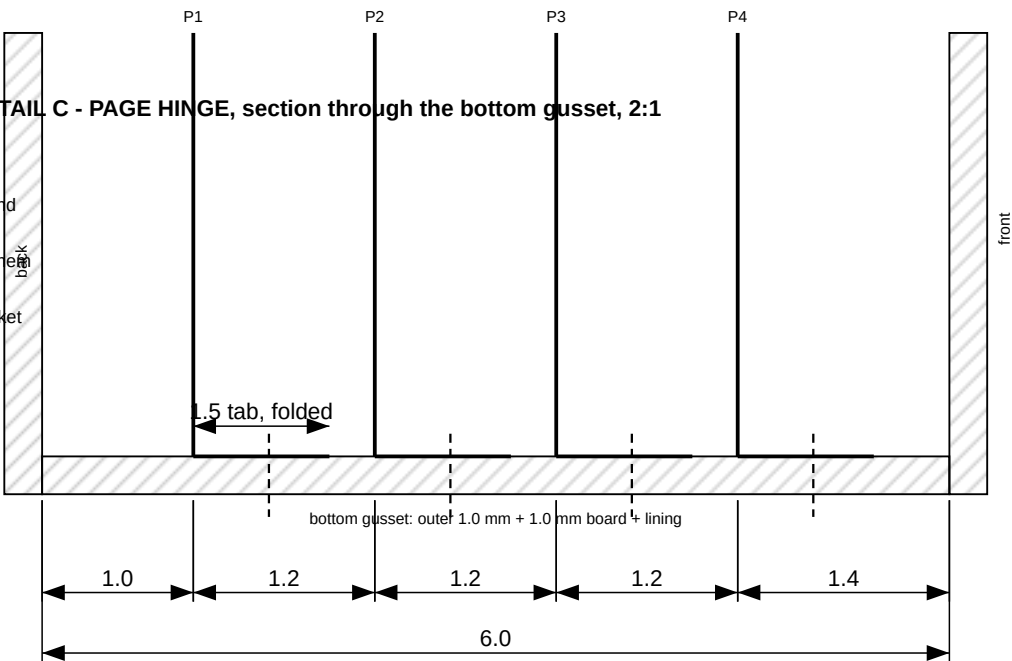

- Each page's 1.5 hinge tab folds toward the front and is stitched through the gusset (lining + board + outer) on one line, 0.5 from the fold. Seams staggered 1.2 apart so the four pages fan open (reference photo).
- Stitch pages P1 to P4 in order from the back; the front panel seam is last. The gusset outer face shows four parallel stitch lines - use the same contrast thread.

DETAIL A - elastic slot section, 2:1

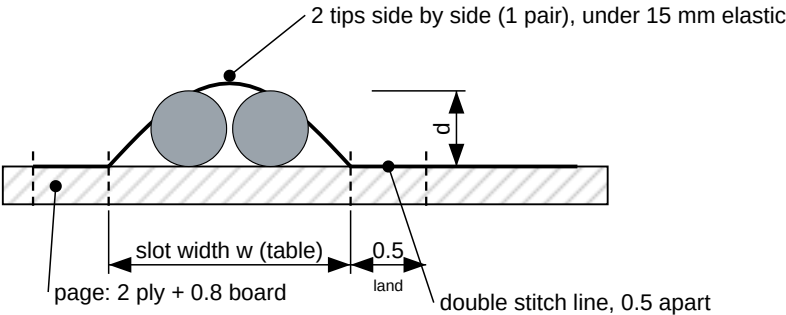

PROJECT	CLIENT	
INTERCHANGEABLE KNITTING NEEDLE CASE	gsumano7 / ziqmac	
SHEET TITLE	SCALE	UNITS
Details - strap, cable pocket, page hinge section, elastic section	1:2 / 2:1 as noted	cm (page A3)
SOURCE	DATE / REV	SHEET
Cardboard prototype (photos 1-5) + client reference photos (Rev B)	2026-10-01 Rev B	7 of 8

SHEET 8 - CONTENTS CHECKLIST, BILL OF MATERIALS, CONSTRUCTION & CUTTING LIST

CONTENTS CHECKLIST - 64 tips (32 pairs), 5 cables, 14 accessories: where each item lives

Size	10 cm tips	Page	Slot	w	5 cm tips	Page	Slot	w
2.0 mm	2 x 10 cm	Page 1	1	0.6	2 x 5 cm	Page 3	1	0.6
2.25 mm	2 x 10 cm	Page 1	2	0.7	2 x 5 cm	Page 3	2	0.7
2.5 mm	2 x 10 cm	Page 1	3	0.8	2 x 5 cm	Page 3	3	0.8
2.75 mm	2 x 10 cm	Page 1	4	0.9	2 x 5 cm	Page 3	4	0.9
3.0 mm	2 x 10 cm	Page 1	5	1.0	2 x 5 cm	Page 3	5	1.0
3.25 mm	2 x 10 cm	Page 1	6	1.1	2 x 5 cm	Page 3	6	1.1
3.5 mm	2 x 10 cm	Page 1	7	1.2	2 x 5 cm	Page 3	7	1.2
3.75 mm	2 x 10 cm	Page 1	8	1.3	2 x 5 cm	Page 3	8	1.3
4.0 mm	2 x 10 cm	Page 1	9	1.4	2 x 5 cm	Page 3	9	1.4
4.5 mm	2 x 10 cm	Page 1	10	1.5	2 x 5 cm	Page 3	10	1.5
5.0 mm	2 x 10 cm	Page 1	11	1.6	2 x 5 cm	Page 3	11	1.6
5.5 mm	2 x 10 cm	Page 2	1	1.7	2 x 5 cm	Page 4	1	1.7
6.0 mm	2 x 10 cm	Page 2	2	1.8	2 x 5 cm	Page 4	2	1.8
7.0 mm	2 x 10 cm	Page 2	3	1.9	2 x 5 cm	Page 4	3	1.9
8.0 mm	2 x 10 cm	Page 2	4	2.0	2 x 5 cm	Page 4	4	2.0
9.0 mm	2 x 10 cm	Page 2	5	2.1	-	-	-	-
10.0 mm	2 x 10 cm	Page 2	6	2.2	-	-	-	-

Totals: 17 pairs x 10 cm (34 tips) on pages 1 + 2; 15 pairs x 5 cm (30 tips) on pages 3 + 4; 32 pairs / 64 tips.

Accessories: 6 end caps + 4 keys + 3 connectors + grip patch -> page 4 snap pocket; 5 cables -> back-panel cable pocket.

BILL OF MATERIALS (per case)

#	Item	Qty	Cut size (cm) / note
1	Outer shell, faux leather (PU) 1.0-1.2 mm, tan	1	48.4 x 43.2 net + allowance (sheet 1)
2	Lining, faux leather 0.6 mm, tan	1	48.4 x 43.2 net + allowance
3	Board 1.0 mm: back panel, front panel	2	21 x 13, 21 x 12.7
4	Board 0.8 mm: pages	4	20.0 x 12.5
5	Page faces, faux leather 1.0 mm	8	20.0 x 14.0 (incl. 1.5 hinge tab) + allowance
6	Knit elastic 15 mm, tan	4	17.1 / 14.2 / 17.1 / 8.9 cm
7	Strap, faux leather 1.2 mm, dark brown, 2 ply	2	3.0 x 36.0 (sheet 7)
8	Buckle piece + keeper, dark brown	1+1	3.0 x 8.0; 3.4 x 0.7
9	Buckle 30 mm, antique brass	1	roller or plain
10	Spring snaps 12.5 mm (line 20), antique brass	4 sets	2 side flaps, 1 strap, 1 pocket
11	Accessory pocket + flap, faux leather	1+1	7.0 x 9.5; 7.0 x 4.0
12	Cable pocket, lining faux leather	1	20.0 x 10.0 + 15 mm elastic 20 cm
13	Leather grip patch, veg-tan 1.8-2 mm	1	6.0 x 4.0, R 0.5
14	Thread, bonded polyester Tex 70, contrast	-	stitch length 3 mm
15	Logo emboss plate	1	2.5 x 2.5 (artwork by client)

CONSTRUCTION SEQUENCE

1. Cut outer shell, lining and board (sheet 1). Emboss the logo on the top flap while flat.
2. Stitch the strap to the outer shell (back panel + top gusset + top flap); add buckle piece and keeper.
3. Make the four pages (sheets 3-6): stitch elastics and labels on the face plies, add the pocket to page 4, then laminate face + board + back ply and edge-stitch, leaving the hinge tab single-ply.
4. Stitch the cable pocket to the back-panel lining. Set the side-flap studs and front-panel sockets.
5. Stitch the page hinge tabs through the bottom gusset in order P1-P4 (sheet 7, detail C).
6. Laminate lining to shell with board in back and front panels; turn and edge-stitch 0.3 all round.
7. Dry-fold; set the strap stud on the front panel and the socket in the tongue; check all snaps.
8. Load the set per the contents checklist; check the closed case has no pressure on the 10 mm tips.

TOLERANCES

Cut pieces +/- 0.1 cm; elastic stitch lines +/- 0.05 cm (the 0.6 slot must still take two 2 mm tips); snap centres +/- 0.15 cm; page hinge seams +/- 0.1 cm.

MEASUREMENT RECORD - what each prototype / reference photo contributed

Photo	Feature	Value used on drawings
P1	Cardboard cross pattern	Top flap 5.0, top gusset 6.5, back 21.0 x 13.0, bottom gusset 6.0, front 12.7; side gusset 5.7, side flap 8.0, snaps
P2-P5	Cardboard panels	Slot widths 0.6-2.2 (= 6-22 mm), 0.5 lands, 1.0 end margins, 1.5 above the points
R1, R3	Closed clutch, front/back	Trifold clutch, wrap strap 3.0 with buckle, keeper and snap; logo on flap; R 1.0 corners; edge stitch
R2, R3	Open case	Pages sewn into the bottom gusset, not removable; side flaps tuck inside; cable pocket at the back
R4, R5	Page interiors	1.5 elastic across the middle of each page; size labels above tips; snap accessory pocket on the 5.5-8 page

HARDWARE SIZE ASSUMPTIONS (confirm against the real set - Q6)

Item	Qty	Assumed size (cm)	Where
Screw-on end cap	6	1.0 dia x 1.5	page 4 pocket
Cable key	4	1.2 x 3.5	page 4 pocket
Cable connector	3	1.0 dia x 3.0	page 4 pocket
Leather grip patch	1	6.0 x 4.0 x 0.2	page 4 pocket
Cables 25-100 cm	5	coil to 8.0 dia	back-panel cable pocket

PROJECT INTERCHANGEABLE KNITTING NEEDLE CASE	CLIENT gsumano7 / ziqmac	
SHEET TITLE Contents checklist, bill of materials, construction & cutting list	SCALE -	UNITS cm (page A3)
SOURCE Cardboard prototype (photos 1-5) + client reference photos (Rev B)	DATE / REV 2026-10-01 Rev B	SHEET 8 of 8