


ENERGIZER L92

Ultimate Lithium



Industry Standard Dimensions

mm (inches)

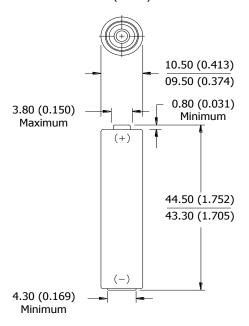

Specifications

AAA

Classification: "Cylindrical Lithium"

Chemical System: Lithium/Iron Disulfide (Li/FeS₂)

Designation: ANSI 24-LF, IEC-FR03

Nominal Voltage: 1.5 Volts Compatible With: EA92, E92, NH12, 1212

Storage Temp: -40°C to 60°C (-40°F to 140°F)
Operating Temp: -40°C to 60°C (-40°F to 140°F)*

Typical Weight: 7.6 grams (0.3 oz.)

Typical Volume: 3.8 cubic centimeters (0.2 cubic inch)

Max Discharge: 1.5 Amps Continuous

(single battery only) 2.0Amps Pulse (2 sec on / 8 sec off)

Max Rev Current: 2 uA

Lithium Content: Less than 1 gram

Typical IR: 140 to 300 milliohms (depending on method)

Shelf Life: 20 years at 21°C Shipping: Please refer to PSDS Document

Certifications:


This battery has Underwriters Laboratories component recognition (MH29980)



*All data shown tested at 21°C unless otherwise stated.


Milliamp-Hours Capacity

Constant Current Discharge to 0.8 Volts

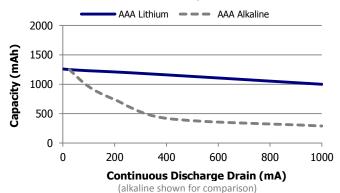


Discharge Profile

Constant Current Discharge

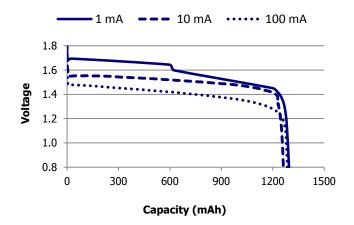

Temperature Effects on Capacity

Constant Current Discharge

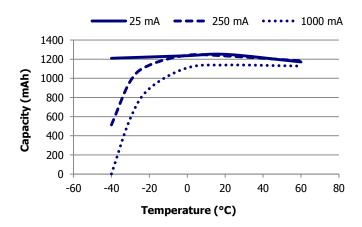

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.


©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.


Form No. EBC-4201T9X-F Page 1 of 2



ENERGIZER L92




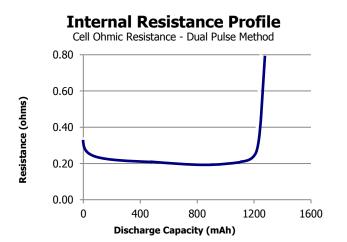

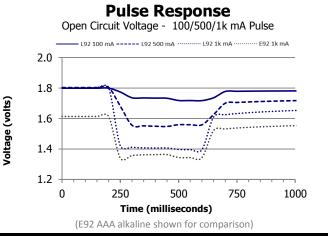



Constant Power Performance

Typical Characteristics to 0.8 Volts

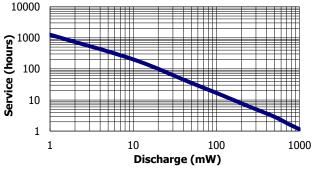


Application Tests

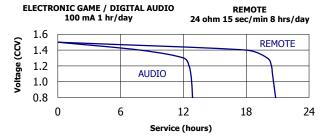

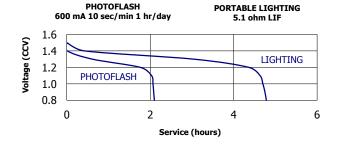



Constant Current Performance

Typical Characteristics to 0.8 Volts

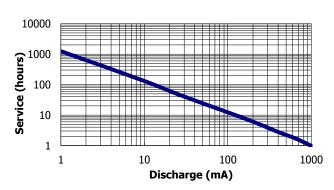

Industry Standard Tests

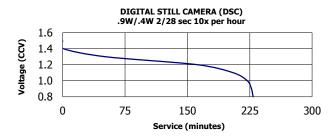

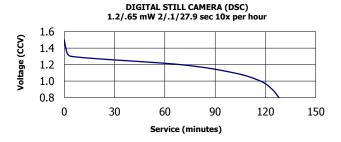

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Form No. EBC-4201T9X-F Page 2 of 2