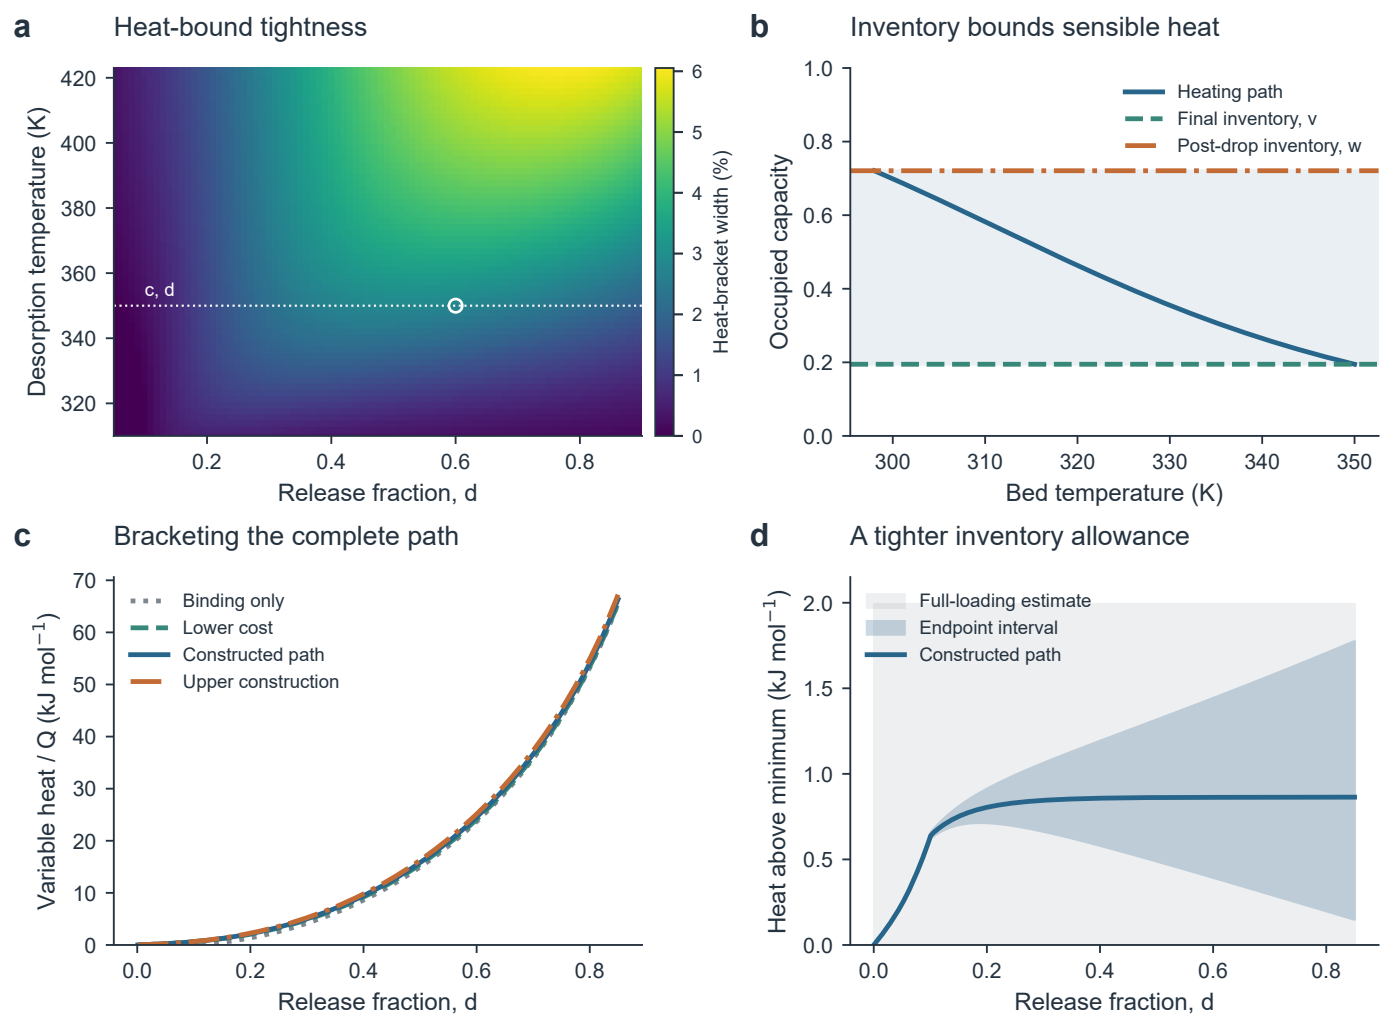

a
Heat-bound tightness
Desorption temperature (K)
Release fraction, d
c, d
Heat-bracket width (%)
b
Inventory bounds sensible heat
Occupied capacity
Bed temperature (K)
Heating path
Final inventory, v
Post-drop inventory, w
c
Bracketing the complete path
Variable heat / Q (kJ mol⁻¹)
Release fraction, d
Binding only
Lower cost
Constructed path
Upper construction
d
A tighter inventory allowance
Heat above minimum (kJ mol⁻¹)
Release fraction, d
Full-loading estimate
Endpoint interval
Constructed path