

Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C


Chapter 5 Memory Access Exercises

Zonghua Gu

Fall 2025

Question: Endianness


What are the memory address of these four words?

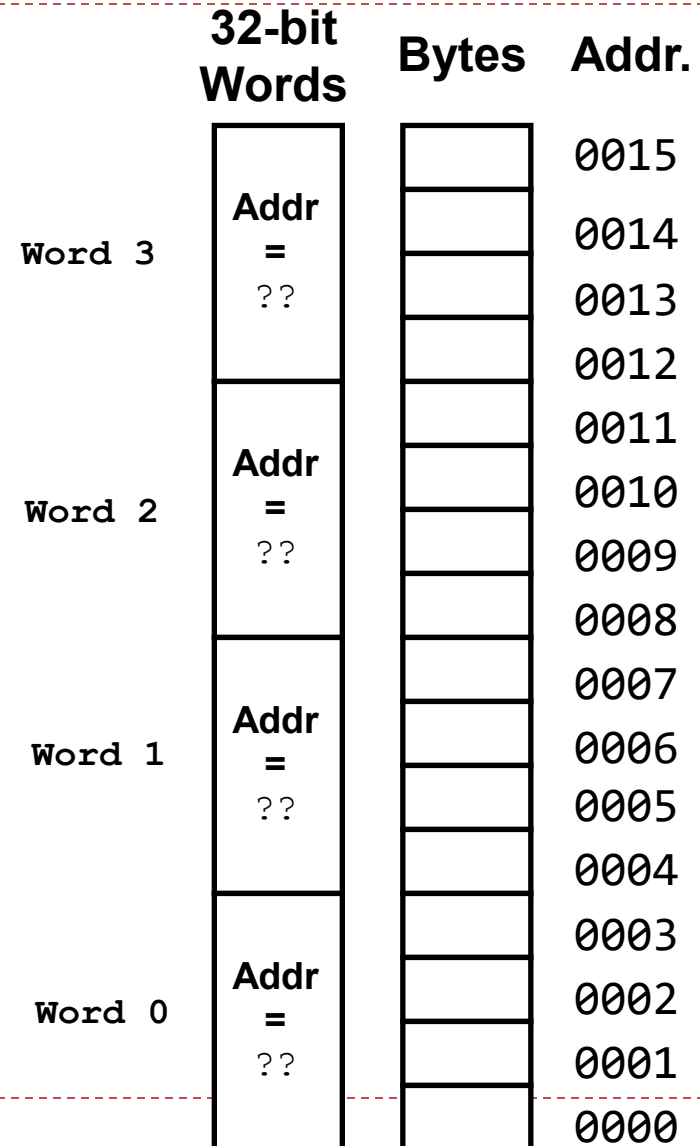


Question: Endianness

- Q: Assume Big-Endian ordering. If a 32-bit word resides at memory address N, what is the address of:
 - (a) The MSB (Most Significant Byte)
 - (b) The 16-bit half-word corresponding to the most significant half of the word
- Q: Redo the question assuming Little-Endian ordering.

Big-Endian

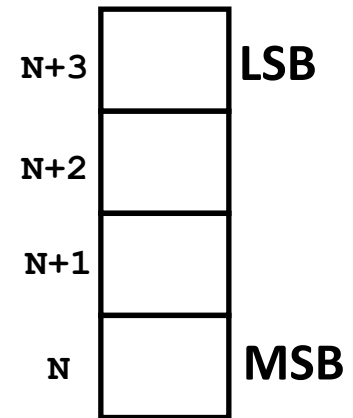

Little-Endian

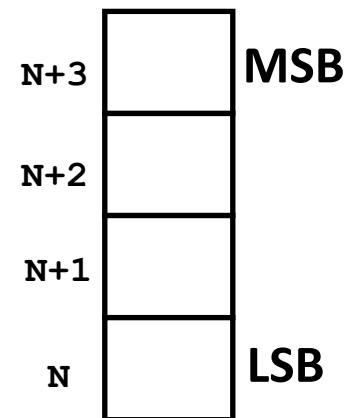

Question: Endianness

The word stored at address `0x20008000` with Big-Endian ordering is

The word stored at address `0x20008000` with Little-Endian ordering is

Memory Address	Memory Data
<code>0x20008003</code>	<code>0xA7</code>
<code>0x20008002</code>	<code>0x90</code>
<code>0x20008001</code>	<code>0x8C</code>
<code>0x20008000</code>	<code>0xEE</code>

Endianness

```
LDR r11, [r0]  
; r0 = 0x20008000
```

r11 before load

0x12345678

r11 after load w/
Big-Endian ordering

r11 after load w/
Little-Endian ordering

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Endianness

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

- ▶ Assume little endian for the following questions: $r0 = 0x20008000$
- ▶ **LDRH r1, [r0]**
 - ▶ r1 after load:
- ▶ **LDSB r1, [r0]**
 - ▶ r1 after load:
- ▶ **STR r1, [r0], #4**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after store:
 - ▶ Memory content after store:
- ▶ **STR r1, [r0, #4]**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after load:
 - ▶ Memory content after store:
- ▶ **STR r1, [r0, #4]!**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after load:
 - ▶ Memory content after store:

Review

Data Alignment

- Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide
- Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7 (MSbyte)	Address 6	Address 5	Address 4 (LSbyte)
Address 3	Address 2	Address 1	Address 0

Well-aligned: each word begins on a mod-4 address, which can be read in a single memory cycle

The first read cycle would retrieve 4 bytes from addresses 4 through 7; of these, the bytes from addresses 4 and 5 are discarded, and those from addresses 6 and 7 are moved to the far right; The second read cycle retrieves 4 bytes from addresses 8 through 11; the bytes from addresses 10 and 11 are discarded, and those from addresses 8 and 9 are moved to the far left; Finally, the two halves are combined to form the desired 32-bit operand:

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9 (MSbyte)	Address 8
Address 7	Address 6 (LSbyte)	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

Ill-aligned: a word begins on address 6, not a mod-4 address, which can be read in 2 memory cycles

		Address 7	Address 6 (LSbyte)
--	--	-----------	--------------------



Address 9 (MSbyte)	Address 8		
--------------------	-----------	--	--

Address 9 (MSbyte)	Address 8	Address 7	Address 6 (LSbyte)
--------------------	-----------	-----------	--------------------

Question: Data Alignment

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4 bytes each). How many memory cycles are required to read each of the following from memory?
 - (a) A 2-Byte operand read from decimal address 5
 - (b) A 2-Byte operand read from decimal address 15
 - (c) A 4-Byte operand read from decimal address 10
 - (d) A 4-Byte operand read from decimal address 20

Question: Data Align

Address 111	Address 110	Address 109	Address 108
Address 107	Address 106	Address 105	Address 104
Address 103	Address 102	Address 101	Address 100
Address 99	Address 98	Address 97	Address 96

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4 bytes each).
 - (a) What is the address of MSB of the word at address 102,, assuming Little-Endian ordering?
 - (b) What is the address of LSB of the word at address 102,, assuming Little-Endian ordering?
 - (b) How many memory cycles are required to read the word at address 102?
 - (c) How many memory cycles are required to read the half word at address 102?

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7	Address 6	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

Answer: Memory Cycles

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide.
 - It takes _____ memory cycle(s) to read a Byte from memory
 - It takes _____ memory cycle(s) to read a half-word from memory
 - It takes _____ memory cycle(s) to read a word from memory
 - It takes _____ memory cycle(s) to read a double word from memory

Question: Arrays

- Q: If the first element of a one-dimensional array `x[]` is stored at memory address `0x12345678`, what is address of the second element if the array `x[]` contains
 - (a) chars
 - (b) shorts
 - (c) ints
 - (c) longs

LDM

- ▶ Assume that memory and registers r0 through r3 appear as follows. Suppose r3 = 0x8000. Describe the memory and register contents after executing each instruction (individually, not sequentially):

- ▶ LDMIA r3!, {r0, r1, r2}
- ▶ Or LDMIB r3!, {r2, r1, r0}

Memory Address	Memory Data
0x8010	0x00000001
0x800c	0xFEEDDEAF
0x8008	0x00008888
0x8004	0x12340000
r3 ➡ 0x8000	0xBABE0000

LDR

- ▶ Suppose R2 and R5 hold the values 8 and 0x23456789
After following code runs on a Big-Endian system, what value is in R7? How about in a little-endian system?
 - ▶ STR R5, [R2, #0]
 - ▶ LDRB R7, [R2, #1]
 - ▶ LDRSH R7, [R2, #1]
 - ▶ LDRSH R7, [R2, #2]

Compute register and memory values at each step of this program

- ▶ MOVW R0, #0xAFEI
- ▶ MOVT R0, #0xBADC
- ▶ MOVT R2, #0xABCD
- ▶ STR R3, [R1]
- ▶ LDRSH R4, (R1, #0xC)
- ▶ PUSH (R1, R3)
- ▶ POP (R5)

R0	0x00000000
R1	0x10000200
R2	0x0000FFFF
R3	0x18675309
R4	0x00000000
R5	0x00000000
...	
R13	0x10000200

0F	IF	AA
0E	IE	99
0D	ID	88
0C	IC	77
0B	IB	66
0A	IA	55
09	I9	44
08	I8	33
07	I7	22
06	I6	11
05	I5	FF
04	I4	EE
03	I3	I2
02	I2	11
01	I1	IB
00	I0	AA
0x100001E0	0x100001F0	0x10000200
Mem Address	Mem Address	Mem Address