

Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C


Chapter 5 Memory Access Exercises ANS

Zonghua Gu

Fall 2025

Question: Endianness

What are the memory address of these four words?

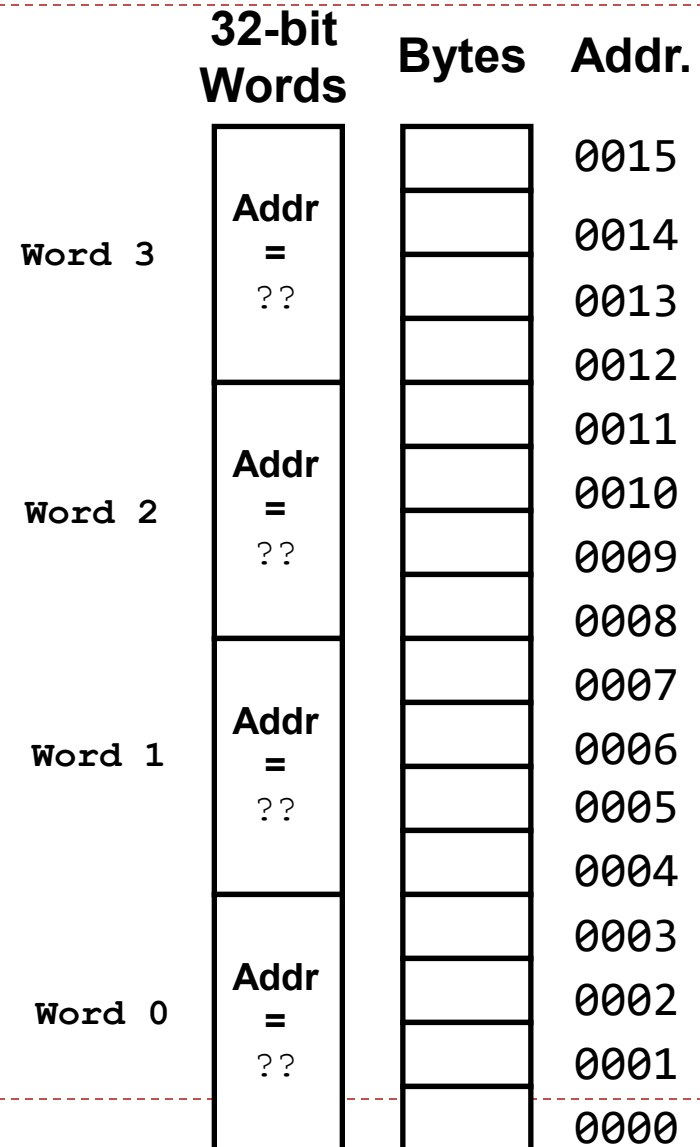

Answer: Endianness


What are the memory address of these four words?
Same as the address of the lowest-address Byte
(this is true for either Little-Endian or Big-Endian ordering)

	32-bit Words	Bytes	Addr.
Word 3	Addr = 0x0012		0015
			0014
			0013
			0012
Word 2	Addr = 0x0008		0011
			0010
			0009
			0008
Word 1	Addr = 0x0004		0007
			0006
			0005
			0004
Word 0	Addr = 0x0000		0003
			0002
			0001
			0000


Question: Endianness

- Q: Assume Big-Endian ordering. If a 32-bit word resides at memory address N, what is the address of:
 - (a) The MSB (Most Significant Byte)
 - (b) The 16-bit half-word corresponding to the most significant half of the word
- Q: Redo the question assuming Little-Endian ordering.

Big-Endian


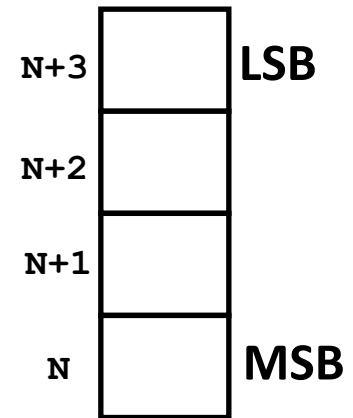


Little-Endian

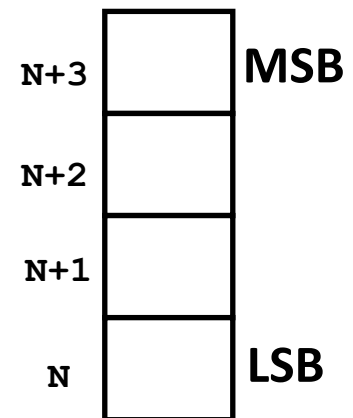

Answer: Endianness

- A: With Big-Endian ordering:
 - (a) Address of MSB: N
 - (b) Address of 16-bit half-word corresponding to the most significant half of the word: N (the half-word has address range of $[N, N+1]$, so its address is N)
- With Little-Endian ordering:
 - (a) Address of MSB: $N+3$
 - (b) Address of 16-bit half-word corresponding to the most significant half of the word: $N+2$ (the half-word has address range of $[N+2, N+3]$, so its address is $N+2$)

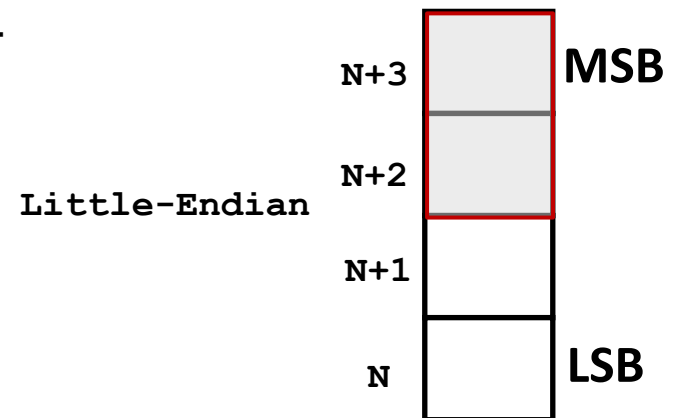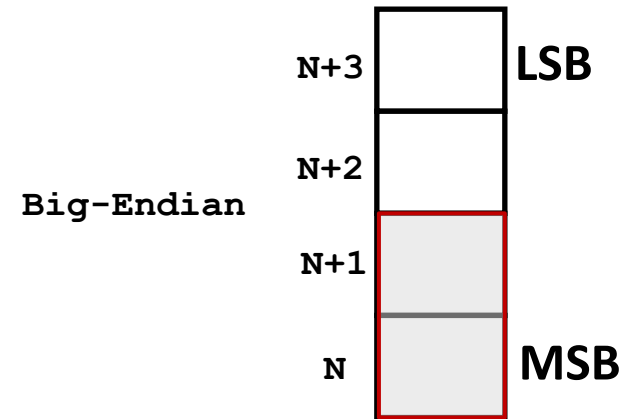

Question: Endianness

The word stored at address `0x20008000` with Big-Endian ordering is

The word stored at address `0x20008000` with Little-Endian ordering is

Memory Address	Memory Data
<code>0x20008003</code>	<code>0xA7</code>
<code>0x20008002</code>	<code>0x90</code>
<code>0x20008001</code>	<code>0x8C</code>
<code>0x20008000</code>	<code>0xEE</code>

Answer: Endianness

The word stored at address 0x20008000 with Big-Endian ordering is

0xEE8C90A7

The word stored at address 0x20008000 with Little-Endian ordering is

0xA7908CEE

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Endianness only specifies byte order, not bit order in a byte!



Endianness

```
LDR r11, [r0]  
; r0 = 0x20008000
```

r11 before load

0x12345678

r11 after load w/
Big-Endian ordering

r11 after load w/
Little-Endian ordering

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Endianness ANS

```
LDR r11, [r0]  
; r0 = 0x20008000
```

r11 before load

0x12345678

r11 after load w/
Big-Endian ordering

0xEE8C90A7

r11 after load w/
Little-Endian ordering

0xA7908CEE

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Endianness ANS

```
LDR r11, [r0]  
; r0 = 0x20008000
```

r11 before load

0x12345678

r11 after load w/
Big-Endian ordering

0xEE8C90A7

r11 after load w/
Little-Endian ordering

0xA7908CEE

Endianness

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

- ▶ Assume little endian for the following questions: $r0 = 0x20008000$
- ▶ **LDRH r1, [r0]**
 - ▶ r1 after load:
- ▶ **LDSB r1, [r0]**
 - ▶ r1 after load:
- ▶ **STR r1, [r0], #4**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after store:
 - ▶ Memory content after store:
- ▶ **STR r1, [r0, #4]**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after load:
 - ▶ Memory content after store:
- ▶ **STR r1, [r0, #4]!**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ r0 after load:
 - ▶ Memory content after store:

Endianness ANS

- ▶ Assume little endian for the following questions: $r0 = 0x20008000$
- ▶ **LDRH $r1, [r0]$**
 - ▶ $r1$ after load: $0x00008CEE$
- ▶ **LDSB $r1, [r0]$**
 - ▶ $r1$ after load: $0xFFFFFFFF$
- ▶ **STR $r1, [r0], \#4$**
 - ▶ Assume $r1 = 0x76543210$
 - ▶ $r0$ after store: $0x20008004$
 - ▶ Post-index. Store at old $r0$, then $r0 = r0 + 4$.
 - ▶ Memory content after store:

Memory Address	Memory Data
$0x20008003$	$0xA7$
$0x20008002$	$0x90$
$0x20008001$	$0x8C$
$0x20008000$	$0xEE$

Memory Address	Memory Data
$0x20008007$	
$0x20008006$	
$0x20008005$	
$0x20008004$	
$0x20008003$	$0x76$
$0x20008002$	$0x54$
$0x20008001$	$0x32$
$0x20008000$	$0x10$

Endianness ANS

▶ **STR r1, [r0, #4]**

- ▶ Assume r1 = 0x76543210
- ▶ r0 after load: 0x20008000
 - ▶ Pre-index. Store at r0 + 4; r0 unchanged.
- ▶ Memory content after store:

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Memory Address	Memory Data
0x20008007	0x76
0x20008006	0x54
0x20008005	0x32
0x20008004	0x10
0x20008003	
0x20008002	
0x20008001	
0x20008000	

Endianness ANS

▶ **STR r1, [r0, #4]!**

- ▶ $r0 := r0 + 4$; store at new $r0$.
- ▶ Assume $r1 = 0x76543210$
- ▶ $r0$ after load: $0x20008004$
 - ▶ Pre-index with update. $r0 = r0 + 4$; store at new $r0$.
- ▶ Memory content after store:

Memory Address	Memory Data
0x20008003	0xA7
0x20008002	0x90
0x20008001	0x8C
0x20008000	0xEE

Memory Address	Memory Data
0x20008007	0x76
0x20008006	0x54
0x20008005	0x32
0x20008004	0x10
0x20008003	
0x20008002	
0x20008001	
0x20008000	

Data Alignment

- Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide
- Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7 (MSbyte)	Address 6	Address 5	Address 4 (LSbyte)
Address 3	Address 2	Address 1	Address 0

Well-aligned: each word begins on a mod-4 address, which can be read in a single memory cycle

The first read cycle would retrieve 4 bytes from addresses 4 through 7; of these, the bytes from addresses 4 and 5 are discarded, and those from addresses 6 and 7 are moved to the far right; The second read cycle retrieves 4 bytes from addresses 8 through 11; the bytes from addresses 10 and 11 are discarded, and those from addresses 8 and 9 are moved to the far left; Finally, the two halves are combined to form the desired 32-bit operand:

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9 (MSbyte)	Address 8
Address 7	Address 6 (LSbyte)	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

Ill-aligned: a word begins on address 6, not a mod-4 address, which can be read in 2 memory cycles

Address 11	Address 10	Address 9 (MSbyte)	Address 8
Address 7	Address 6 (LSbyte)	Address 5	Address 4
Address 9 (MSbyte)	Address 8	Address 7	Address 6 (LSbyte)



Question: Data Alignment

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4 bytes each). How many memory cycles are required to read each of the following from memory?
 - (a) A 2-Byte operand read from decimal address 5
 - (b) A 2-Byte operand read from decimal address 15
 - (c) A 4-Byte operand read from decimal address 10
 - (d) A 4-Byte operand read from decimal address 20

Answer: Data Align

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7	Address 6	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. How many memory cycles are required to read each of the following from memory?
 - (a) A 2-Byte operand read from decimal address 5
 - (b) A 2-Byte operand read from decimal address 15
 - (c) A 4-Byte operand read from decimal address 10
 - (d) A 4-Byte operand read from decimal address 20
- A: (a) The operand contains memory content in address range [5,6]. It can be read in 1 memory cycle; the memory controller returns a word in address range [4,7]. The operand can be obtained via 1-Byte offset addressing into the word.
- (b) The operand contains memory content in address range [15,16]. It can be read in 2 memory cycles; the memory controller returns 2 words in address ranges [12,15] and [16, 19], which can be combined to return a word in address range [14,17]. The operand can be obtained via 1-Byte offset addressing into the word.
- (c) The operand contains memory content in address range [10,13]. It can be read in 2 memory cycles; the memory controller returns 2 words in address ranges [8,11] and [12, 15], which can be combined to return a word with address range [10,13].
- (d) The operand contains memory content in address range [20,23]. Since $20\%4=0$, it is well-aligned, and can be read in 1 memory cycle.

Question: Data Align

Address 111	Address 110	Address 109	Address 108
Address 107	Address 106	Address 105	Address 104
Address 103	Address 102	Address 101	Address 100
Address 99	Address 98	Address 97	Address 96

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4 bytes each).
 - (a) What is the address of MSB of the word at address 102,, assuming Little-Endian ordering?
 - (b) What is the address of LSB of the word at address 102,, assuming Little-Endian ordering?
 - (b) How many memory cycles are required to read the word at address 102?
 - (c) How many memory cycles are required to read the half word at address 102?

Answer: Data Align

Address 111	Address 110	Address 109	Address 108
Address 107	Address 106	Address 105	Address 104
Address 103	Address 102	Address 101	Address 100
Address 99	Address 98	Address 97	Address 96

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide. Consider 16 bytes of memory (addresses 0 to 15) arranged as four 32-bit words (4 bytes each).
 - (a) What is the address of MSB of the word at address 102, assuming Little-Endian ordering?
 - (b) What is the address of LSB of the word at address 102, assuming Little-Endian ordering?
 - (c) How many memory cycles are required to read the word at address 102?
 - (d) How many memory cycles are required to read the half word at address 102?
- A:
 - (a) MSB of the word at address 102 is 105
 - (b) LSB of the word at address 102 is 102
 - (c) 2 cycles.
 - (d) 1 cycle.

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7	Address 6	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

Answer: Memory Cycles

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide.
 - It takes _____ memory cycle(s) to read a Byte from memory
 - It takes _____ memory cycle(s) to read a half-word from memory
 - It takes _____ memory cycle(s) to read a word from memory
 - It takes _____ memory cycle(s) to read a double word from memory

Address 15	Address 14	Address 13	Address 12
Address 11	Address 10	Address 9	Address 8
Address 7	Address 6	Address 5	Address 4
Address 3	Address 2	Address 1	Address 0

Answer: Memory Cycles

- Q: Assume a byte-addressable memory with a data bus that is 32 bits (4 bytes) wide.
 - It takes _____ memory cycle(s) to read a Byte from memory
 - It takes _____ memory cycle(s) to read a half-word from memory
 - It takes _____ memory cycle(s) to read a word from memory
 - It takes _____ memory cycle(s) to read a double word from memory
- A:
 - It takes ___1___ memory cycle(s) to read a Byte from memory
 - It takes ___1 or 2___ memory cycle(s) to read a half-word from memory
 - It takes ___1 or 2___ memory cycle(s) to read a word from memory
 - It takes ___2 or 3___ memory cycle(s) to read a double word from memory (a double word may span at least 2 consecutive words, and at most 3 consecutive words in memory)

Question: Arrays


- Q: If the first element of a one-dimensional array `x[]` is stored at memory address `0x12345678`, what is address of the second element if the array `x[]` contains
 - (a) chars
 - (b) shorts
 - (c) ints
 - (c) longs

Answer: Arrays

- Q: If the first element of a one-dimensional array $x[]$ is stored at memory address $0x12345678$, what is address of the second element if the array $x[]$ contains
 - (a) chars
 - (b) shorts
 - (c) ints
 - (c) longs
- A: $x[1]$'s address is x 's address plus the data type size in Bytes
 - (a) chars: $0x12345678 + 1 = 0x12345679$
 - (b) shorts: $0x12345678 + 2 = 0x1234567A$
 - (c) ints: $0x12345678 + 4 = 0x1234567C$
 - (c) longs: $0x12345678 + 8 = 0x12345680$


Load Multiple Registers

LDMxx r0!, {r3,r1,r7,r2}

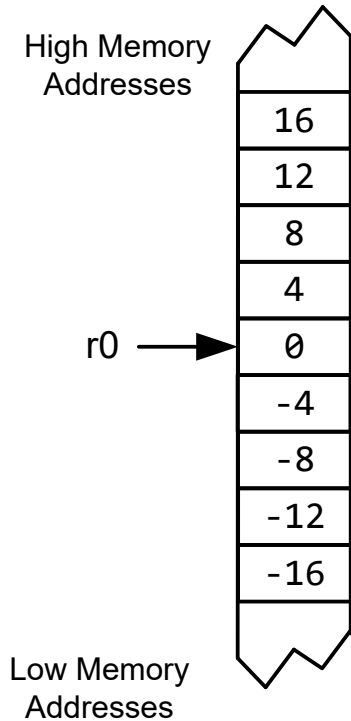

LDMIA


Increment After

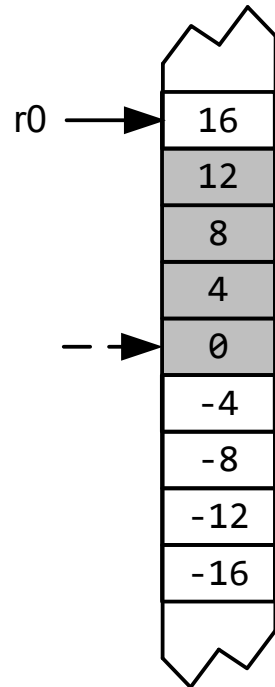

r1 = 0
r2 = 4
r3 = 8
r7 = 12

LDMIB


Increment Before

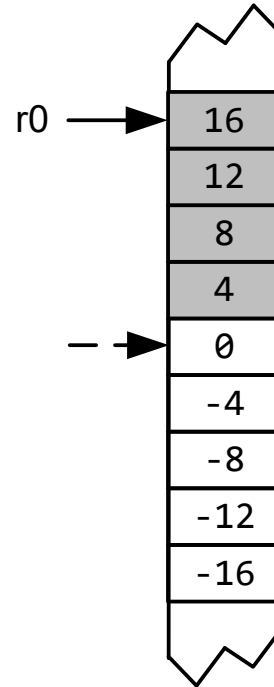

r1 = 4
r2 = 8
r3 = 12
r7 = 16

LDMDA


Decrement After

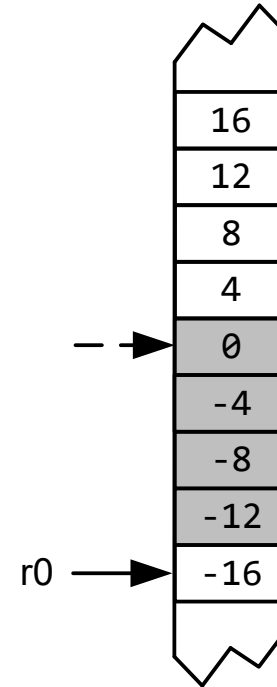

r1 = -12
r2 = -8
r3 = -4
r7 = -0

LDMDB

Decrement Before

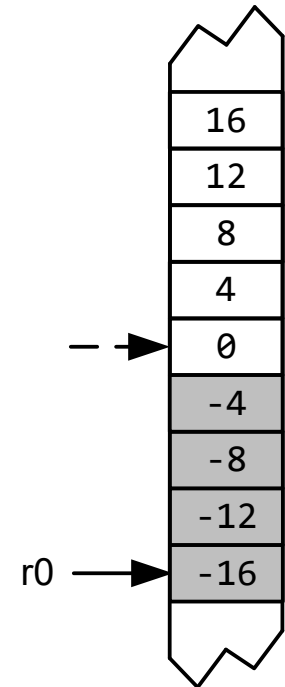

r1 = -16
r2 = -12
r3 = -8
r7 = -4

LDM

- ▶ Assume that memory and registers r0 through r3 appear as follows. Suppose r3 = 0x8000. Describe the memory and register contents after executing each instruction (individually, not sequentially):

- ▶ LDMIA r3!, {r0, r1, r2}
- ▶ Or LDMIB r3!, {r2, r1, r0}
- ▶ Or LDMIB r3!, {r1, r2, r0}

Memory Address	Memory Data
0x8010	0x00000001
0x800c	0xFEEDDEAF
0x8008	0x00008888
0x8004	0x12340000
r3 ➡ 0x8000	0xBABE0000

LDM ANS

- Assume that memory and registers r0 through r3 appear as follows. Suppose r3 = 0x8000. Describe the memory and register contents after executing each instruction (individually, not sequentially):

- LDMIA r3!, {r0, r1, r2}
- Or LDMIB r3!, {r2, r1, r0}

ANS:

- After LDMIA r3!, {r0, r1, r2}
- r0 = 0xBABE0000 (loaded from 0x8000)
- r1 = 0x12340000 (loaded from 0x8004)
- r2 = 0x00008888 (loaded from 0x8008)
- r3 = 0x800C (auto-incremented)
- Or after LDMIB r3!, {r2, r1, r0}
- r0 = 0x12340000 (loaded from 0x8004)
- r1 = 0x00008888 (loaded from 0x8008)
- r2 = 0xFEEDDEAF (loaded from 0x800c)
- r3 = 0x800C (auto-incremented)
- Or after LDMIB r3!, {r1, r2, r0}
- r0 = 0x12340000 (loaded from 0x8004)
- r1 = 0x00008888 (loaded from 0x8008)
- r2 = 0xFEEDDEAF (loaded from 0x800c)
- r3 = 0x800C (auto-incremented)

Memory Address

0x8010

0x800c

0x8008

0x8004

r3 → 0x8000

Memory Data

0x00000001

0xFEEDDEAF

0x00008888

0x12340000

0xBABE0000

The order in which registers are listed does not matter. For STM/LDM, the lowest-numbered register is stored/loaded at the lowest memory address. (Note that r3 is incremented by 4 (1 word) each time, not 1 byte)

LDR

- ▶ Suppose R2 and R5 hold the values 8 and 0x23456789
After following code runs on a Big-Endian system, what value is in R7? How about in a little-endian system?
- ▶ STR R5, [R2, #0]
- ▶ LDRB R7, [R2, #1]
- ▶ LDRSH R7, [R2, #1]
- ▶ LDRSH R7, [R2, #2]

LDRB R7, [R2, #1] ANS

- ▶ After STR R5, [R2, #0] (same as STR R5, [R2]) and LDRB R7, [R2, #1] (detailed explanations not needed for exam):
 - ▶ Memory address R2 contains 0x23456789. STR stores a 32-bit register value to memory at base-plus-immediate without changing the base, and LDRB loads a single byte and zero-extends to 32 bits, so endianness only affects which byte resides at offset +1.
 - ▶ R2 holds 8 (base address), and R5 holds 0x23456789; first the store writes that 32-bit word to memory at address R2+0, and then a byte load reads one byte from address R2+1 into R7.
 - ▶ Big-endian: the word 0x23456789 is laid out in memory as bytes 23 45 67 89 at addresses A, A+1, A+2, A+3 respectively, so LDRB R7, [R2, #1] reads 0x45 and zero-extends it to R7 = 0x00000045.
 - ▶ Little-endian: the same word is laid out as 89 67 45 23 at addresses A, A+1, A+2, A+3 respectively, so LDRB R7, [R2, #1] reads 0x67 and zero-extends it to R7 = 0x00000067.

Memory Address	Memory Data	Memory Address	Memory Data
0x0000000B	0x89	0x0000000B	0x23
0x0000000A	0x67	0x0000000A	0x45
0x00000009	0x45	0x00000009	0x67
R2 → 0x00000008	0x23	R2 → 0x00000008	0x89

LDRSH R7, [R2, #1] ANS

▶ ANS after LDRSH R7, [R2, #1]:

- ▶ Big-endian: the word 0x23456789 is laid out in memory as bytes 23 45 67 89 at addresses A, A+1, A+2, A+3 respectively, so LDRSH R7, [R2, #1] reads 0x4567 and sign-extends it to R7 = 0x00004567. (Sign bit is 0 for 0x4567)
- ▶ Little-endian: the same word is laid out as 89 67 45 23 at addresses A, A+1, A+2, A+3 respectively, so LDRSH R7, [R2, #1] reads 0x4567 and sign-extends it to R7 = 0x00004567. (Sign bit is 0 for 0x4567)

Memory Address	Memory Data	Memory Address	Memory Data
0x0000000B	0x89	0x0000000B	0x23
0x0000000A	0x67	0x0000000A	0x45
0x00000009	0x45	0x00000009	0x67
R2 ➡ 0x00000008	0x23	R2 ➡ 0x00000008	0x89



LDRSH R7, [R2, #2] ANS

▶ ANS after LDRSH R7, [R2, #2]:

- ▶ Big-endian: the word 0x23456789 is laid out in memory as bytes 23 45 67 89 at addresses A, A+1, A+2, A+3 respectively, so LDRSH R7, [R2, #2] reads 0x6789 and sign-extends it to R7 = 0x00006789.
- ▶ Little-endian: the same word is laid out as 89 67 45 23 at addresses A, A+1, A+2, A+3 respectively, so LDRSH R7, [R2, #2] reads 0x2345 and sign-extends it to R7 = 0x00002345.

Memory Address	Memory Data	Memory Address	Memory Data
0x0000000B	0x89	0x0000000B	0x23
0x0000000A	0x67	0x0000000A	0x45
0x00000009	0x45	0x00000009	0x67
R2 → 0x00000008	0x23	R2 → 0x00000008	0x89

Program Understanding

- ▶ Compute register and memory values at each step of this program, given initial register values and memory contents

```
MOVW R0, #0xAFE1
MOVT R0, #0xBADC
MOVT R2, #0xABCD
STR R3, [R1]
LDRSH R4, (R1, #0xC)
```

Initial Register Values

R0	0x00000000
R1	0x10000200
R2	0x0000FFFF
R3	0x18675309
R4	0x00000000
R5	0x00000000
...	
R13	0x10000200

0x10000200	60	1B	11	12	EE	FF	11	22	33	44	55	66	77	88	99	92
0x100001F0	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F
0x100001E0	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F

Initial Memory Contents

Program Understanding ANS

- ▶ After MOVW R0, #0xAFE1, MOVT R0, #0xBADC
- ▶ R0 = 0xBADCAFE1
- ▶ After R2, #0xABCD
 - ▶ R2 = 0xABCDFFFF
- ▶ After STR R3, [R1]
 - ▶ R3 = 0x18675309 is stored at mem address R1 = 0x10000200
- ▶ After LDRSH R4, (R1, #0xC) (load signed half word from R1+0xC=0x1000020C)
 - ▶ R4 = 0xFFFF8877

```

MOVW R0, #0xAFE1
MOVT R0, #0xBADC
MOVT R2, #0xABCD
STR R3, [R1]
LDRSH R4, (R1, #0xC)
    
```

R0	0x00000000
R1	0x10000200
R2	0x0000FFFF
R3	0x18675309
R4	0x00000000
R5	0x00000000
...	
R13	0x10000200

Initial Register Values

0x10000200	09	53	67	18	EE	FF	11	22	33	44	55	66	77	88	99	92
0x100001F0	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F
0x100001E0	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F

Initial Memory Contents

Program Understanding

- ▶ Show all updates to registers as the assembly code shown below runs. Show the NZCV flags next to the instruction if they change. Do not update PC each time. You can assume that each instruction is 32 bits.

R0		R4		R8		R12	
R1		R5		R9		R13	
R2		R6		R10		R14	
R3		R7		R11		R15	

```
LDR R1, =0x10000010
LDR R2, [R1]
LDR R3, [R1,#4]
BL max
SUBS R4, R2, R0 @NZCV = 0110
MOVW R5, #1
LSL R6, R5, #4
BIC R7, R2, R4
ANDS R8, R7, R6 @NZCV = 0110
ROR R9, R3, #12
REV R10, R9
RBIT R11, R10
ADDS R12, R3, R9 @NZCV = 1000
STR R12, [R1,#8]
```

```
loop B loop
ENDP
```

```
max PROC
    CMP R2, R3 @NZCV = 0010
    BLT second
first MOV R0, R2
    B done
second MOV R0, R3
done BX LR
ENDP
```

0x10000010	FF	EF	CD	AB	00	00	CD	AB	D0	BC	D8	A8
------------	----	----	----	----	----	----	----	----	----	----	----	----

Program Understanding ANS

- Show all updates to registers as the assembly code shown below runs. Show the NZCV flags next to the instruction if they change. Do not update PC each time. You can assume that each instruction is 32 bits.

```

LDR R1, =0x10000010
LDR R2, [R1]
LDR R3, [R1,#4]
BL max
SUBS R4, R2, R0 @NZCV = 0110
MOVW R5, #1
LSL R6, R5, #4
BIC R7, R2, R4
ANDS R8, R7, R6 @NZCV = 0110
ROR R9, R3, #12
REV R10, R9
RBIT R11, R10
ADDS R12, R3, R9 @NZCV = 1000
STR R12, [R1,#8]

```

```

loop B loop
ENDP

```

```

max PROC
    CMP R2, R3 @NZCV = 0010
    BLT second
first MOV R0, R2

```

R0	0xABCDFF00	R4	0x00000000	R8	0x00000000	R12	0xABD7BCD0
R1	0x10000010	R5	0x00000001	R9	0x00000000	R13	0x10000200
R2	0xABCDFF00	R6	0x00000010	R10	0xBCD0AB00	R14	0x00000000
R3	0xABD7BCD0	R7	0xABCDEFFF	R11	0x0530D0B0	R15	0x00000250

0x10000010	FF	EF	CD	AB	00	00	CD	AB	D0	BC	D8	A8
------------	----	----	----	----	----	----	----	----	----	----	----	----

6. Assembly

(a) Show all updates to registers as the assembly code shown below runs. Show the NZCV flags next to the instruction if they change. Do not update PC each time. You can assume that each instruction is 32 bits.

```

    → LDR R1, #0x10000010
      LDR R2, [R1]
      LDR R3, [R1, #4]
      BL max
    → SUBS R4, R2, R0  NZCV = 0110
      MOVW R5, #1
      LSL R6, R5, #4
      BIC R7, R2, R6
      ANDS R8, R7, R6  NZCV = 0110
      ROR R9, R3, #12
      REV R10, R9
      RBIT R11, R10
      ADDS R12, R3, R9  NZCV = 1000
      STR R12, [R1, #8]

loop B loop
      ENDP

max PROC
      CMP R2, R3  NZCV = 0010
      BLT second
first MOV R0, R2
      B done
second MOV R0, R3
done BX LR
      ENDP
  
```

<https://www.youtube.com/watch?v=XkjClavu6Ow&list=PLHv6klbVebn0pCLcmCxGVa7ZPx7CB0IRh&index=6>

R0	0xABCEFFF	R4	0x00000000	R8	0x00000000	R12	0xABD7BCD0
R1	0x10000010	R5	0x00000001	R9	0x000ABCD0	R13	0x10000200
R2	0xABCEFFF	R6	0x00000010	R10	0xABCDAB00	R14	0x00000260
R3	0xABCD0000	R7	0xABCEFEF	R11	0x00503D0B	R15	0x00000250