


Embedded Systems with ARM Cortex-M Microcontrollers in Assembly Language and C

Chapter 7 Structured Programming


Z. Gu

Fall 2025


Basic Control Structures

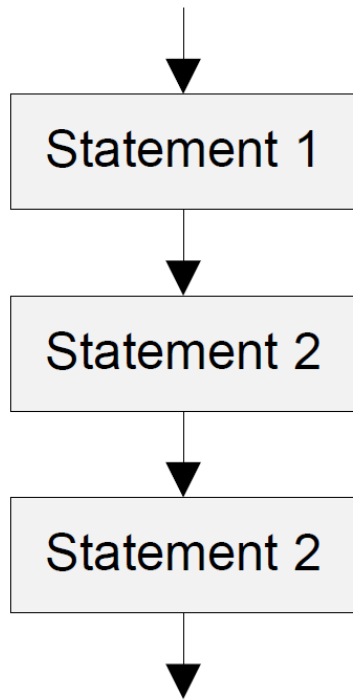

Sequence Structure

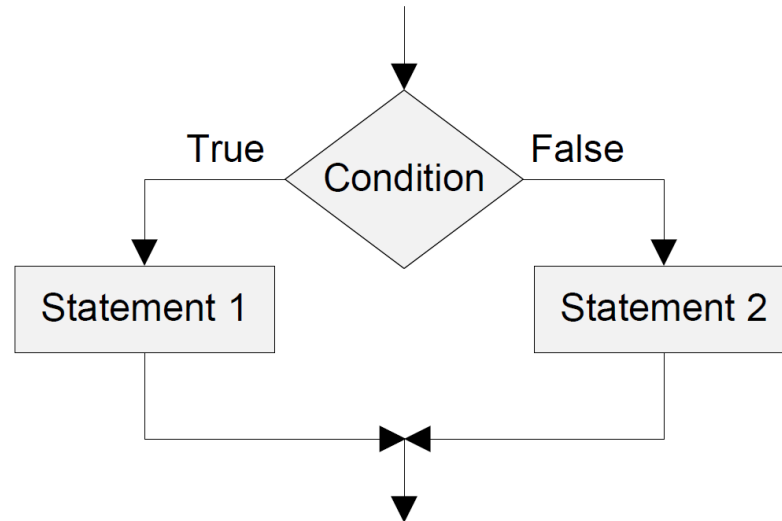

Selection Structure

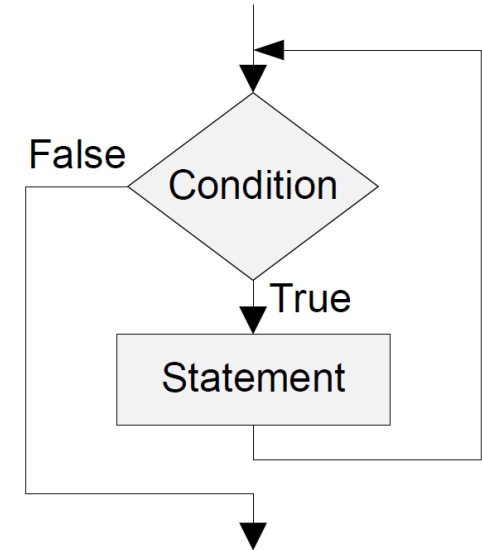

loop: Structure

History


- ▶ Spaghetti Code
 - ▶ Before the 1980s, program flow bounces around anywhere the programmer wanted.
 - ▶ Culprit: overusing “GOTO” statements

Spaghetti code in BASIC

```
1 i=0
2 i=i+1
3 PRINT i; "squared=";i*i
4 IF i>=100 THEN GOTO 6
5 GOTO 2
6 PRINT "Program Completed."
7 END
```

Structured programming in BASIC

```
1 FOR i=1 TO 100
2   PRINT i;"squared=";i*i
3 NEXT i 'termination of loop: body
4 PRINT "Program Completed."
5 END
```

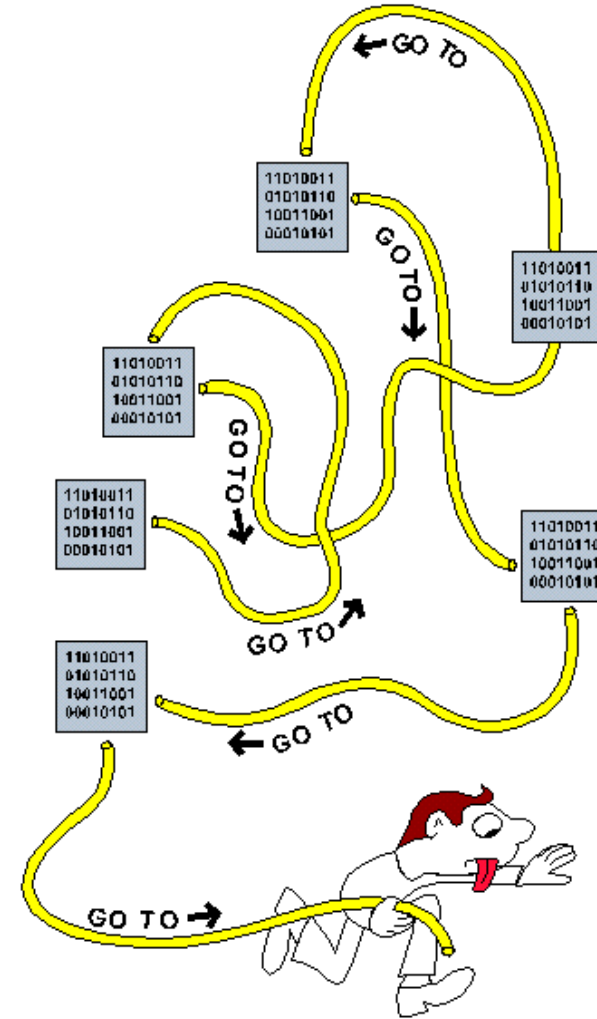

Importance of Structured Programming


- ▶ Assembly is not a structured programming language
 - ▶ Does not directly support selection and loop:
 - ▶ Branch in assembly = “goto” in C
 - ▶ Break the single-entry single-exit rule
- ▶ Easy to generate spaghetti code in assembly
 - ▶ Twisted and tangled
 - ▶ Difficult to debug & maintain
- ▶ One strategy to alleviate the challenge
 - ▶ Use **flowcharts** to facilitate assembly programming
 - ▶ That is why textbook has many flowcharts
 - ▶ How to build flowcharts?



© dreamstime.com ID 128289906 © Petyaev

Software Design Strategy: Top-Down Design

- ▶ Three common design strategies
 - ▶ Top-down, also known as stepwise refinement
 - ▶ Bottom up
 - ▶ Object oriented
- ▶ Top-down: Repeatedly break down tasks into smaller and smaller pieces until they are easy to solve
- ▶ Example: Planning a picnic
 - ▶ Task 1: **Where**
 - ▶ Task 2: **When**
 - ▶ Task 3: **Who**
 - ▶ Task 4: **Food**

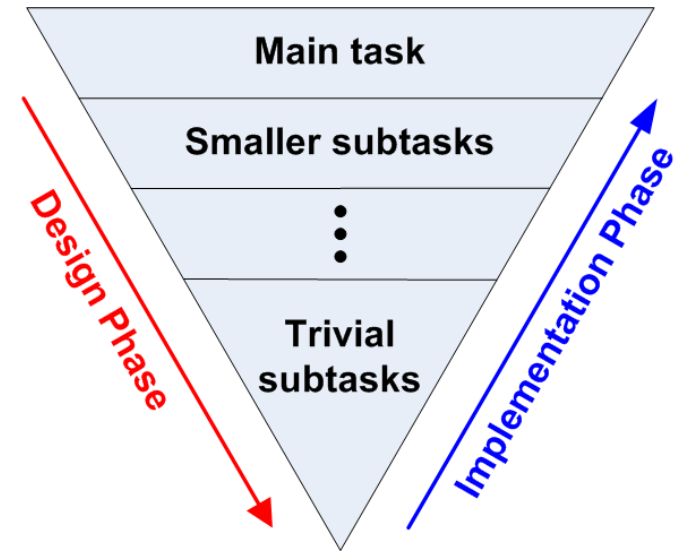

Top-Down Design Example

- ▶ Find all **Armstrong** numbers less than 10,000
 - ▶ Given a positive integer that has n digits, it is an Armstrong number if the sum of the n^{th} powers of its digits equals the number itself.

$$153 = 1^3 + 5^3 + 3^3$$

$$371 = 3^3 + 7^3 + 1^3$$

$$1634 = 1^4 + 6^4 + 3^4 + 4^4$$

Top-Down Design Example

START

If 1 is an Armstrong number, then print 1.
If 2 is an Armstrong number, then print 2.
If 3 is an Armstrong number, then print 3.
If 4 is an Armstrong number, then print 4.
If 5 is an Armstrong number, then print 5.
If 6 is an Armstrong number, then print 6.
...
...
If 9999 is an Armstrong number, then print 9999.

STOP

Step 1

START

$x = 1$

If x is an Armstrong number,
then print x

$x = x + 1$

$x < 10000$

STOP

Step 2

START

$x = 1$

Is x an Armstrong number?

YES

Print x

NO

$x = x + 1$


$x < 10000$

NO


STOP

Step 3

Top-Down Design Example

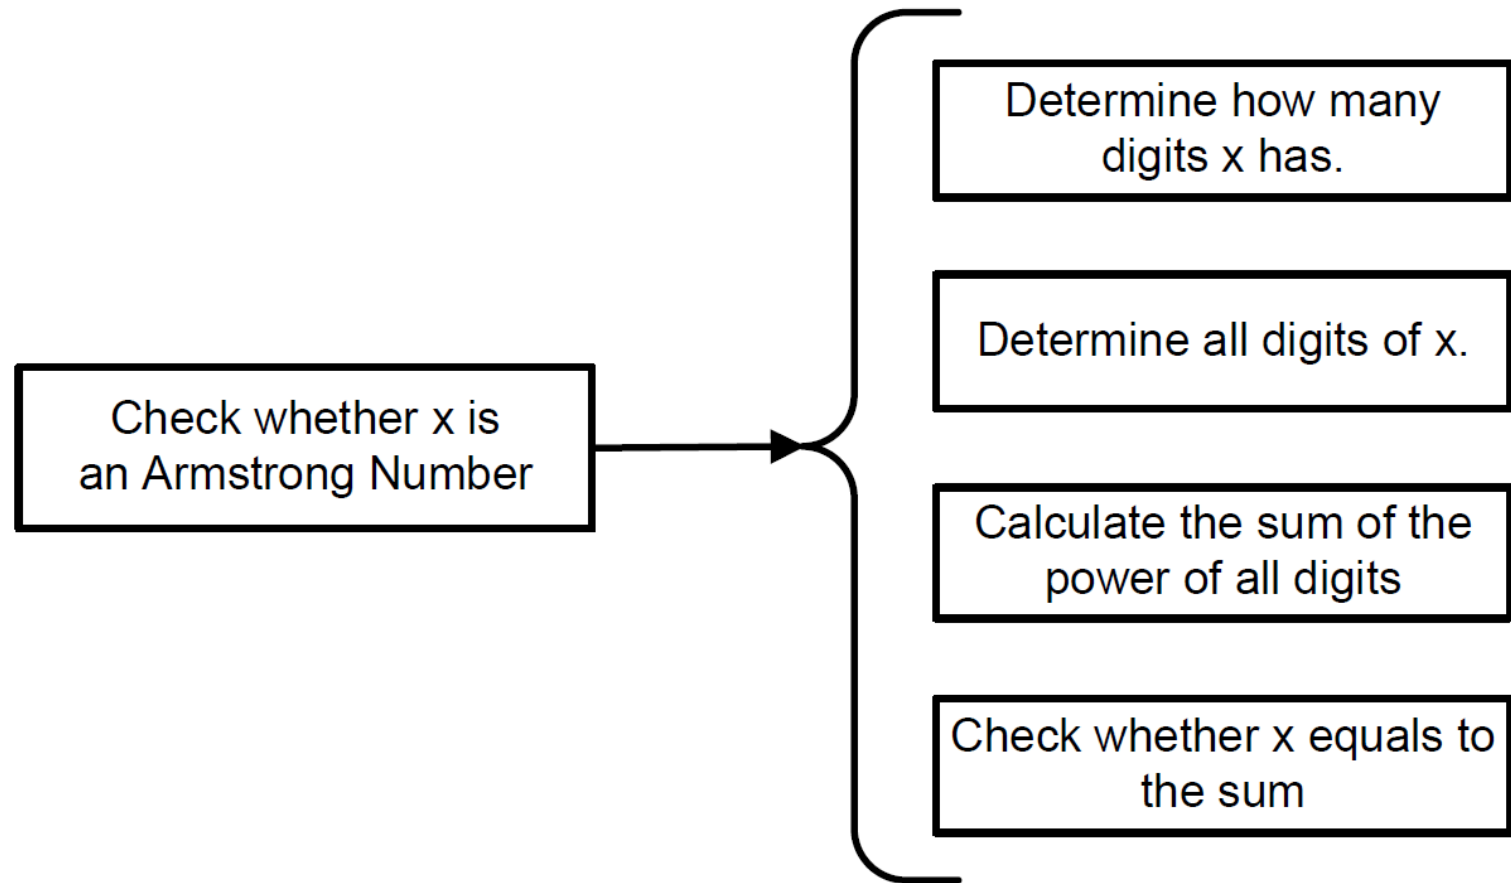

Top-Down Design Example: Counting digits

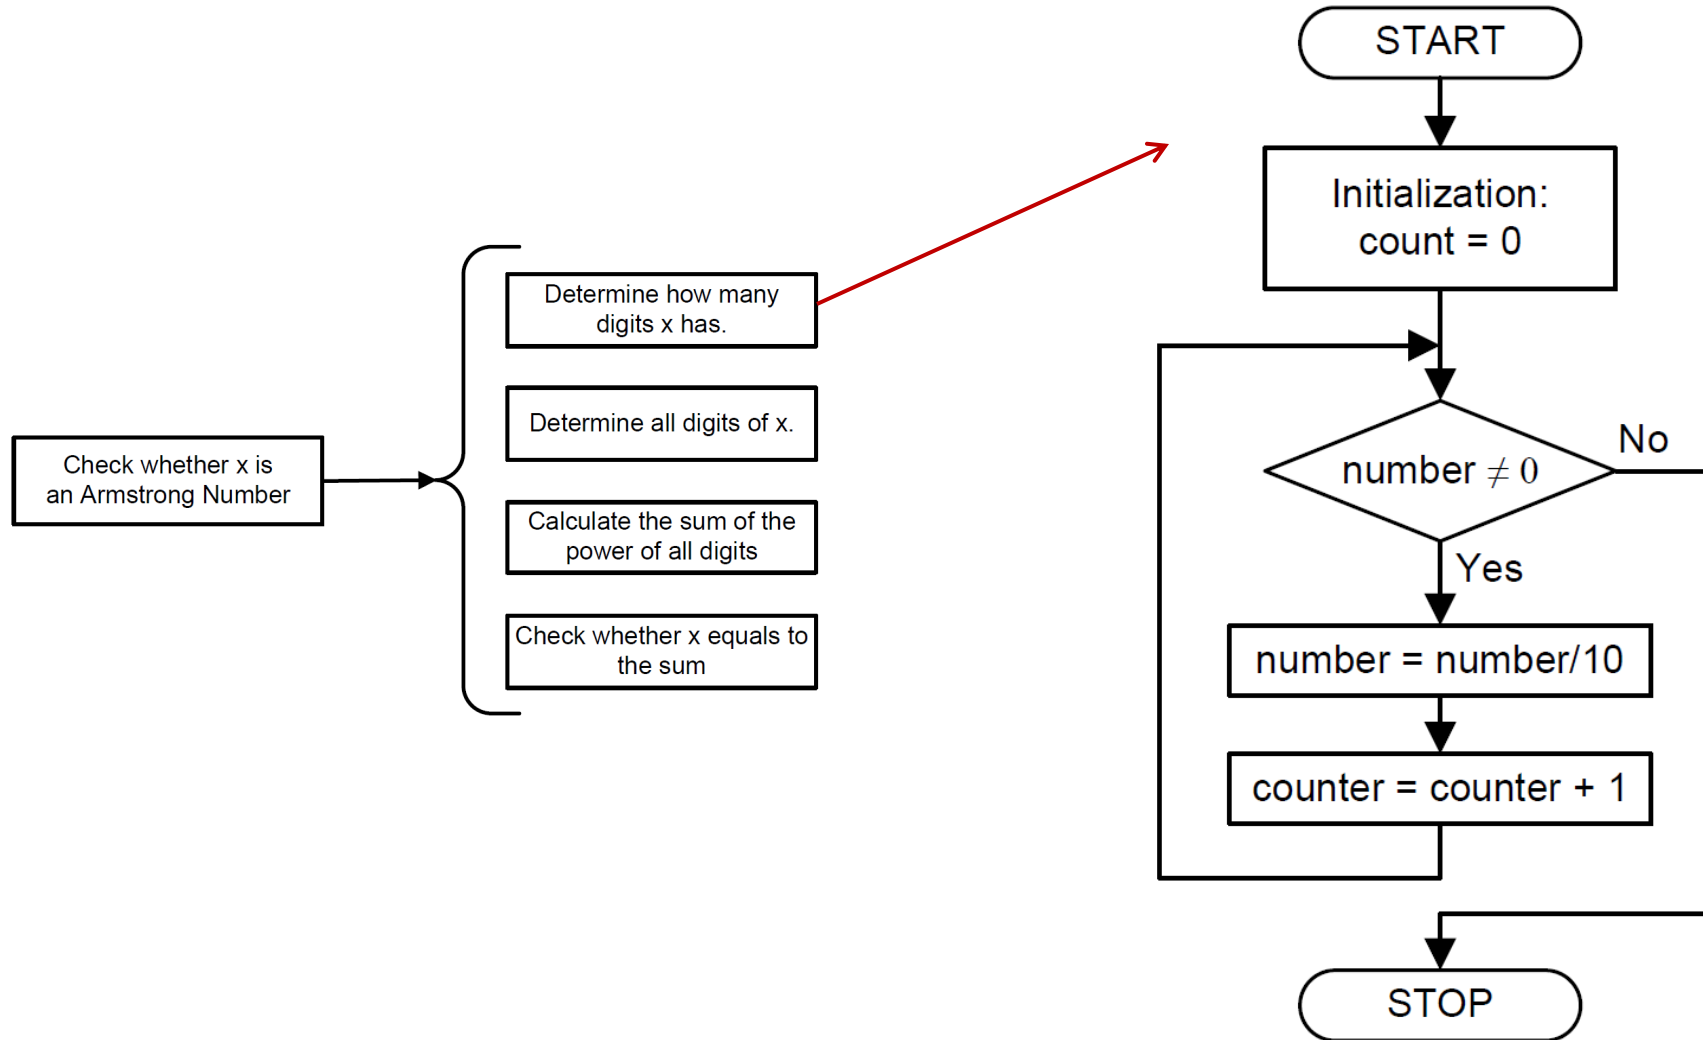

Reuse Registers

```
int A = 0; // 0x00000000
int B = -1; // 0xFFFFFFFF
int C = -2; // 0xFFFFFEE
int D = 2; // 0x00000002

void main(void){
    A = B + C - D;
    return;
}
```

Data memory		
Address	Data	
0x2000,000F	0x00	D = 0x0000,0002 = 2
0x2000,000E	0x00	
0x2000,000D	0x00	
0x2000,000C	0x02	
0x2000,000B	0xFF	C = 0xFFFF,FFFE = -2
0x2000,000A	0xFF	
0x2000,0009	0xFF	
0x2000,0008	0xFE	
0x2000,0007	0xFF	B = 0xFFFF,FFFF = -1
0x2000,0006	0xFF	
0x2000,0005	0xFF	
0x2000,0004	0xFF	
0x2000,0003	0x00	A = 0x0000,0000 = 0
0x2000,0002	0x00	
0x2000,0001	0x00	
0x2000,0000	0x00	

Reuse Registers

```
int A = 0; // 0x00000000
int B = -1; // 0xFFFFFFFF
int C = -2; // 0xFFFFFFF
int D = 2; // 0x00000002

void main(void){
    A = B + C - D;
    return;
}
```

Eight registers are used:
R0, r1, r2, r3, r4, r5, r6, r7

```
AREA myCode, CODE
EXPORT __main
ENTRY
__main PROC
```

```
LDR r2, =B ; r2 = 0x2000,0004
LDR r3, [r2] ; r3 = B = -1
LDR r4, =C ; r4 = 0x2000,0008
LDR r5, [r4] ; r5 = C = -2
LDR r6, =D ; r6 = 0x2000,000B
LDR r7, [r6] ; r7 = D = 2
ADD r1, r3, r5 ; r1 = B + C
SUB r1, r1, r7 ; r1 = B + C - D
LDR r0, =A ; r0 = 0x2000,0000
STR r1, [r0] ; Save A
ENDP
```

```
AREA myData, DATA
```

```
A DCD 0
B DCD -1
C DCD -2
D DCD 2
```

```
END
```

Reuse Registers

```
AREA myCode, CODE
EXPORT __main
ENTRY
__main PROC
```

Lifetime of r3

```
LDR r2, =B
LDR r3, [r2]
LDR r4, =C
LDR r5, [r4]
LDR r6, =D
LDR r7, [r6]
ADD r1, r3, r5
SUB r1, r1, r7
LDR r0, =A
STR r1, [r0]
ENDP
```

```
AREA myData, DATA
A DCD 0
B DCD -1
C DCD -2
D DCD 2

END
```

8 registers used

```
AREA myCode, CODE
EXPORT __main
ENTRY
__main PROC
```

Lifetime of r2

```
LDR r2, =B
LDR r3, [r2]
LDR r2, =C
LDR r5, [r2]
LDR r2, =D
LDR r7, [r2]
ADD r3, r3, r5
SUB r3, r3, r7
LDR r2, =A
STR r3, [r2]
ENDP
```

Lifetime of r2

```
AREA myData, DATA
A DCD 0
B DCD -1
C DCD -2
D DCD 2

END
```

4 registers used

```
AREA myCode, CODE
EXPORT __main
ENTRY
__main PROC
```

```
LDR r2, =B
LDR r3, [r2]
LDR r2, =C
LDR r5, [r2]
LDR r2, =D
LDR r2, [r2]
ADD r3, r3, r5
SUB r3, r3, r2
LDR r2, =A
STR r3, [r2]
ENDP
```


Reuse r2

```
AREA myData, DATA
A DCD 0
B DCD -1
C DCD -2
D DCD 2

END
```

3 registers used

Example 1: Factorial Numbers

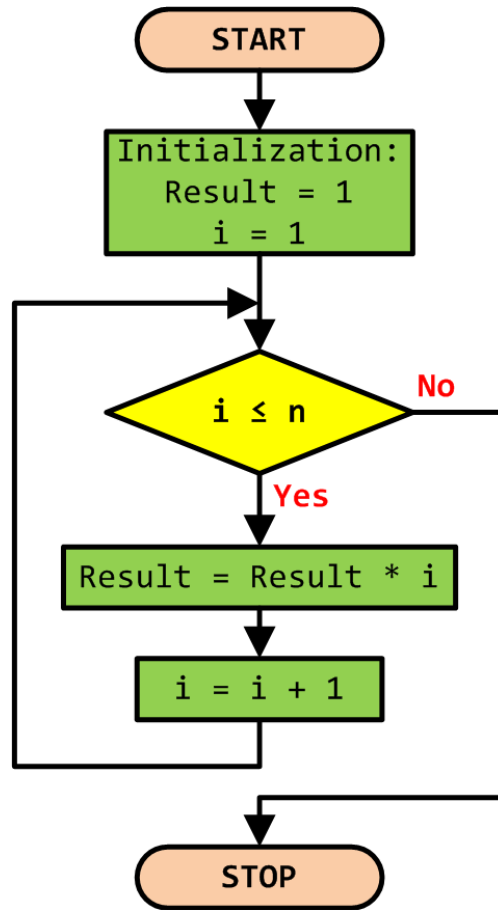

$$n! = \prod_{i=1}^n i = n \times (n - 1) \times (n - 2) \cdots \times 2 \times 1$$

Example 1: Factorial Numbers

C Program	Assembly Program 1	Assembly Program 2
<pre>int main(void) { int result, n, i; result = 1; n = 5;</pre>	<pre>AREA factorial, CODE, READONLY EXPORT __main ENTRY __main PROC</pre>	<pre>AREA factorial, CODE, READONLY EXPORT __main ENTRY __main PROC</pre>
<pre> for (i = 1; i <= n; i++) result = result * i;</pre>	<pre> MOV r1, #4 ; r1 = n MOV r0, #1 ; r0 = result.</pre>	<pre> MOV r1, #4 ; r1 = n MOVS r0, r1 ; r0 = n. Also sets flags based on r0 (so we can handle n==0) MOVEQ r0, #1 ; if n == 0, set r0 = 1</pre>
<pre> } }</pre>	<pre>loop: MOV r2, #1 ; r2 = i = 1 CMP r2, r1 ; compare r2 and n BGT stop ; if i > n, stop MUL r0, r2, r0 ; result *= i ADD r2, r2, #1 ; i++ B loop stop: B stop ENDP END</pre>	<pre>loop: SUBNES r1, r1, #1 ; if r1 != 0: r1 = r1 - 1 (and set flags) MULNE r0, r1, r0 ; if r1 != 0: r0 = r1 * r0 BNE loop ; if r1 != 0, jump to loop label stop: B stop ENDP END</pre>



Worked example for $N = 4$

▶ Assembly Program 1:

- ▶ $r2$ is loop counter (i) initialized to 1, $r0$ is running product (result) initialized to 1, $r1$ holds n .
Entry: $r1 = 4$ (input). $\text{MOV } r0, \#1 \rightarrow r0 = 1$ (initialize result). $\text{MOV } r2, \#1 \rightarrow r2 = 1$ (start $i = 1$).
- ▶ Loop iteration 1: $\text{CMP } r2, r1$ compares 1 and 4 ($1 \leq 4$), so continue. $\text{MUL } r0, r2, r0 \rightarrow r0 = 1 * 1 = 1$. $\text{ADD } r2, r2, \#1 \rightarrow r2 = 2$. B loop branches back.
- ▶ Iteration 2: $\text{CMP } r2, r1$ compares 2 and 4 ($2 \leq 4$), continue. $\text{MUL } r0, r2, r0 \rightarrow r0 = 2 * 1 = 2$. $\text{ADD } r2, r2, \#1 \rightarrow r2 = 3$. B loop.
- ▶ Iteration 3: $\text{CMP } r2, r1$ compares 3 and 4 ($3 \leq 4$), continue. $\text{MUL } r0, r2, r0 \rightarrow r0 = 3 * 2 = 6$. $\text{ADD } r2, r2, \#1 \rightarrow r2 = 4$. B loop.
- ▶ Iteration 4: $\text{CMP } r2, r1$ compares 4 and 4 ($4 \leq 4$), continue. $\text{MUL } r0, r2, r0 \rightarrow r0 = 4 * 6 = 24$. $\text{ADD } r2, r2, \#1 \rightarrow r2 = 5$. B loop.
- ▶ Iteration 5 (exit test): $\text{CMP } r2, r1$ compares 5 and 4 ($5 > 4$), BGT stop taken, loop ends. Fall through to return.
- ▶ Return: $\text{MOV } pc, r14$ (or $\text{BX } lr$), function returns with $r0 = 24$ (which is $4!$).
Final registers of interest: $r0 = 24$ (result), $r1 = 4$ (n), $r2 = 5$ (loop counter one past n).

▶ Assembly Program 2:

- ▶ $r1$ is loop counter initialized to 4, $r0$ is running product initialized to $r1 = 4$.
- ▶ Entry: $r0=4$ (input). $\text{MOVS } r1, r0 \rightarrow r1=4, Z=0$. MOVEQ skipped.
- ▶ Loop iteration 1: $\text{SUBS } r1, r1, \#1 \rightarrow r1=3$ ($Z=0$). $\text{MUL } r0 = r1 * r0 \rightarrow r0 = 3*4 = 12$. BNE true $\rightarrow$ repeat.
- ▶ Iteration 2: $\text{SUBS} \rightarrow r1=2$. $\text{MUL} \rightarrow r0 = 2*12 = 24$. BNE true.
- ▶ Iteration 3: $\text{SUBS} \rightarrow r1=1$. $\text{MUL} \rightarrow r0 = 1*24 = 24$. BNE true.
- ▶ Iteration 4: $\text{SUBS} \rightarrow r1=0$, sets $Z=1$. MULNE skipped (NE false), BNE not taken, fall through to $\text{MOV } pc, r14$. Return $r0 = 24$ (which is $4!$).

Stop B stop

- ▶ “stop B stop” means an infinite loop: that repeatedly branches to the label "stop".
 - ▶ Literal translation to C is `while(1);`
 - ▶ B is the branch instruction in ARM, which causes the program to jump to the specified label or address.
 - ▶ Here, the label and destination are both "stop". This creates a loop: where execution never moves past this point.
 - ▶ It is commonly used to halt the program or wait indefinitely, often when the program completes or to prevent it from running into uninitialized memory.

Example 2: Counting Ones in a Word

Assembly Program

```
        AREA Count_Ones, CODE
        EXPORT __main
        ALIGN
        ENTRY
__main  PROC
        ; r0 = Input = x
        ; r1 = Number of ones = counter
        LDR r0, =0xAAAAAAAA

        ; r1 = r0 >> 31
        MOV r1, r0, LSR #31

        ; r0 = r0 << 2 and change Carry
loop:   MOVS r0, r0, LSL #2

        ; r1 = r1 + r0 >> 31 + Carry
        ADC r1, r1, r0, LSR #31
        BNE loop

Stop:   B stop
        ENDP
        END
```

After LDR: $r0 = 10101010101010101010101010101010$

(Load input data into r0)

After MOV: $r1 = r0 \gg 31 = 1$ (Initialize r1 with the most significant bit of r0. r0 logical shift right by 31 bits, take the leftmost bit b31)

After MOVS: $r0 = r0 \ll 2$

$= 10101010101010101010101010101000$

(Logical shift left r0 by 2 bits and update C = 0, as the last shifted out bit b30)


After ADC: $r1 = r1 + r0 \gg 31 + \text{Carry} = b31 + b29 + b30 = 1 + 1 + 0 = 2$

2nd iteration: $r1 = r1 + b28 + b27 = 2 + 1 + 0 = 3$

If after MOVS, the result in r0 is zero, (no more 1's), Z flag is set to 1 and the loop: exits


Initialization

MOV r1, r0, LSR #31 ; r1 = b31 of r0




Loop

MOVS r0, r0, LSL #2 ; shift b30 into Carry



r0, LSR #31



ADC r1, r1, r0, LSR #31 ; r1 = b31 + b30 + b29

Carry is not updated

At the end of the first loop: $r1 = b31 + b30 + b29$

Example 2: Counting Ones in a Word: Explanations

Iteration	Shifted r0 value (MSB bit)	Carry bit (last shifted out)	r1 (accumulated count)	Notes
0 (init)	—	—	$b_{31} = 1$	r1 initialized with b_{31}
1	$b_{29} = 1$	$b_{30} = 0$	$1 (b_{31}) + 1 (b_{29}) + 0 (b_{30}) = 2$	r0 shifted left by 2 bits
2	$b_{27} = 1$	$b_{28} = 0$	$2 + 1 (b_{27}) + 0 (b_{28}) = 3$	
3	$b_{25} = 1$	$b_{26} = 0$	$3 + 1 (b_{25}) + 0 (b_{26}) = 4$	
4	$b_{23} = 1$	$b_{24} = 0$	$4 + 1 (b_{23}) + 0 (b_{24}) = 5$	

- ▶ In 0xAAAAAAAA, bits at odd positions (31, 29, 27, ..., 1) are all 1, bits at even positions (30, 28, 26, ..., 0) are all 0.
- ▶ Carry bit is always the even bit index at each iteration.
- ▶ At each iteration, r1 accumulates 1 (highest bit, odd index) + 0 (carry bit, even index).
- ▶ The loop: ends when r0 becomes zero after the last shift, triggering the Zero flag and exiting the branch.
- ▶ The count accumulates to 16, consistent with the fact that 0xAAAAAAAA has exactly 16 ones in 32 bits.
- ▶ This program counts two bits per loop: iteration, leveraging the Carry bit, and will take 16 iterations for a 32-bit word.

Example 2: Counting Ones in a Word: Simpler Programs

```
LDR r0, =0xAAAAAAAA ; Load input data into r0
MOV r2, #0           ; Initialize count (r2) to 0

loop:
  MOV r1, r0, LSR #31 ; Extract leftmost bit of r0 into r1 (0 or 1)
  ADD r2, r2, r1       ; Add extracted bit to count in r2
  MOVS r0, r0, LSL #1  ; Shift r0 left by 1 bit, update flags
  BNE loop            ; If r0 != 0, repeat loop
```

Algo 1

```
LDR r0, =0xAAAAAAAA ; Load input data into r0
MOV r2, #0           ; Initialize bit count accumulator (r2) to 0

loop:
  MOVS r0, r0, LSL #1 ; Shift left by 1 bit, carry gets old MSB
  ADC r2, r2, #0       ; Add carry (0 + carry) to r2
  BNE loop            ; Loop while r0 != 0 (Zero flag clear)
```

Algo 2

- ▶ Algo 1: use `MOV r1, r0, LSR #31` to extract the highest bit from `r0` and accumulates the per-bit count. (Carry flag is set but ignored.)
- ▶ Algo 2: use `MOVS r0, r0, LSL #1` to shift left by 1 bit and update the carry flag with the bit shifted out (the leftmost bit of the original value). Use `ADC` (Add with Carry) to add the carry bit to accumulator `r2` without needing to move the leftmost bit explicitly.
- ▶ Both programs count one bit per loop iteration, discarding the Carry bit, and will take 32 iterations for a 32-bit word.


Quiz

- ▶ Q: In Algo 1 and Algo 2, can we change **MOVS** r0, r0, LSL #1 to **MOV** r0, r0, LSL #1?
 - ▶ ANS: No, since the C carry flag, which captures the leftmost bit shifted out, is needed for bit counting
- ▶ Q: In Algo 1, can we change **MOV** r1, r0, LSR #31 to **MOVS** r1, r0, LSR #31?
 - ▶ ANS: Yes, **MOVS** sets flags, but they are not used by later instructions.
- ▶ Q: In Algo 2, can we change **ADC** r2, r2, #0 to **ADD** r2, r2, #0?
 - ▶ ANS: No, **ADC** (Add with Carry) adds two operands **plus** the **carry flag**. **ADD** only adds the two operands without considering the carry flag

Example 3: Finding Max of an Array

```
// Initialize max and location
maxLocation = 0;
maxValue = array[0];

// loop: through the array
for (i = 0; i < arraySize; i++) {
    if (array[i] > maxValue) {
        maxValue = array[i];
        maxLocation = i;
    }
}
```

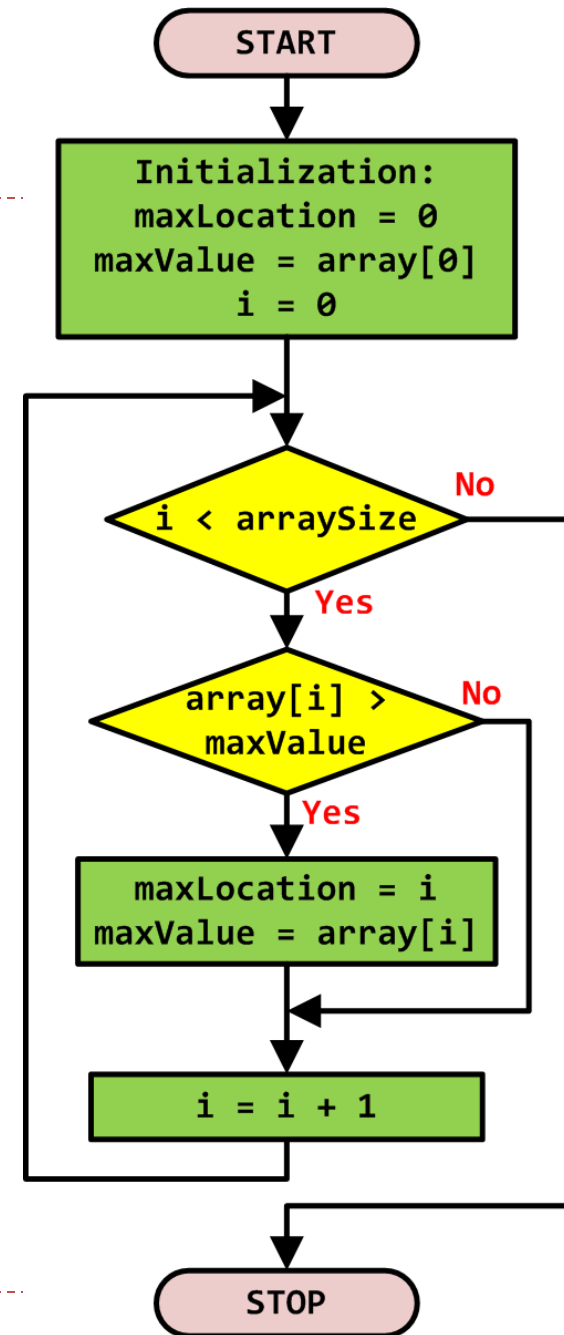

Example 3: Finding Max of an Array

C Program	Assembly Program
<pre>int array[10] = {-1, 5, 3, 8, 10, 23, 6, 5, 2, -10}; int size = 10; int main(void) { int i, maxLocation, maxValue;</pre>	<pre>AREA myData, DATA ALIGN array DCD -1,5,3,8,10,23,6,5,2,-10 size DCD 10</pre>
<pre> // Initialize max and location maxLocation = 0; maxValue = array[0]; // loop: through the array for (i = 0; i < size; i++){ if (array[i] > maxValue) { maxValue = array[i]; maxLocation = i; } } while(1); //dead loop: }</pre>	<pre>__main AREA findMax, CODE EXPORT __main ALIGN ENTRY PROC ; Identify the array size LDR r3, =size LDR r3, [r3] ; array size SUB r3, r3, #1 ; Initialize max value and location LDR r4, =array LDR r0, [r4] ; r0 = default max MOV r1, #0 ; r1 = max location ; loop: over the array loop: MOV r2, #0 ; loop: index i CMP r2, r3 ; compare i & size BGE stop ; stop if i ≥ size LDR r5, [r4,r2,LSL #2] ; array[i] CMP r5, r0 ; compare with max MOVGT r0, r5 ; update max value MOVGT r1, r2 ; update location ADD r2, r2, #1 ; update index i B loop: stop B stop ; dead loop: ENDP END</pre>

Quiz

- ▶ Instruction LDR r5, [r4,r2,LSL #2] has the form:
- ▶ LDR <destination register>, [<base register>, <index register>, LSL #<shift amount>]
- ▶ Address=value in r4+(value in r2×2²)
 - ▶ The memory address is calculated by taking the value in the <base register> (here r4) plus the value in the <index register> (here r2) shifted left (logical shift left, LSL) by a certain number of bits (#2 means shifted by 2 bits, or multiplied by 4).
- ▶ Q: why do we perform $r2 \times 2^2$ here?
- ▶ ANS: