Chapter 1 Introduction

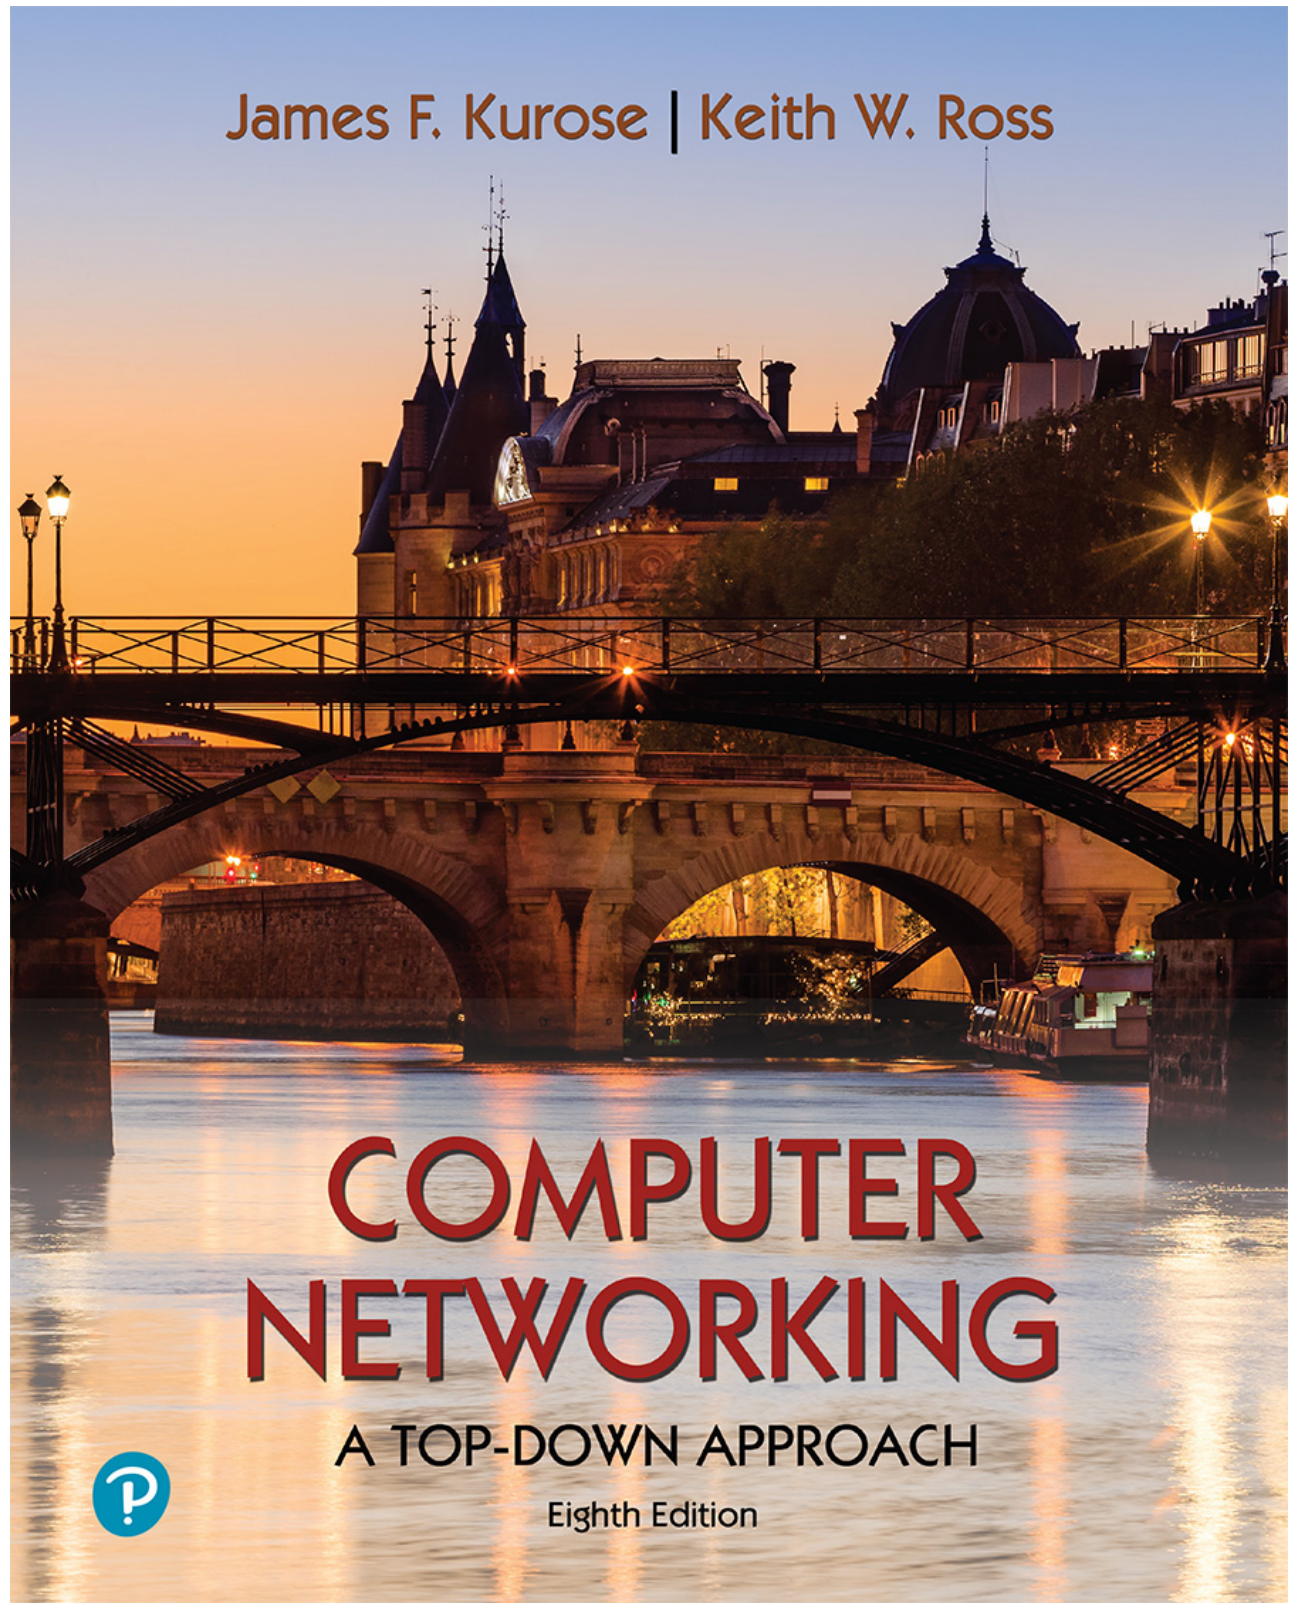

Computer Networking: A Top-Down Approach
8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Acknowledgement: Based on the textbook's website:
https://gaia.cs.umass.edu/kurose_ross/index.php

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models

IMPORTANT

How do packet delay and loss occur?

- packets *queue* in router buffers, waiting for turn for transmission
  - queue length grows when arrival rate to link (temporarily) exceeds output link capacity
- packet *loss* occurs when memory to hold queued packets fills up

packet being transmitted (transmission delay)

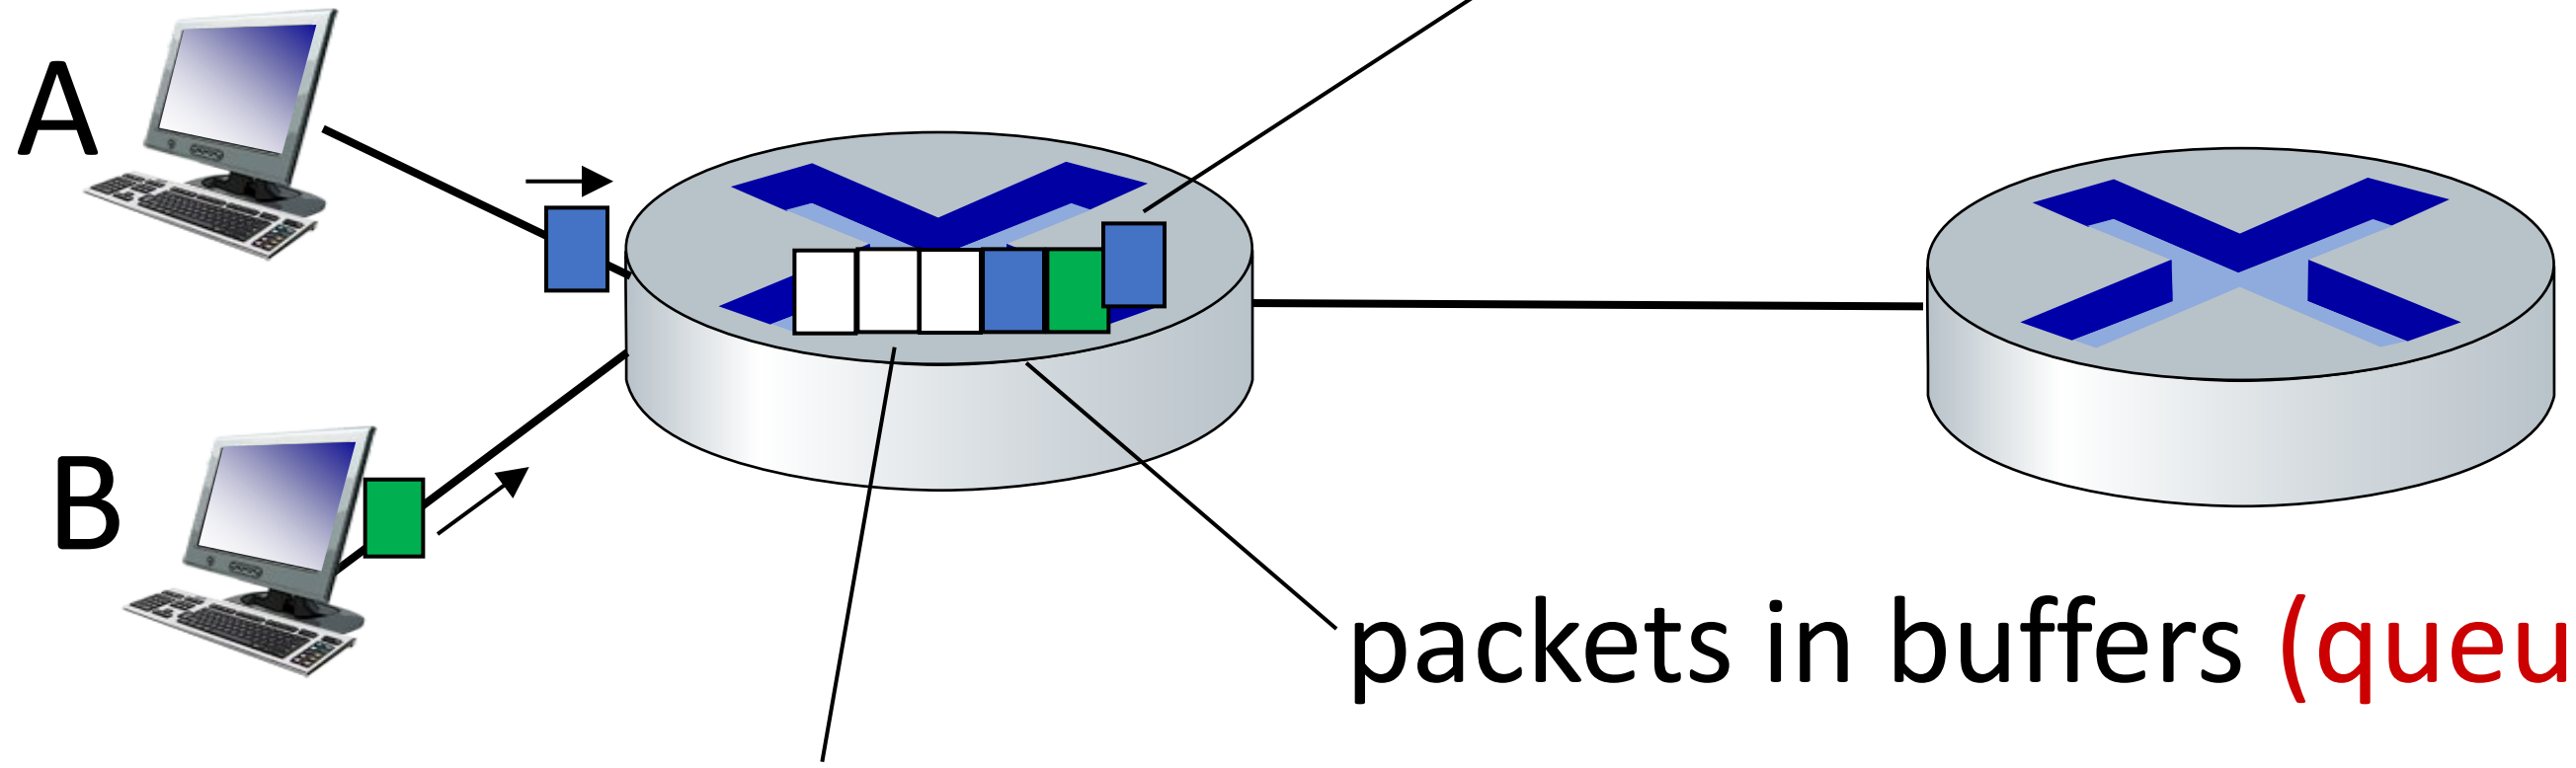

packets in buffers (queueing delay)

free (available) buffers: arriving packets dropped (loss) if no free buffers

IMPORTANT

Packet delay: four sources

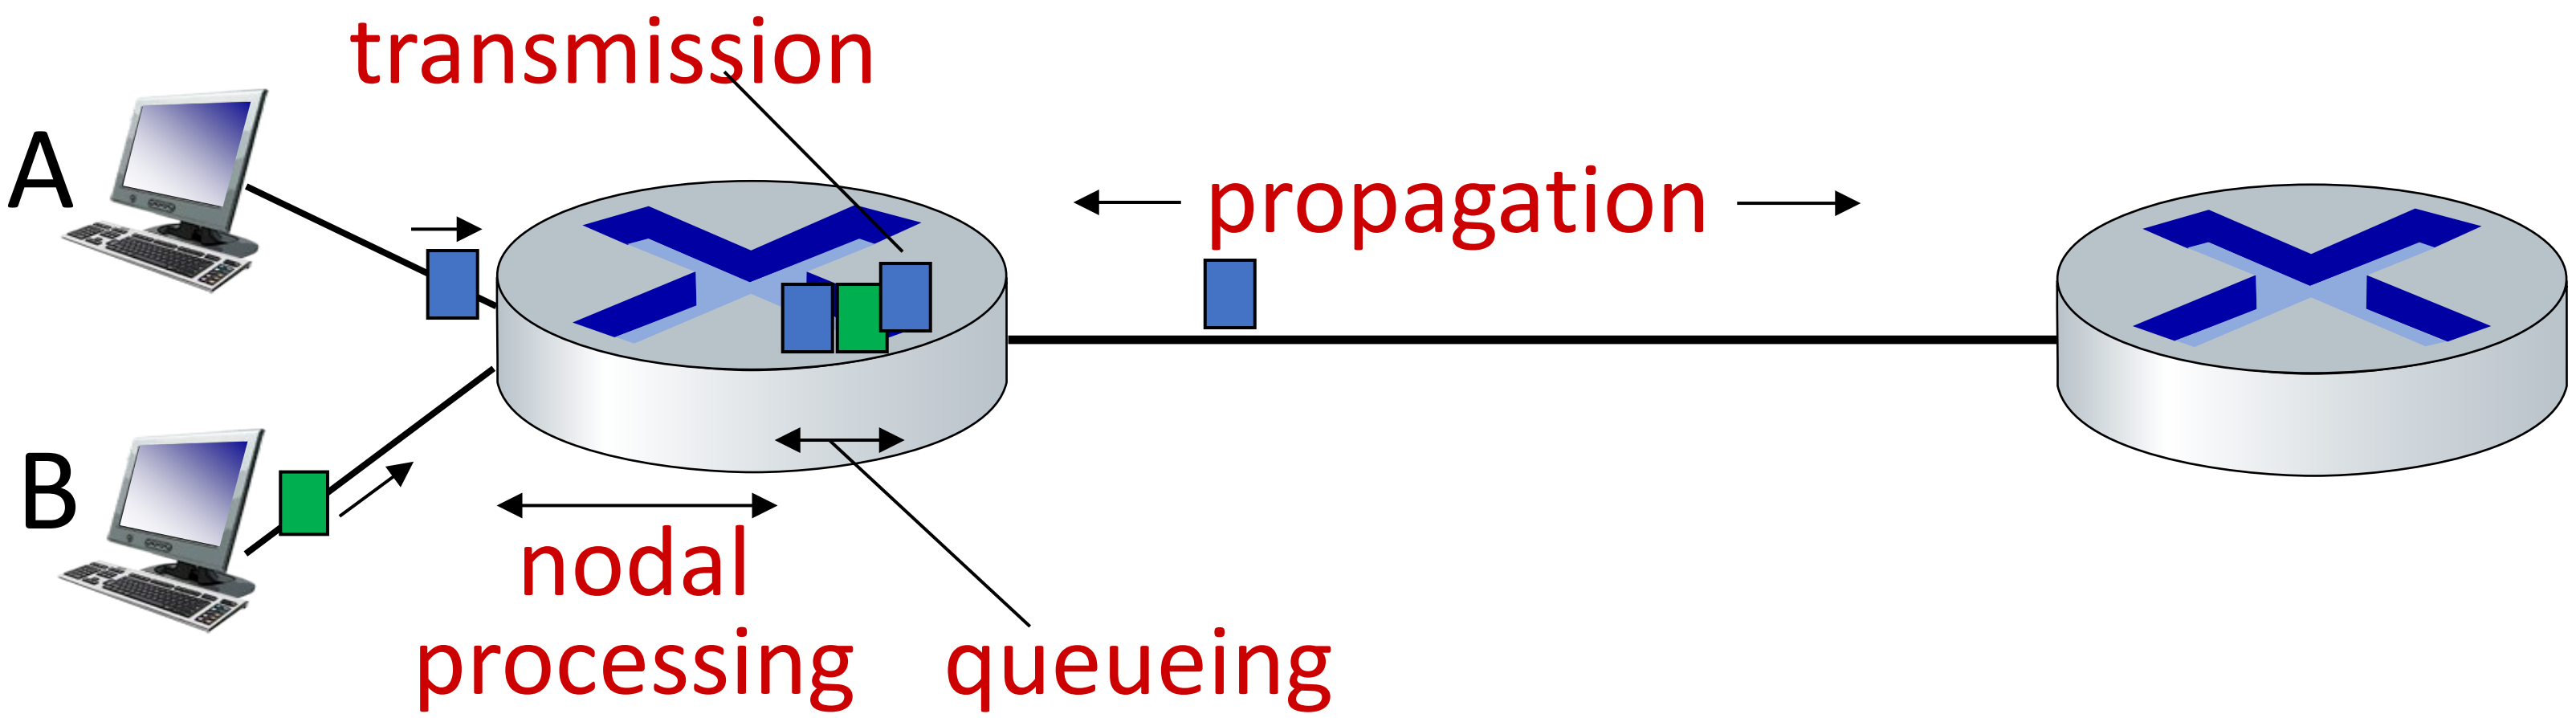

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{proc}: nodal processing

- check bit errors
- determine output link
- typically < microsecs

d_{queue}: queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

IMPORTANT

Packet delay: four sources

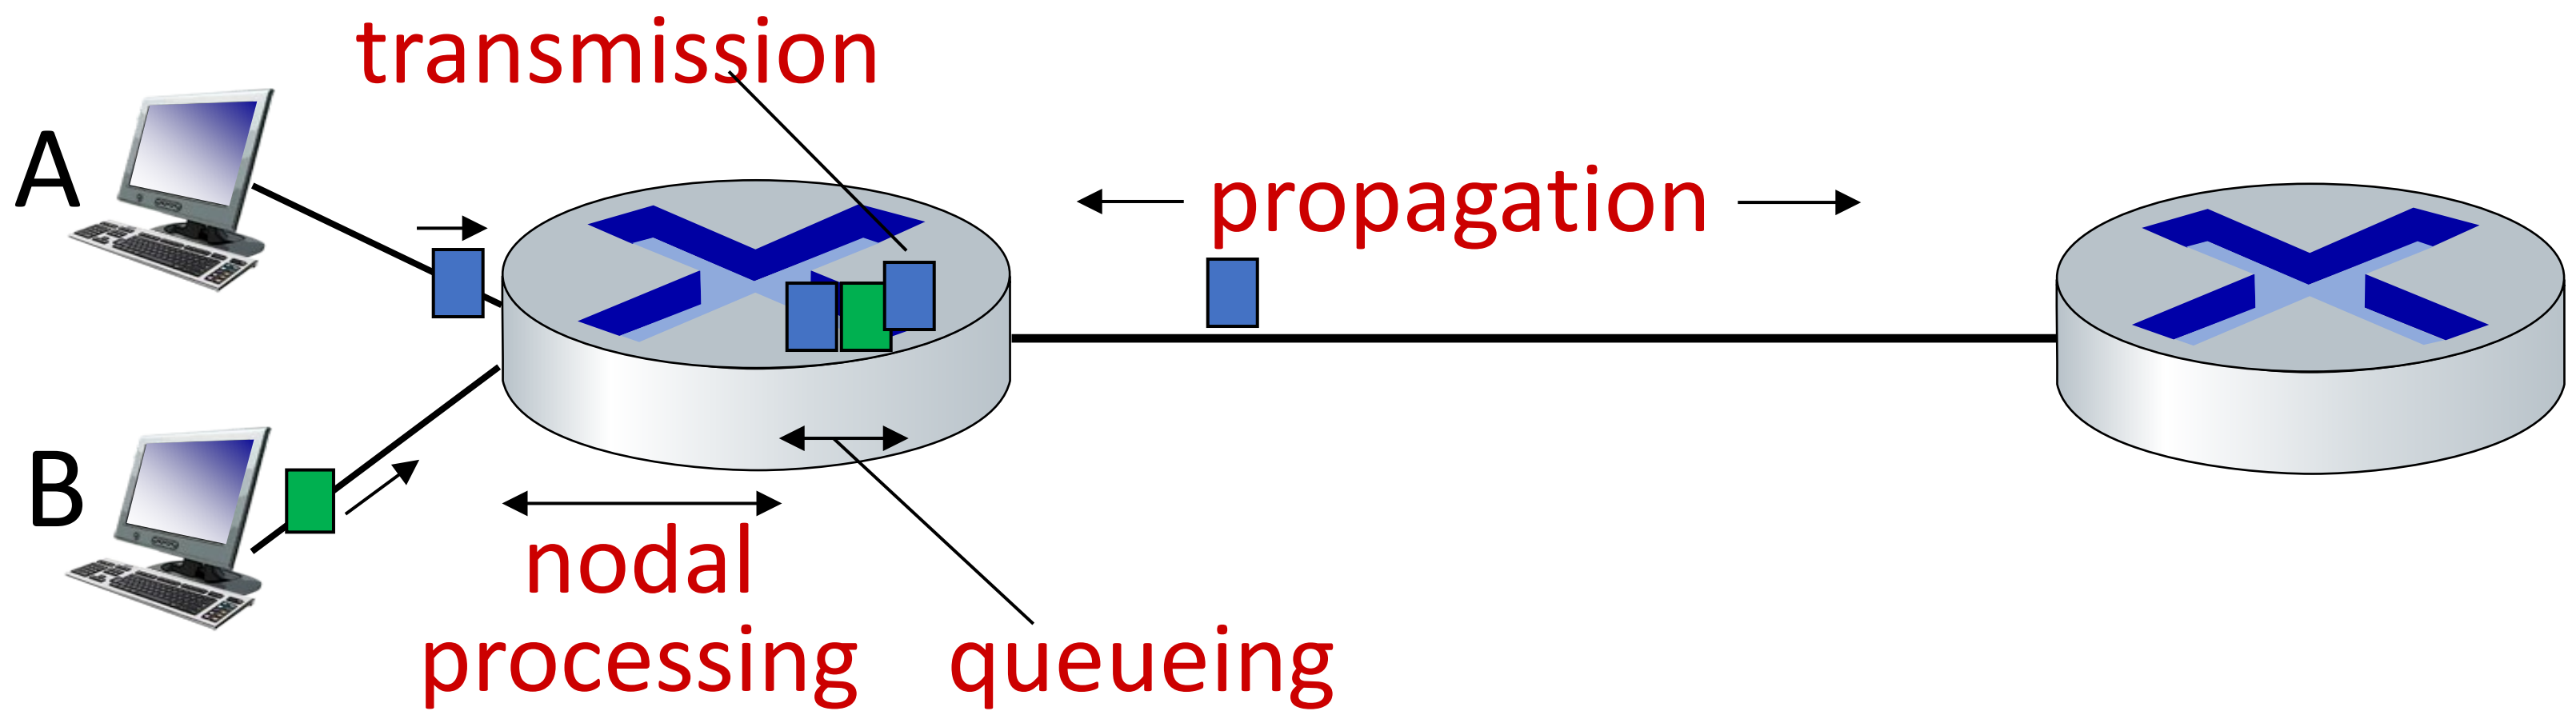

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{trans}: transmission delay:

- *L*: packet length (bits)
- *R*: link *transmission rate (bps)*
- $d_{trans} = L/R$

d_{prop}: propagation delay:

- *d*: length of physical link
- *s*: propagation speed (~2x10^8 m/sec)
- $d_{\text{prop}} = d/s$

d_{trans} and d_{prop} *very* different

IMPORTANT

Caravan analogy

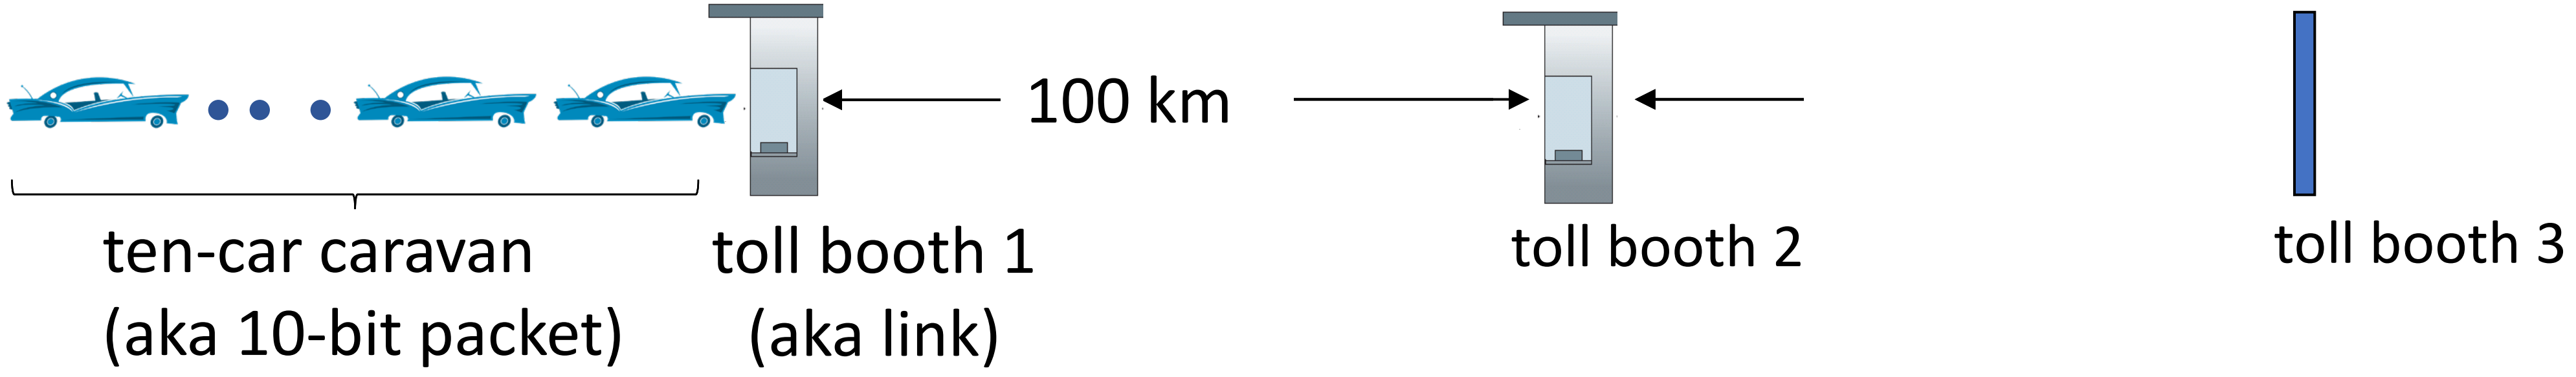

- car ~ bit; caravan ~ packet; toll service ~ link transmission
- toll booth takes 12 sec to service car (bit transmission time)
- “propagate” at 100 km/hr
- *Q:* How long until all caravans (packets) arrive at 2nd toll booth?
- time to “push” entire caravan through toll booth onto highway = 12*10 = 120 sec
- time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr) = 1 hr
- *A:* 62 minutes

IMPORTANT

How long until all cars (packets) arrive at 2nd toll booth

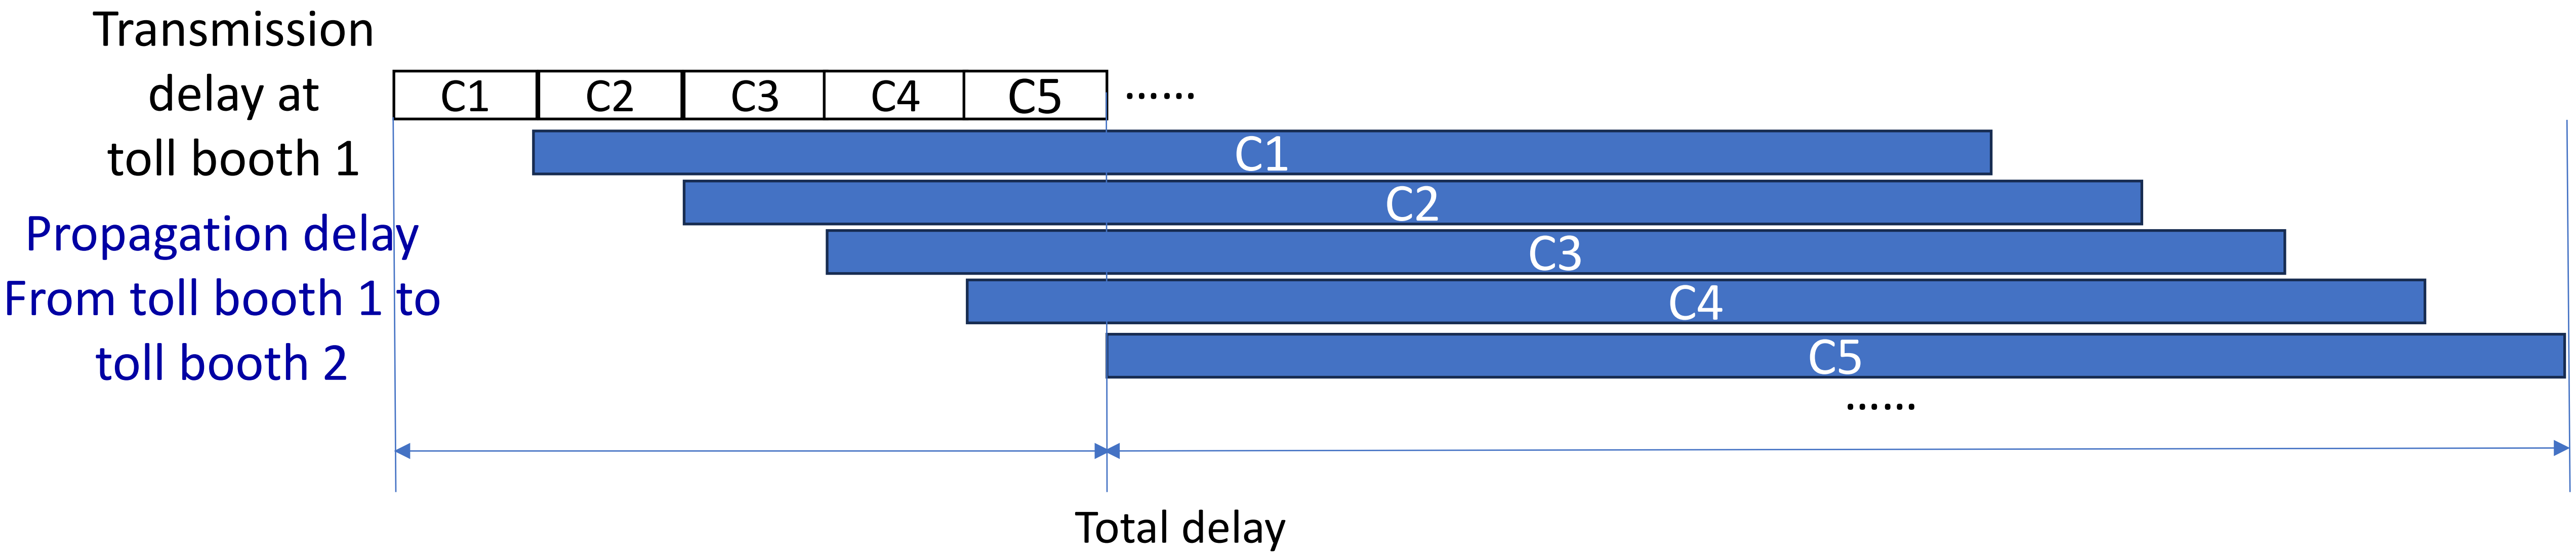
Transmission delay at toll booth 1
C1
C2
C3
C4
C5
……
Propagation delay From toll booth 1 to toll booth 2
C1
C2
C3
C4
C5
……
Total delay

- Total delay for sending all cars from source to toll booth 1 to toll booth 2 =
  - Transmission delay of all cars (also the last car) at toll booth 1 = 12*10 (120 sec), plus
  - Propagation delay of the last car from toll booth 1 to toll booth 2 = 100km/(100km/hr) (1 hr)
  - = 62 minutes

IMPORTANT

Caravan analogy

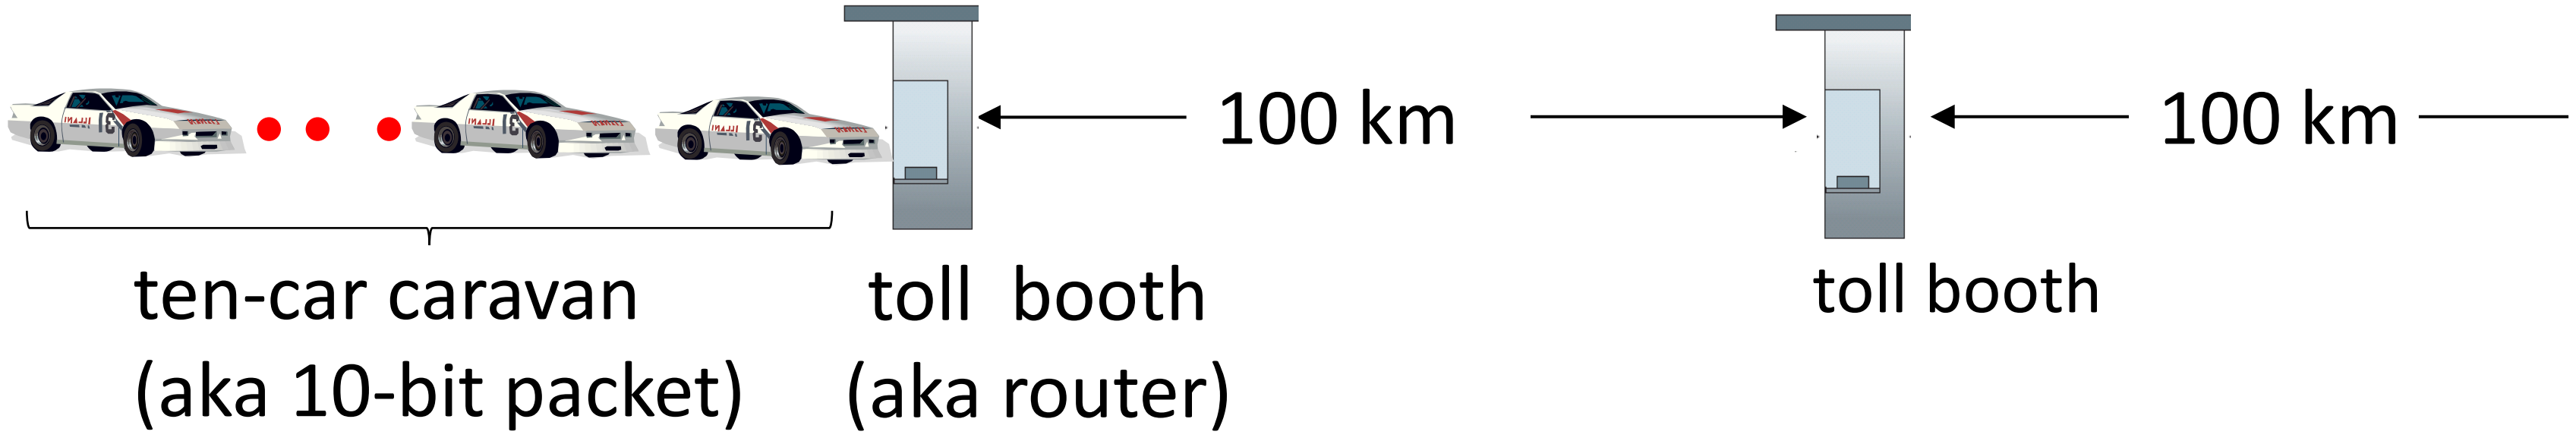

- suppose cars now “propagate” at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- *Q: Will cars arrive to 2nd booth before all cars serviced at first booth?*

  A: Yes! after 7 min, first car arrives at second booth; three cars still at first booth

  1st car: transmission delay 1 min + prop delay 100km/(1000km/hr) = 0.1 hr=6 min

IMPORTANT

Quiz

- Performance: Delay. Consider the network shown in the figure below, with three links, each with a transmission rate of 1 Mbps, and a propagation delay of 2 msec per link. Assume the length of a packet is 1000 bits.
- What is the end-end delay of a packet from when it first begins transmission on link 1, until is it received in full by the server at the end of link 3.
- You can assume that queueing delays and packet processing delays are zero, but make sure you include packet transmission time delay on all links. Assume store-and forward packet transmission.

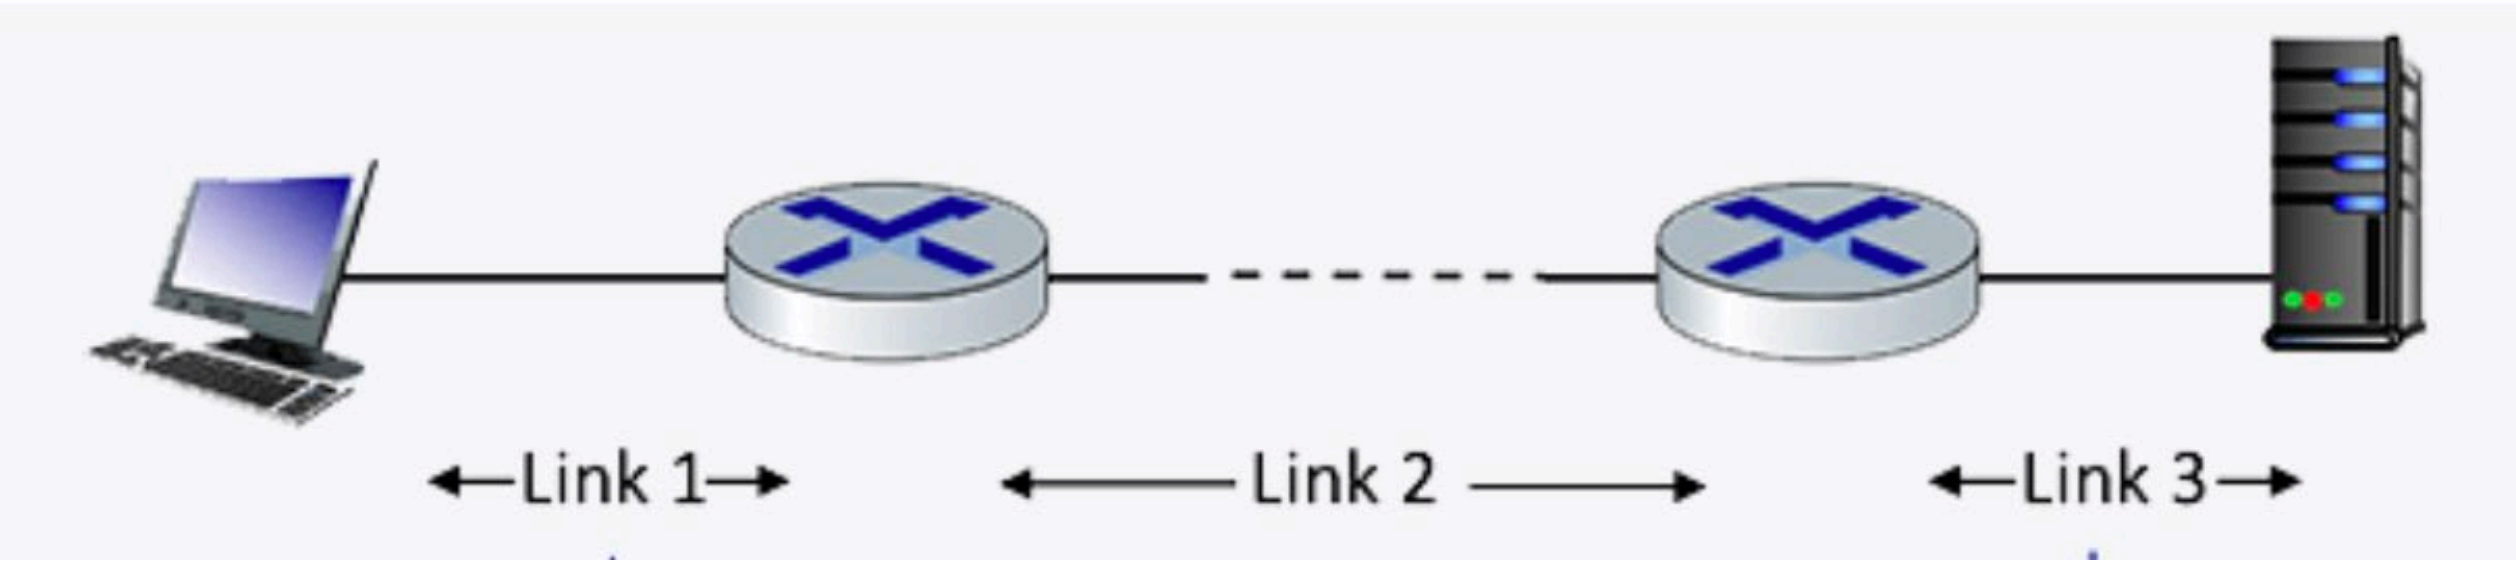

- ANS: at each link, transmission delay is 1000 bits/1Mbps=1 ms, propagation delay is 2 ms, so delay is 1+2=3 ms.
- To traverse all three links, total delay is 3+3+3=12 ms.

IMPORTANT

Quiz

- Performance: Packet Transmission Delay. Consider the network shown below, with a sending server on the left, sending packets to two different client receivers on the right. The sender is sending packets to the receivers over separate TCP connections. The links have transmission rates of R1 = 1 Mbps. Assume that R2 = R3 = 1 Mbps. Assume that the propagation delay is 2 msec per link. Suppose each packet is 1000 bits in size.
- What is the end-to-end delay of a packet from when it first begins transmission at the sender, until it is received in full by one of the two clients at the right (the answer is the same for both clients)? Assume store-and-forward packet transmission. You can assume the queueing delay and processing delay are both zero.

- ANS: at each link, transmission delay is 1000 bits/1Mbps=1 ms, propagation delay is 2 ms, so delay is 1+2=3 ms.
- To traverse all two links, total delay is 3+3=6 ms.
- The 2nd stage, packet transmission in parallel.

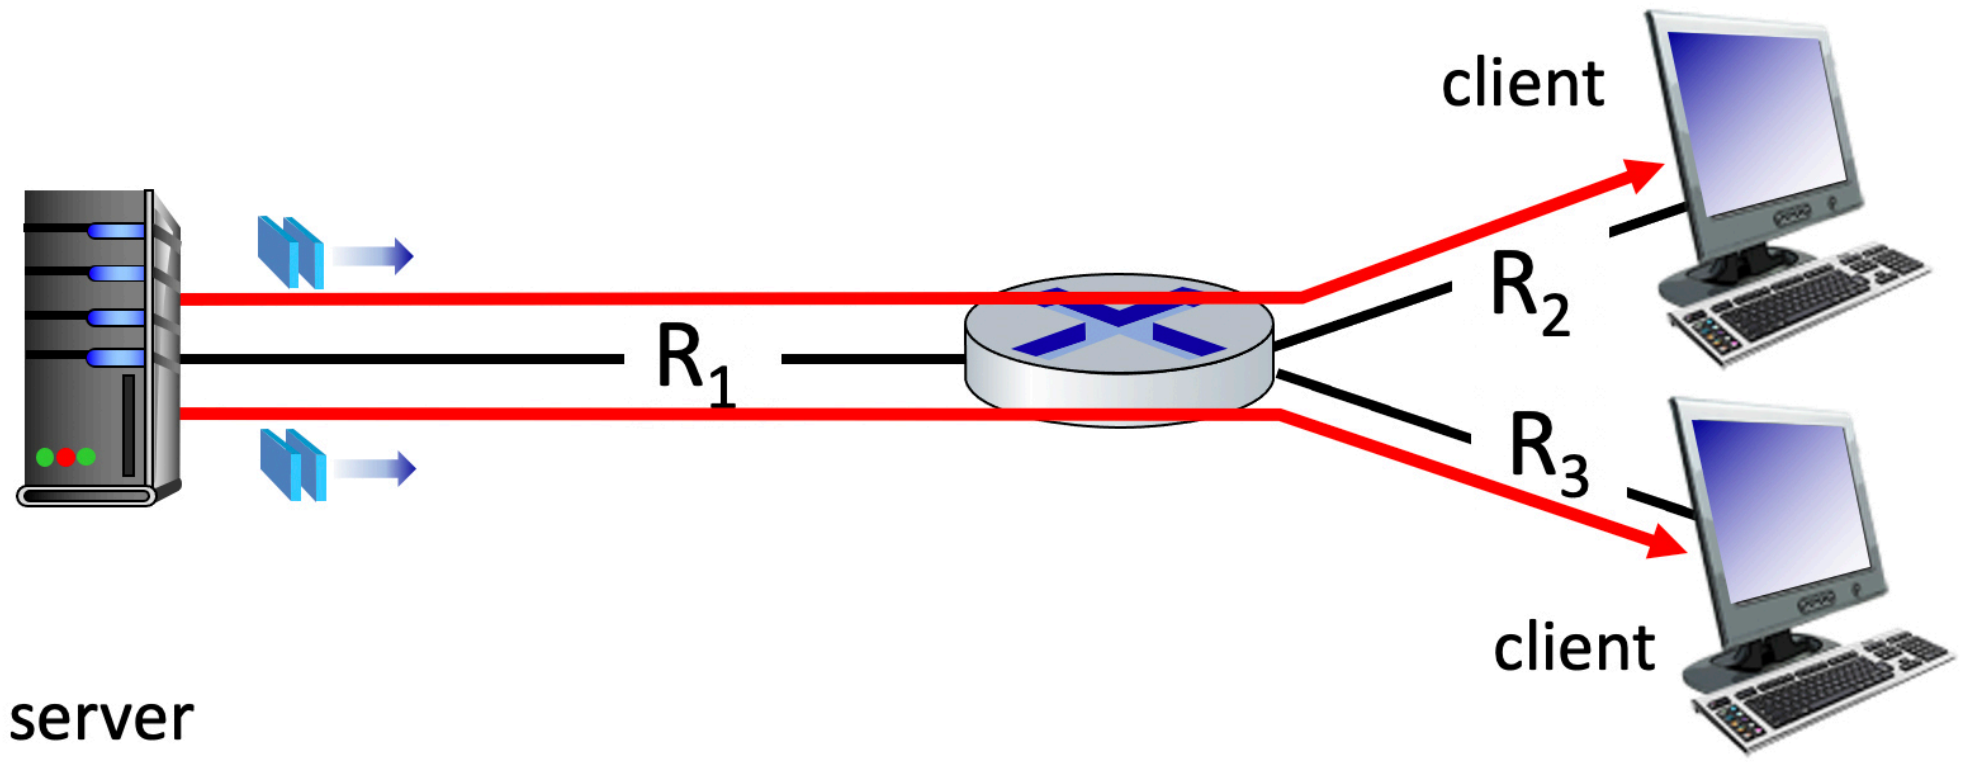

Packet queueing delay (revisited)

- *a:* average packet arrival rate
- *L:* packet length (bits)
- *R:* link bandwidth (bit transmission rate)

$$\frac{L \cdot a}{R} : \quad \frac{\text{arrival rate of bits}}{\text{service rate of bits}}$$

"traffic intensity"

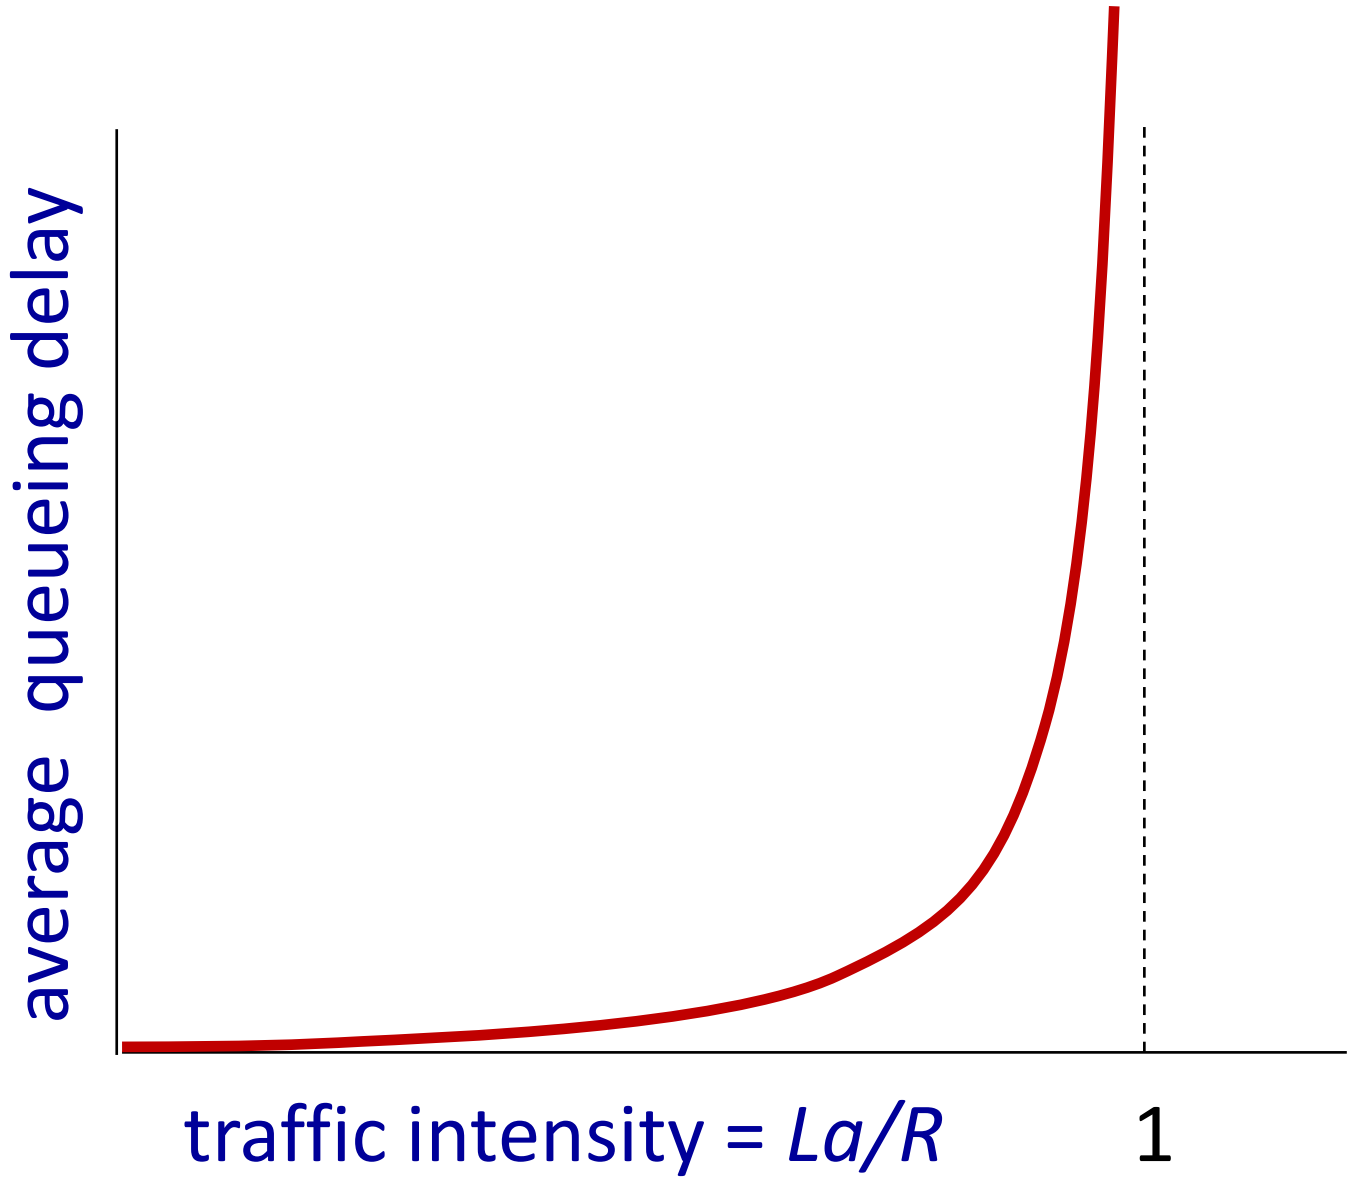

- *La/R* ~ 0: avg. queueing delay small
- *La/R* -> 1: avg. queueing delay large
- *La/R* > 1: more "work" arriving is more than can be serviced - average delay infinite!

La/R ~ 0

La/R -> 1

"Real" Internet delays and routes

- what do "real" Internet delay & loss look like?
- **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination. For all *i:*
  - sends three packets that will reach router *i* on path towards destination (with time-to-live field value of *i*)
  - router *i* will return packets to sender
  - sender measures time interval between transmission and reply

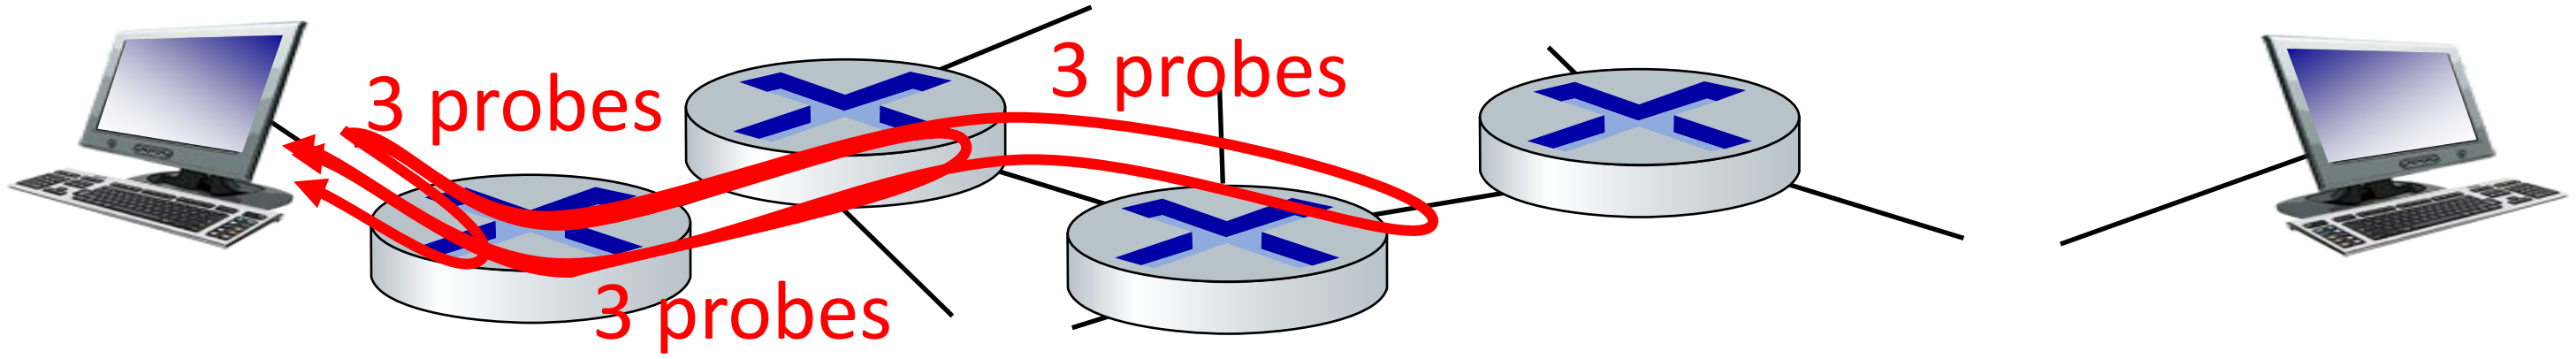

Real Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

3 delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

3 delay measurements to border1-rt-fa5-1-0.gw.umass.edu

trans-oceanic link

looks like delays *decrease*! Why?

* means no response (probe lost, router not replying)

* Do some traceroutes from exotic countries at www.traceroute.org

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

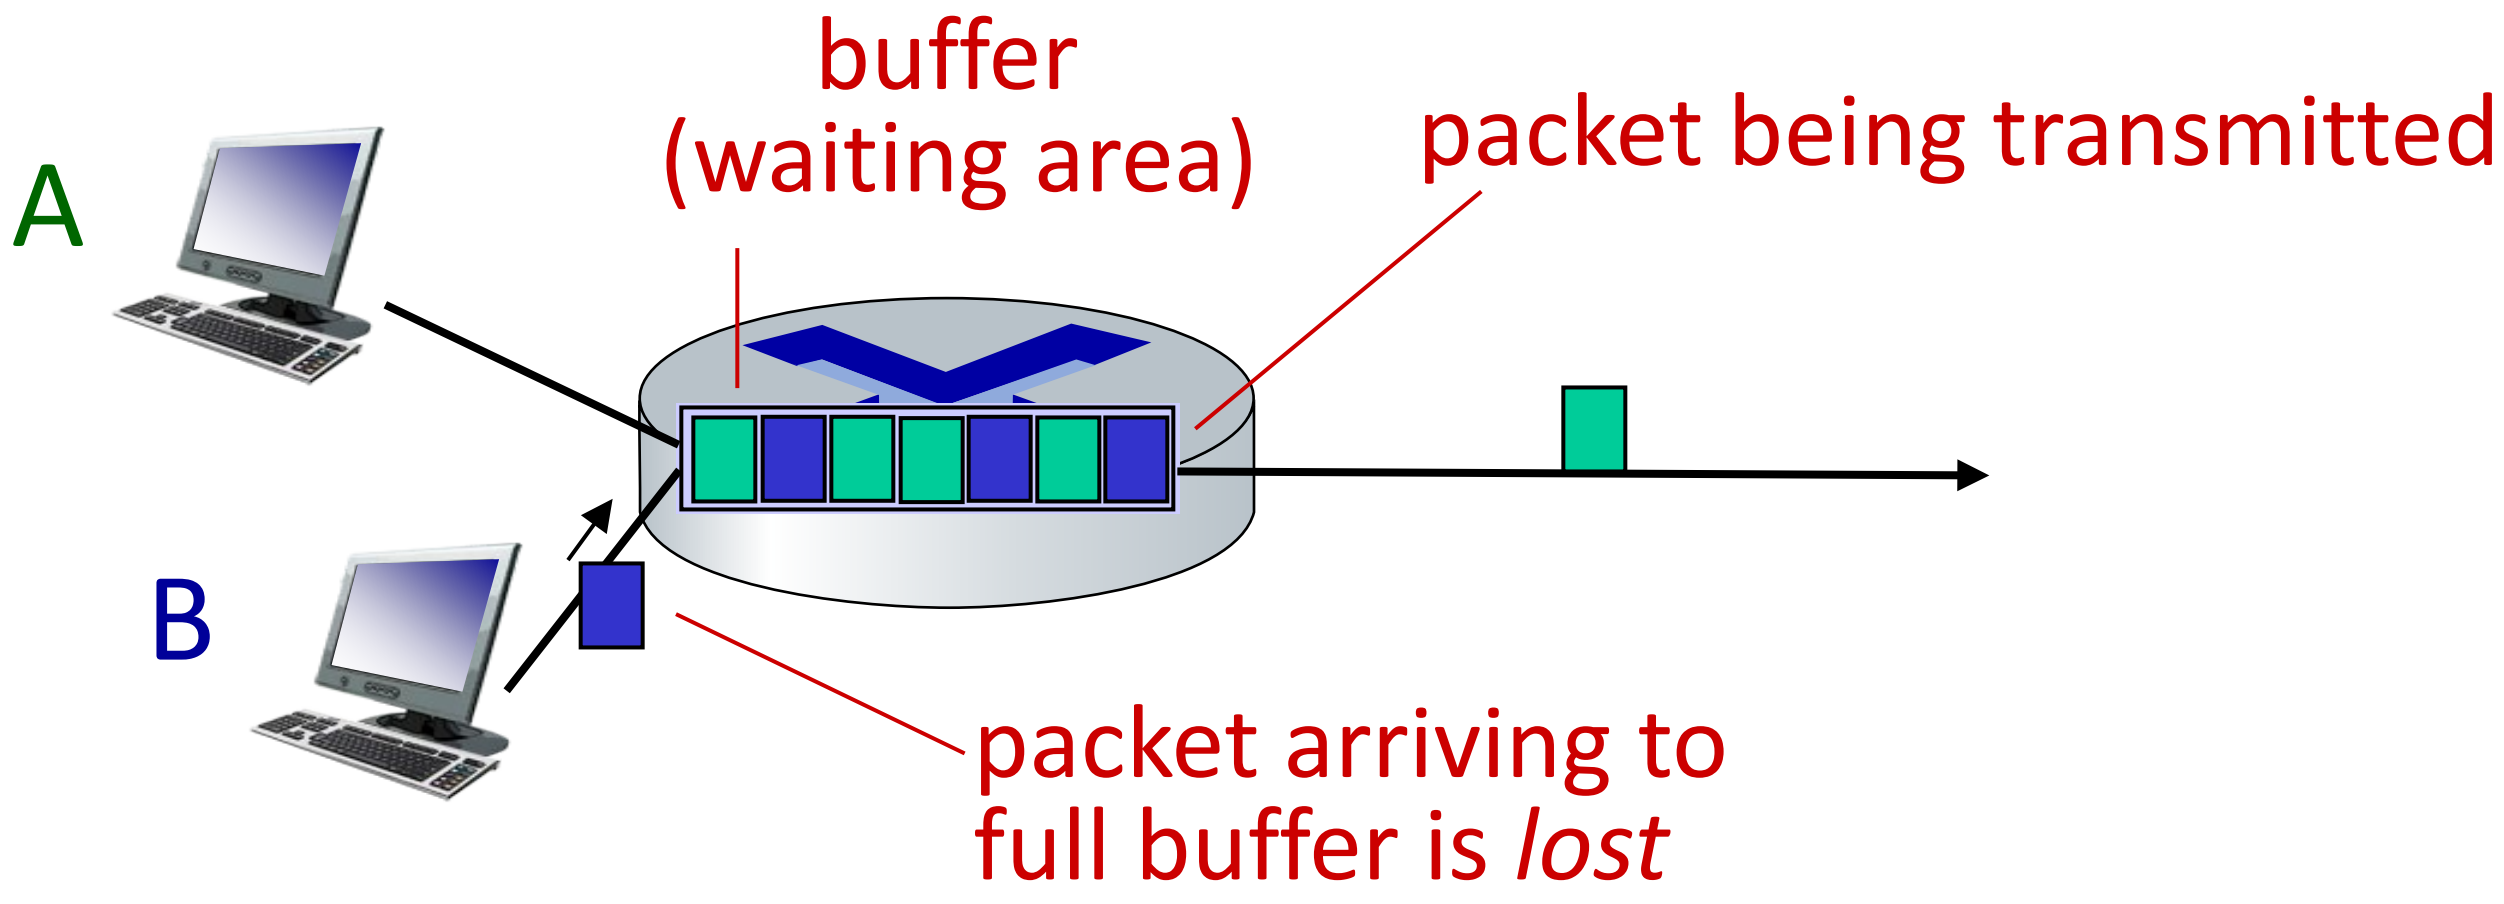

* Check out the Java applet for an interactive animation (on publisher's website) of queuing and loss

IMPORTANT

Throughput

- *throughput:* rate (bits/time unit) at which bits are being sent from sender to receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

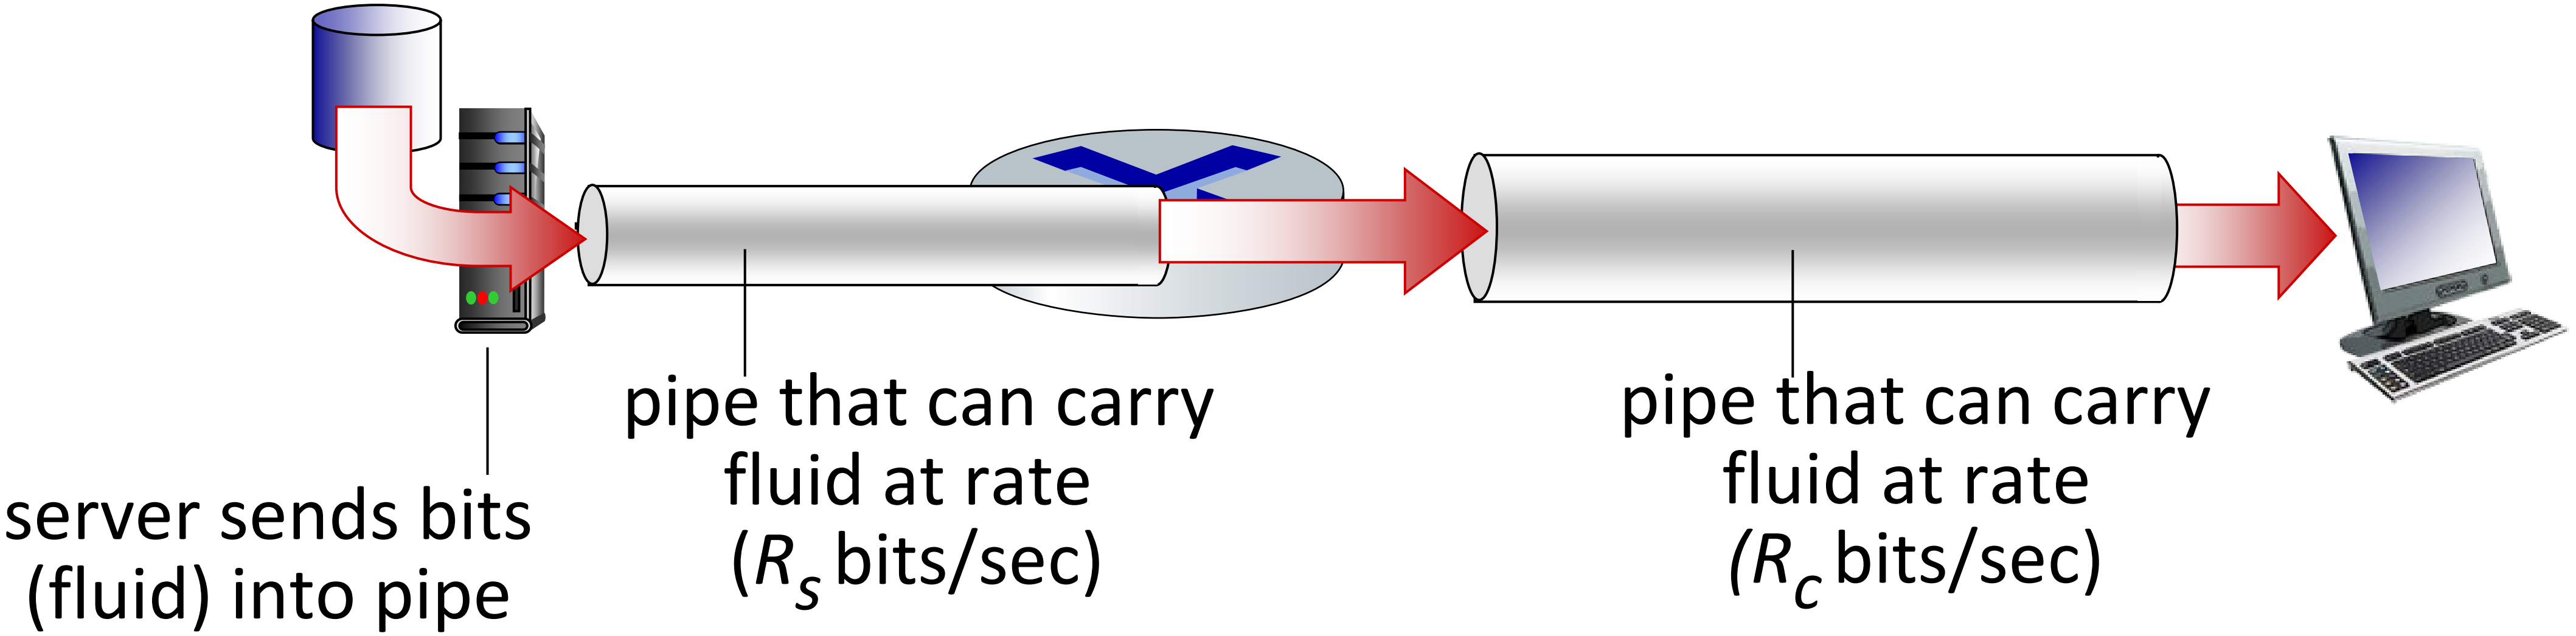
server sends bits (fluid) into pipe
pipe that can carry fluid at rate (R_s bits/sec)
pipe that can carry fluid at rate (R_c bits/sec)

IMPORTANT

Throughput

$R_s < R_c$ What is average end-end throughput?

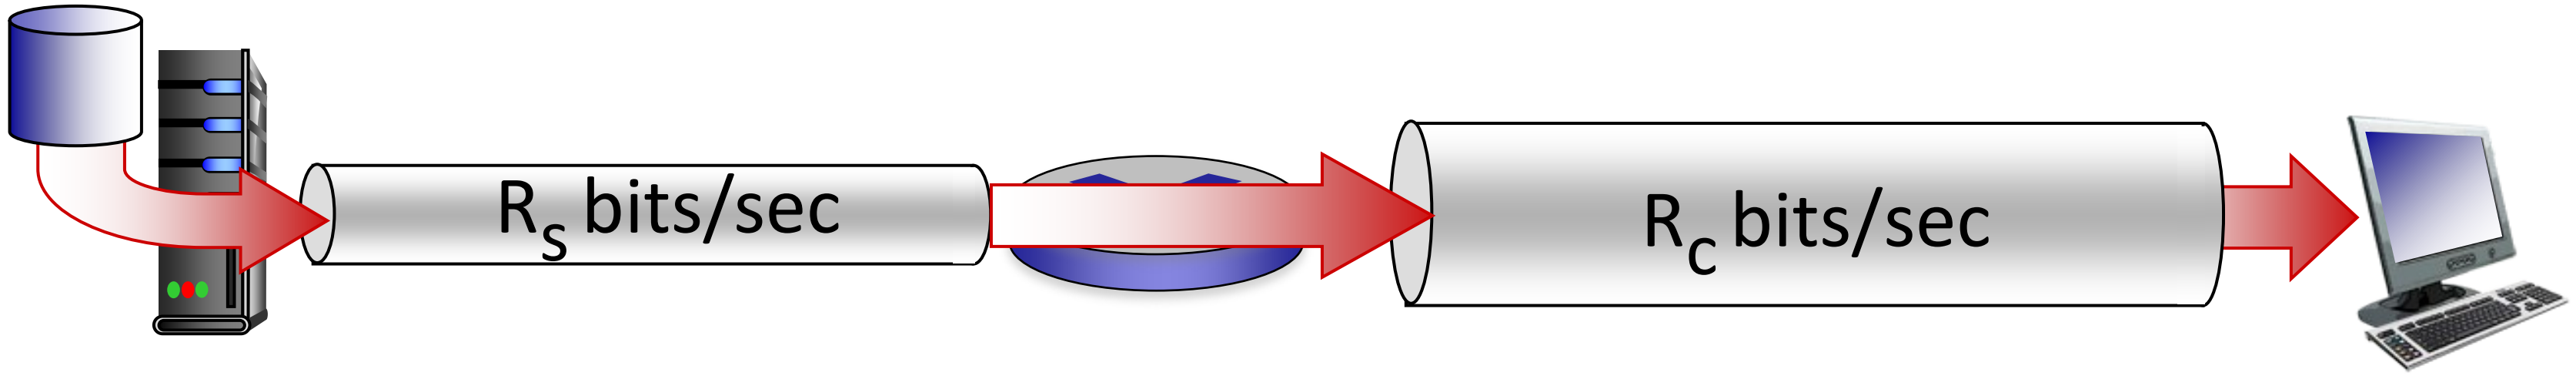

$R_s > R_c$ What is average end-end throughput?

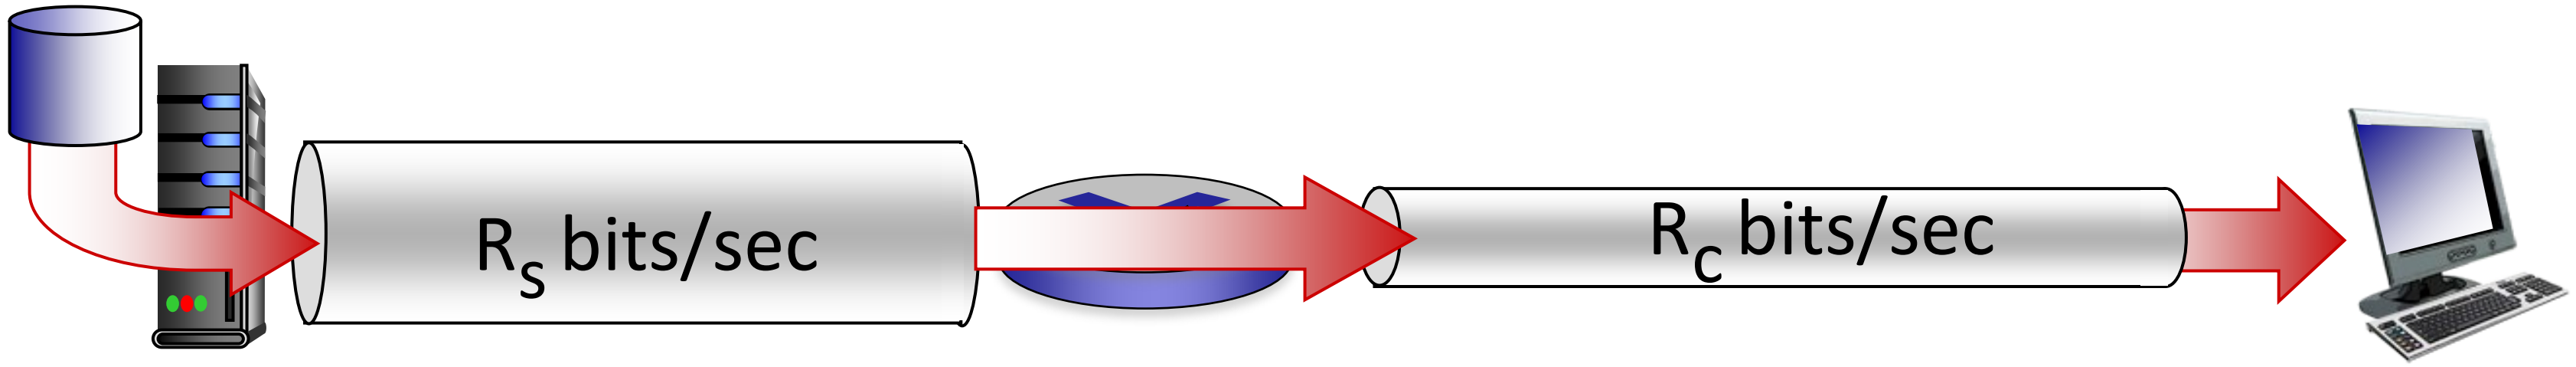

bottleneck link

link on end-end path that constrains end-end throughput

IMPORTANT

Throughput: network scenario

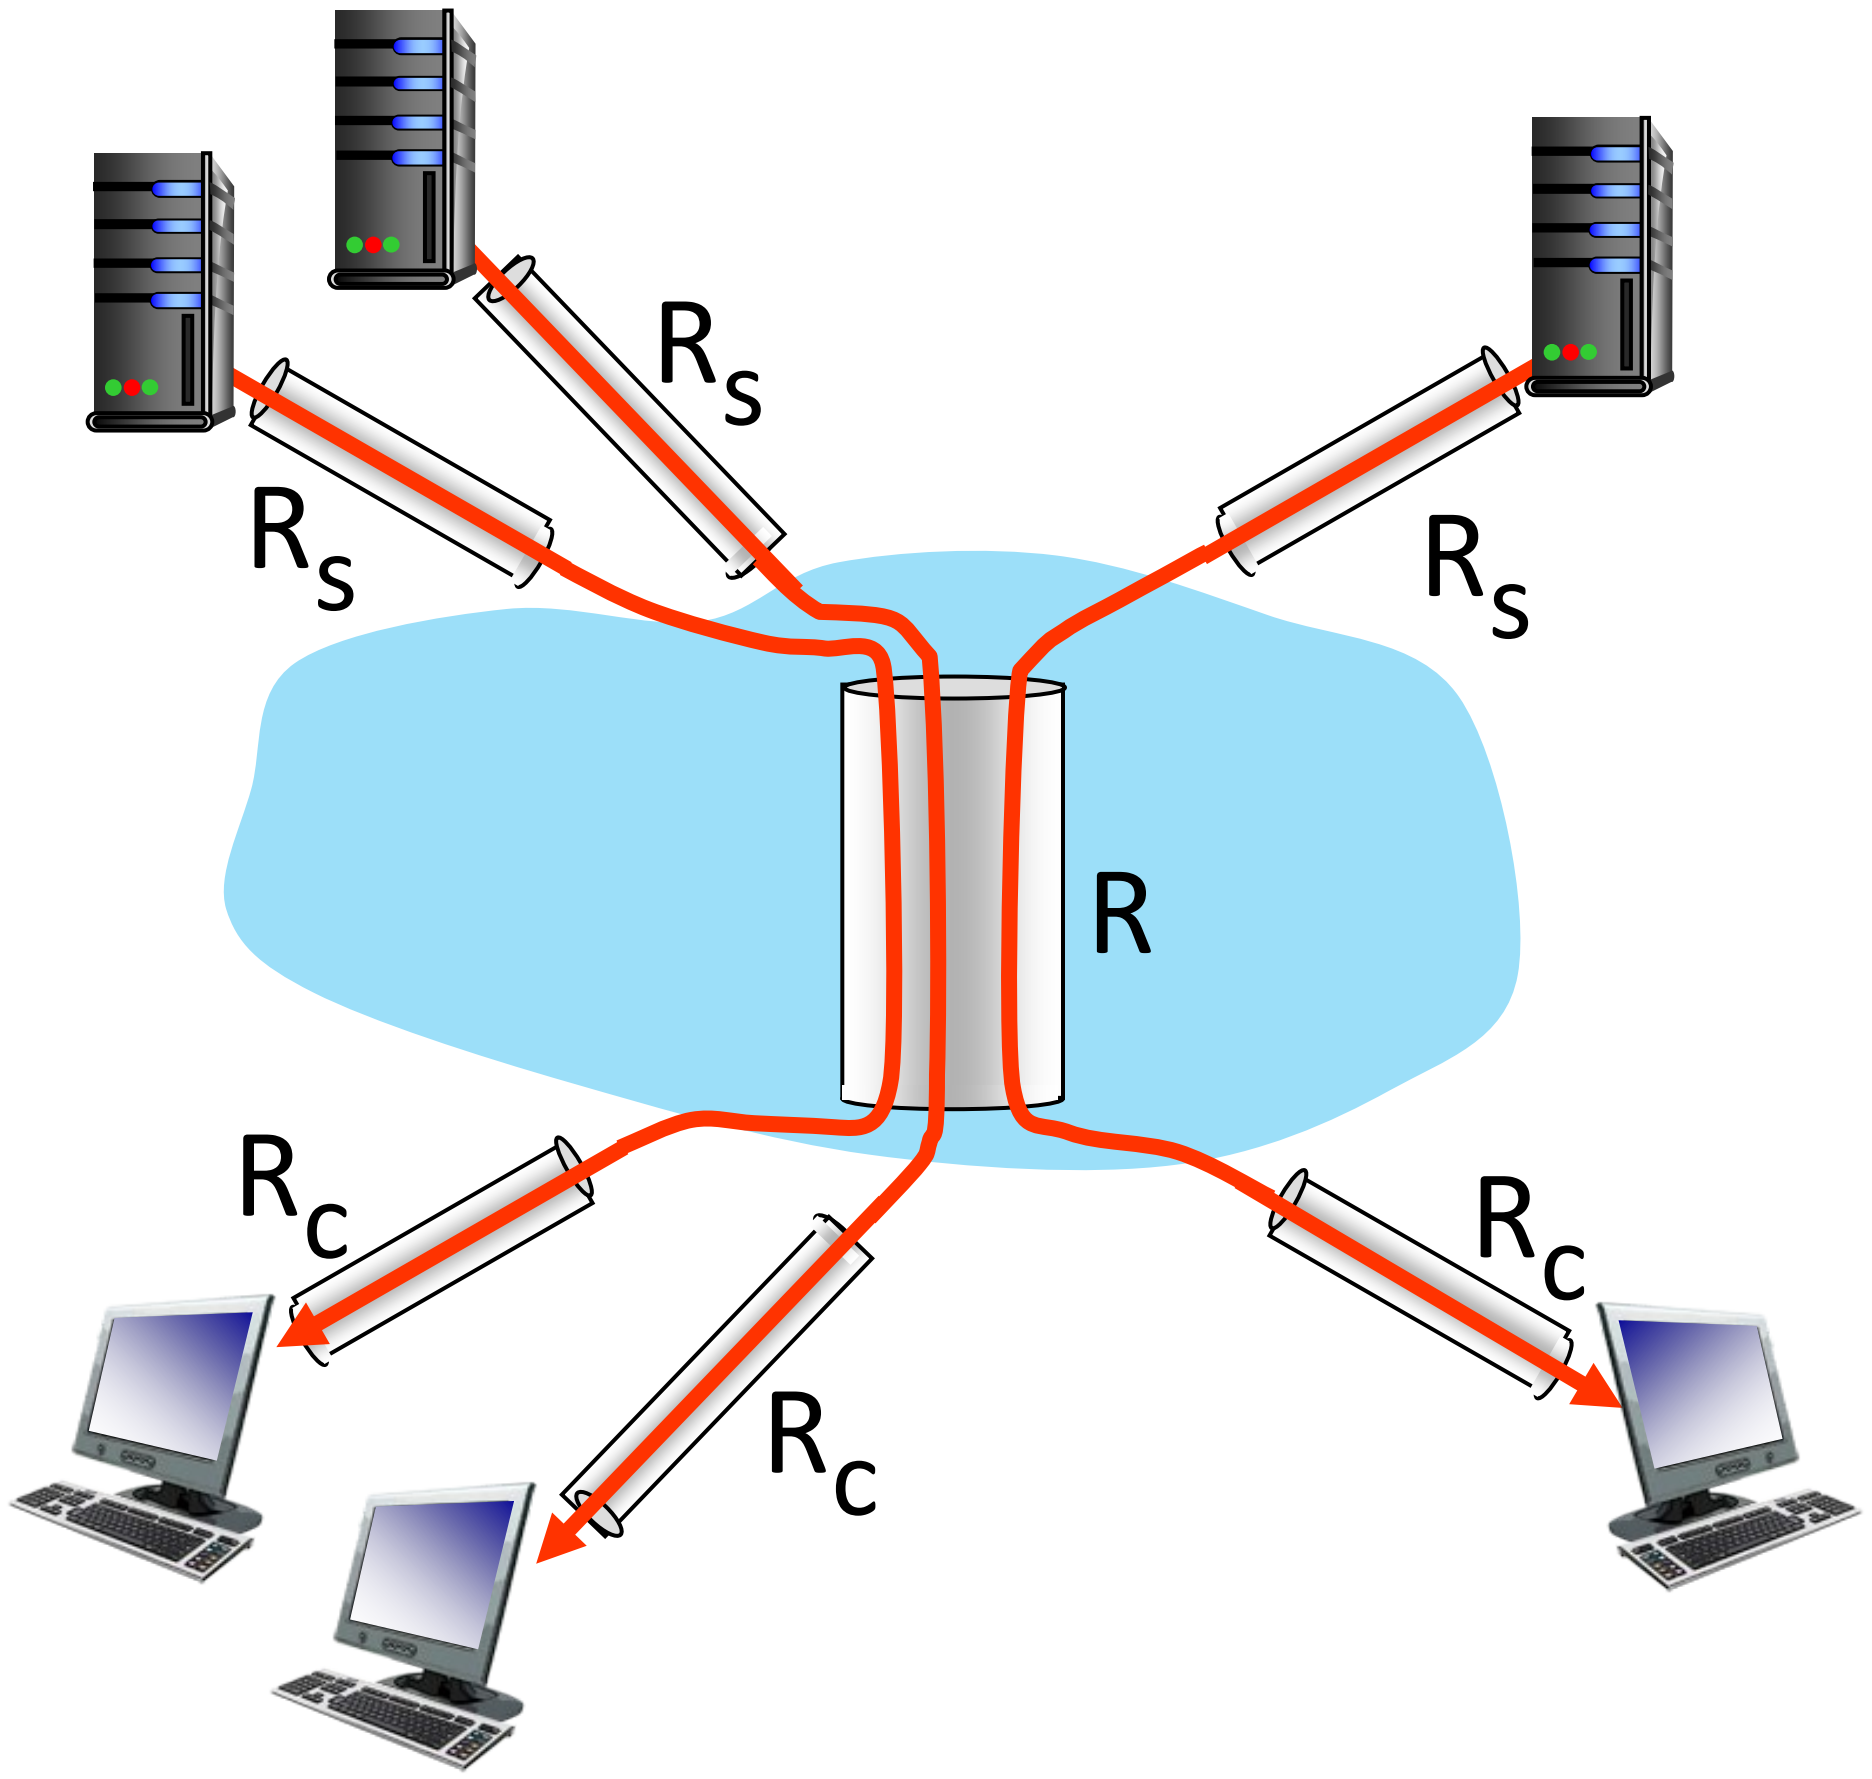

10 connections (fairly) share backbone bottleneck link *R* bits/sec

- per-connection end-end throughput: $min(R_c,R_s,R/10)$
- in practice: R_c or R_s is often bottleneck

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/

Additional Questions

- https://gaia.cs.umass.edu/kurose_ross/interactive/

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models

IMPORTANT

Network security

- Internet not originally designed with (much) security in mind
  - *original vision:* “a group of mutually trusting users attached to a transparent network” ☺
  - Internet protocol designers playing “catch-up”
  - security considerations in all layers!
- We now need to think about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks

IMPORTANT

Network security

- Internet not originally designed with (much) security in mind
  - *original vision:* “a group of mutually trusting users attached to a transparent network” ☺
  - Internet protocol designers playing “catch-up”
  - security considerations in all layers!
- We now need to think about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks

IMPORTANT

Bad guys: packet interception

packet "sniffing":

- broadcast media (shared Ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

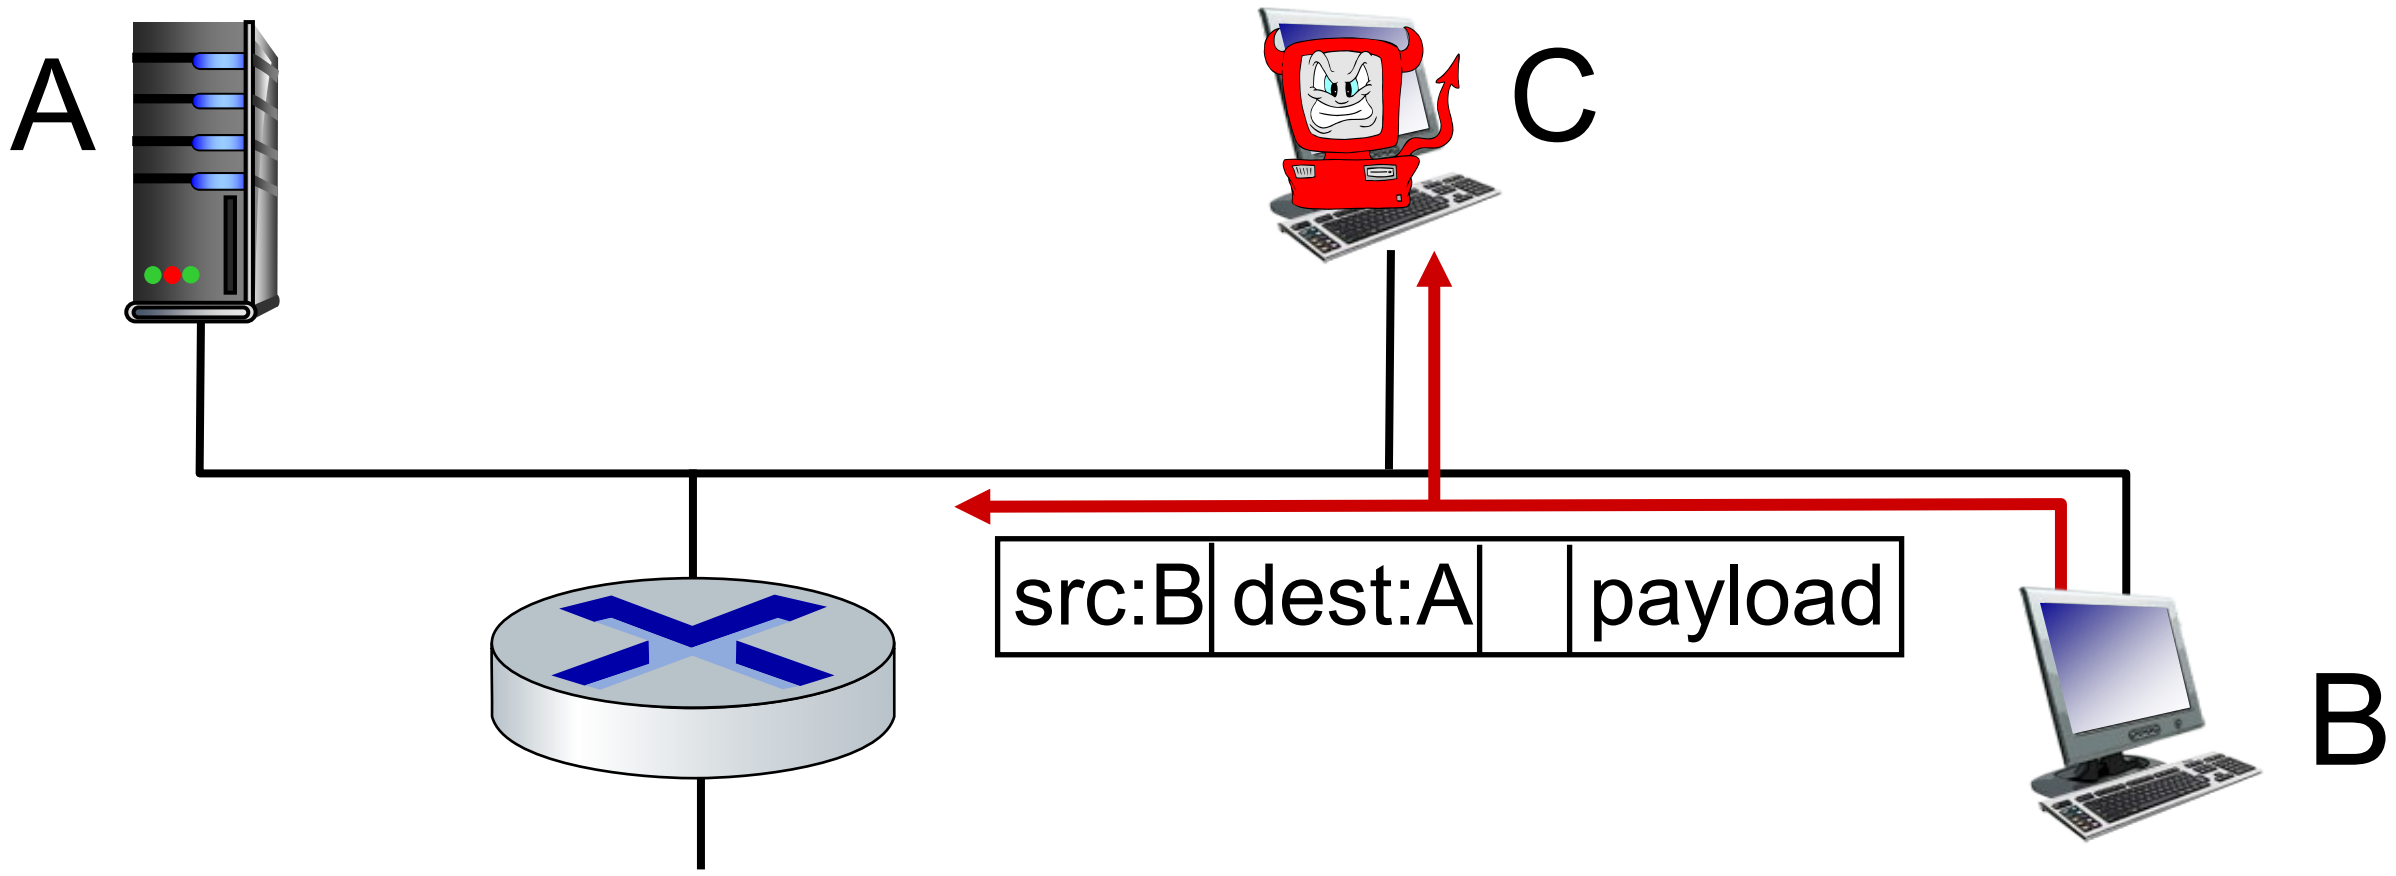

Wireshark software used for our end-of-chapter labs is a (free) packet-sniffer

IMPORTANT

Bad guys: fake identity

IP spoofing: injection of packet with false source address

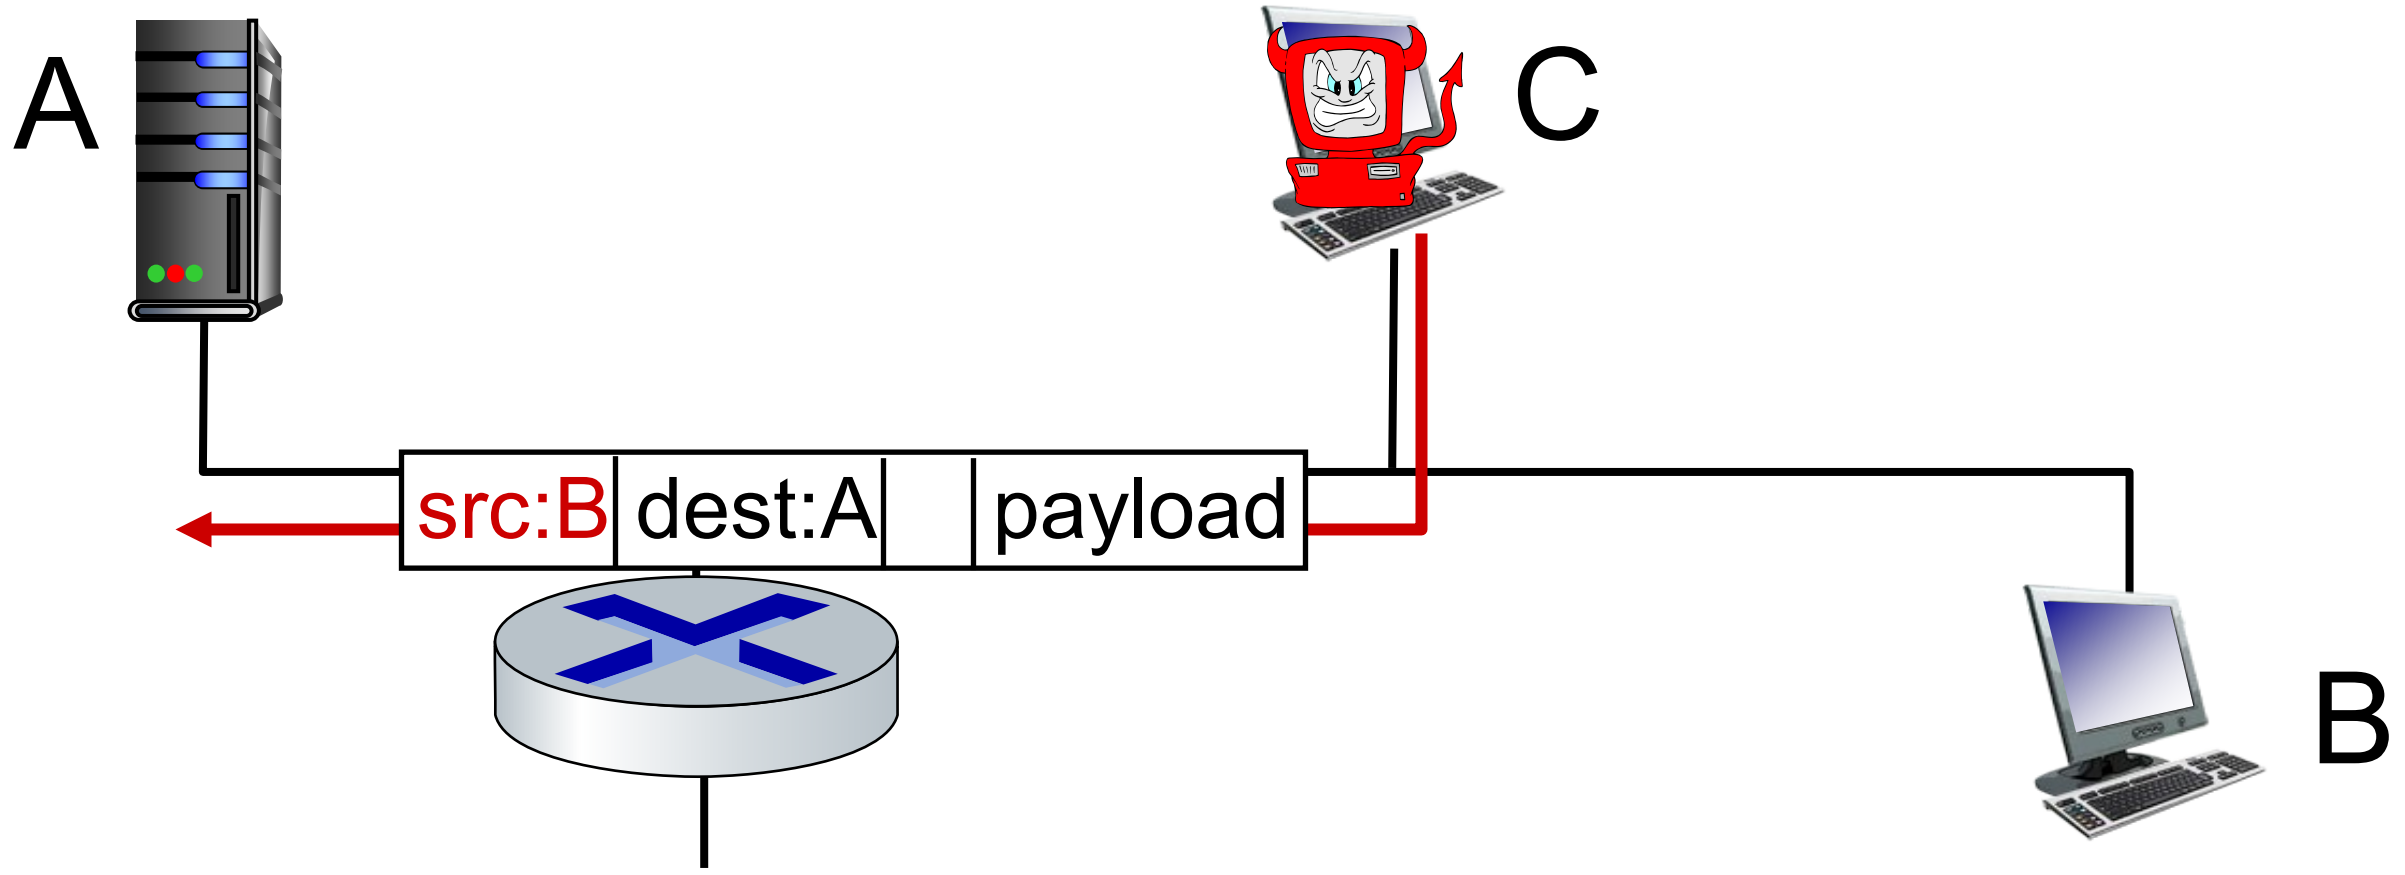

IMPORTANT

Bad guys: denial of service

Denial of Service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets to target from compromised hosts

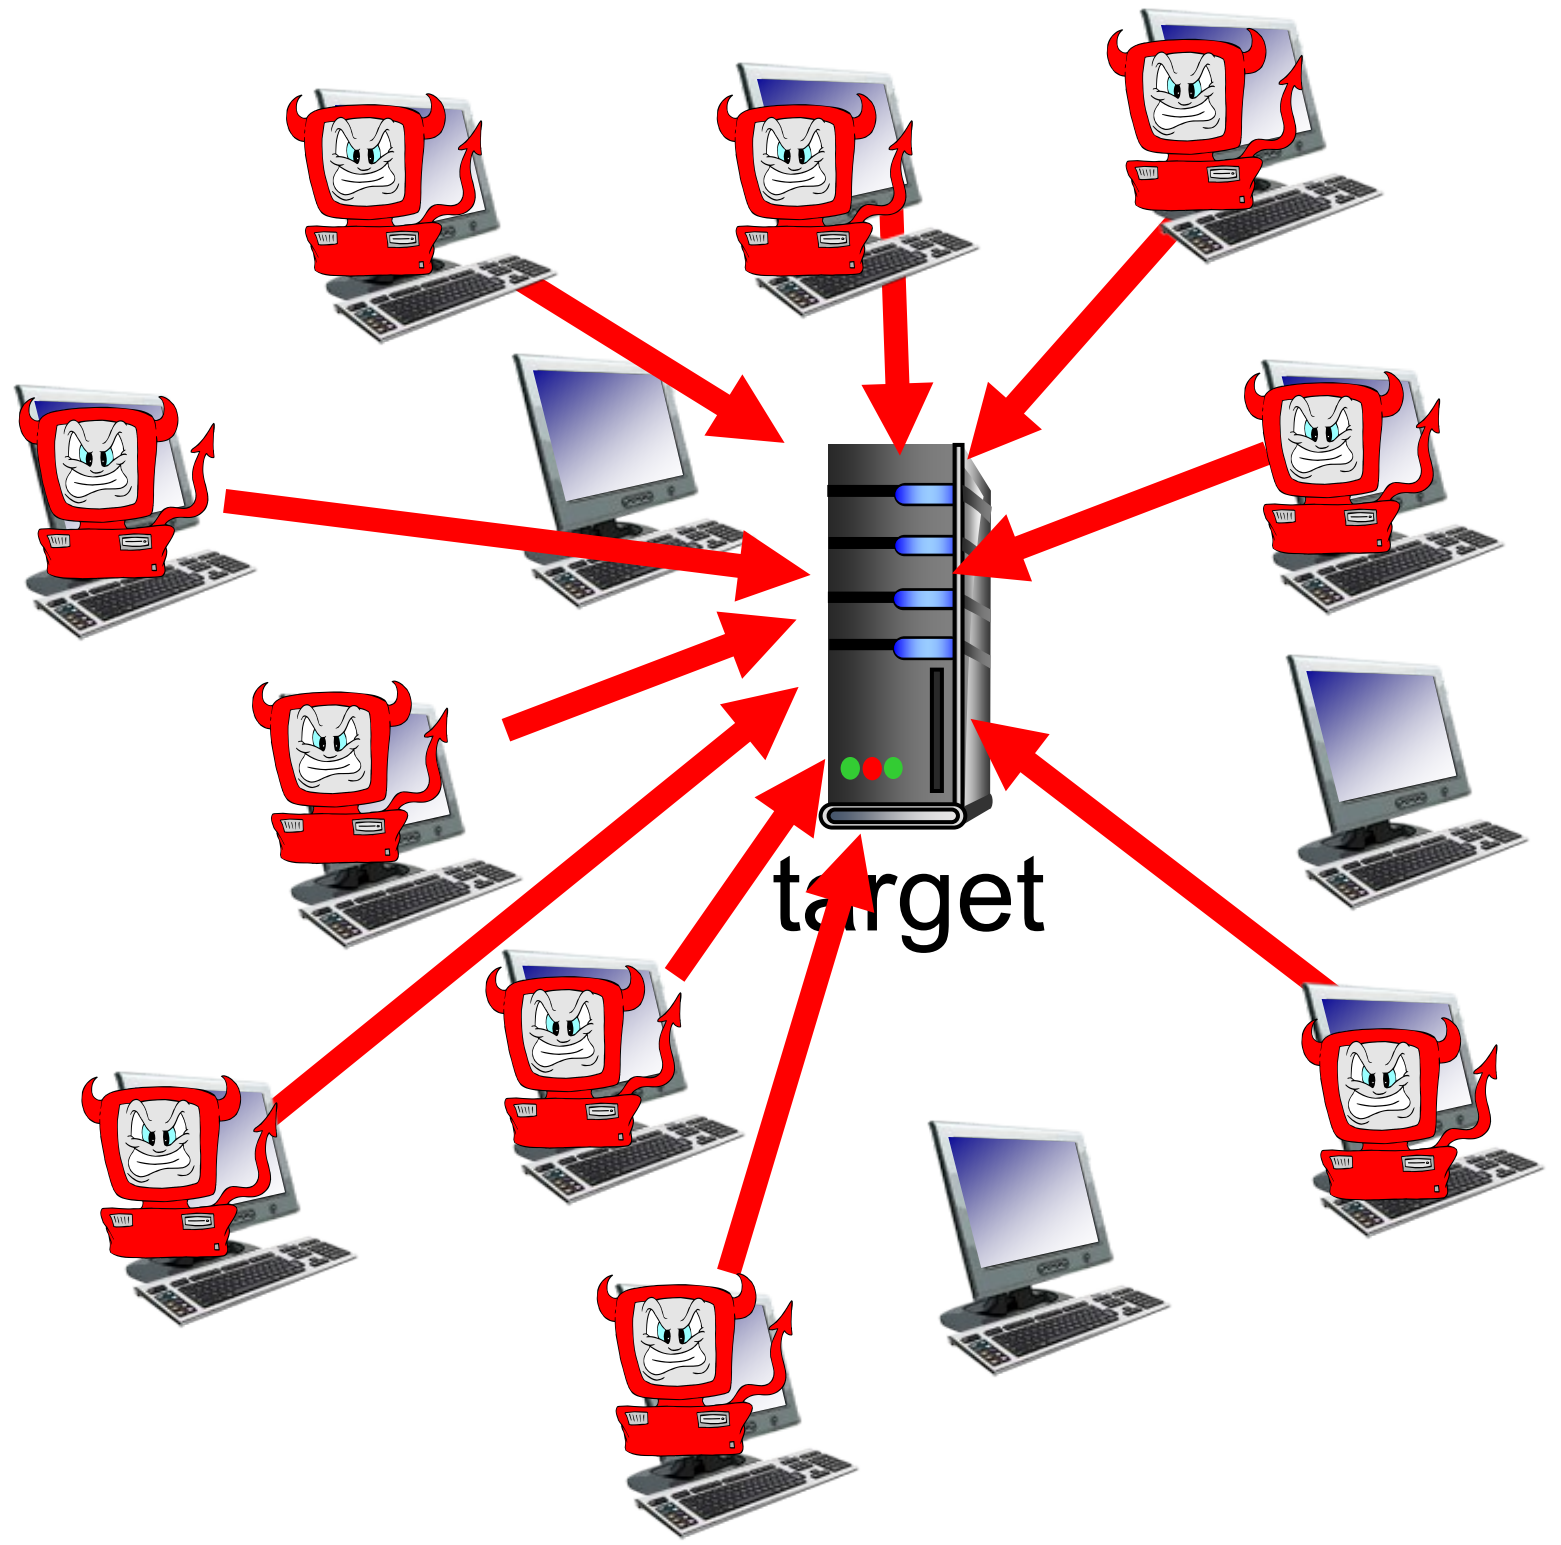

Lines of defense:

- authentication: proving you are who you say you are
  - cellular networks provides hardware identity via SIM card; no such hardware assist in traditional Internet
- confidentiality: via encryption
- integrity checks: digital signatures prevent/detect tampering
- access restrictions: password-protected VPNs
- firewalls: specialized “middleboxes” in access and core networks:
  - off-by-default: filter incoming packets to restrict senders, receivers, applications
  - detecting/reacting to DOS attacks

… lots more on security (throughout, Chapter 8)

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models

Protocol "layers" and reference models

Networks are complex, with many "pieces":

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

Question: is there any hope of *organizing* structure of network?

- and/or our *discussion* of networks?

Example: organization of air travel



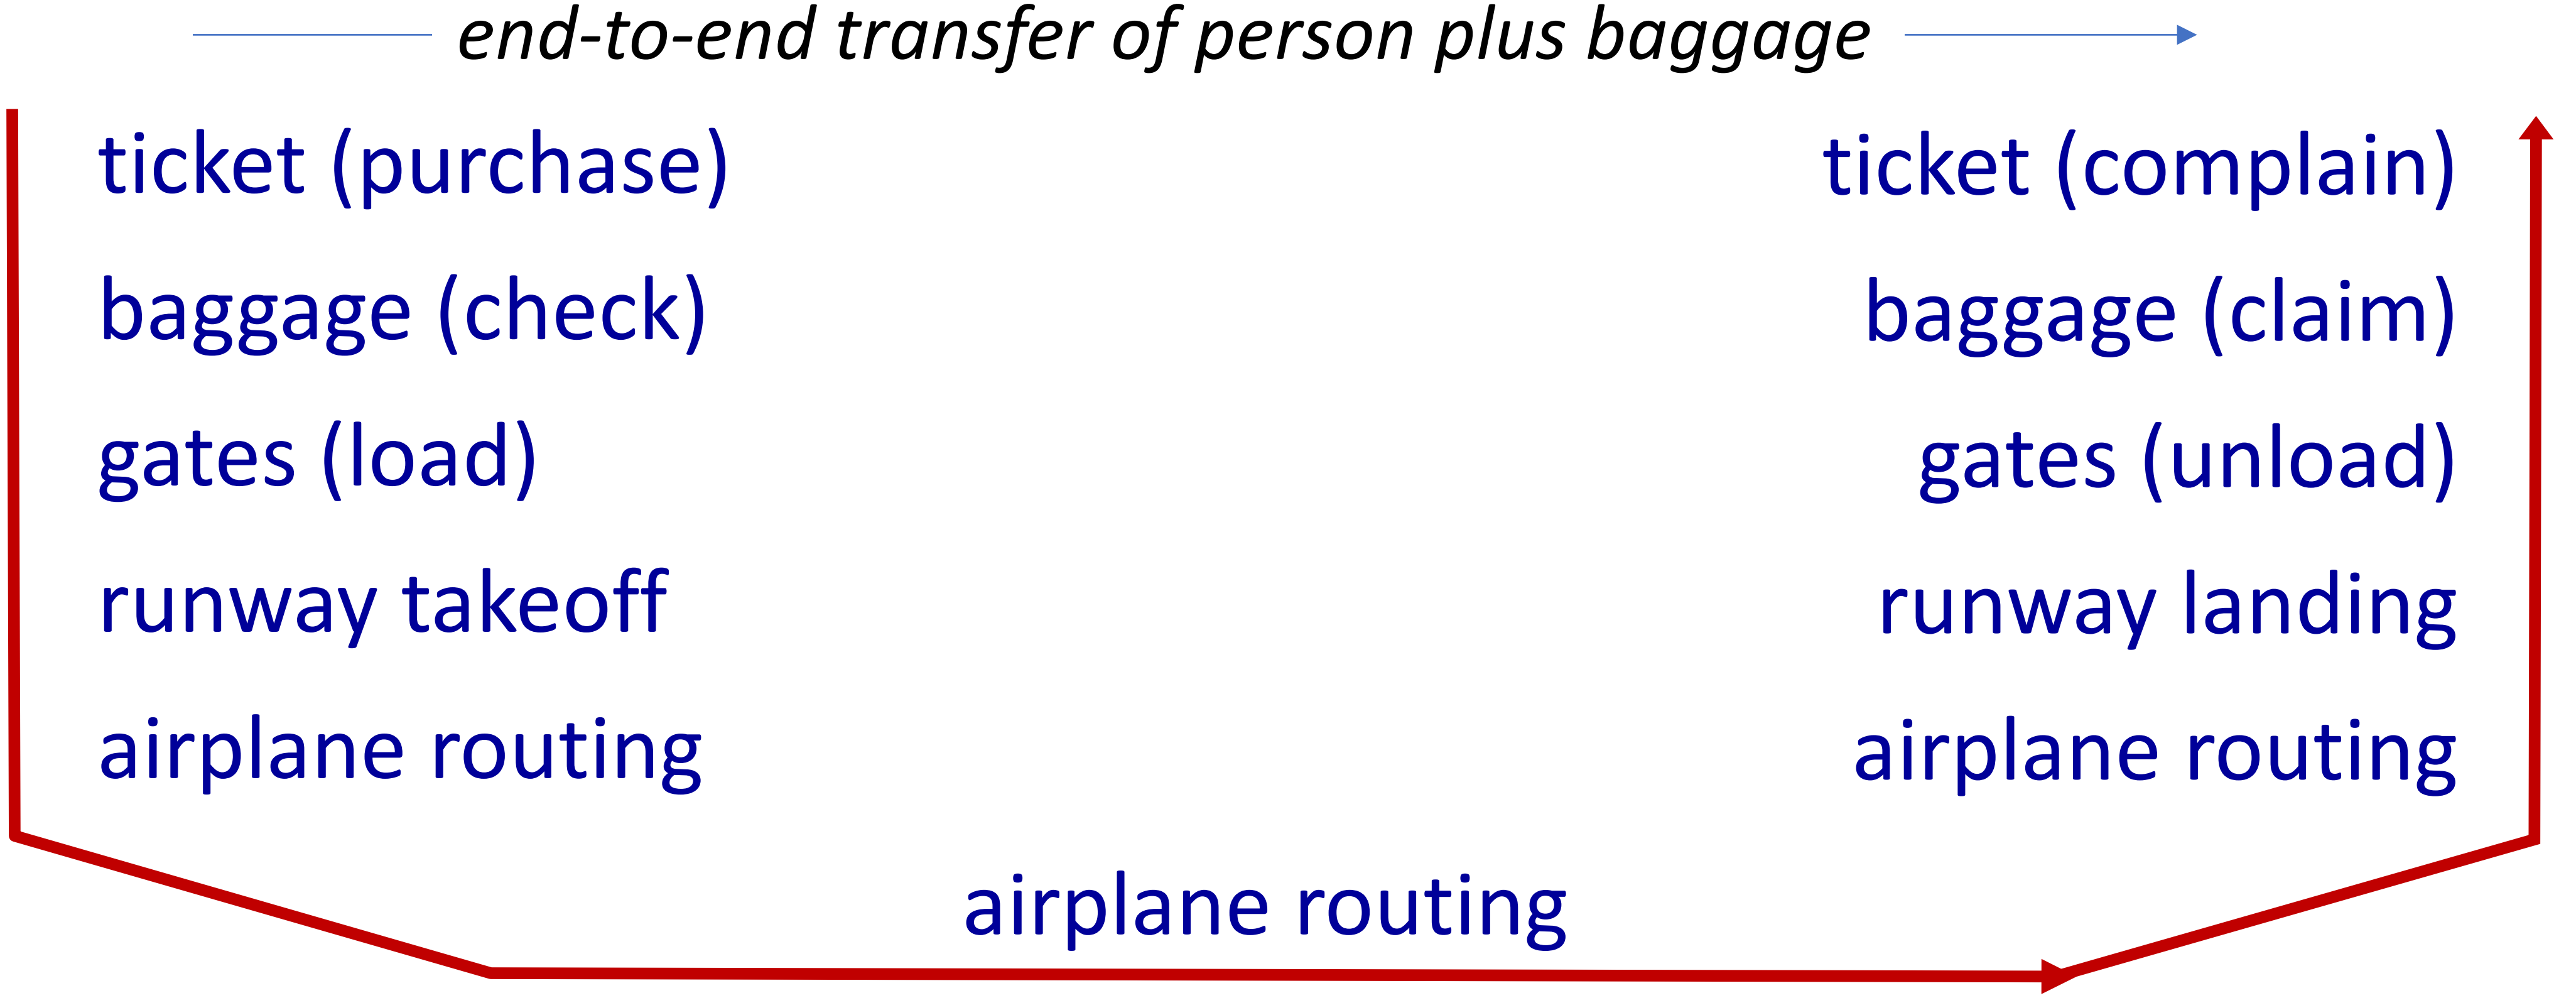

end-to-end transfer of person plus baggage

ticket (purchase)

baggage (check)

gates (load)

runway takeoff

airplane routing

ticket (complain)

baggage (claim)

gates (unload)

runway landing

airplane routing

airplane routing

How would you *define/discuss* the *system* of airline travel?

- a series of steps, involving many services

Example: organization of air travel

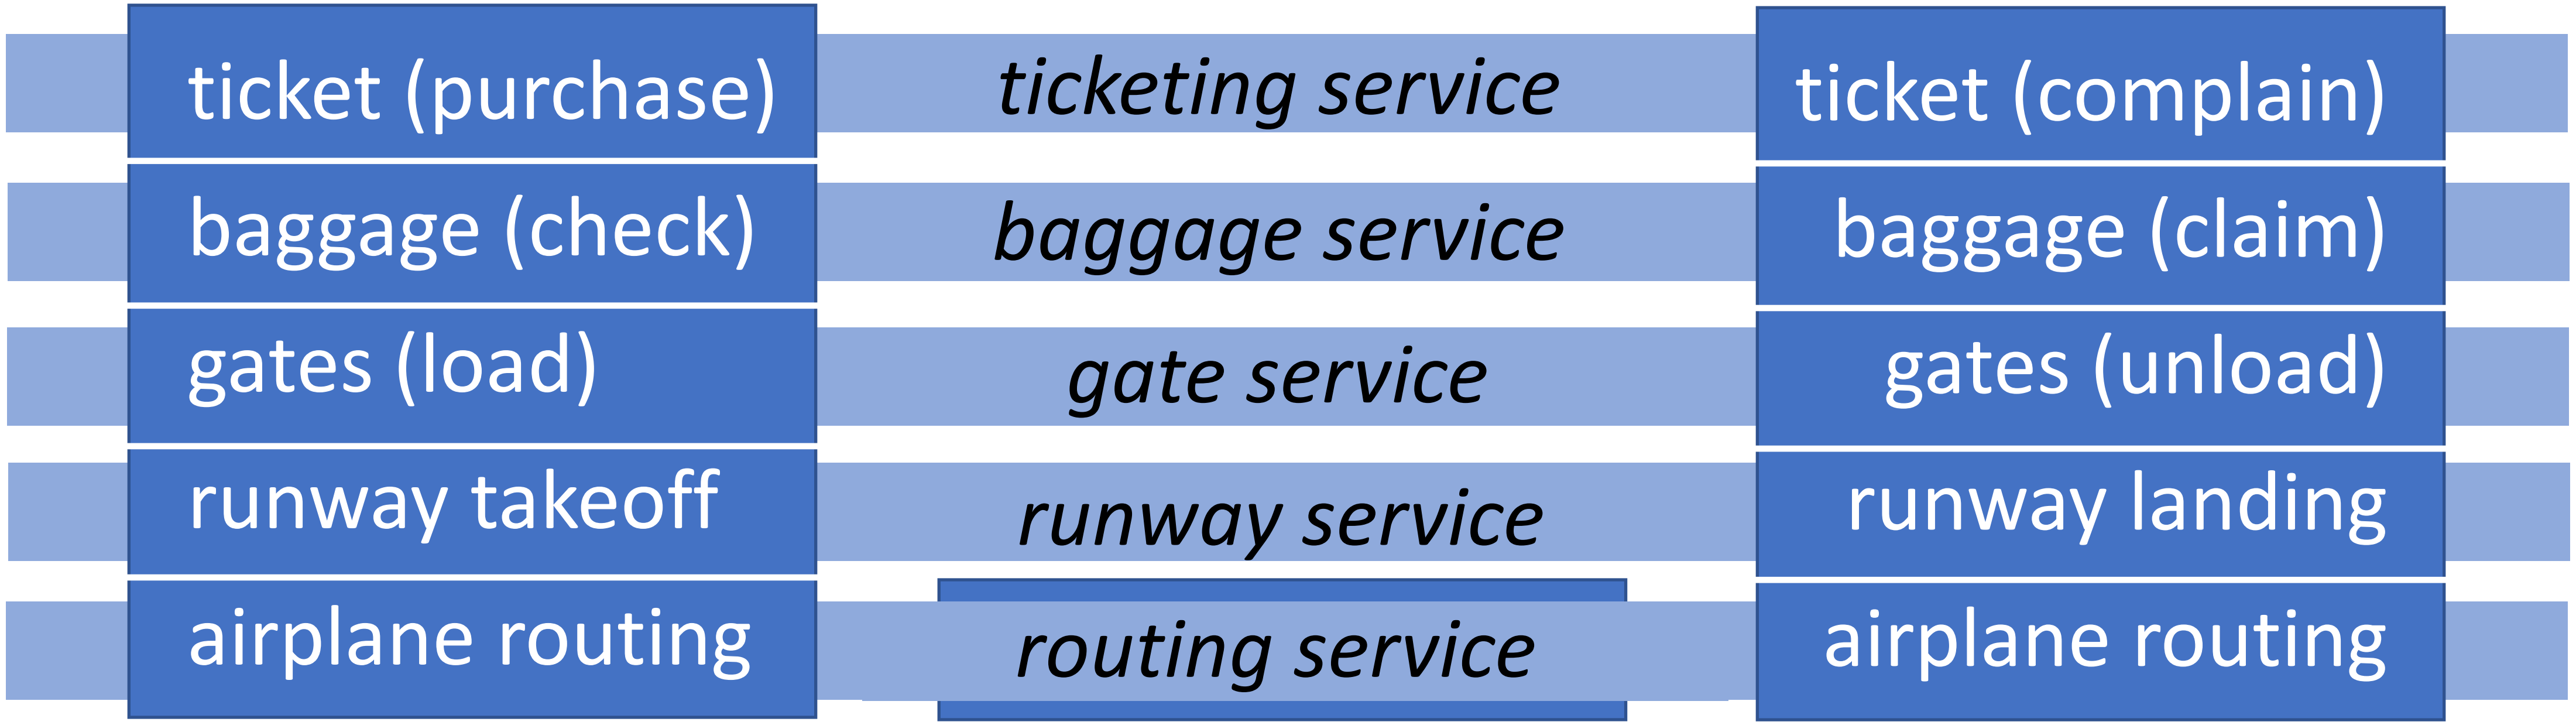

ticket (purchase)	*ticketing service*	ticket (complain)
baggage (check)	*baggage service*	baggage (claim)
gates (load)	*gate service*	gates (unload)
runway takeoff	*runway service*	runway landing
airplane routing	*routing service*	airplane routing

layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Approach to designing/discussing complex systems:

- explicit structure allows identification, relationship of system’s pieces
  - layered *reference model* for discussion
- modularization eases maintenance, updating of system
  - change in layer's service *implementation*: transparent to rest of system
  - e.g., change in gate procedure doesn’t affect rest of system

Layered Internet protocol stack

- *application:* supporting network applications
  - HTTP, IMAP, SMTP, DNS
- *transport:* process-process data transfer
  - TCP, UDP
- *network:* routing of datagrams from source to destination
  - IP, routing protocols
- *link:* data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi), PPP
- *physical:* bits "on the wire"

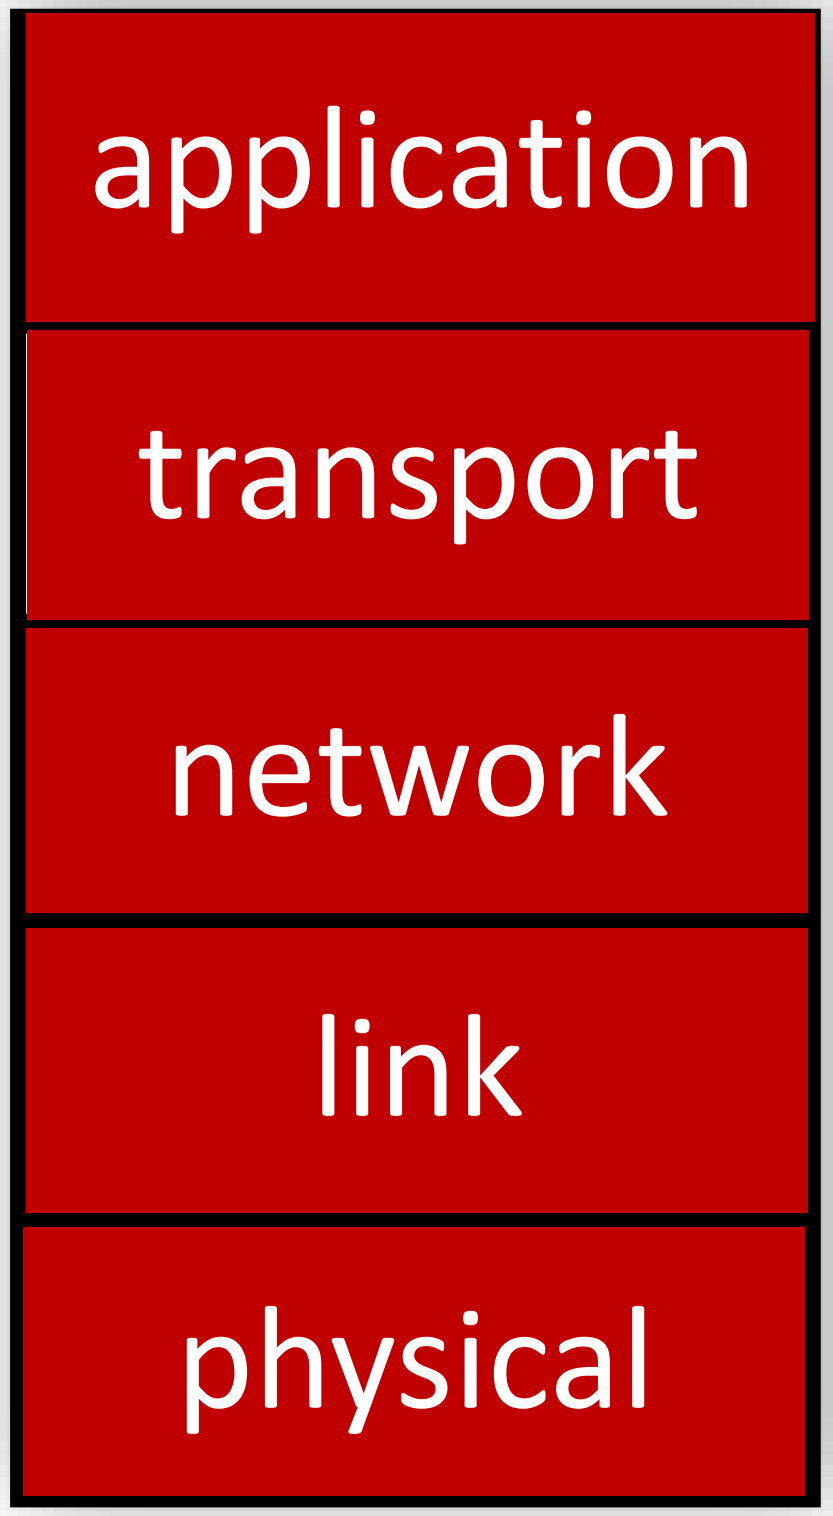

application

transport

network

link

physical

Services, Layering and Encapsulation

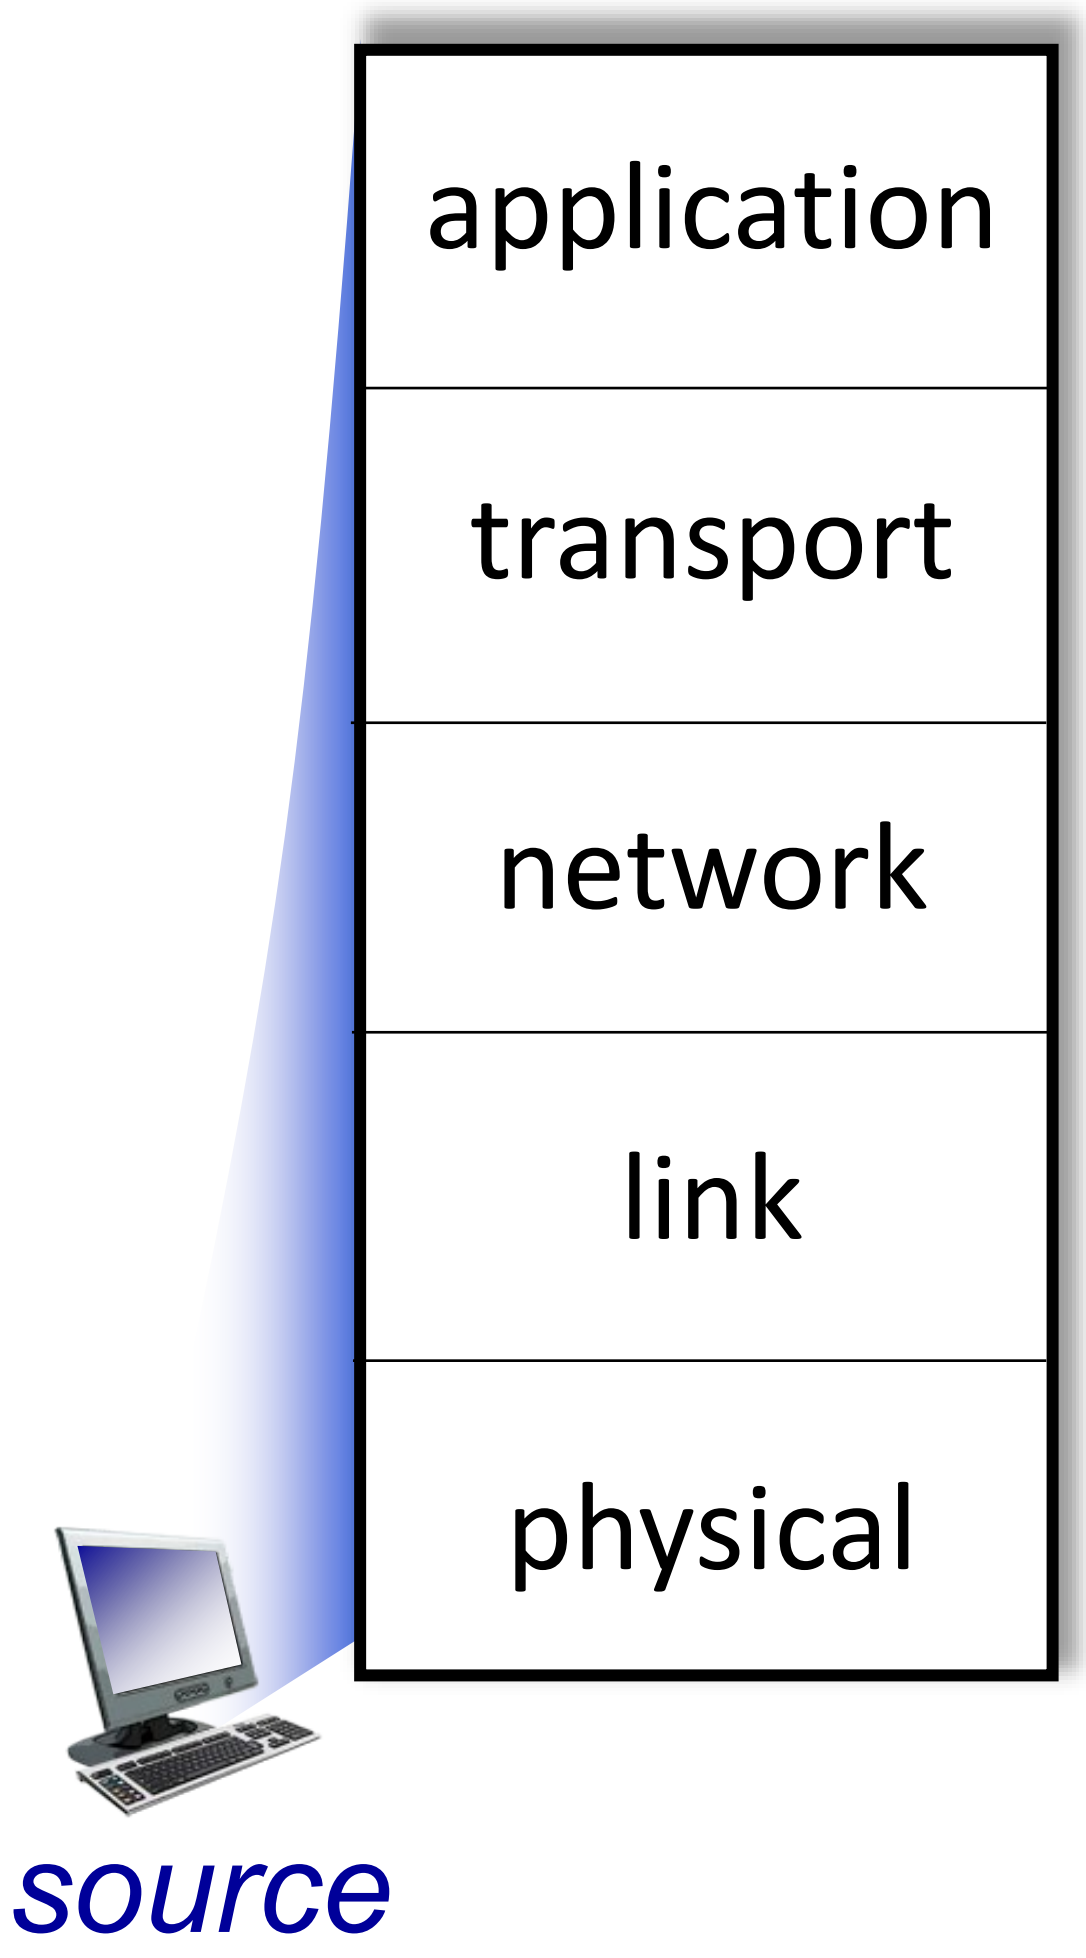

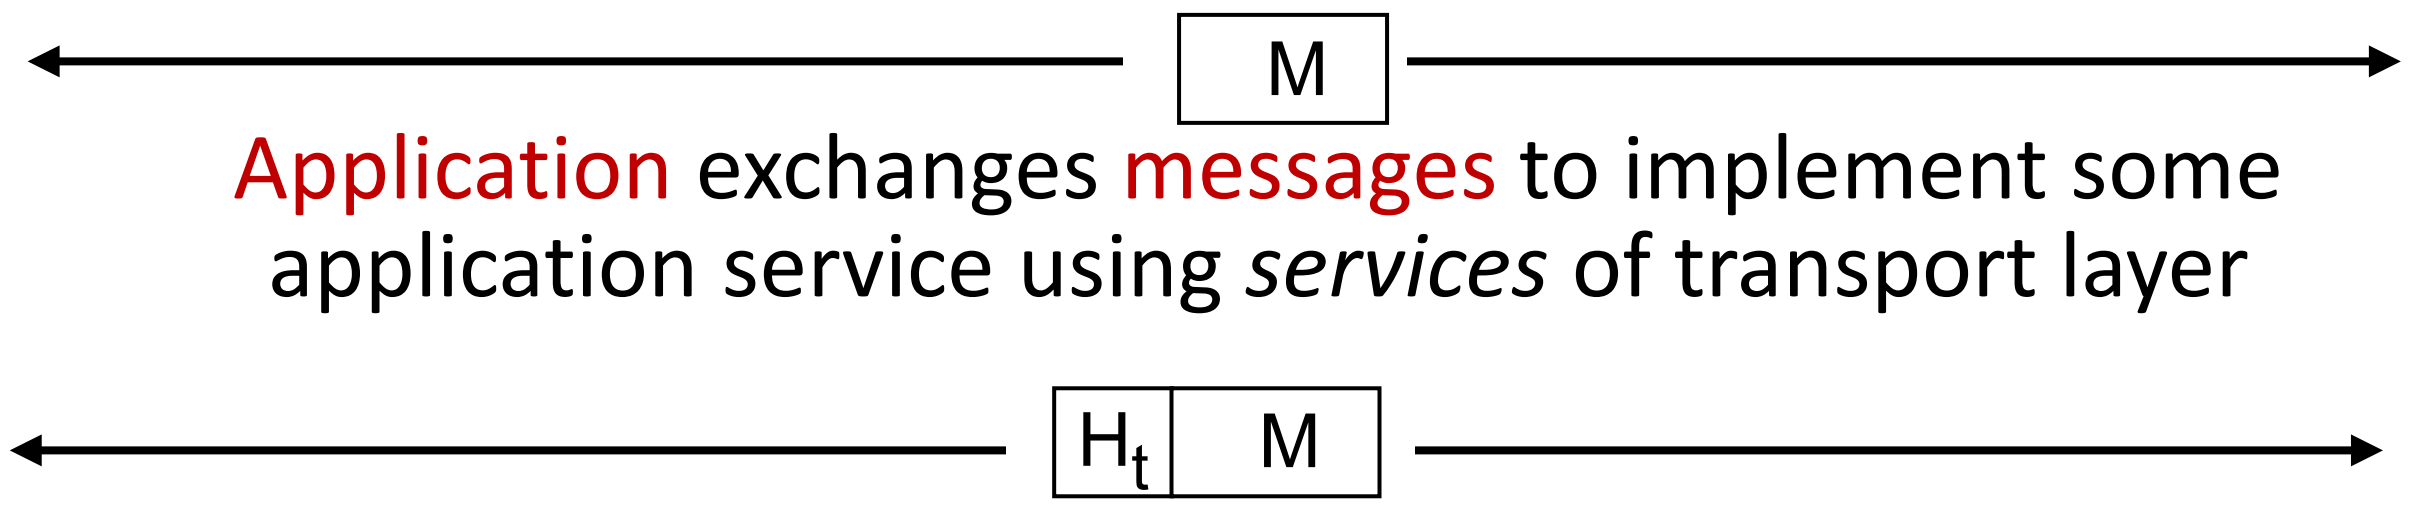

Application exchanges messages to implement some application service using *services* of transport layer

Transport-layer protocol transfers M (e.g., reliably) from one *process* to another, using services of network layer

- transport-layer protocol encapsulates application-layer message, M, with *transport* layer-layer header H_t to create a transport-layer segment
  - H_t used by transport layer protocol to implement its service

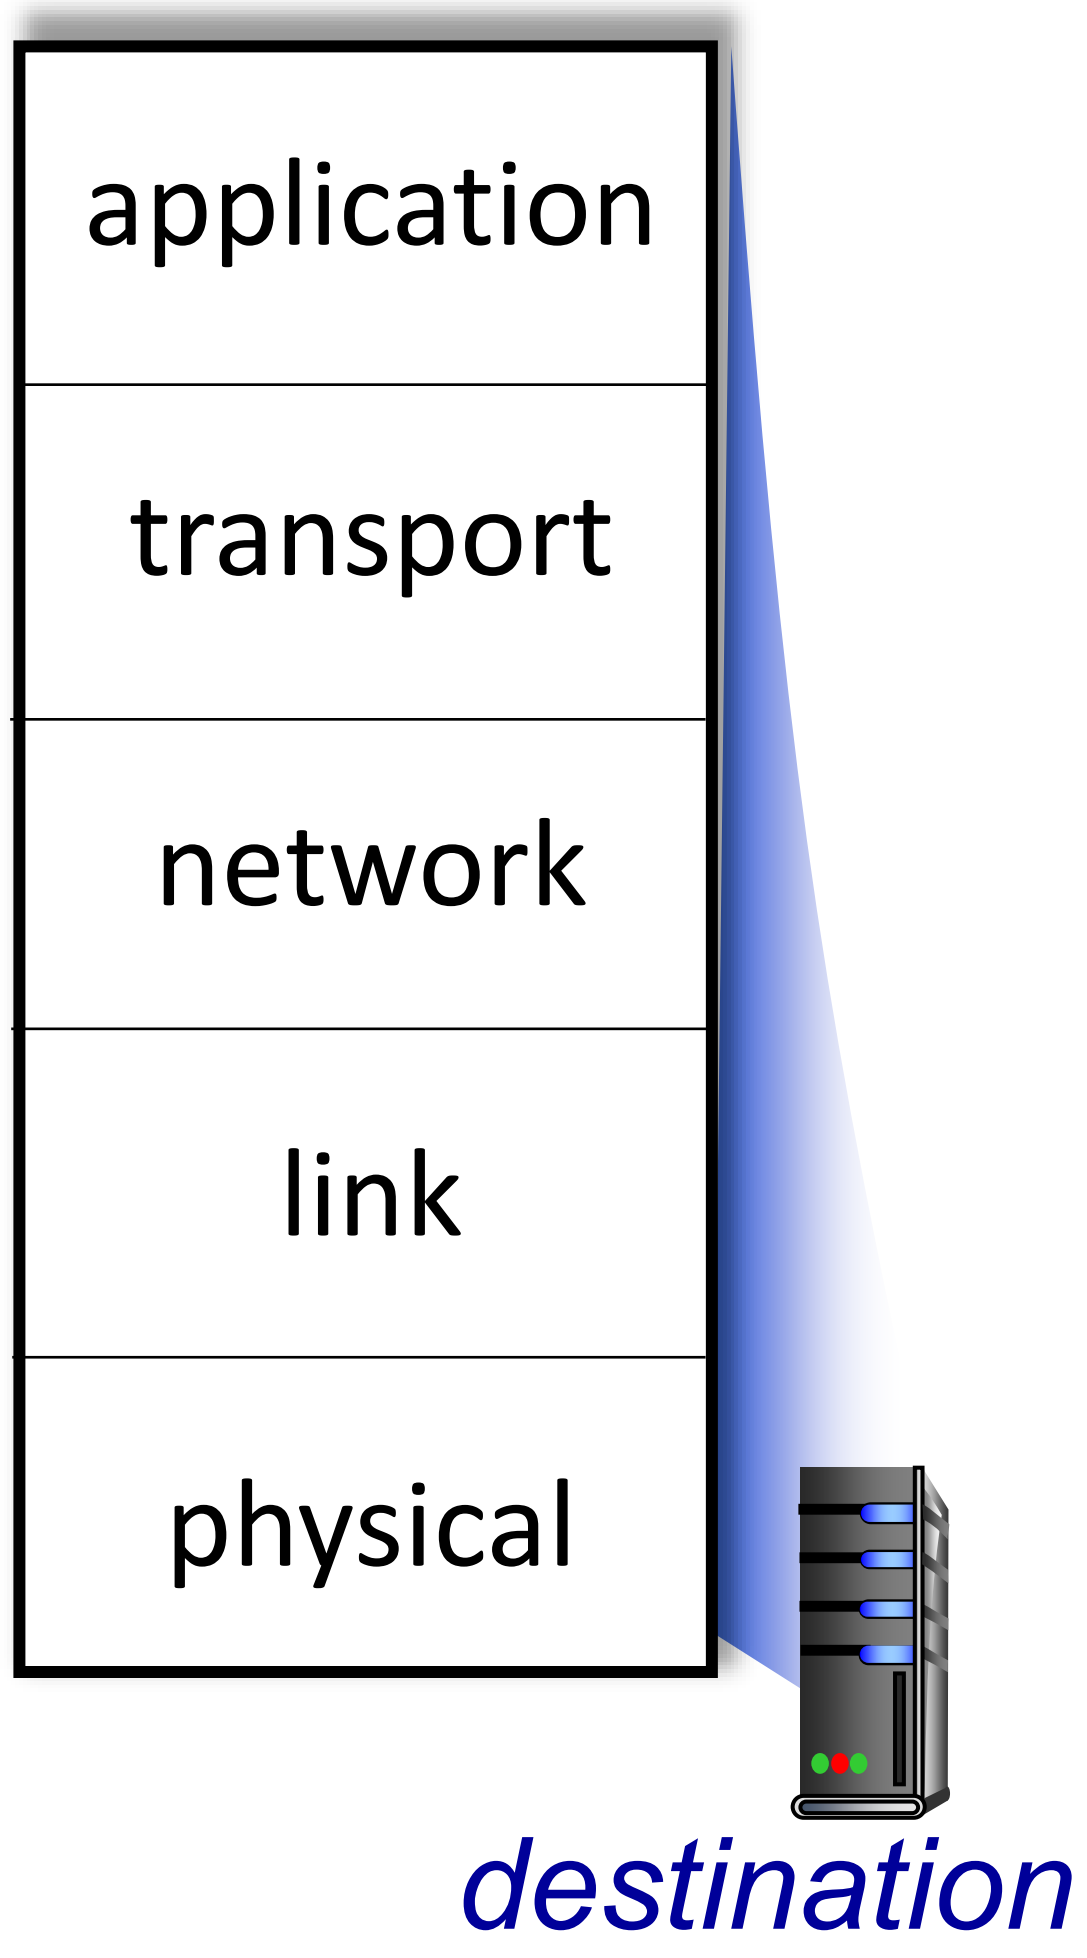

Services, Layering and Encapsulation

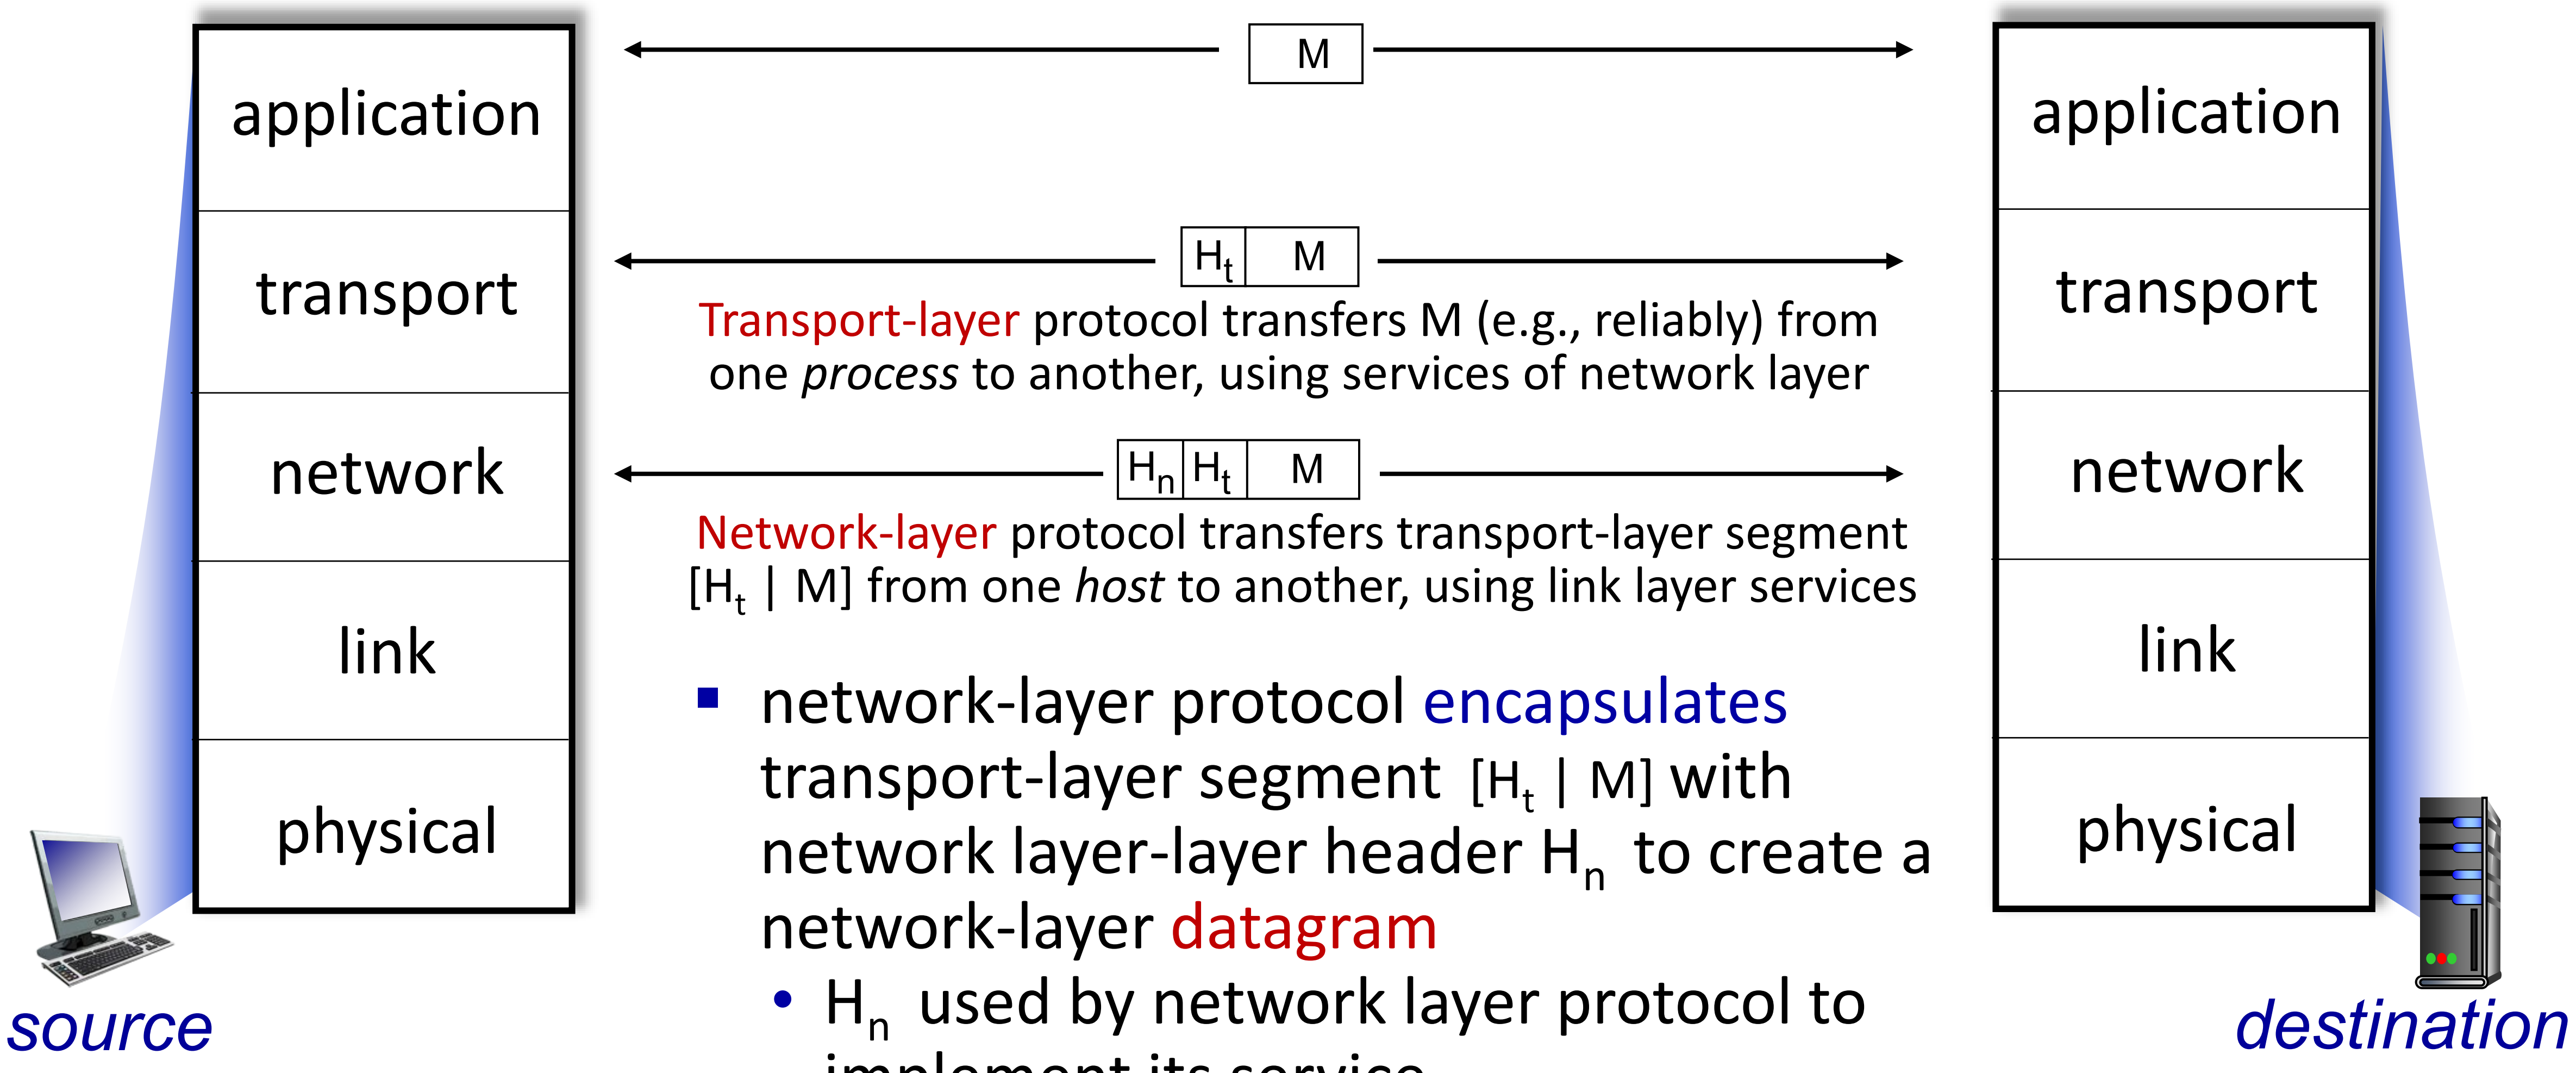

Transport-layer protocol transfers M (e.g., reliably) from one *process* to another, using services of network layer

Network-layer protocol transfers transport-layer segment [H_t | M] from one *host* to another, using link layer services

- network-layer protocol encapsulates transport-layer segment [H_t | M] with network layer-layer header H_n to create a network-layer datagram
  - H_n used by network layer protocol to implement its service

Services, Layering and Encapsulation

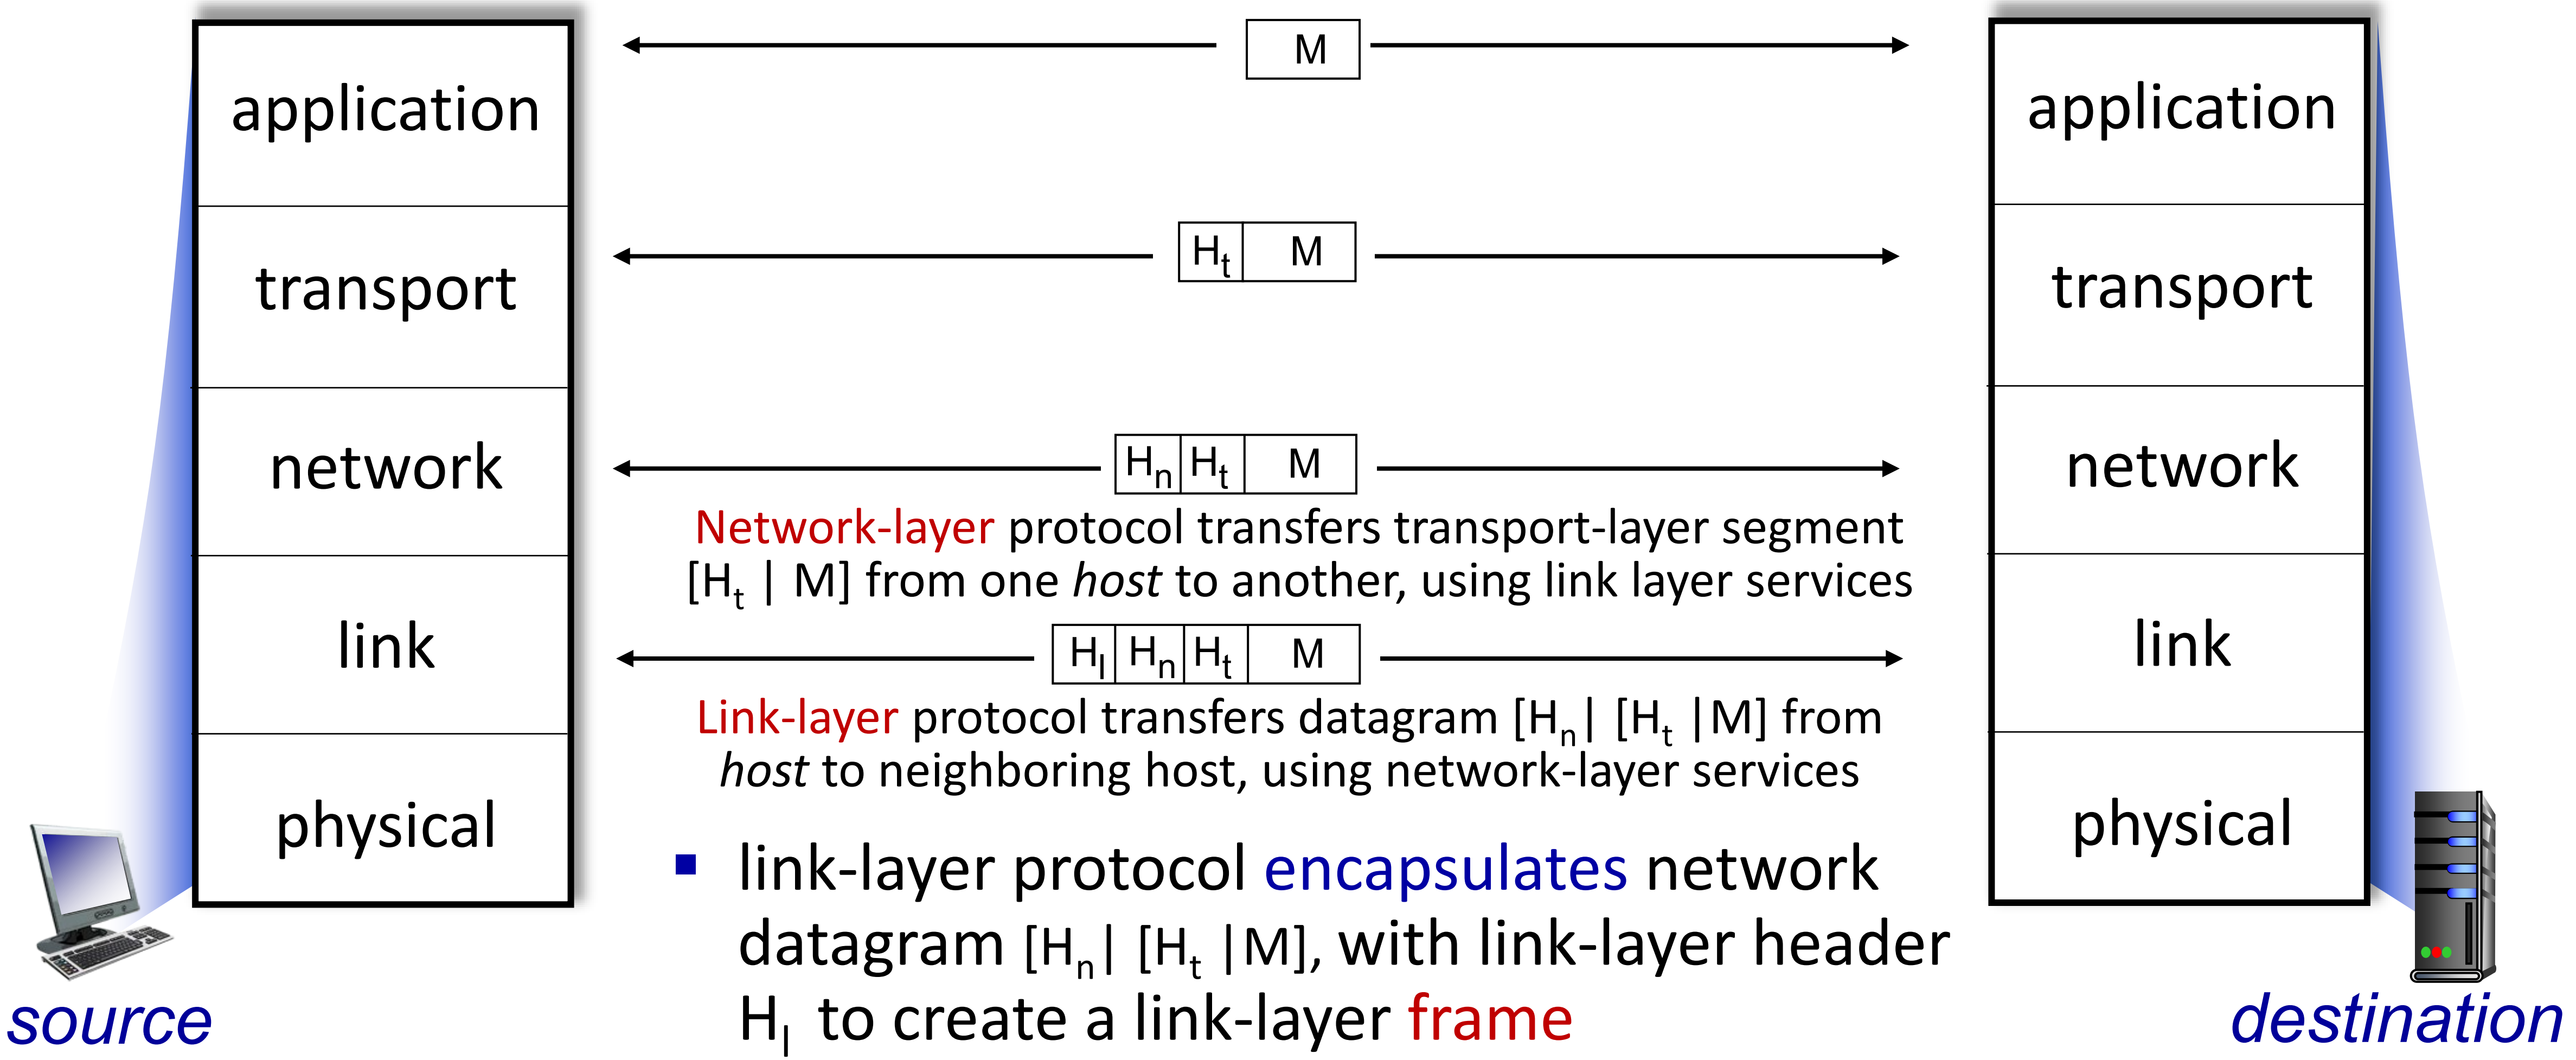

Network-layer protocol transfers transport-layer segment [H_t | M] from one *host* to another, using link layer services

Link-layer protocol transfers datagram [H_n| [H_t |M] from *host* to neighboring host, using network-layer services

- link-layer protocol encapsulates network datagram [H_n| [H_t |M], with link-layer header H_l to create a link-layer frame

Encapsulation

Matryoshka dolls (stacking dolls)

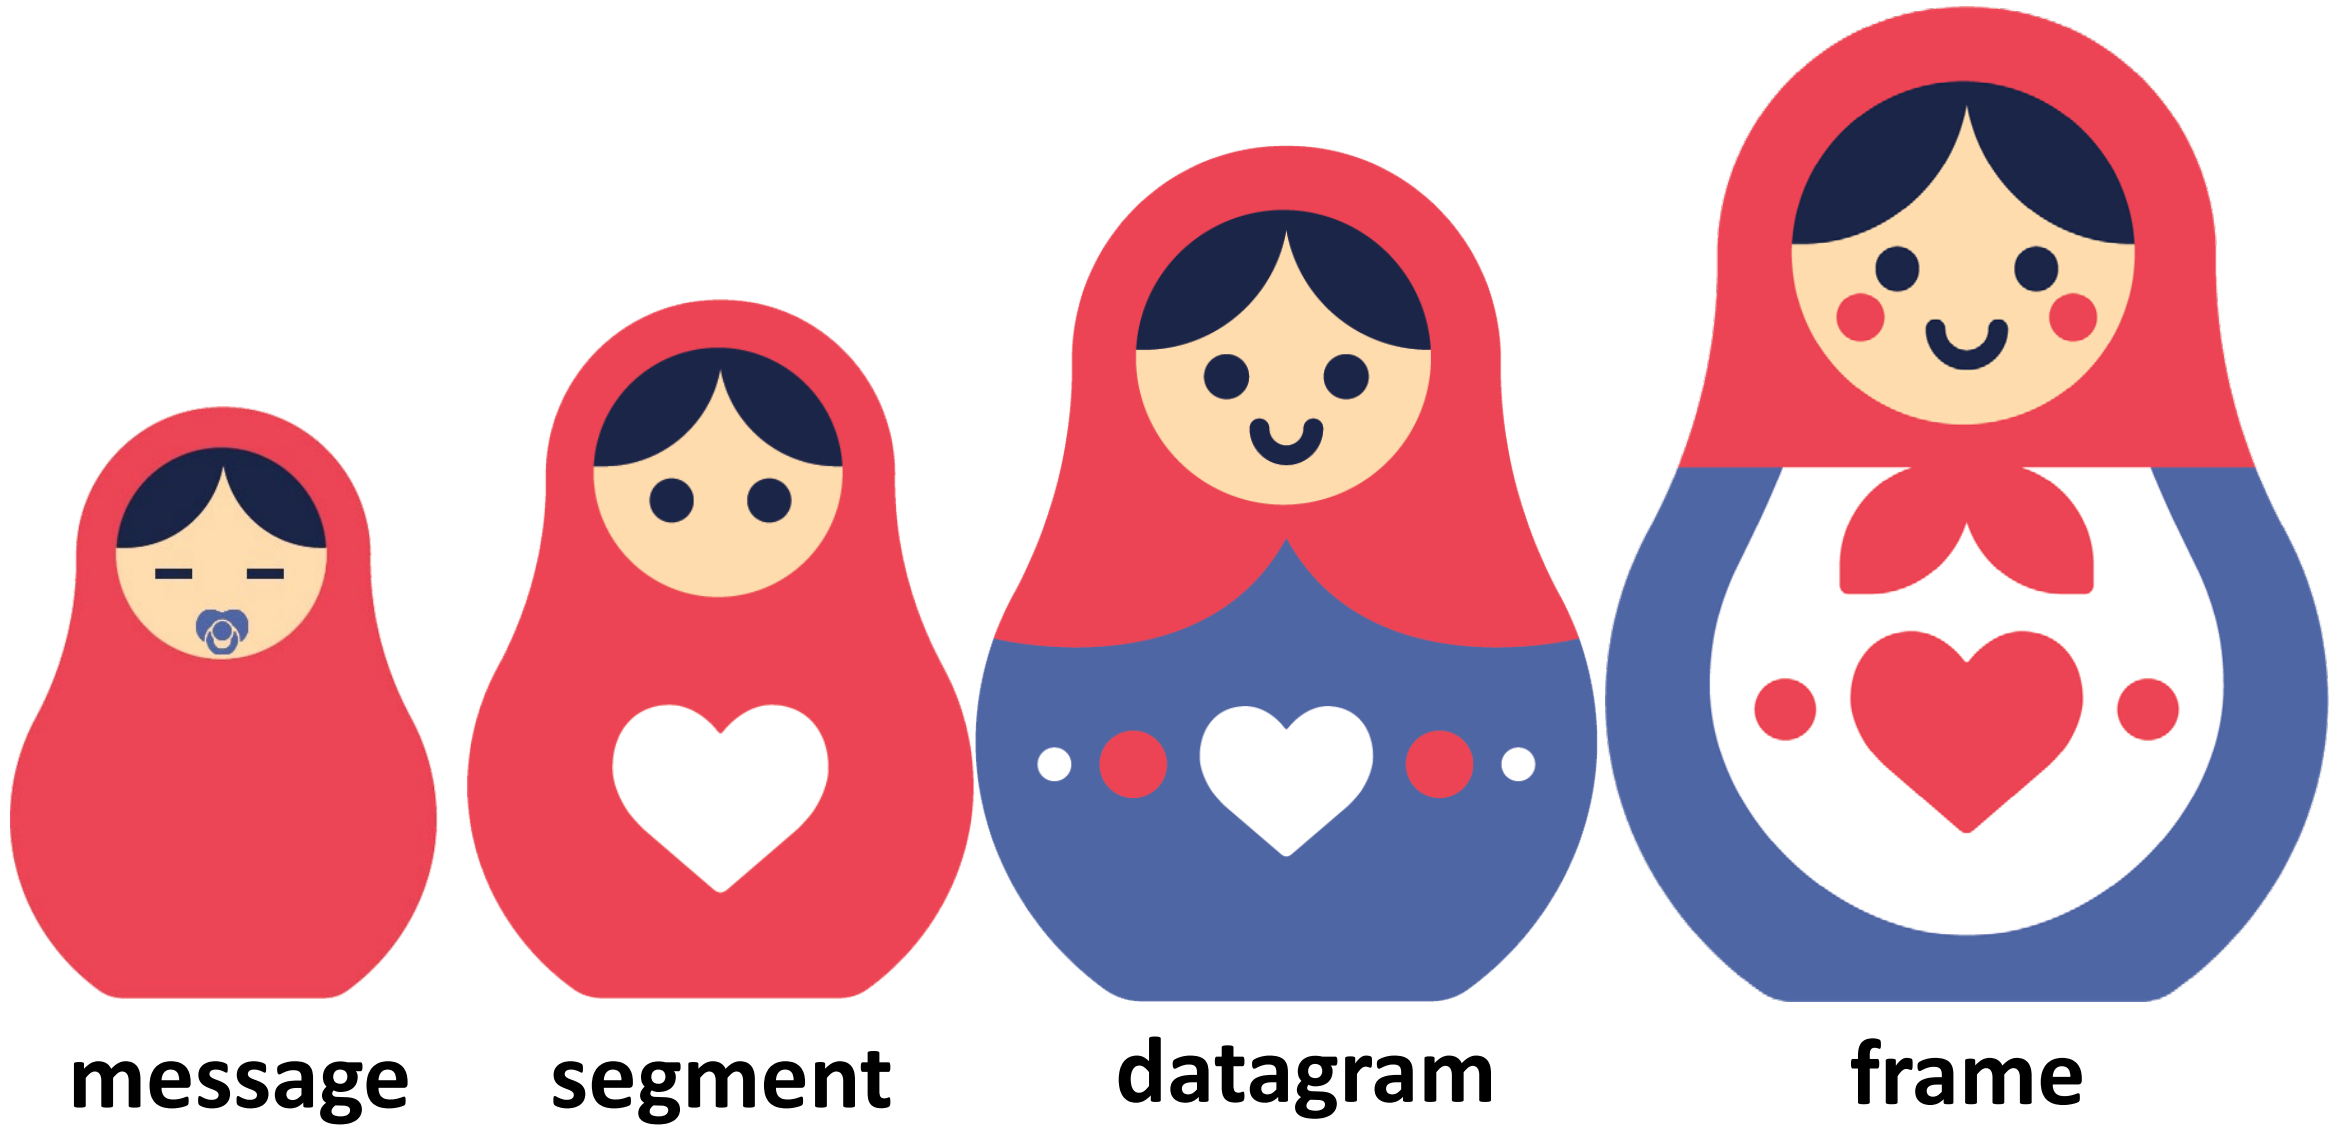

Credit: https://dribbble.com/shots/7182188-Babushka-Boi

Services, Layering and Encapsulation

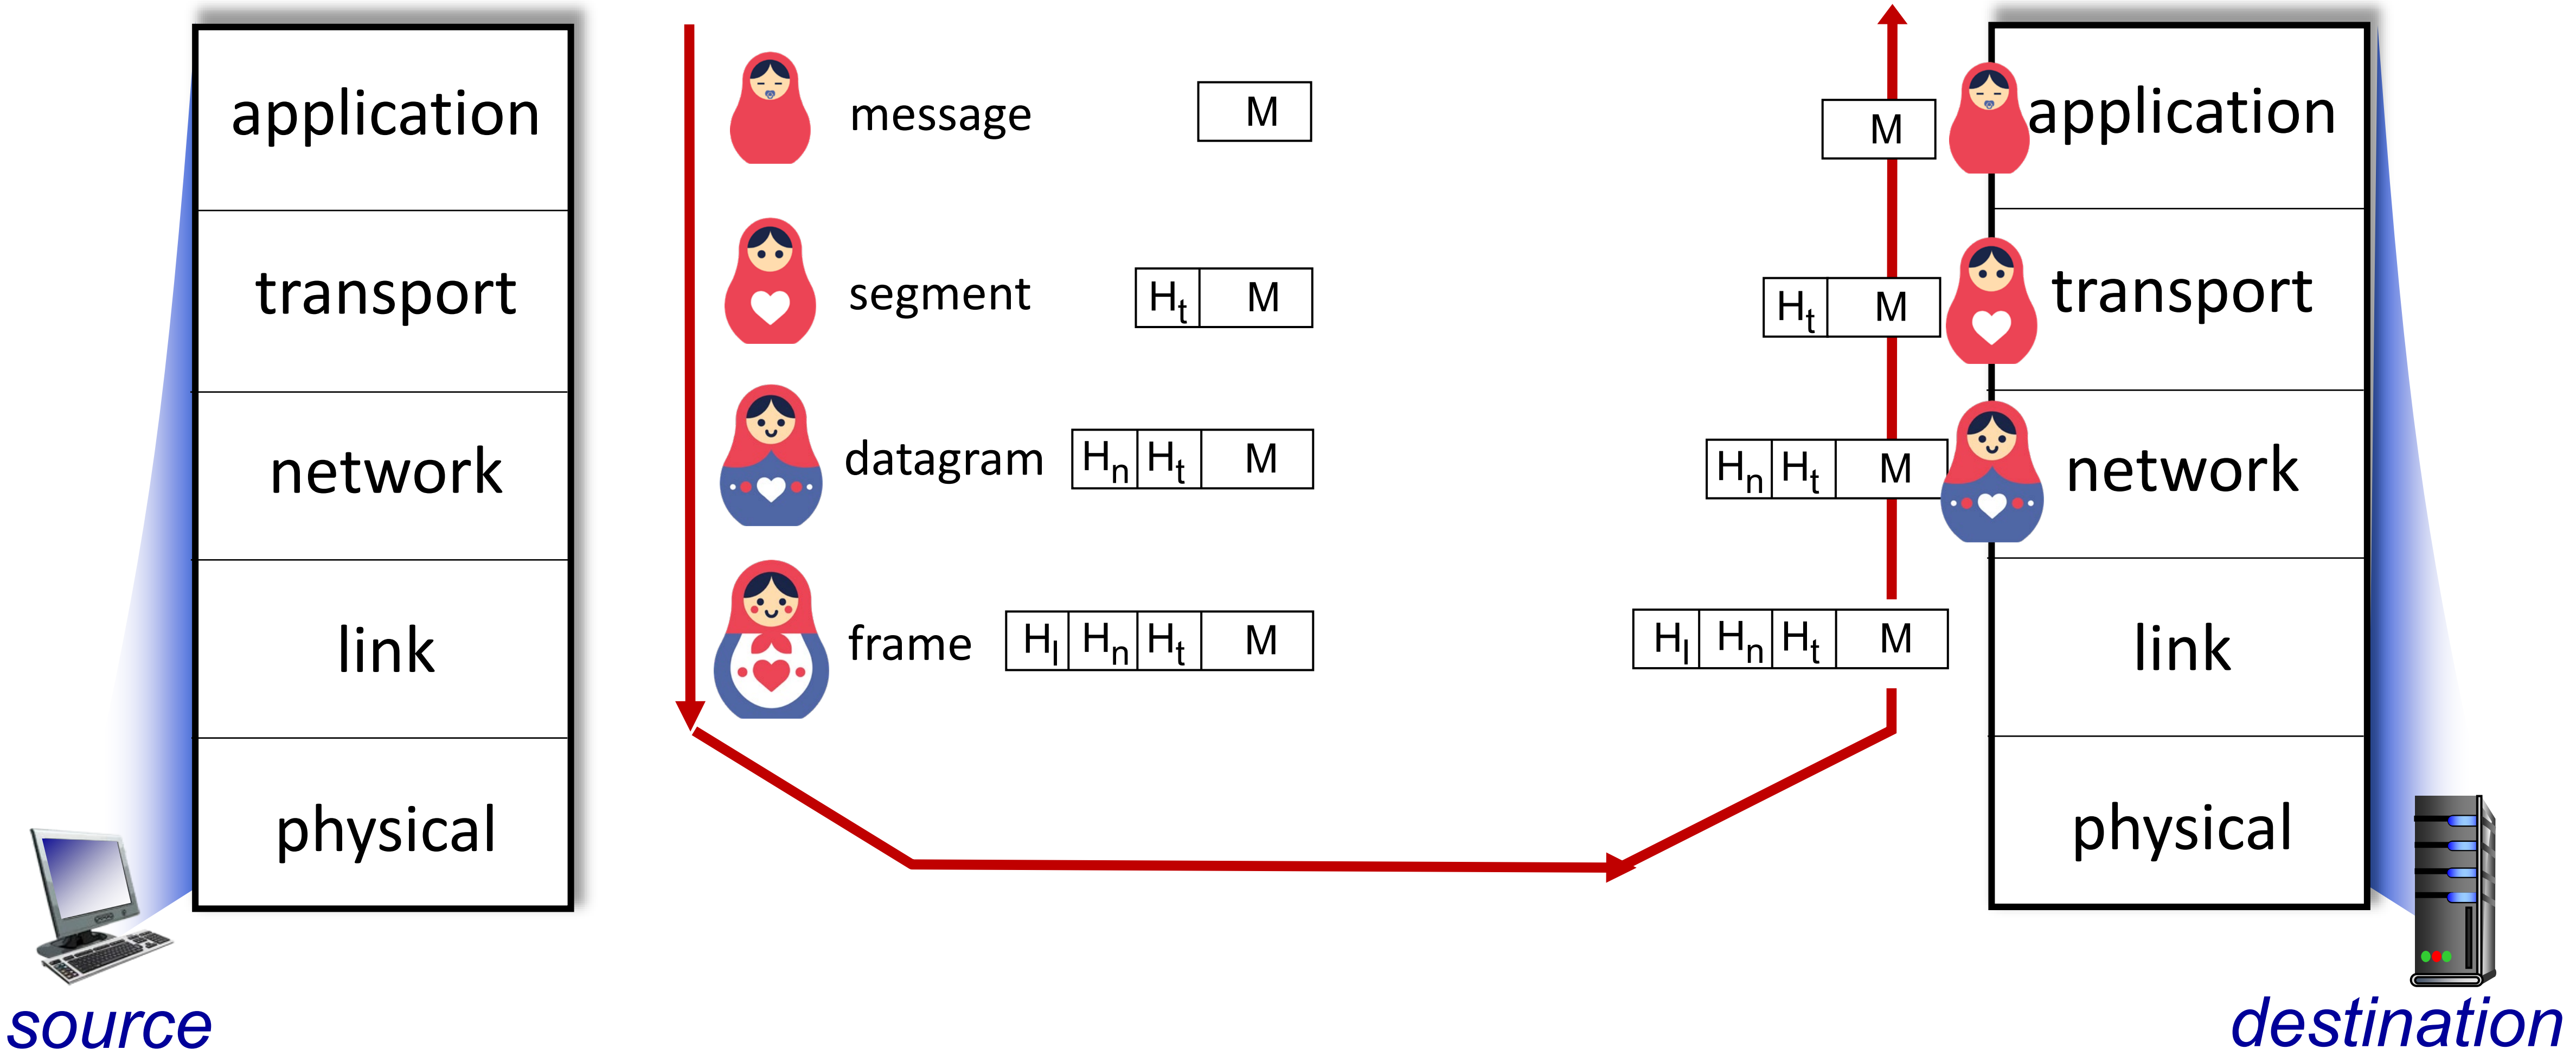

Encapsulation: an end-end view

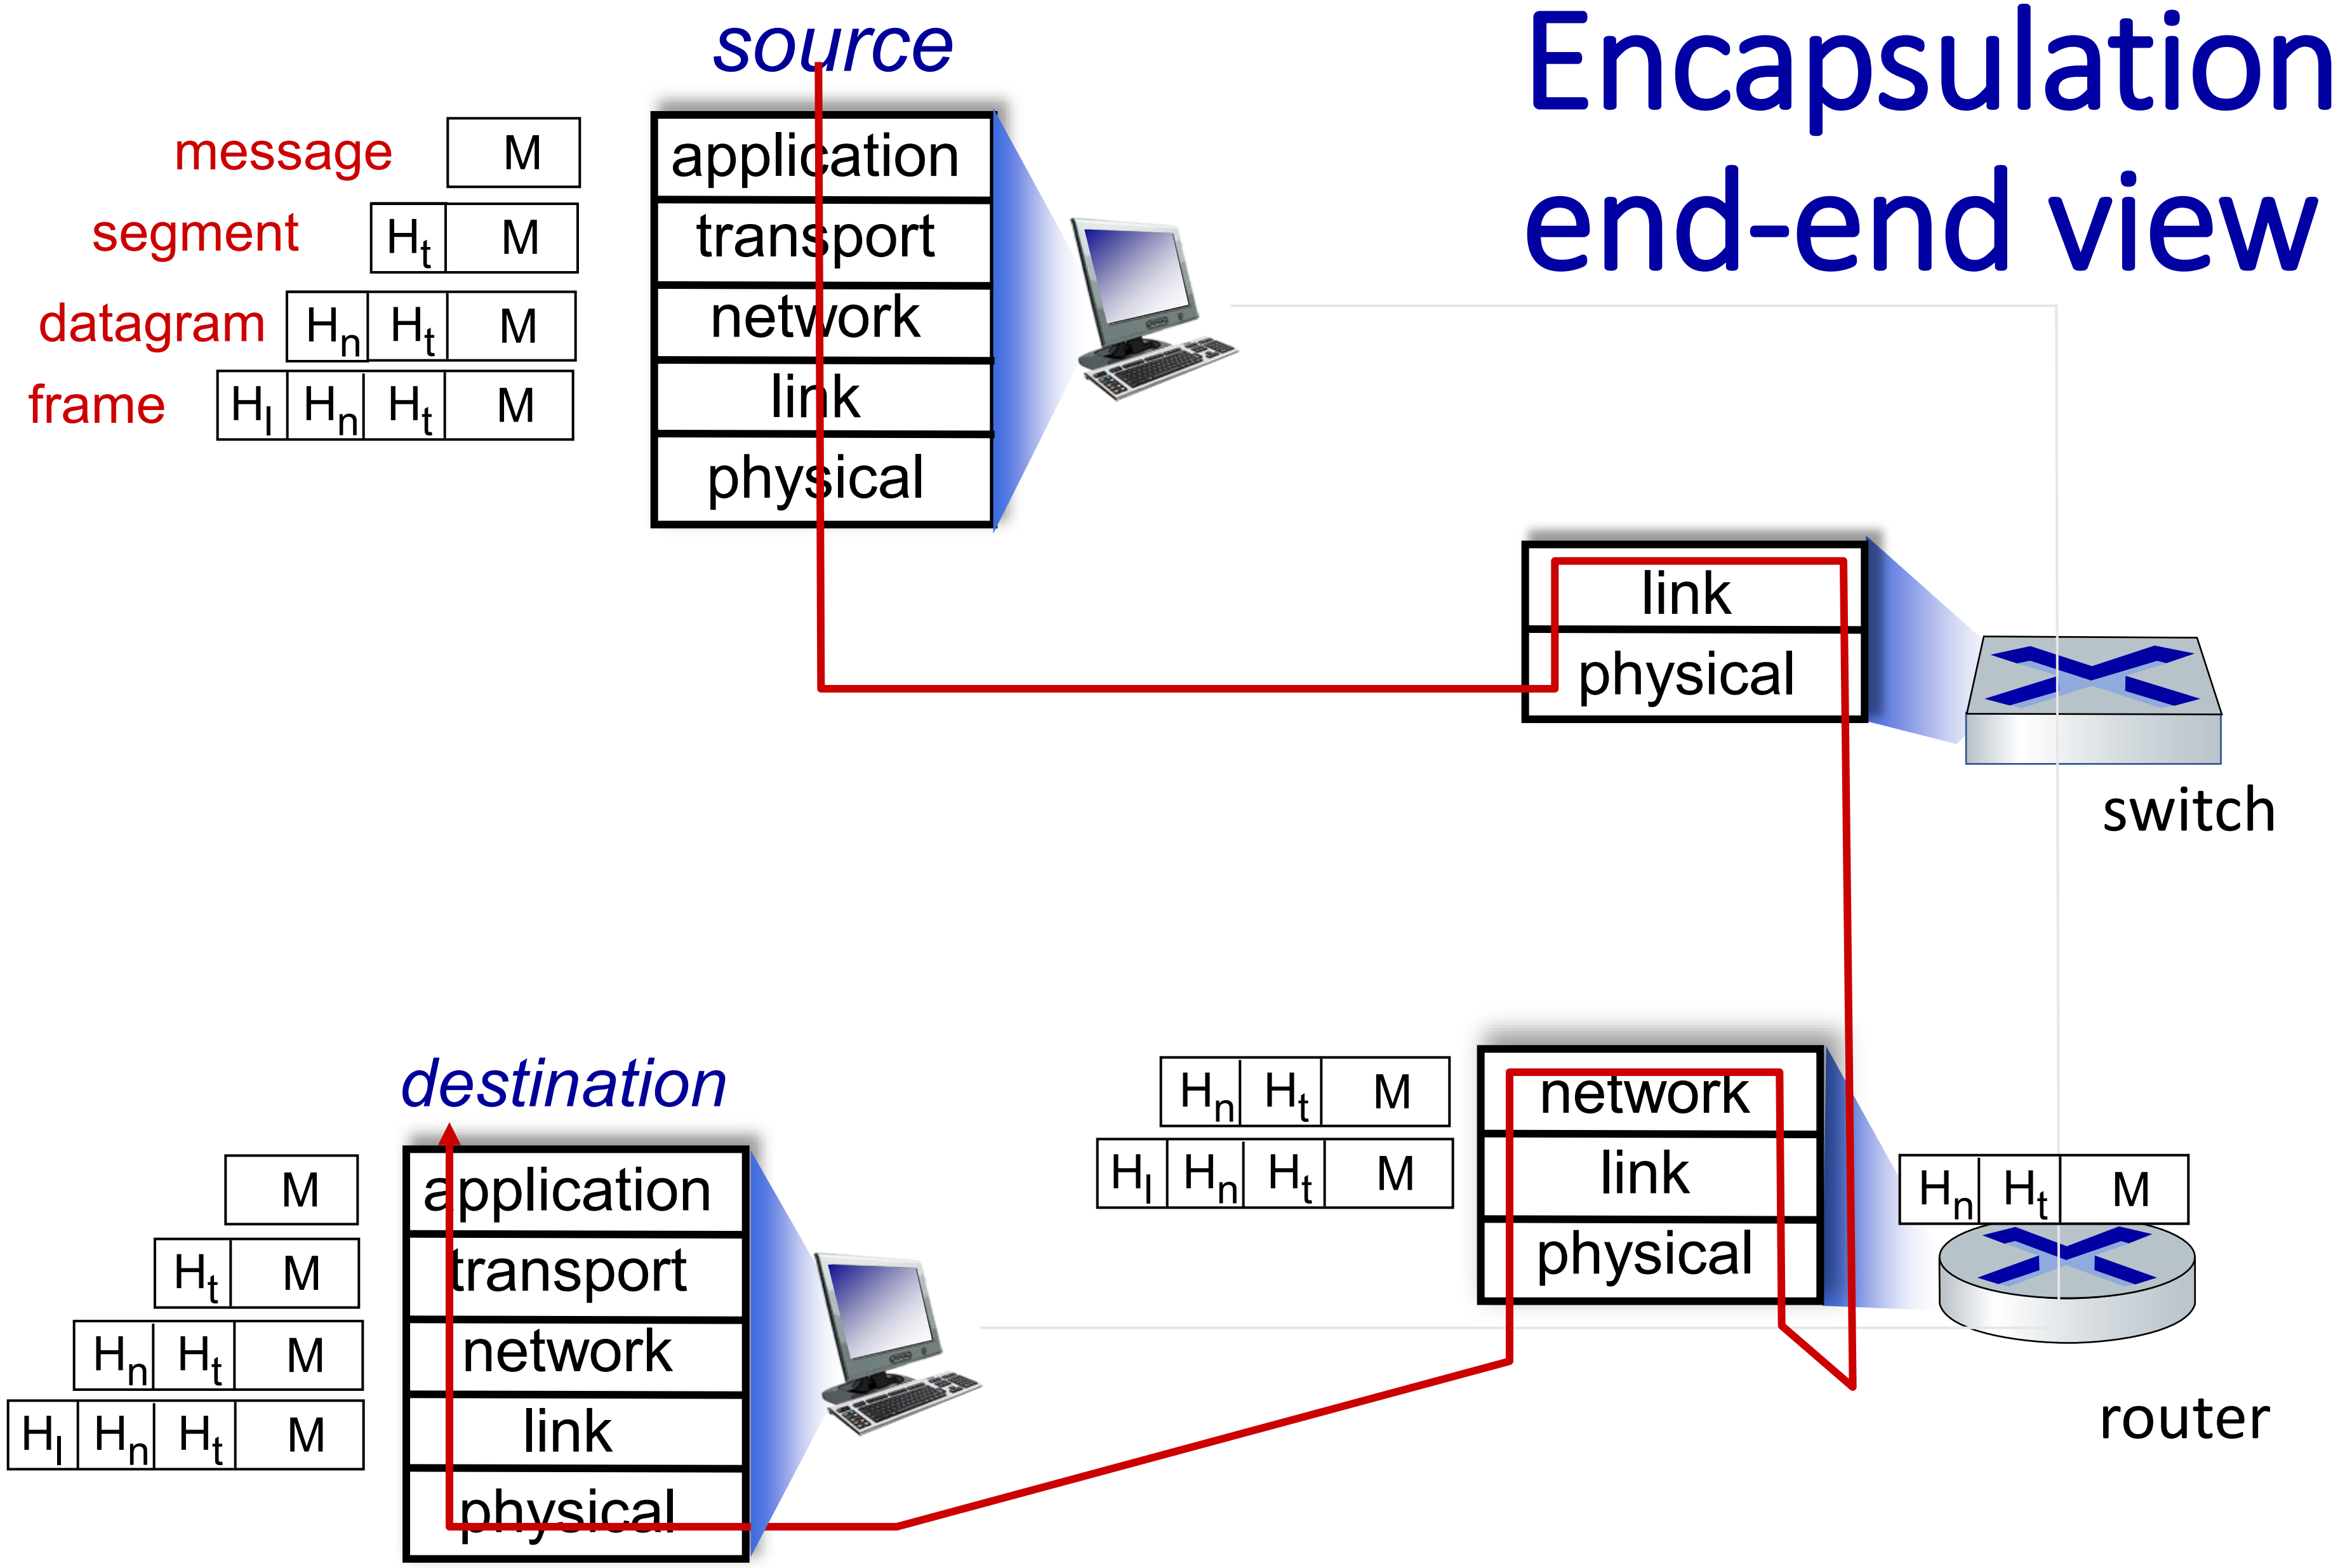

Additional Chapter 1 slides

ISO/OSI reference model

Two layers not found in Internet protocol stack!

- *presentation:* allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session:* synchronization, checkpointing, recovery of data exchange
- Internet stack “missing” these layers!
  - these services, *if needed,* must be implemented in application
  - needed?

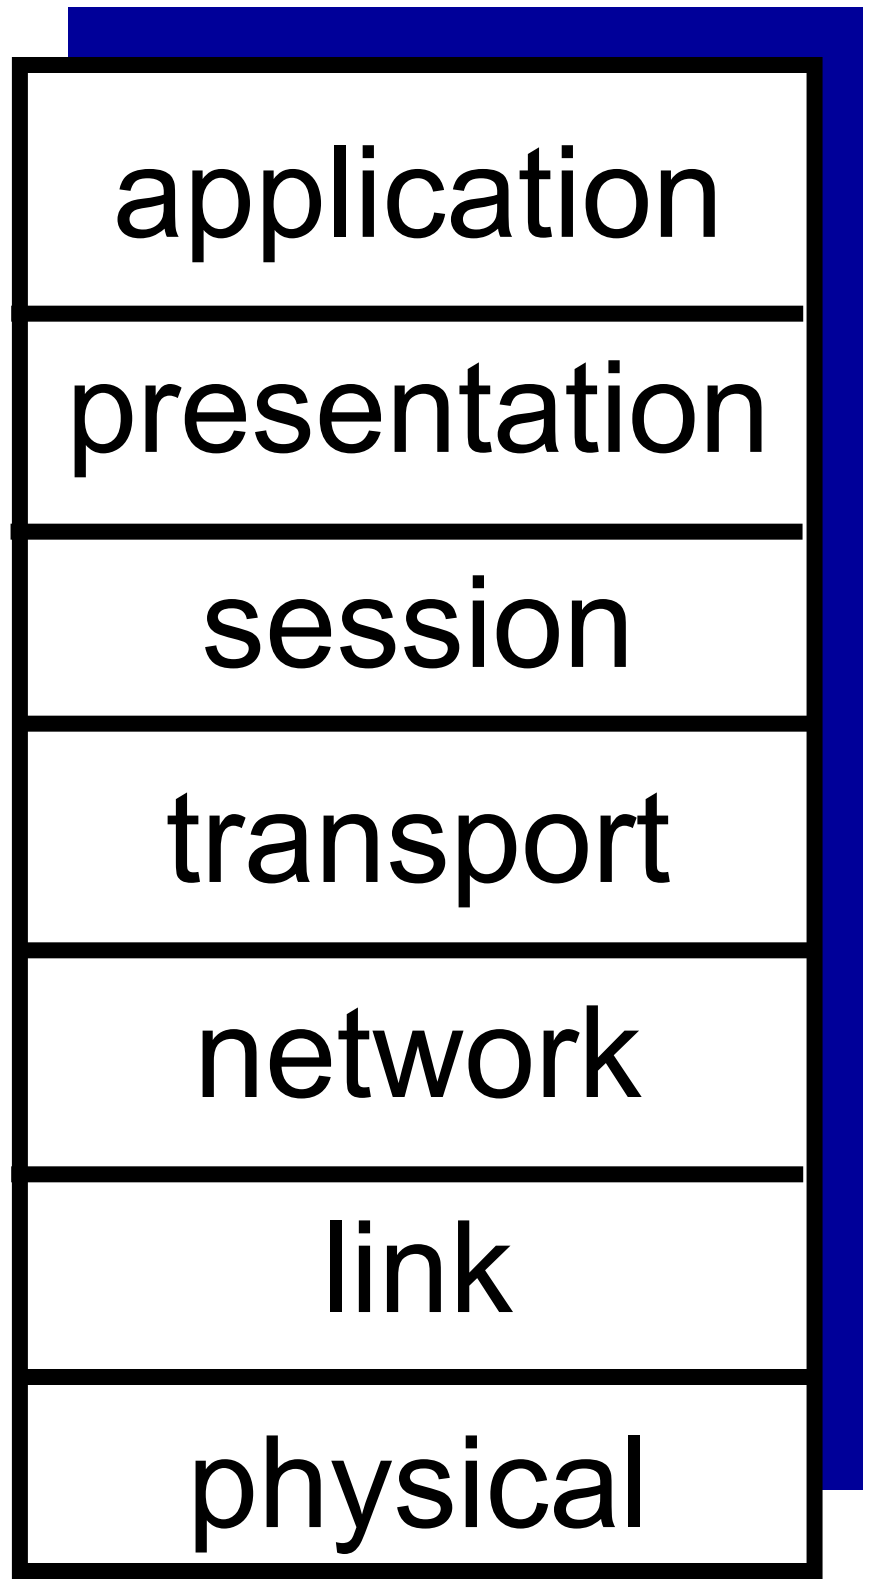

application
presentation
session
transport
network
link
physical

The seven layer OSI/ISO reference model

Services, Layering and Encapsulation

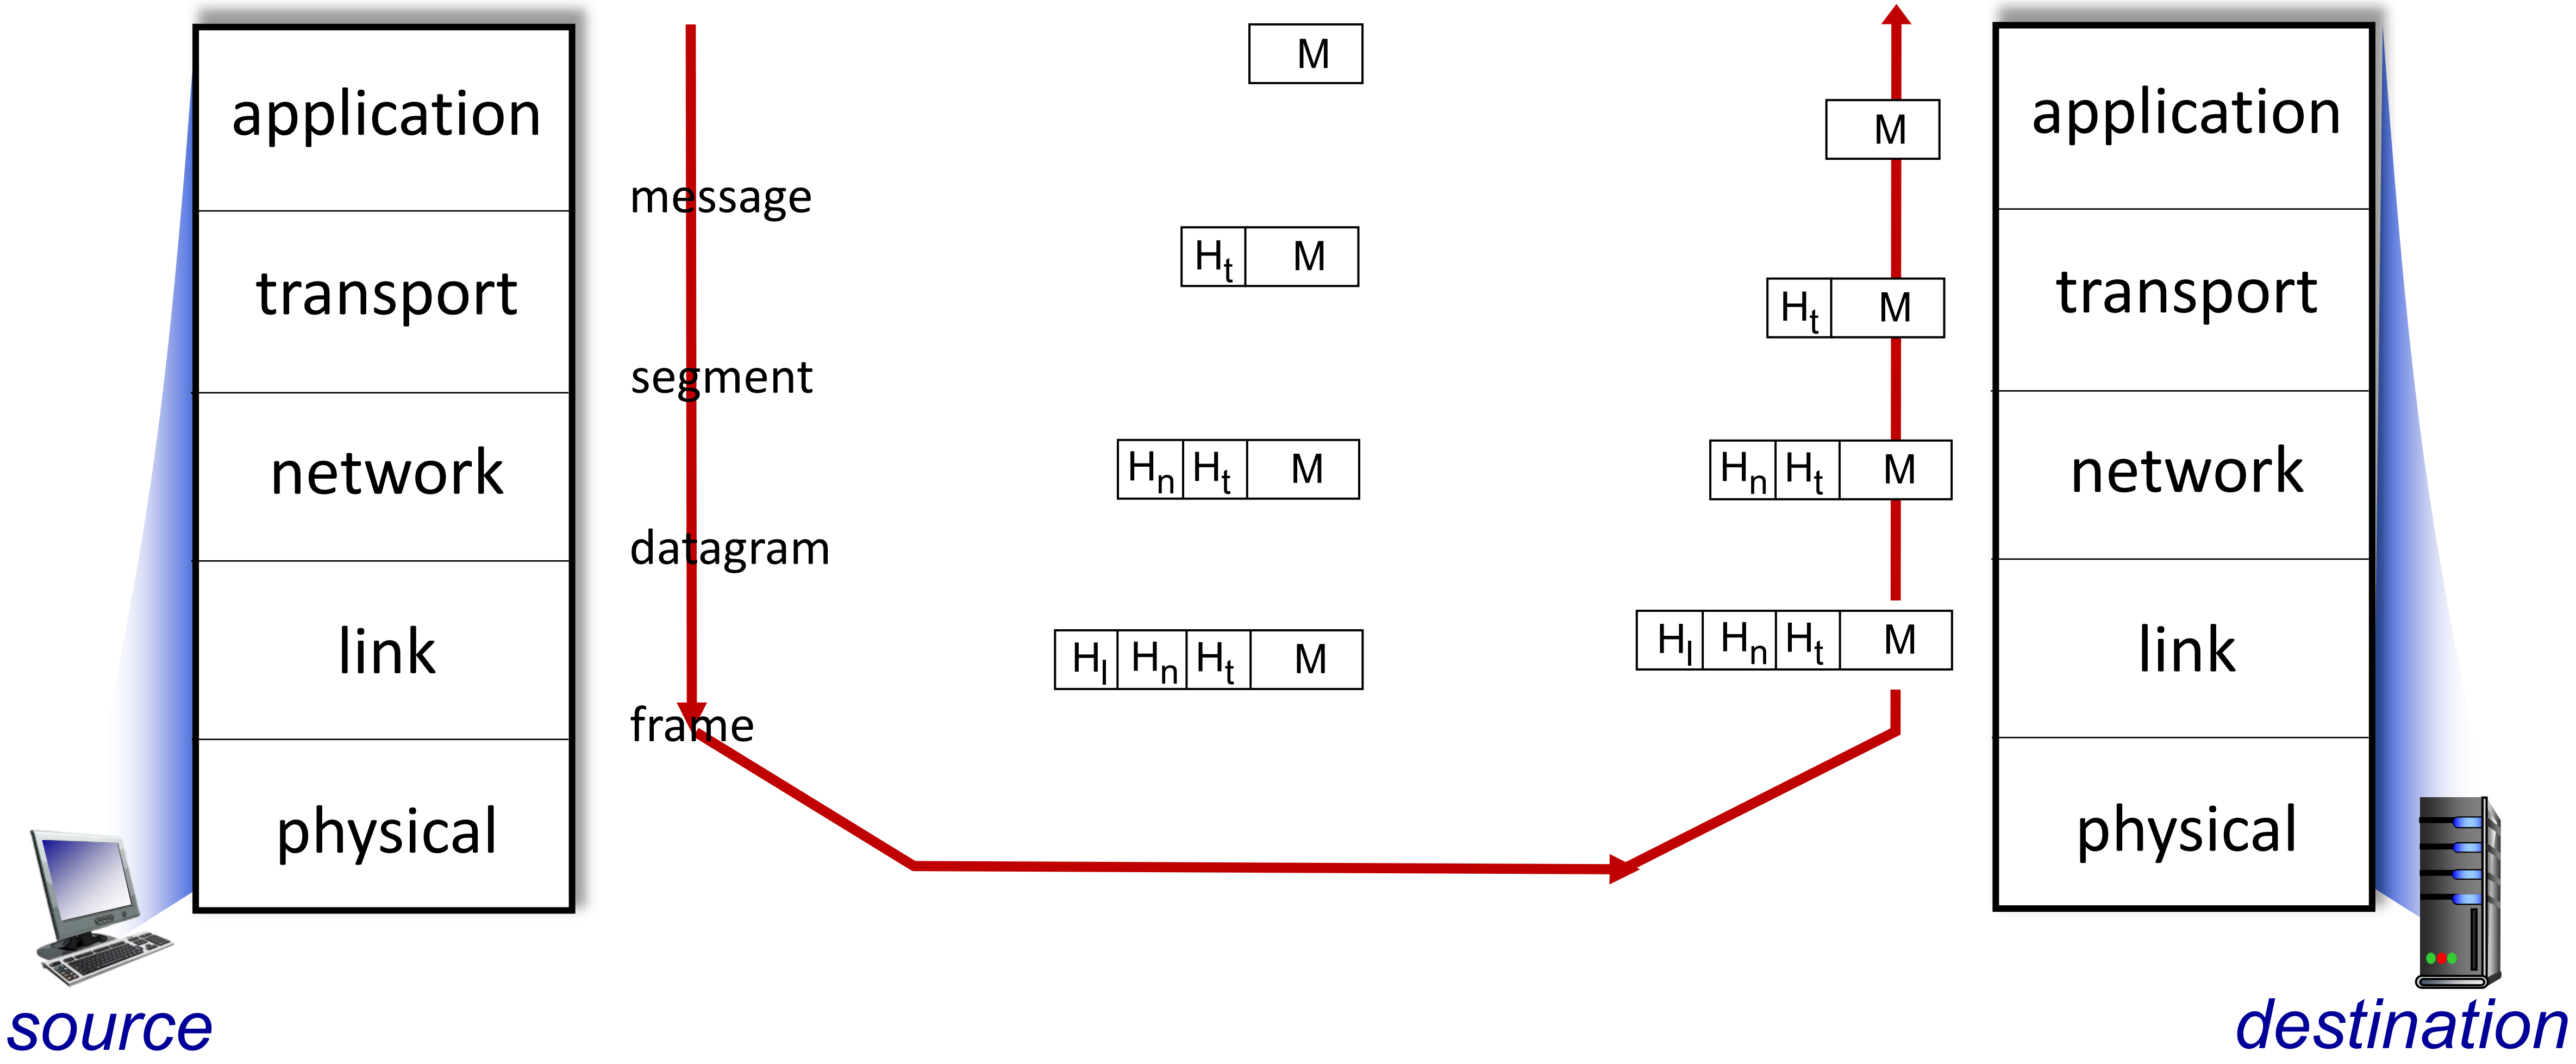

Wireshark

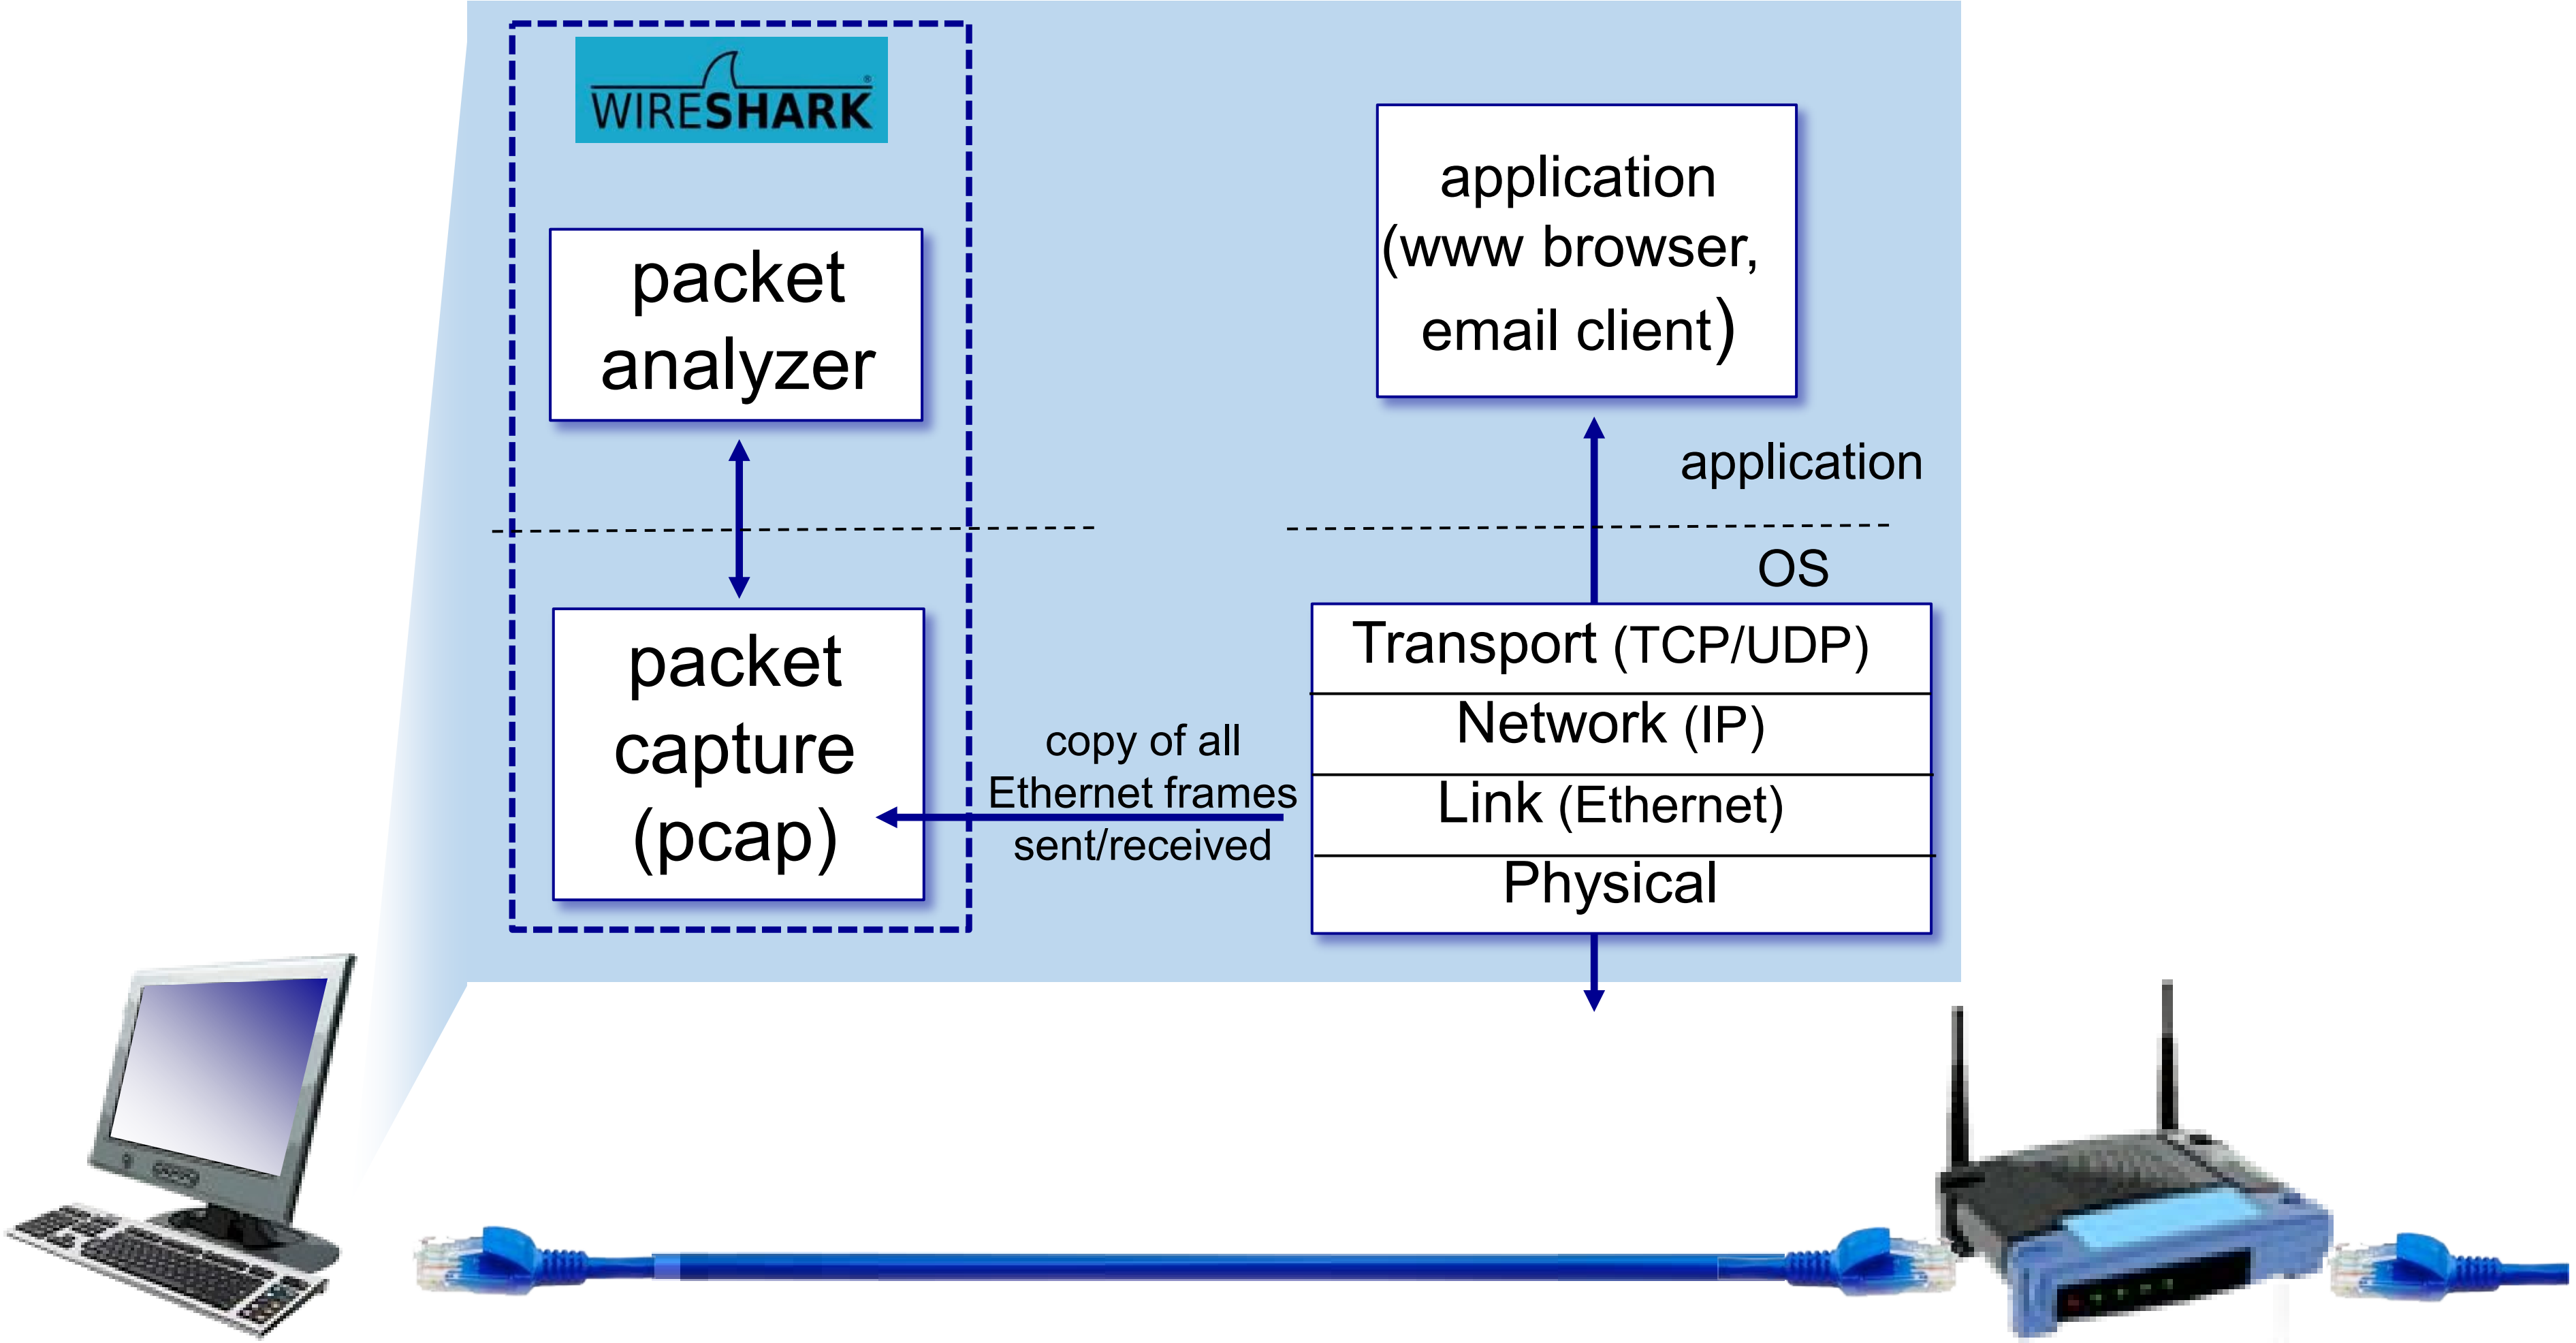
WIRESHARK
packet analyzer
packet capture (pcap)
copy of all Ethernet frames sent/received
application (www browser, email client)
application
OS
Transport (TCP/UDP)
Network (IP)
Link (Ethernet)
Physical