Chapter 1
Introduction

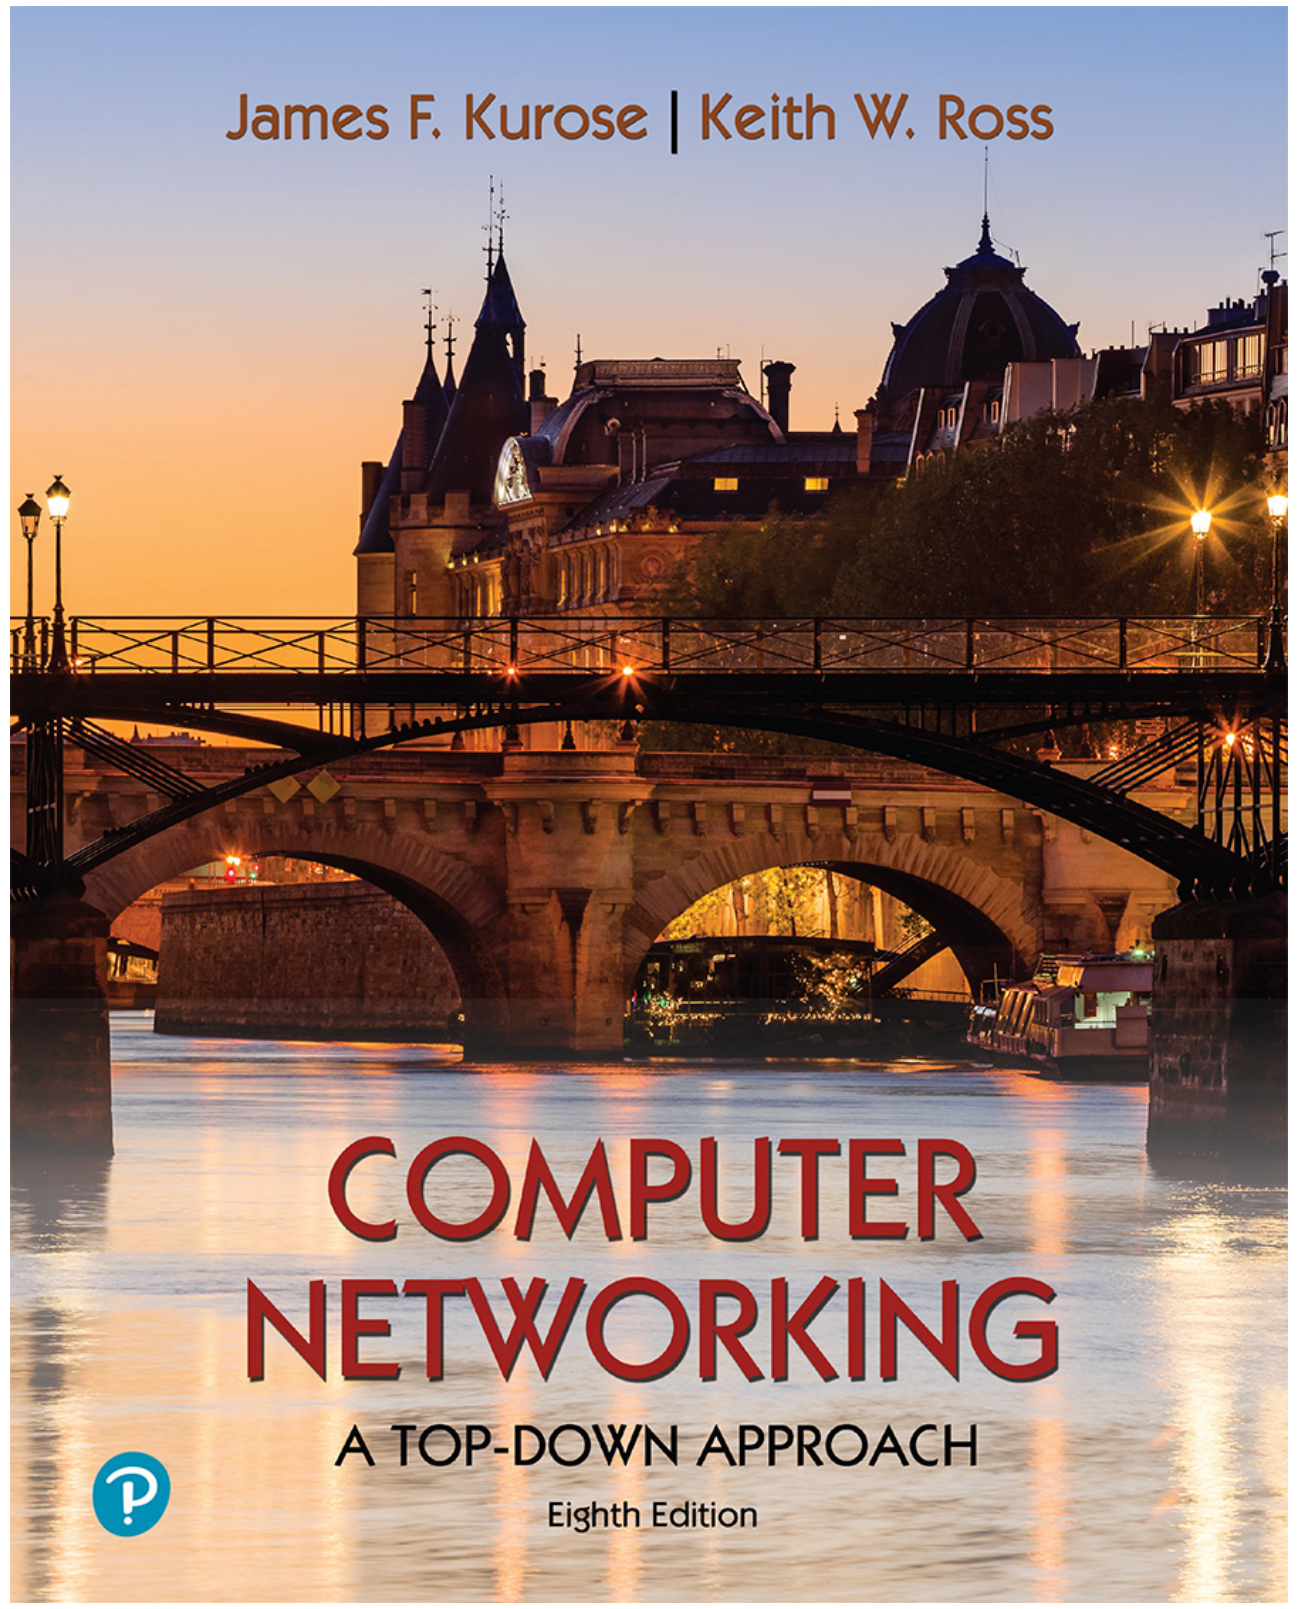

Computer Networking: A Top-Down Approach
8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Acknowledgement: Based on the textbook's website:
https://gaia.cs.umass.edu/kurose_ross/index.php

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models

The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - network forwards packets from one router to the next, across links on path from source to destination

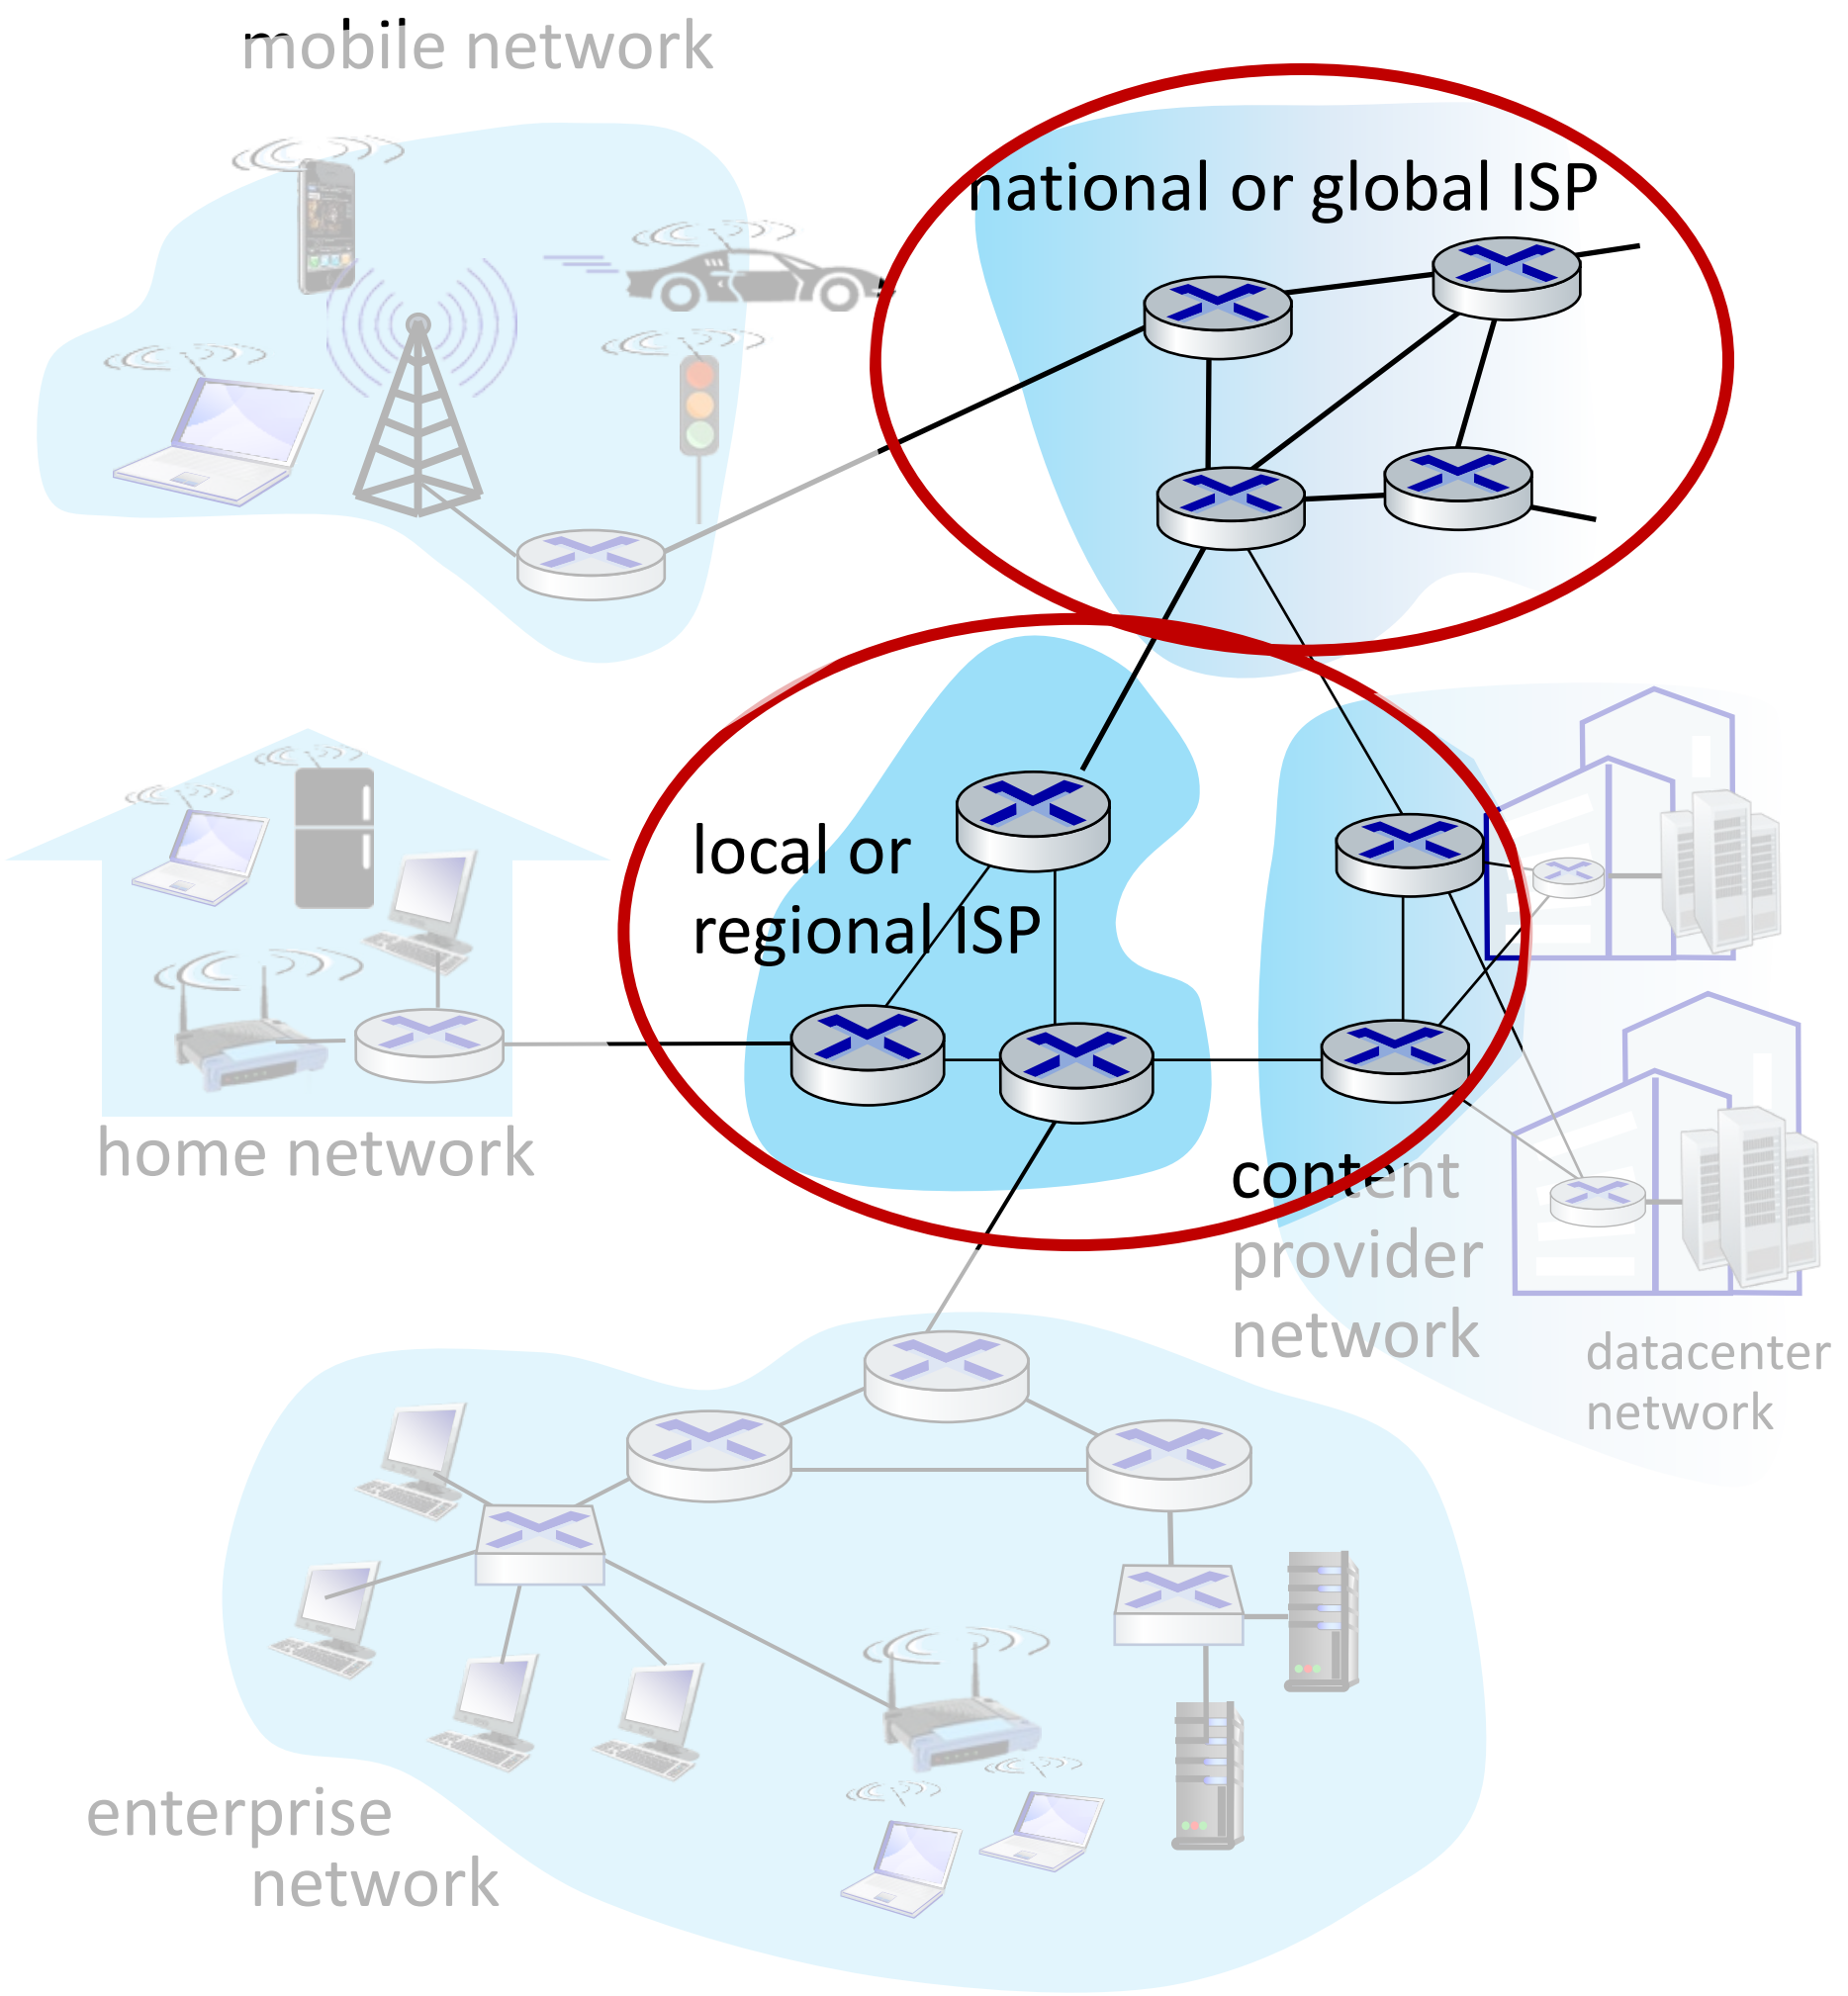

Two key network-core functions

Forwarding:
- aka “switching”
- *local* action: move arriving packets from router’s input link to appropriate router output link

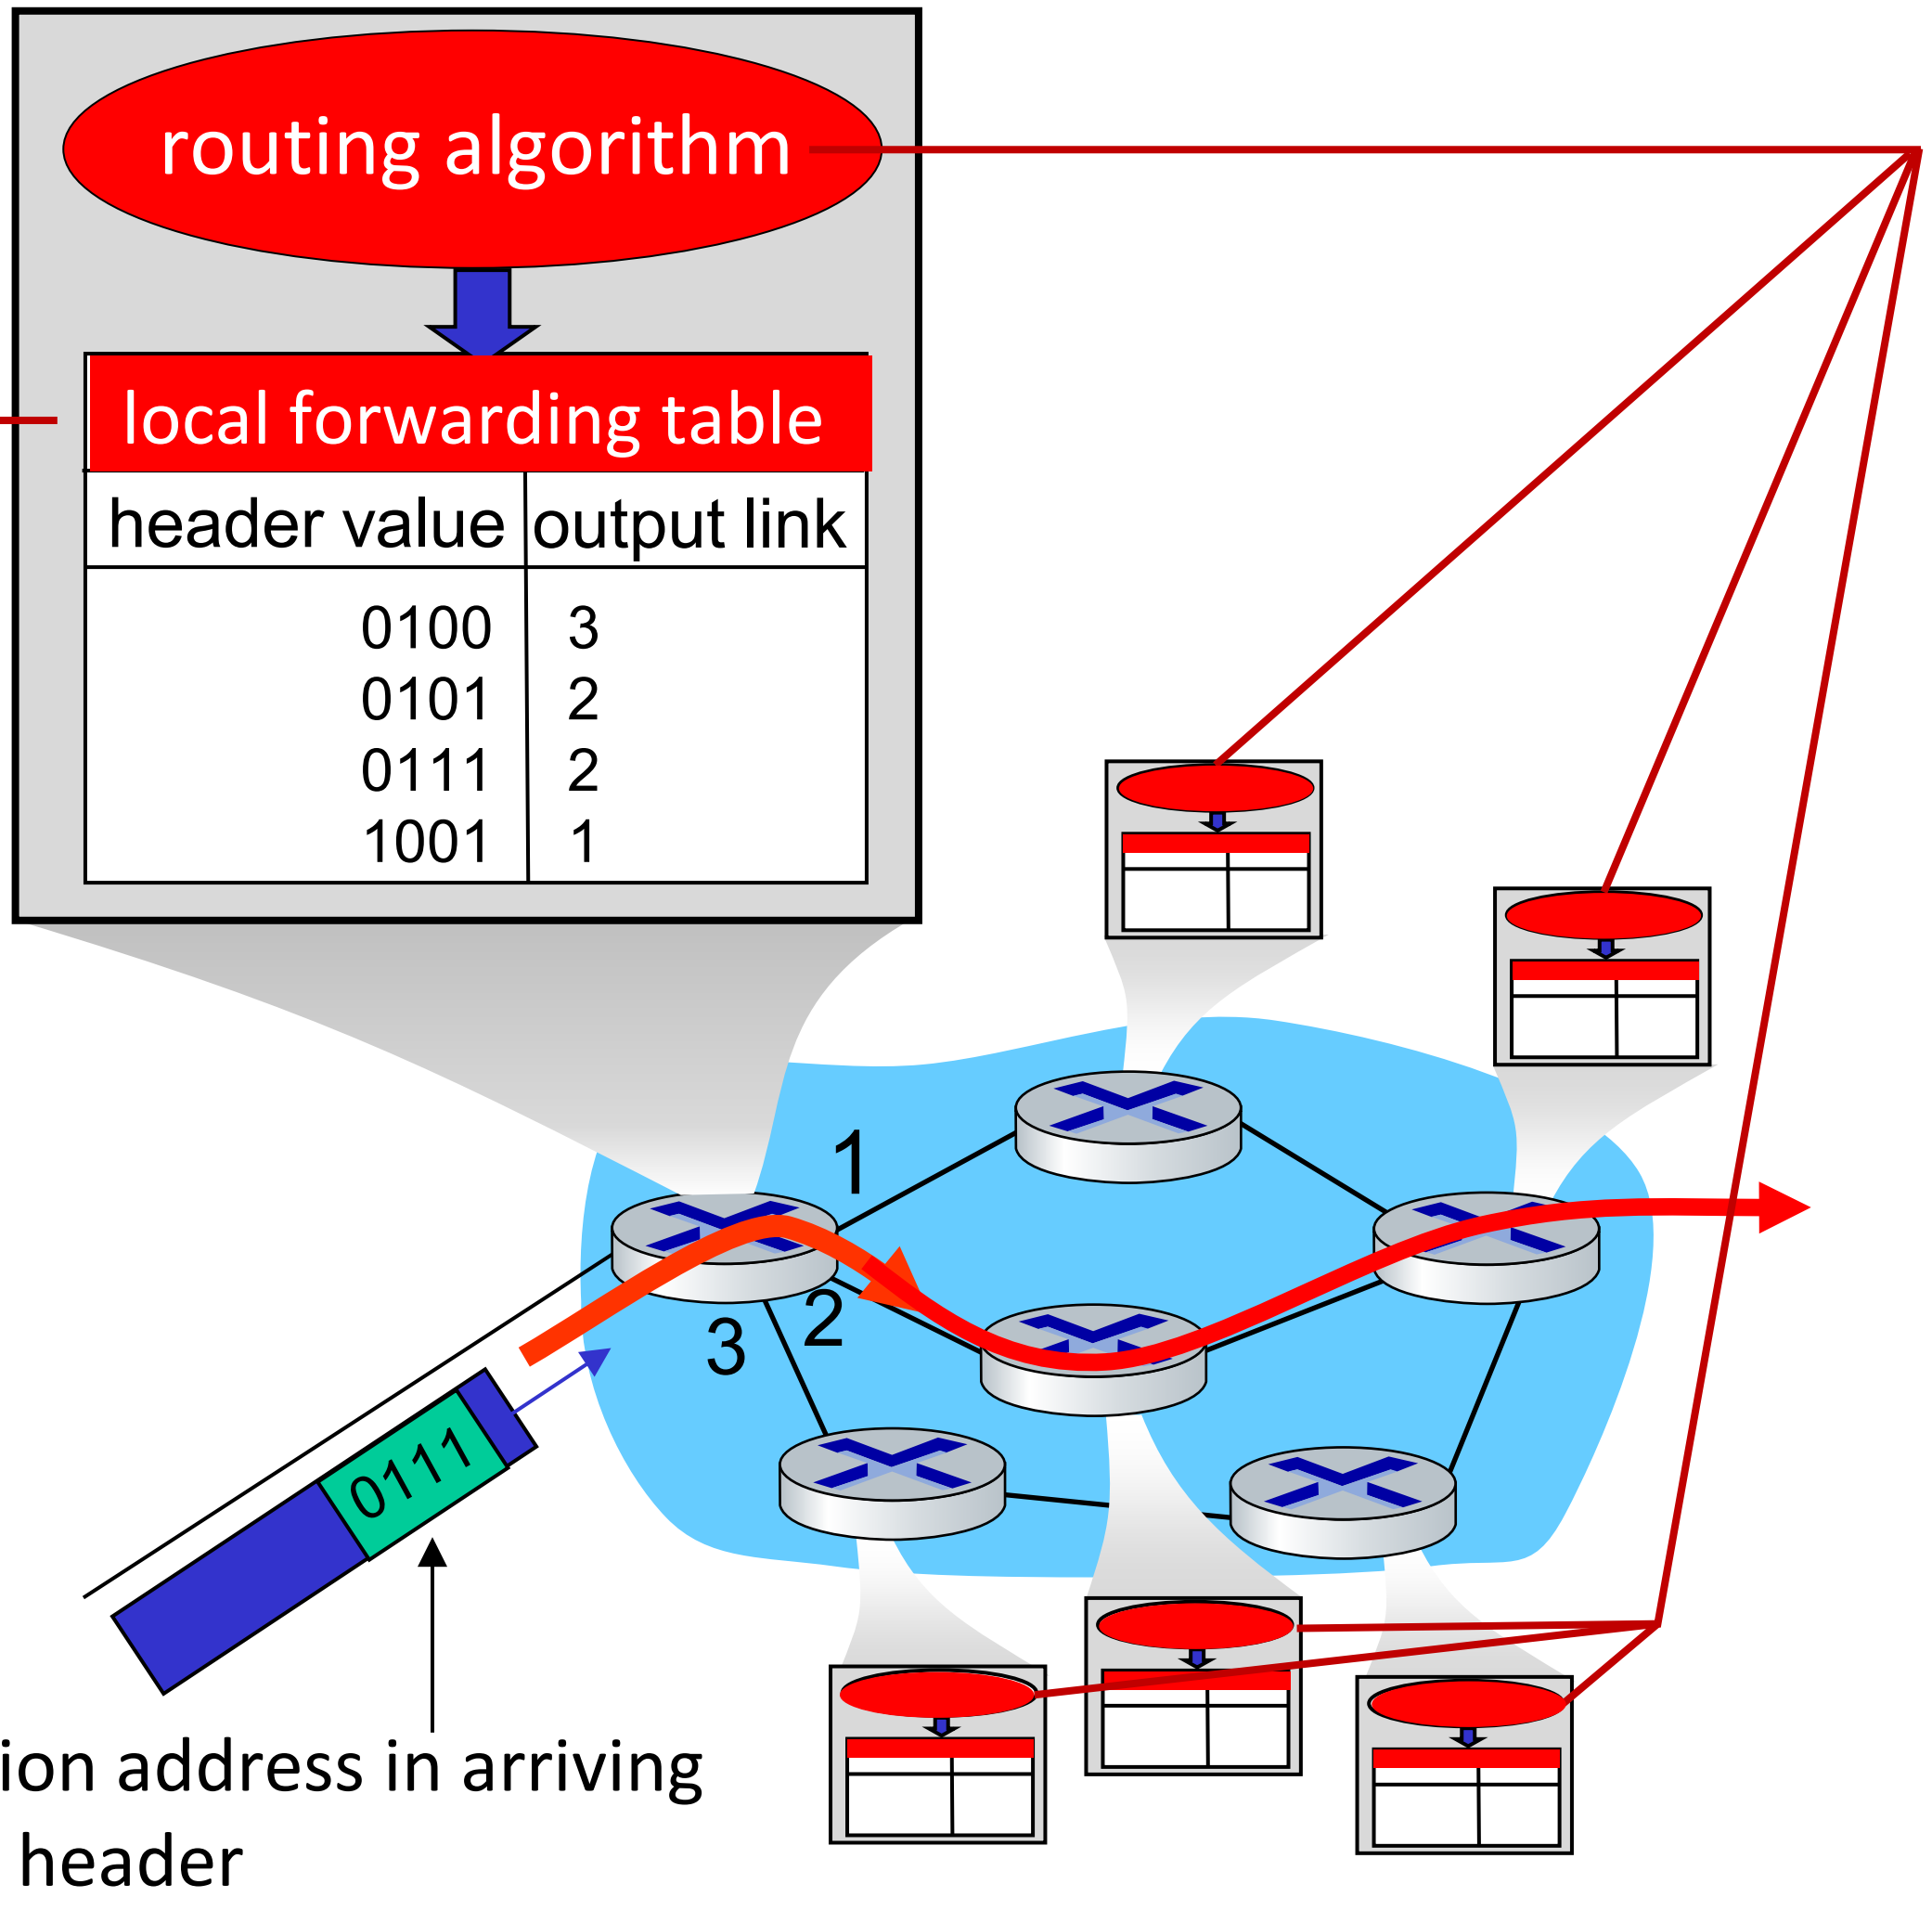

Routing:
- *global* action: determine source-destination paths taken by packets
- routing algorithms


45 h
3,053 miles
48 h
3,309 miles
routing
San Jose
Northampton
United States


forwarding
forwarding
45 h
3,053 miles
48 h
3,309 miles
United States
San Jose
Northampton
Cleveland
Sacramento

Packet-switching: store-and-forward

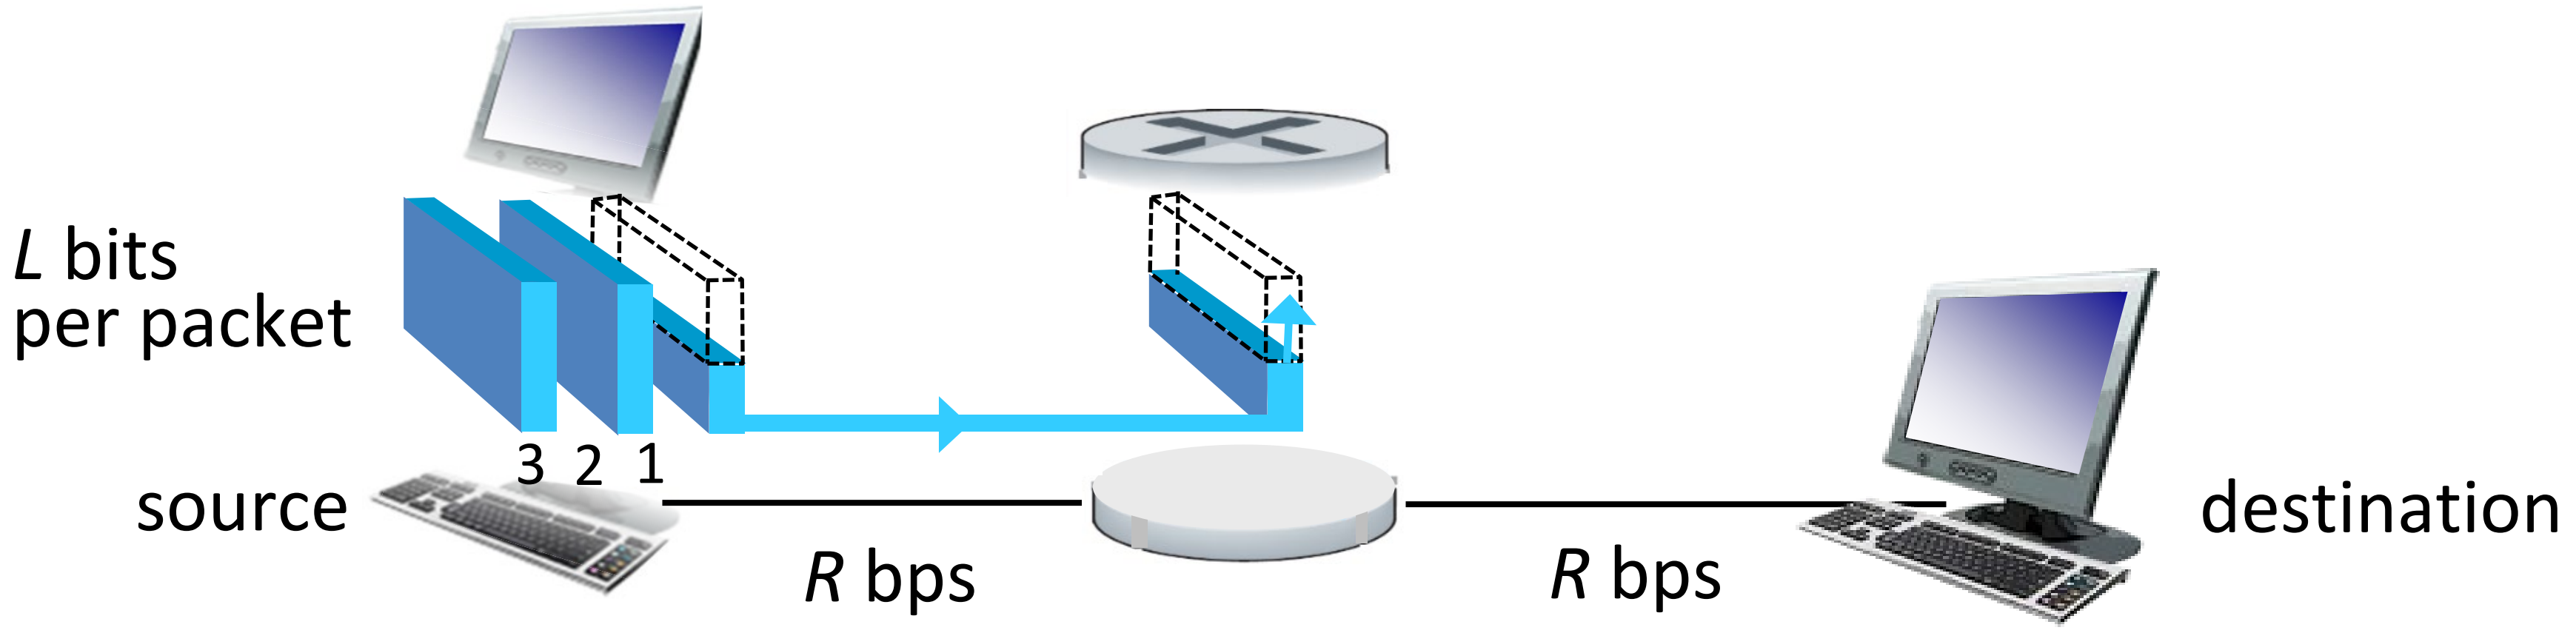

- packet transmission delay: takes L/R seconds to transmit (push out) L-bit packet into link at R bps
- *store and forward: entire* packet must arrive at router before it can be transmitted on next link

One-hop numerical example:

- L = 10 Kbits
- R = 100 Mbps
- one-hop transmission delay = 0.1 msec

Packet-switching: queueing

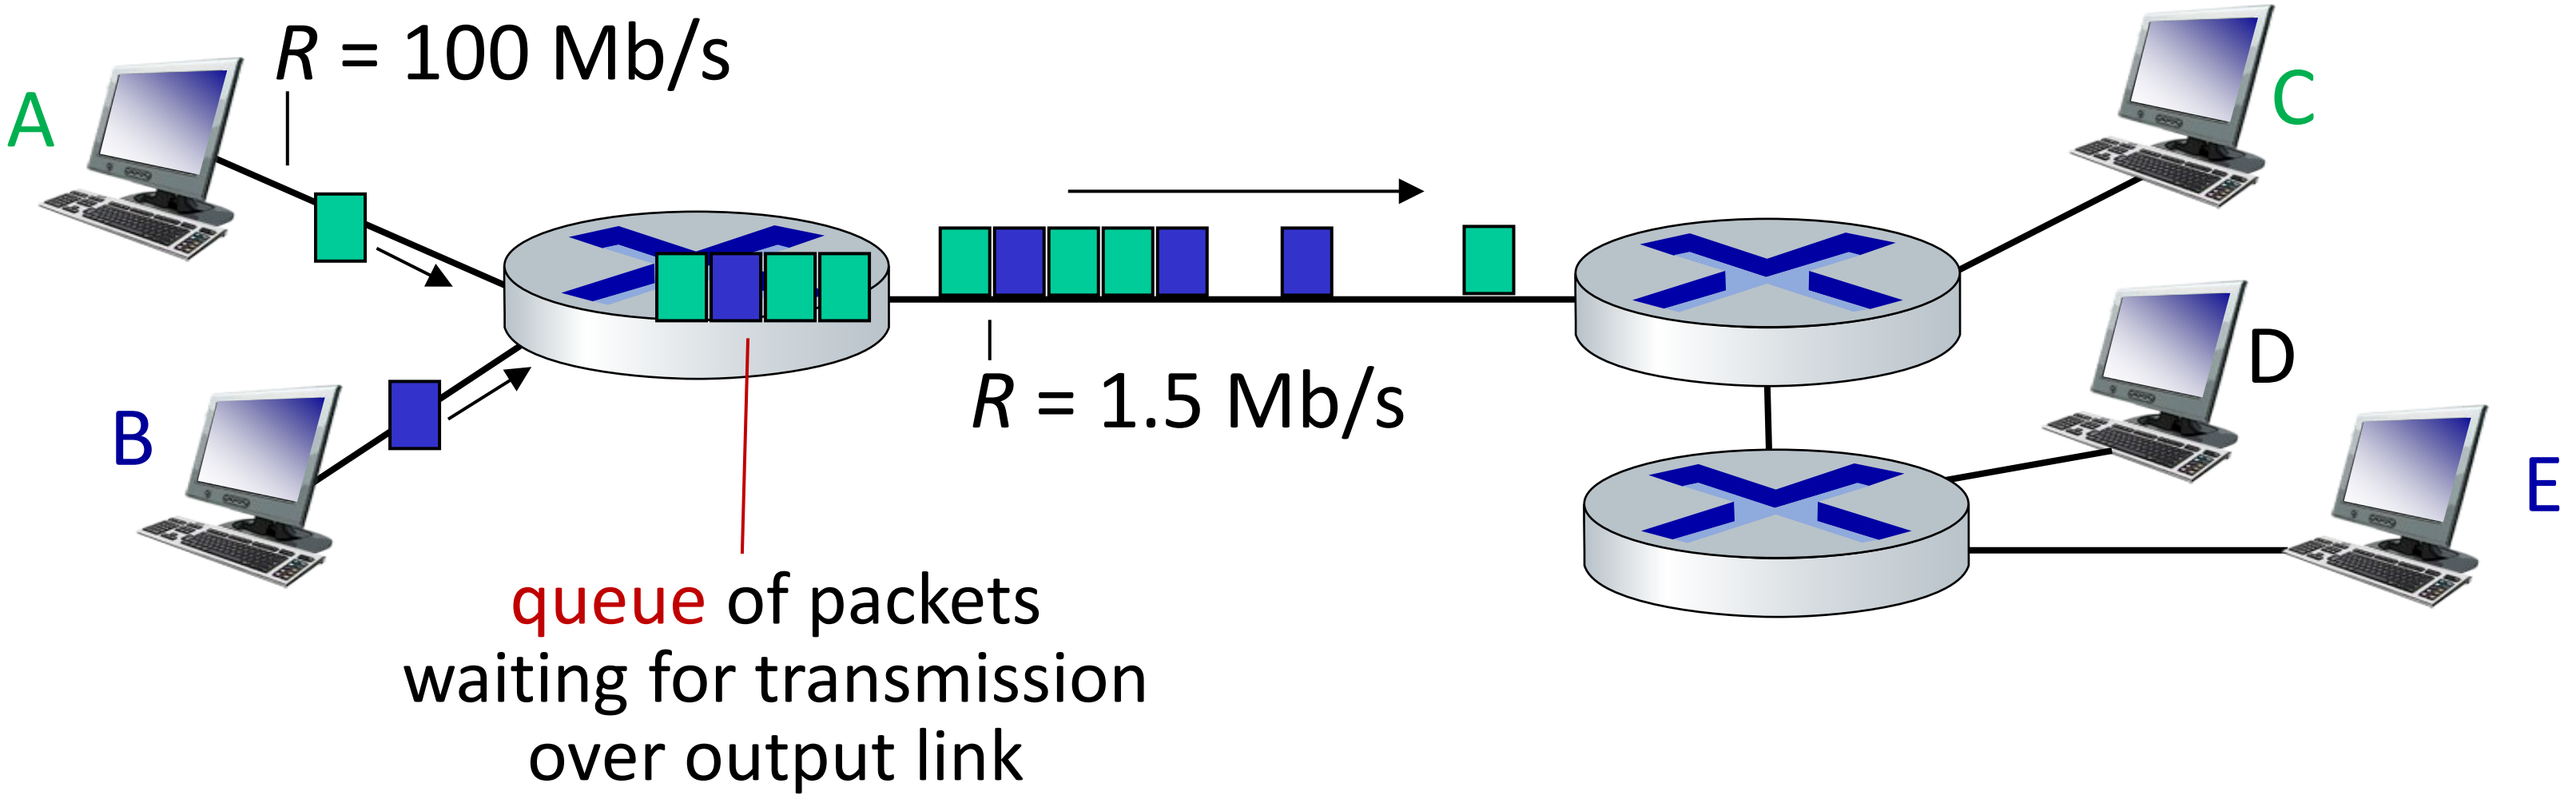

Queueing occurs when work arrives faster than it can be serviced:

Packet-switching: queueing

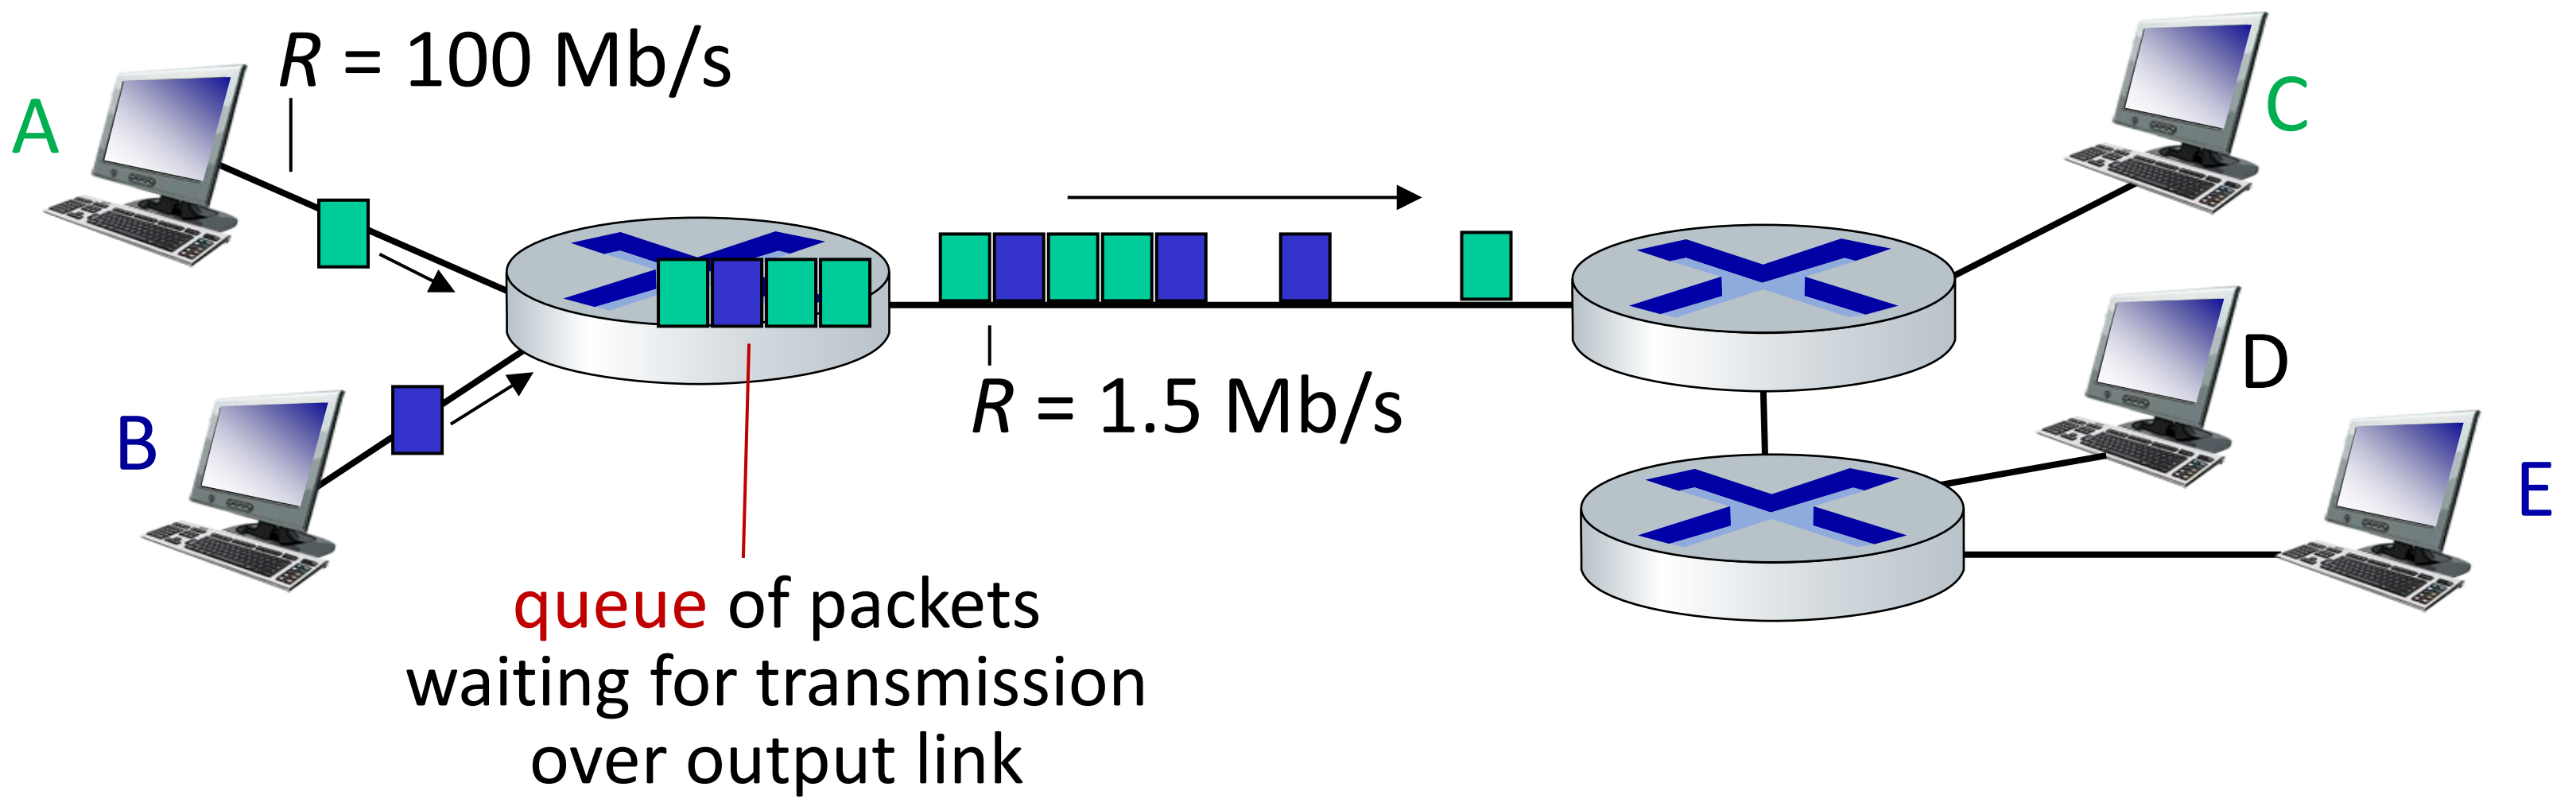

Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Alternative to packet switching: circuit switching

end-end resources allocated to, reserved for "call" between source and destination

- in diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

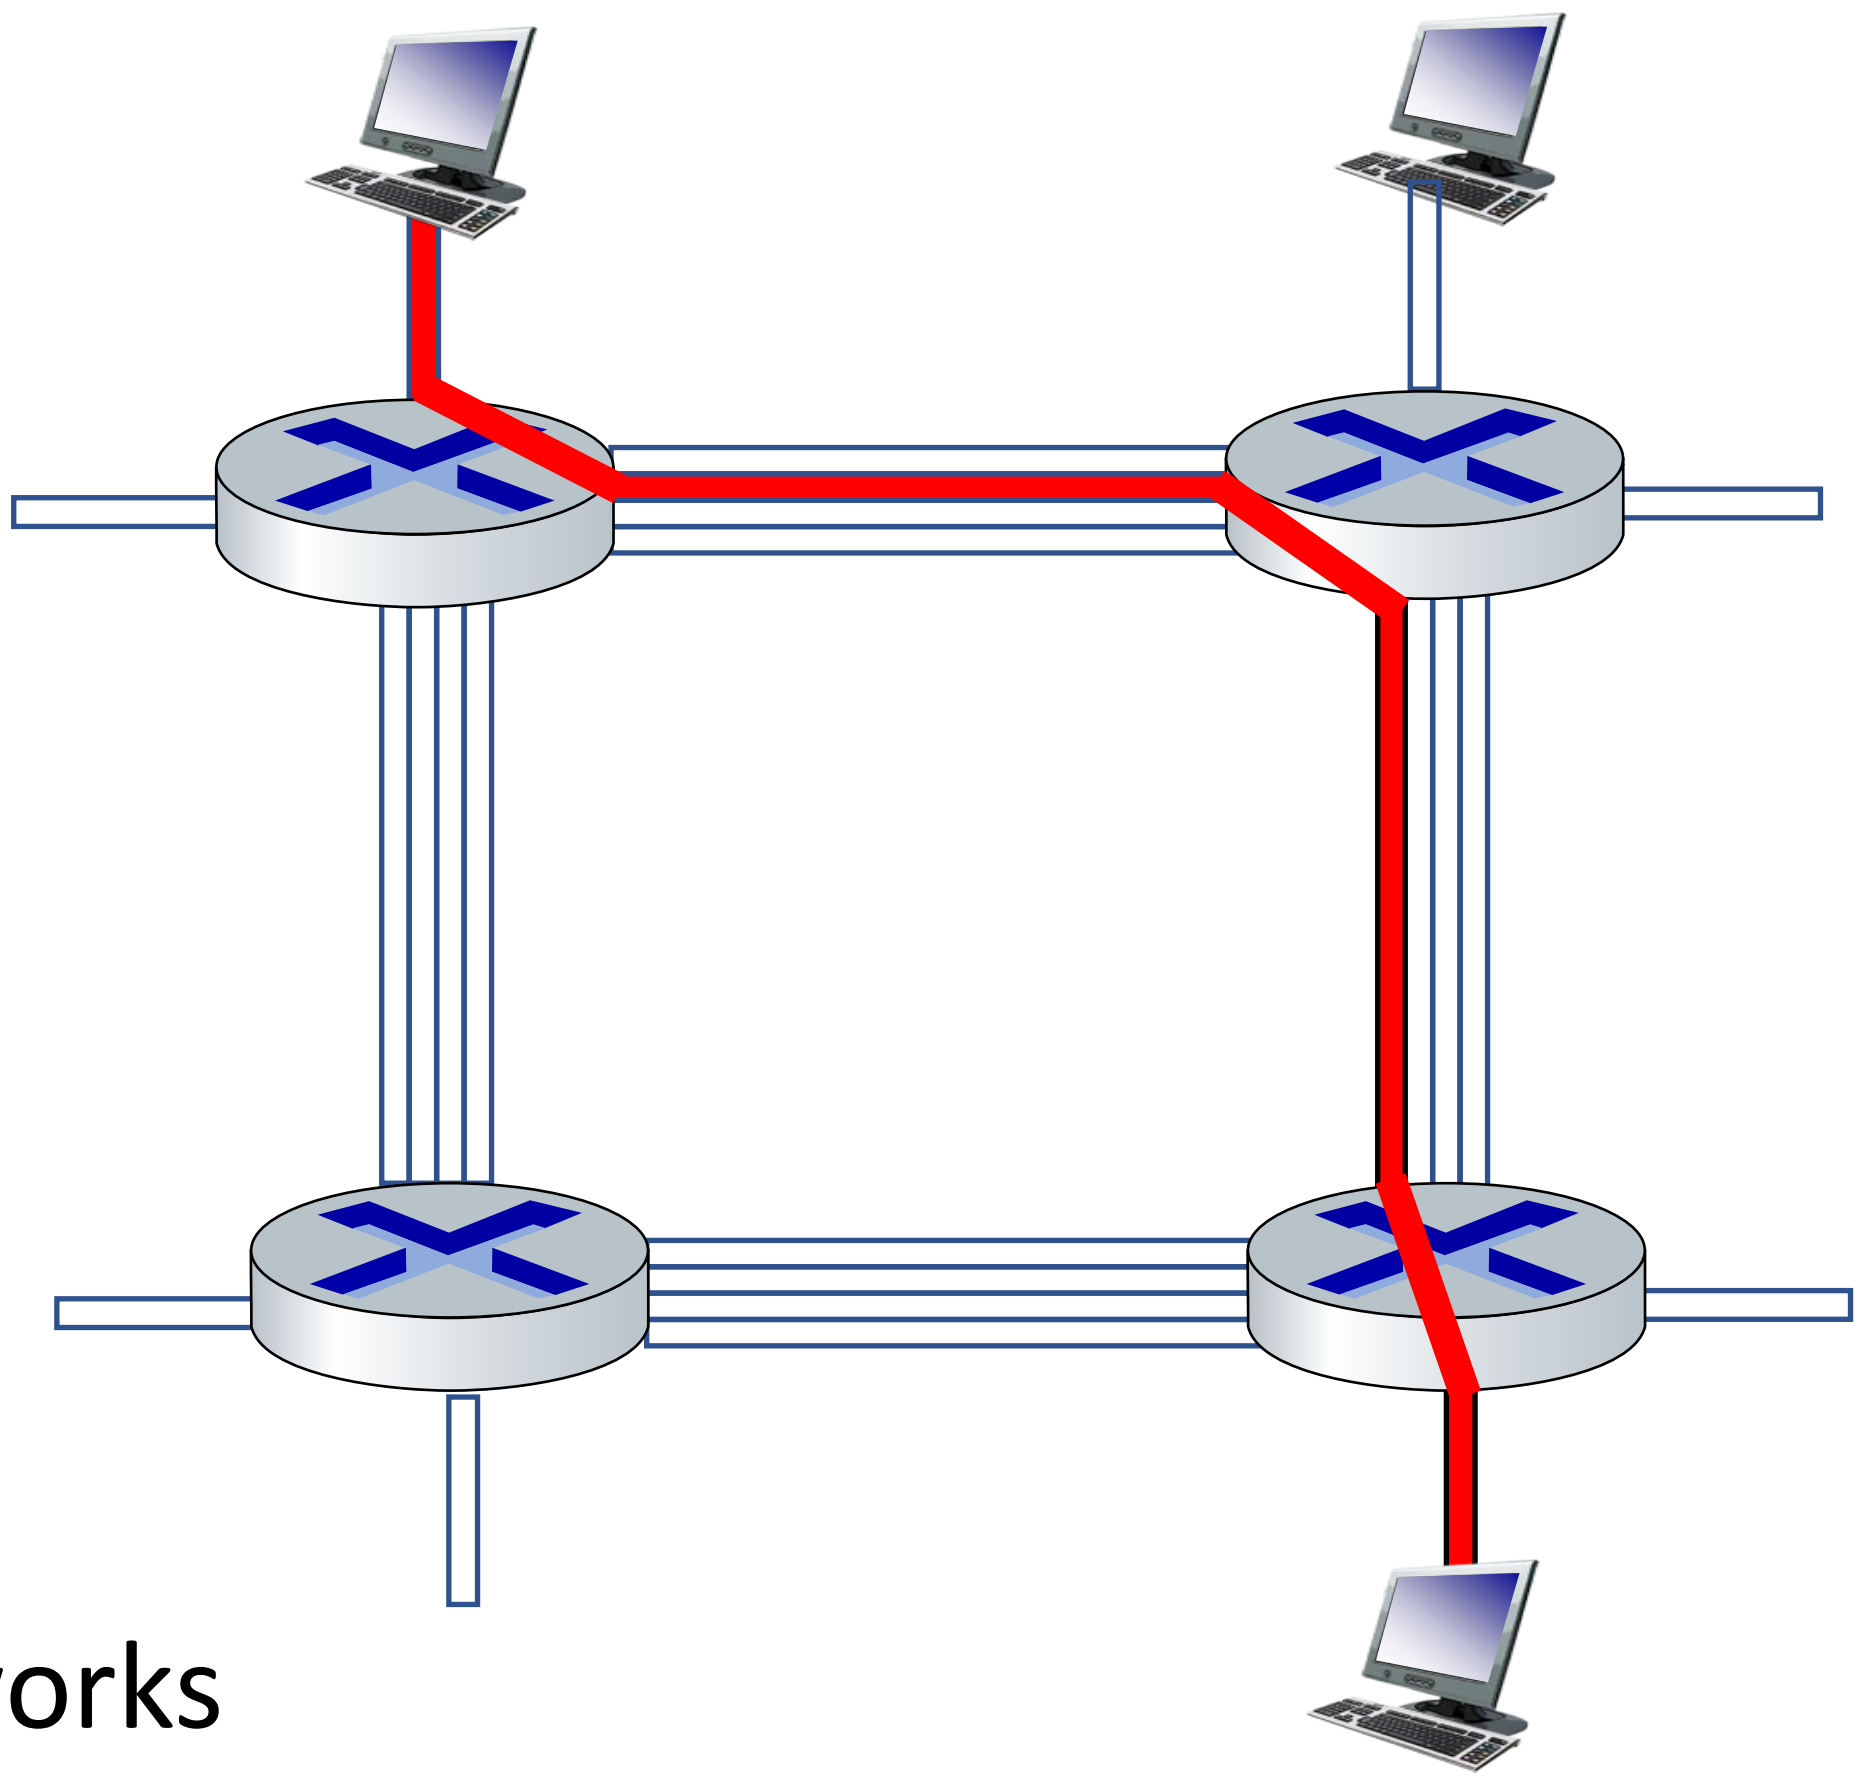

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Circuit switching: FDM and TDM

Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands
- each call allocated its own band, can transmit at max rate of that narrow band

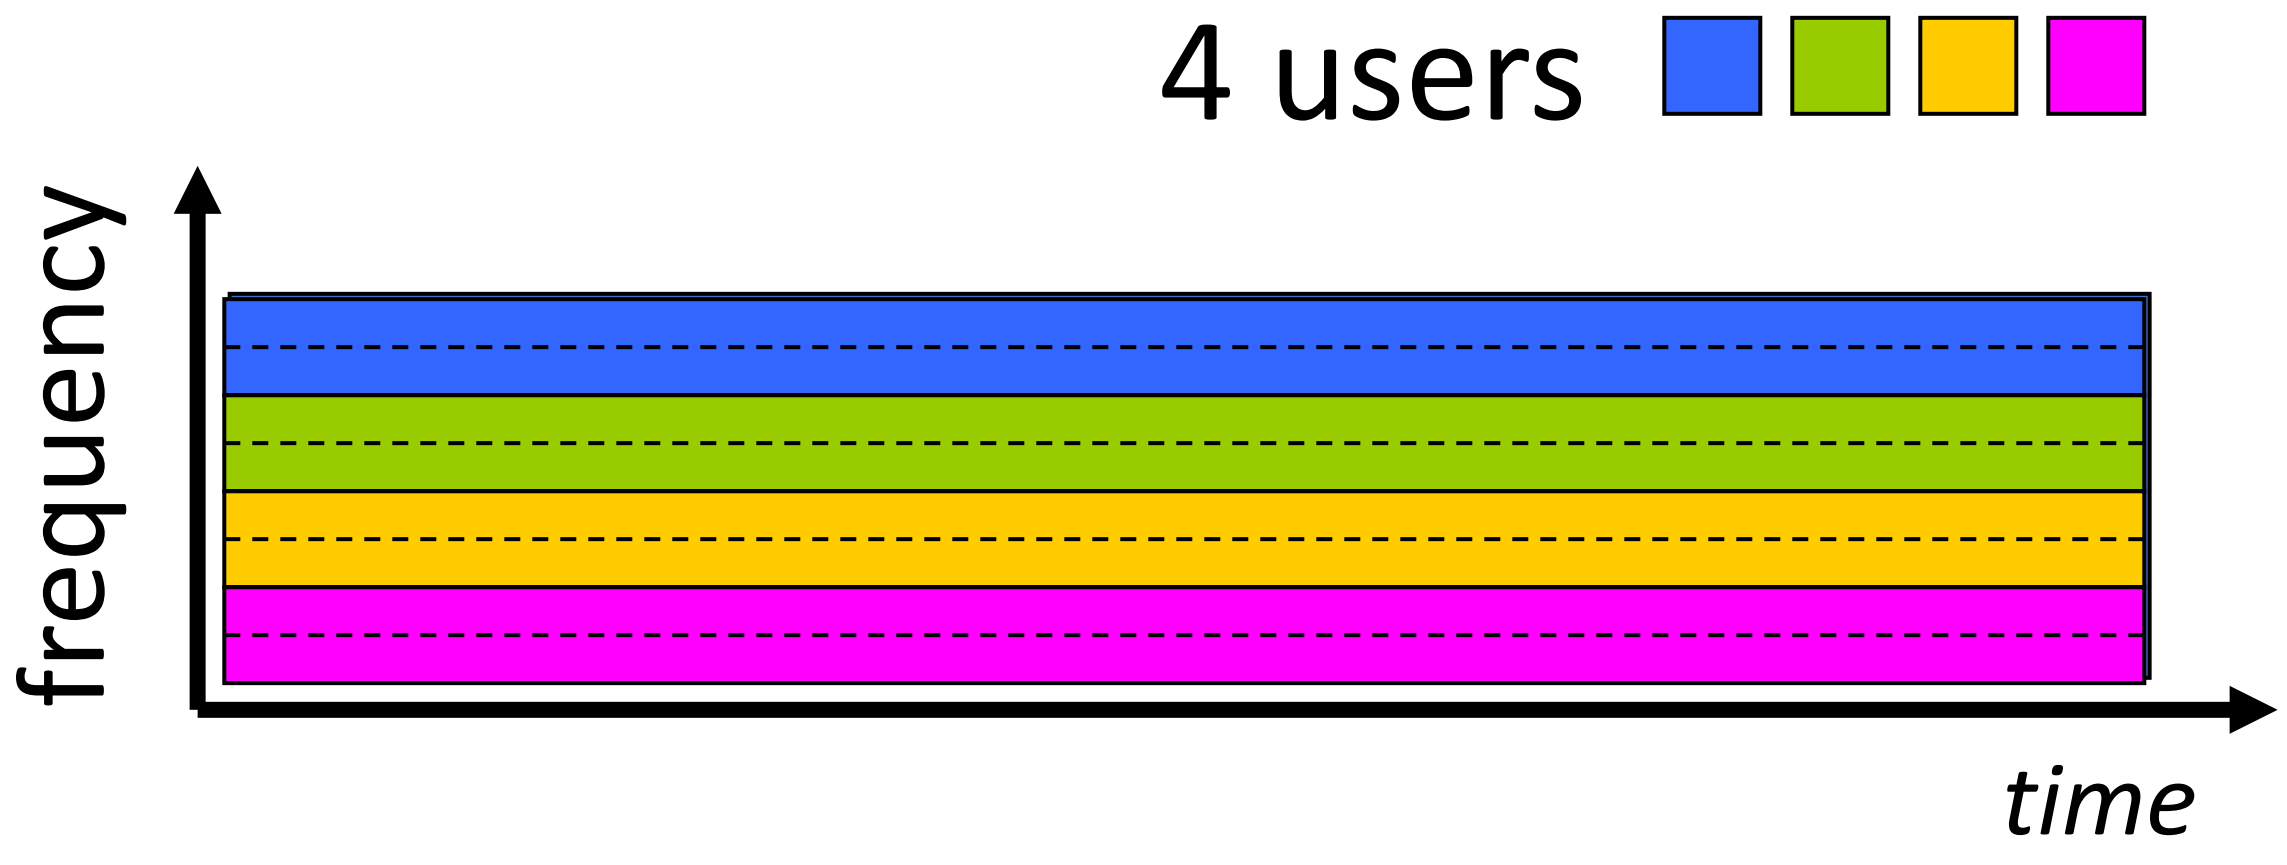

Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band (only) during its time slot(s)

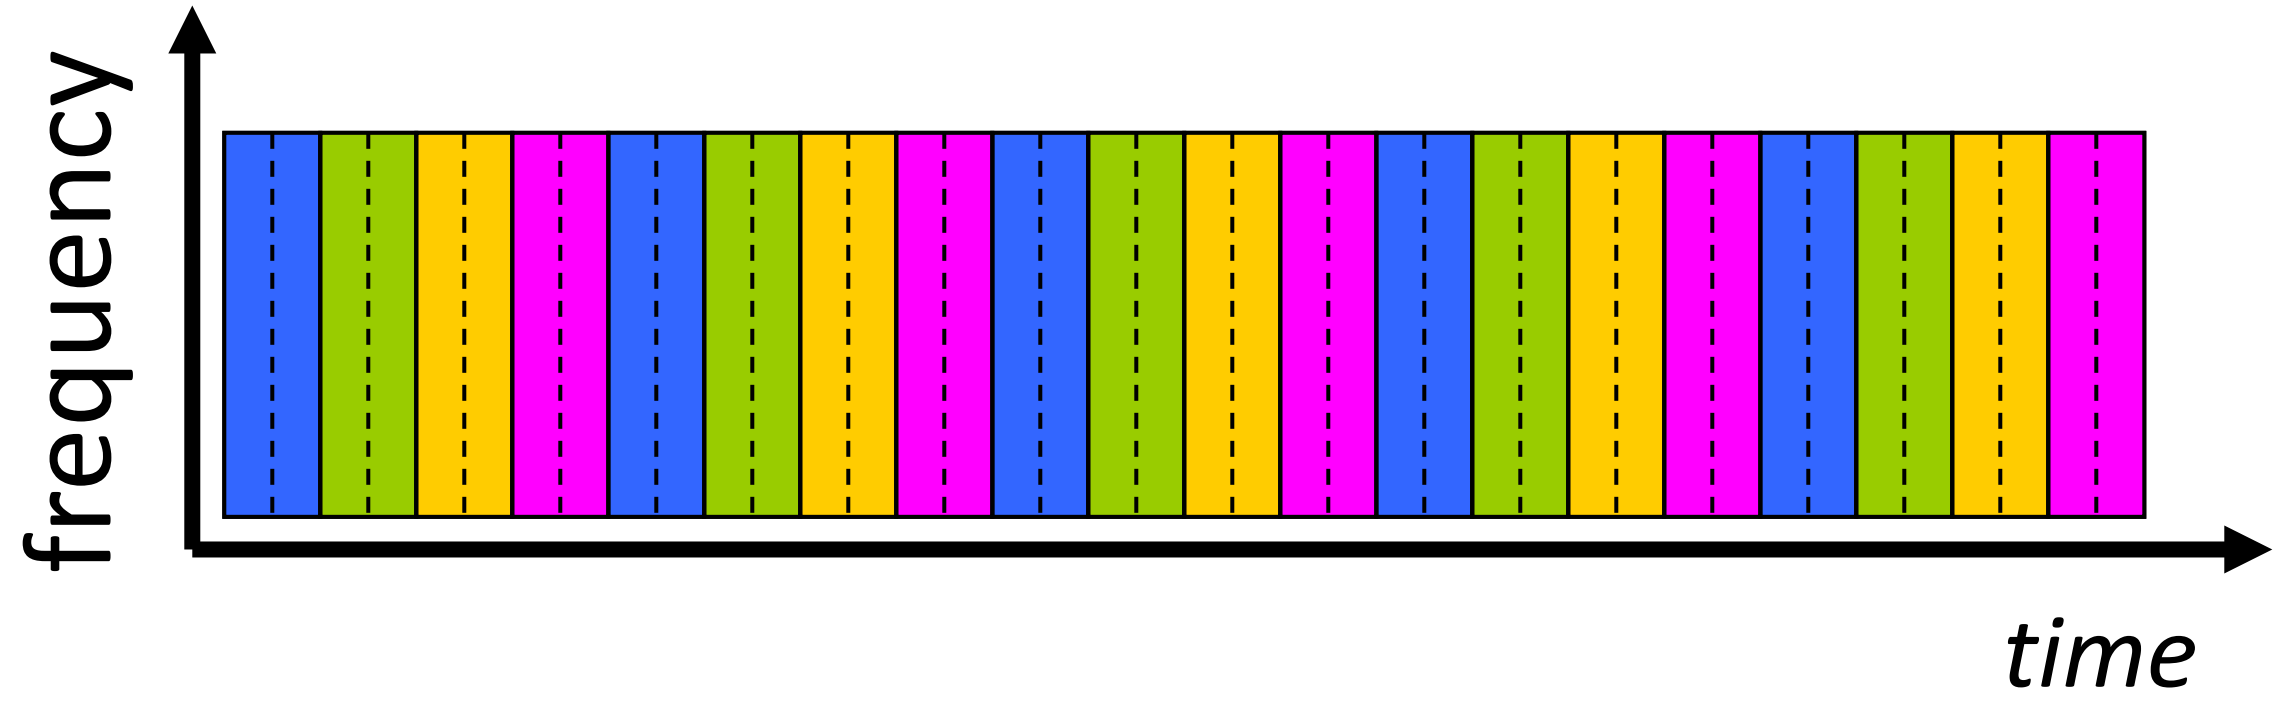

Packet switching versus circuit switching

example:

- 1 Gb/s link
- each user:
  - 100 Mb/s when "active"
  - active 10% of time

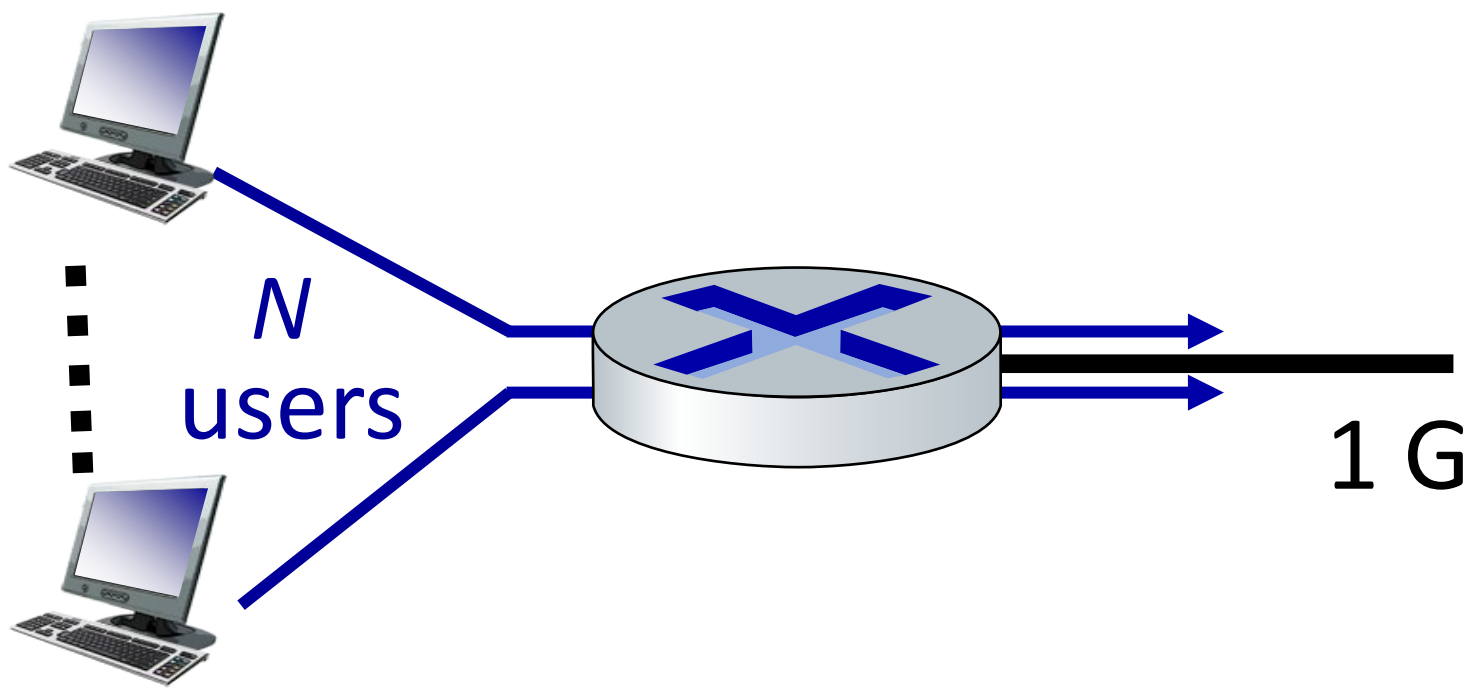

Q: how many users can use this network under circuit-switching and packet switching?

- *circuit-switching:* 10 users
- *packet switching:* with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

A: HW problem (for those with course in probability only)

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Proof: with 35 users, probability > 10 active at same time is less than .0004

- Problem Setup:
  - Number of users: 35
  - Probability of each user being active: 10% = 0.1
  - We want to find P(X > 10), where X is the number of active users
- Calculation:
  - We need to calculate the probability of having 10 or fewer active users at the same time, then subtract that from 1 to get the probability of having 11 or more users active at the same time.
  - First, we calculate P(X ≤ 10) using the cumulative binomial probability function:
    - $P(X \leq 10) = \sum(k=0 \text{ to } 10)\ C(35,k) * 0.1^k * 0.9^{(35-k)}$
    - Where C(35,k) is the binomial coefficient "35 choose k".
    - Each term is probability of k users being active and (35-k) users being idle
  - Then, we can find P(X > 10) by subtracting from 1:
    - $P(X > 10) = 1 - P(X \leq 10) \approx 0.0003846$

Packet switching versus circuit switching

Is packet switching a "slam dunk winner"?

- great for "bursty" data – sometimes has data to send, but at other times not
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss due to buffer overflow
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior with packet-switching?
  - "It's complicated." We'll study various techniques that try to make packet switching as "circuit-like" as possible.

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

Internet structure: a "network of networks"

- hosts connect to Internet via access Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
  - so that *any* two hosts *(anywhere!)* can send packets to each other
- resulting network of networks is very complex
  - evolution driven by economics, national policies

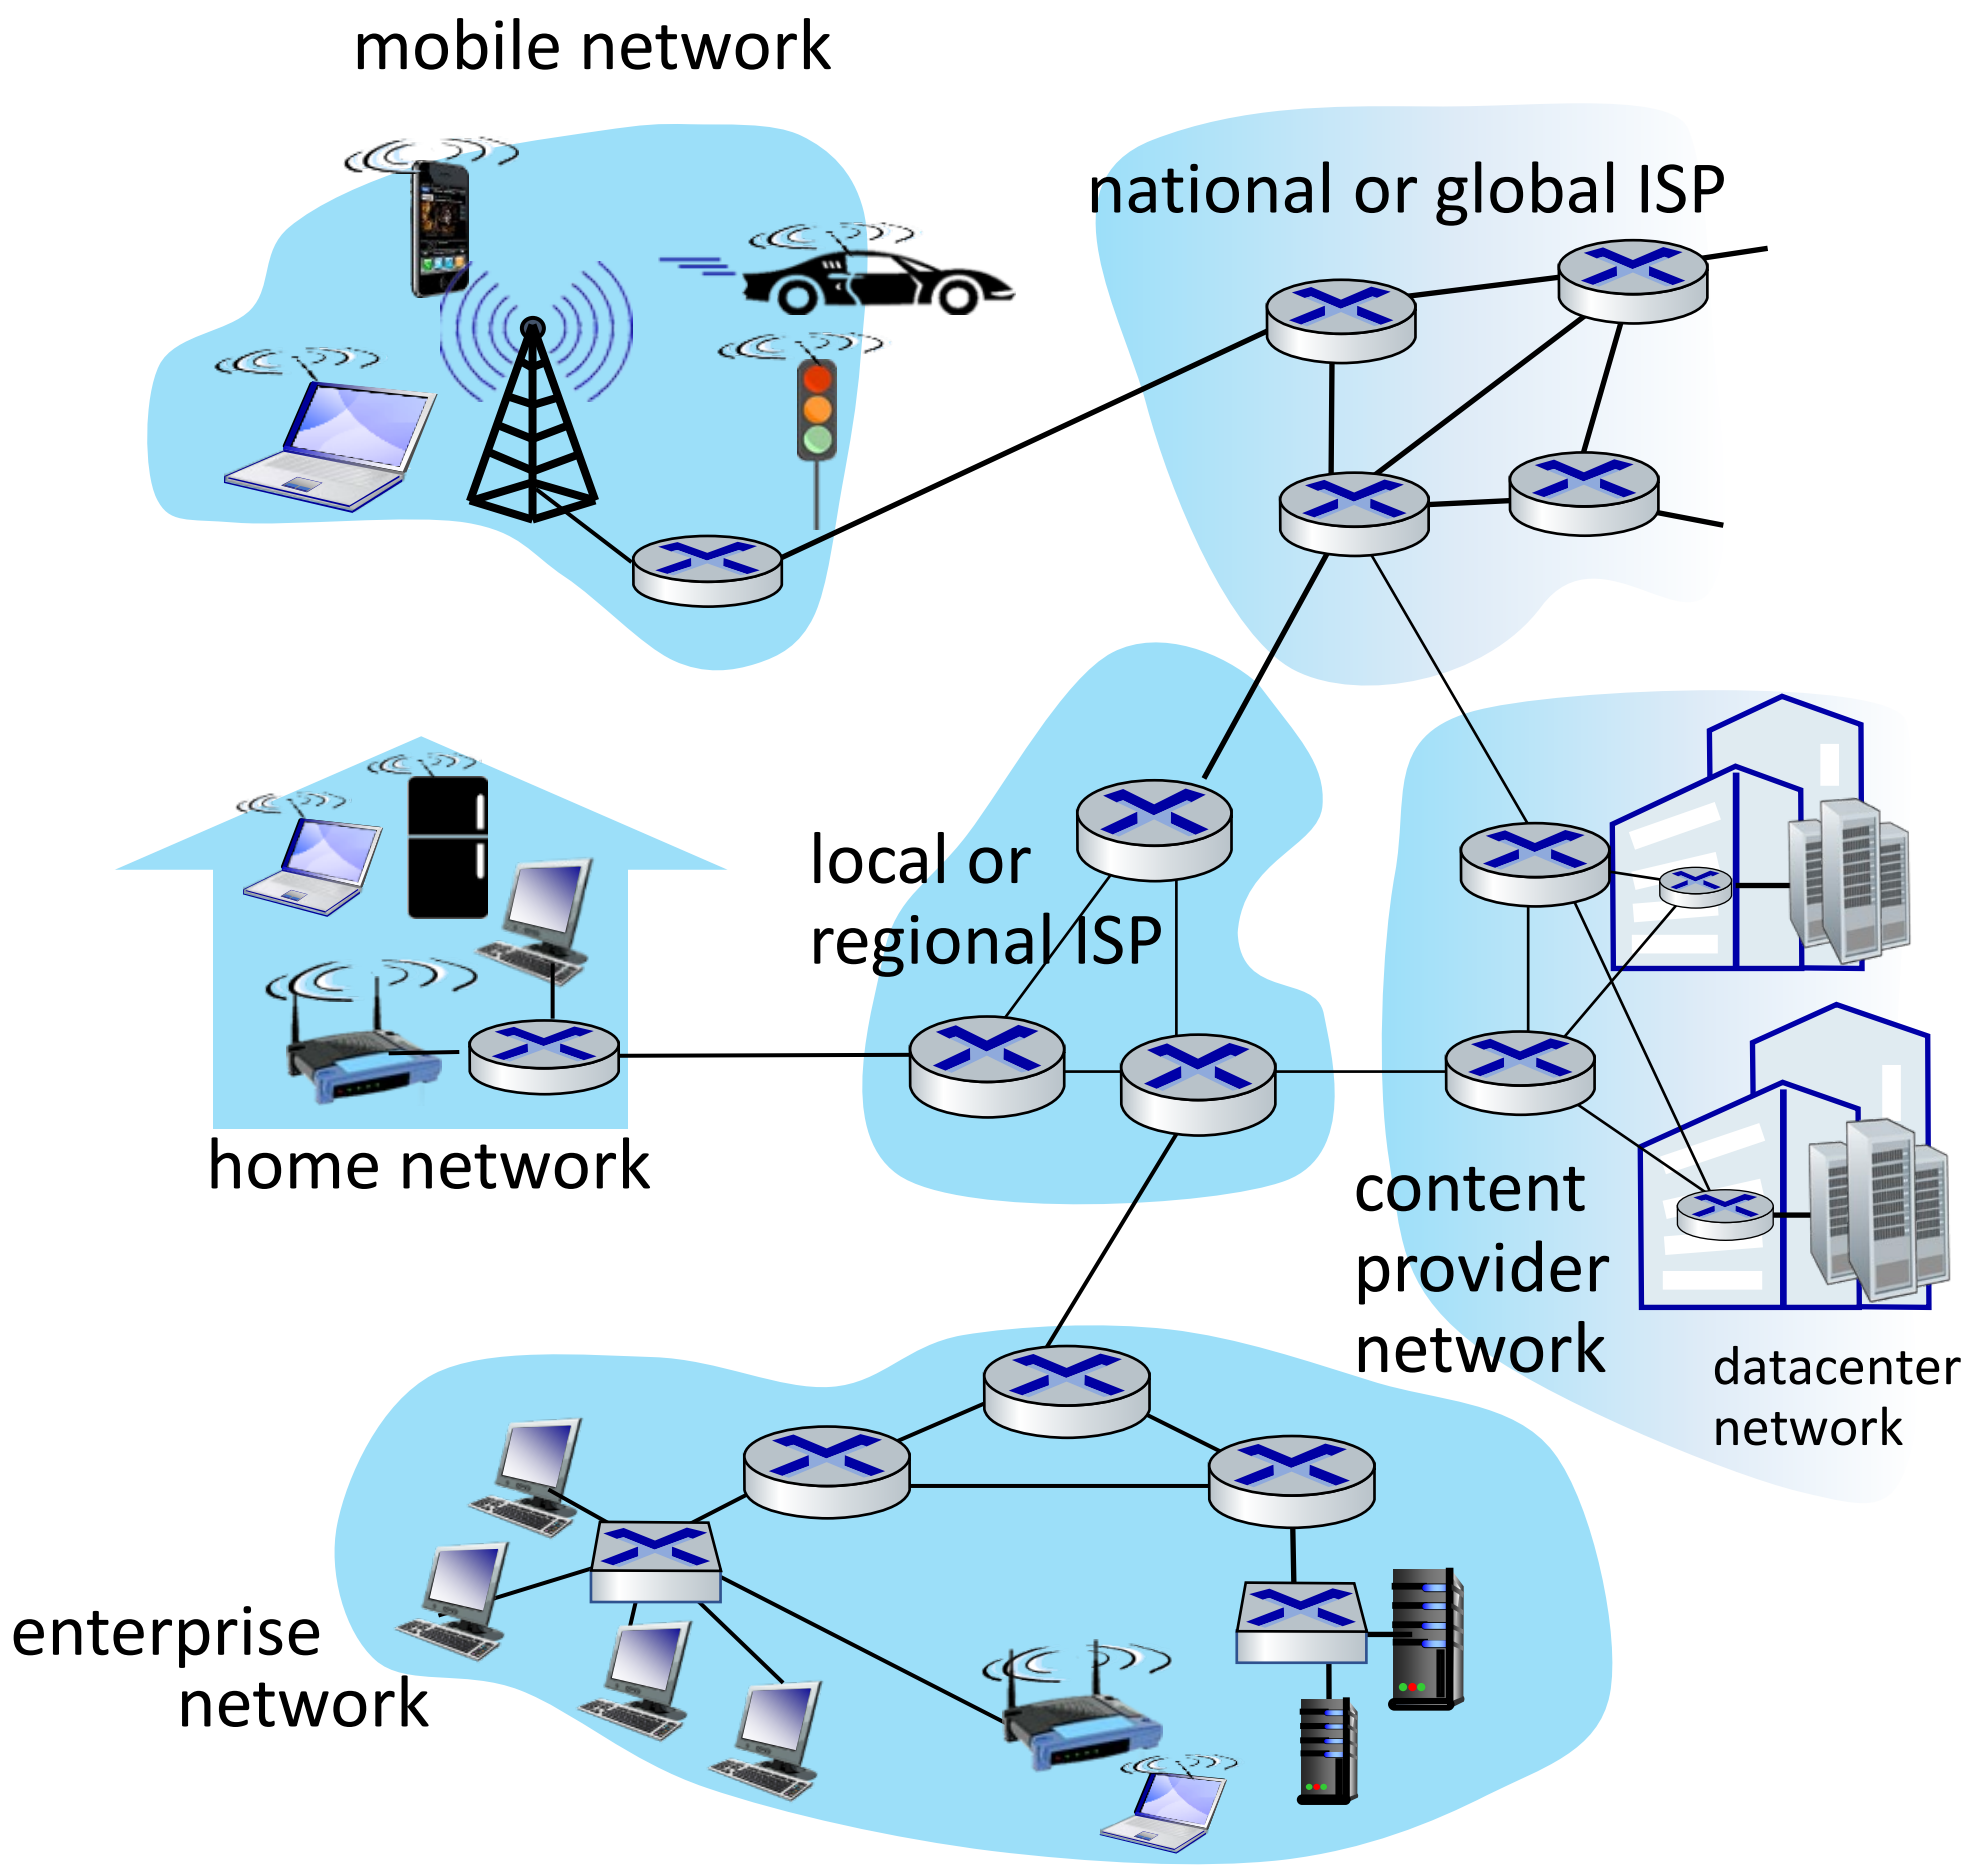

Let's take a stepwise approach to describe current Internet structure

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

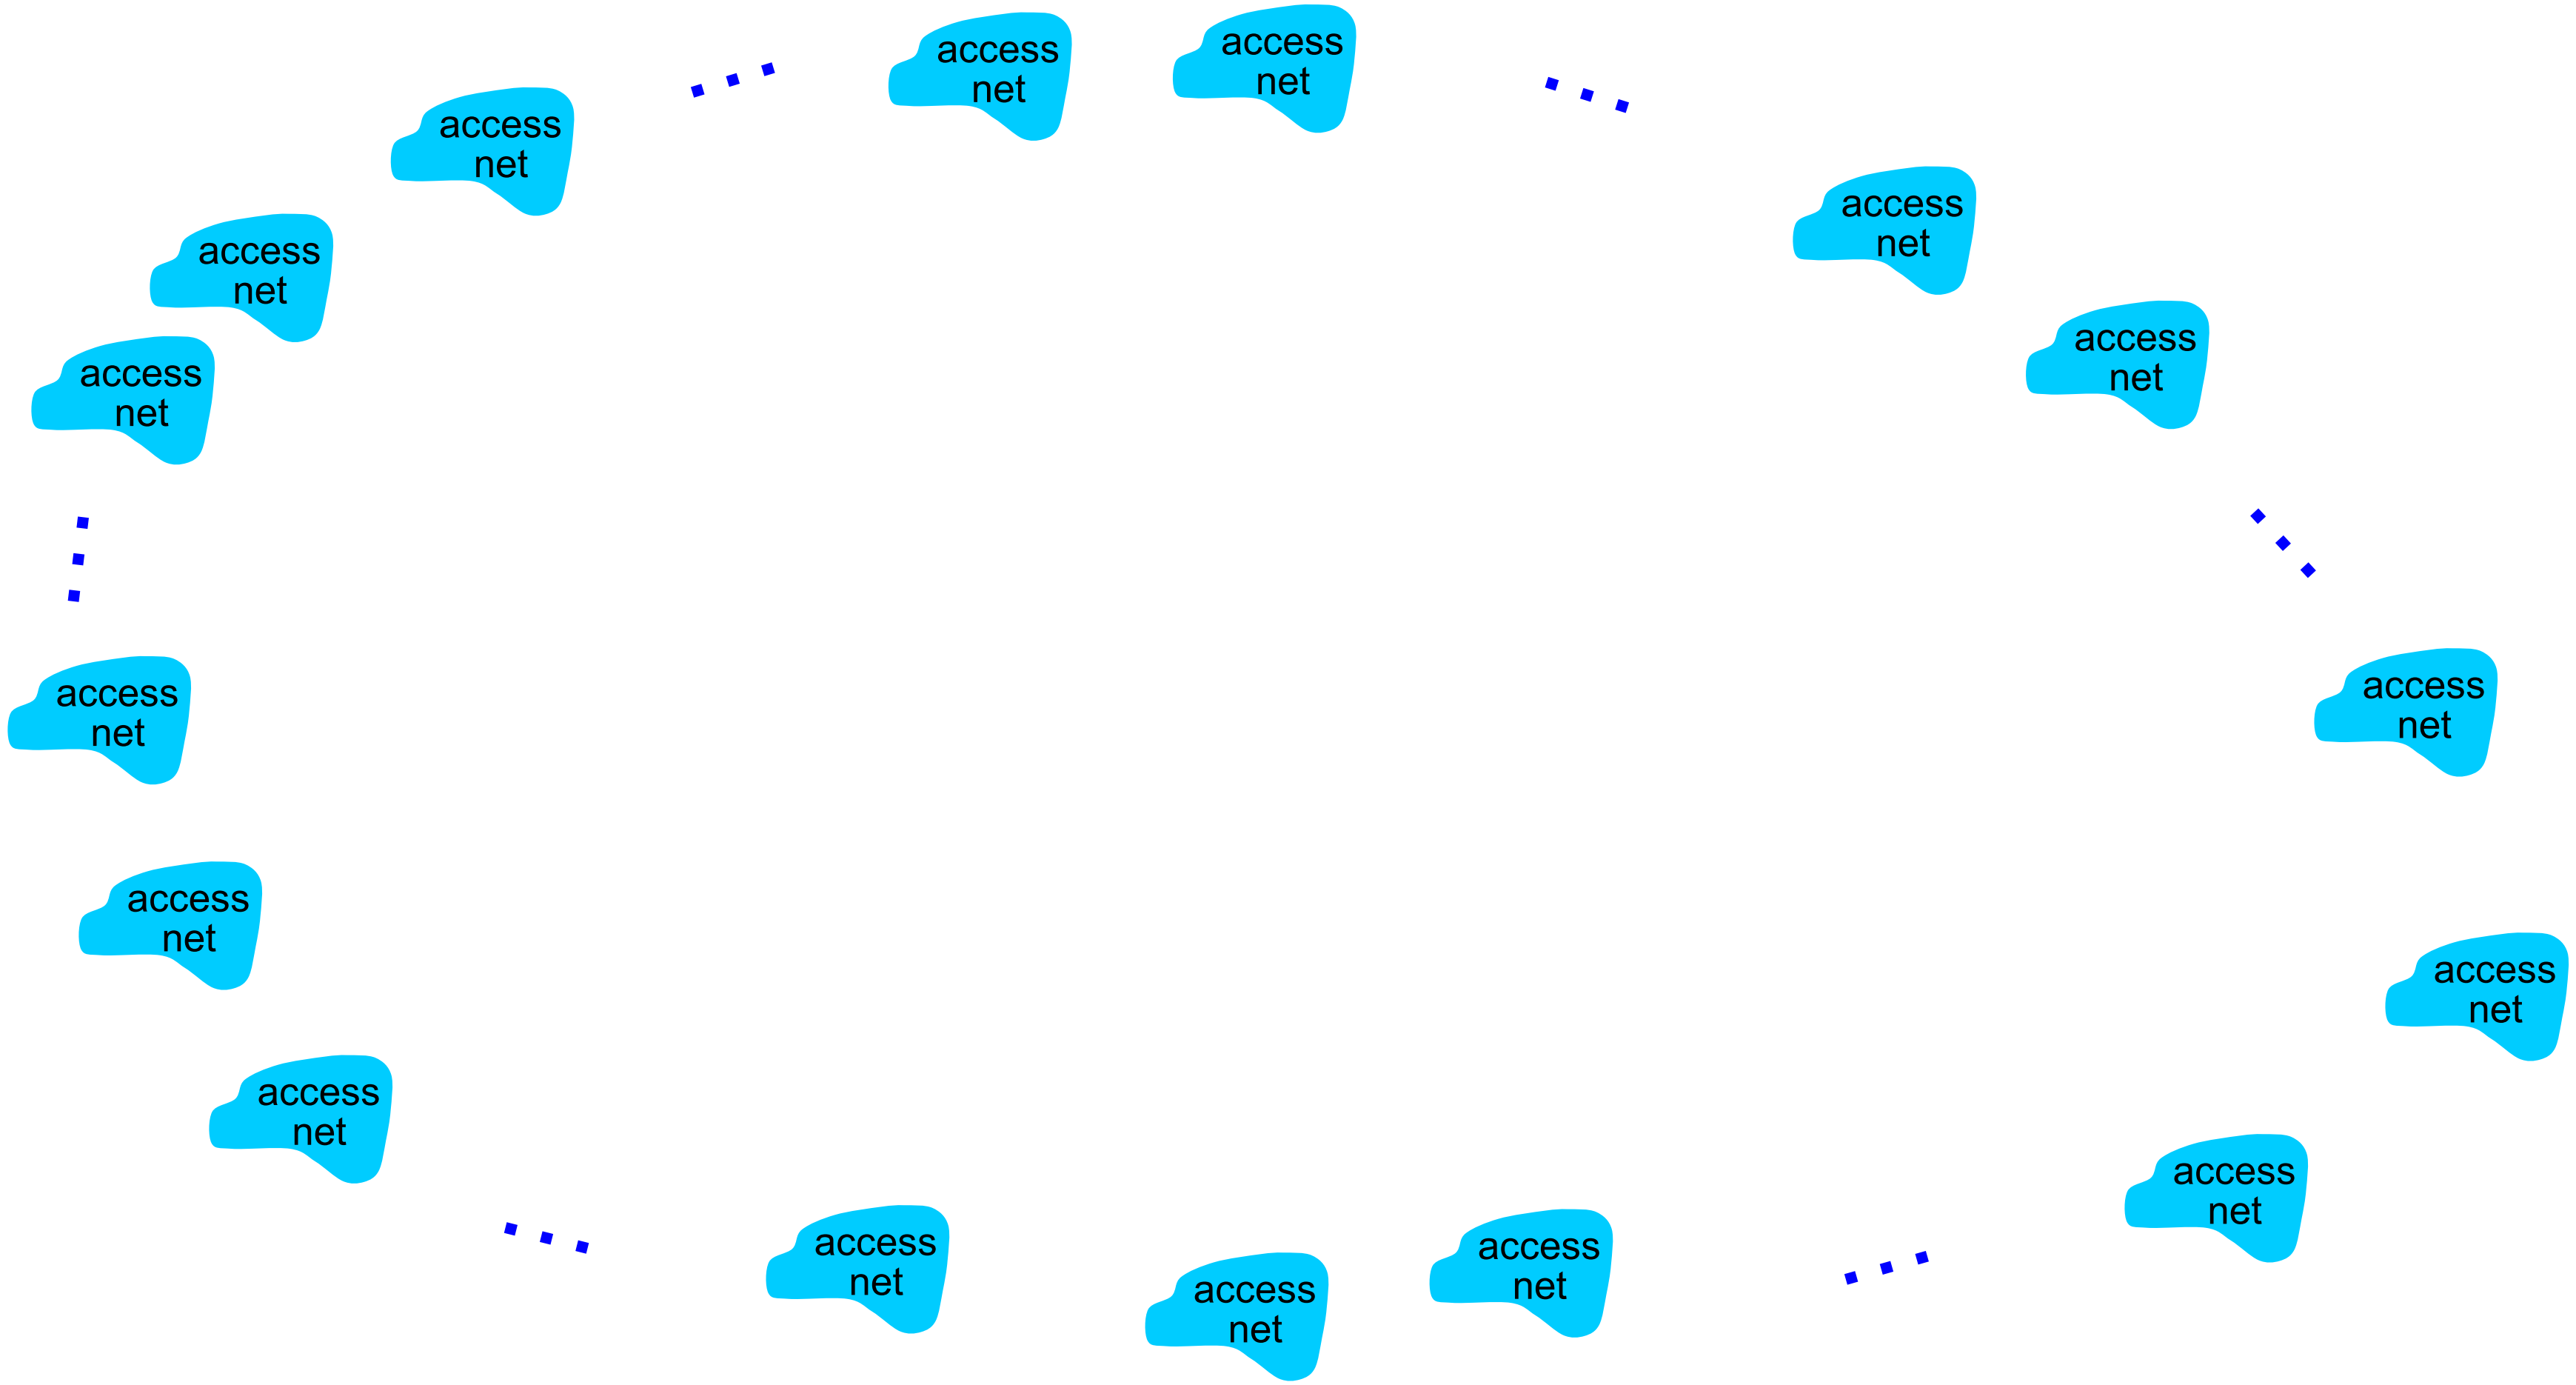

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

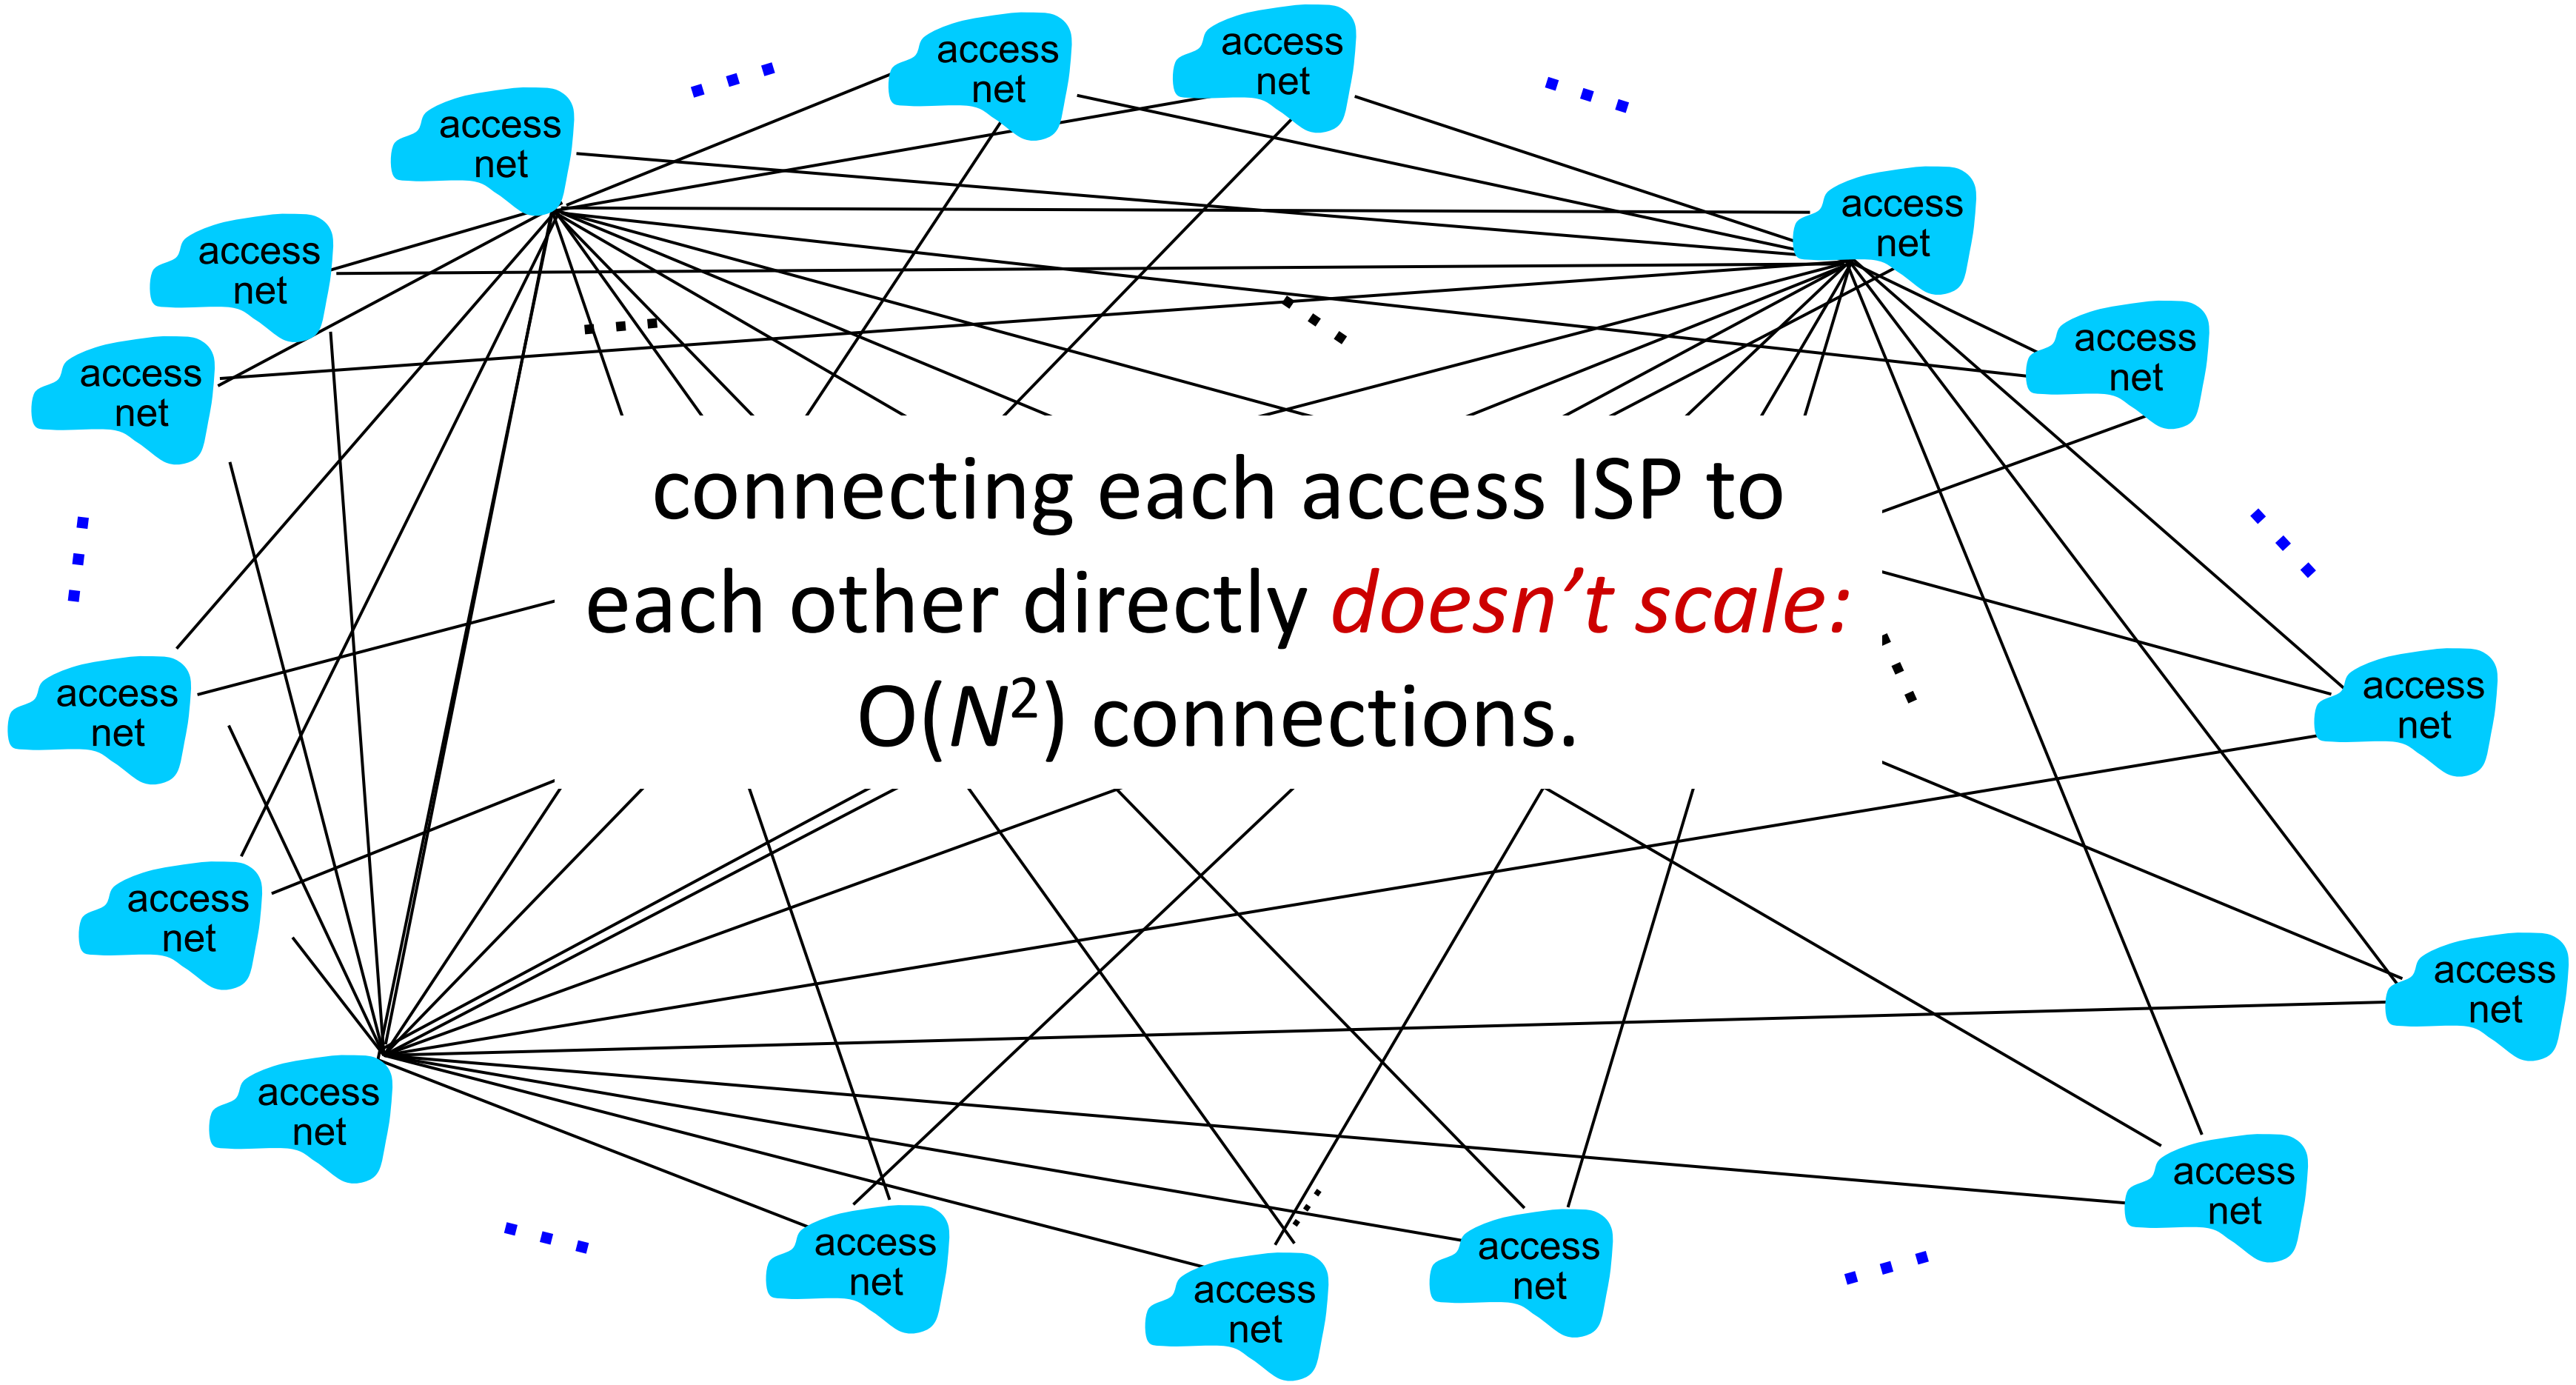

Internet structure: a "network of networks"

Option: connect each access ISP to one global transit ISP?
Customer and provider ISPs have economic agreement.

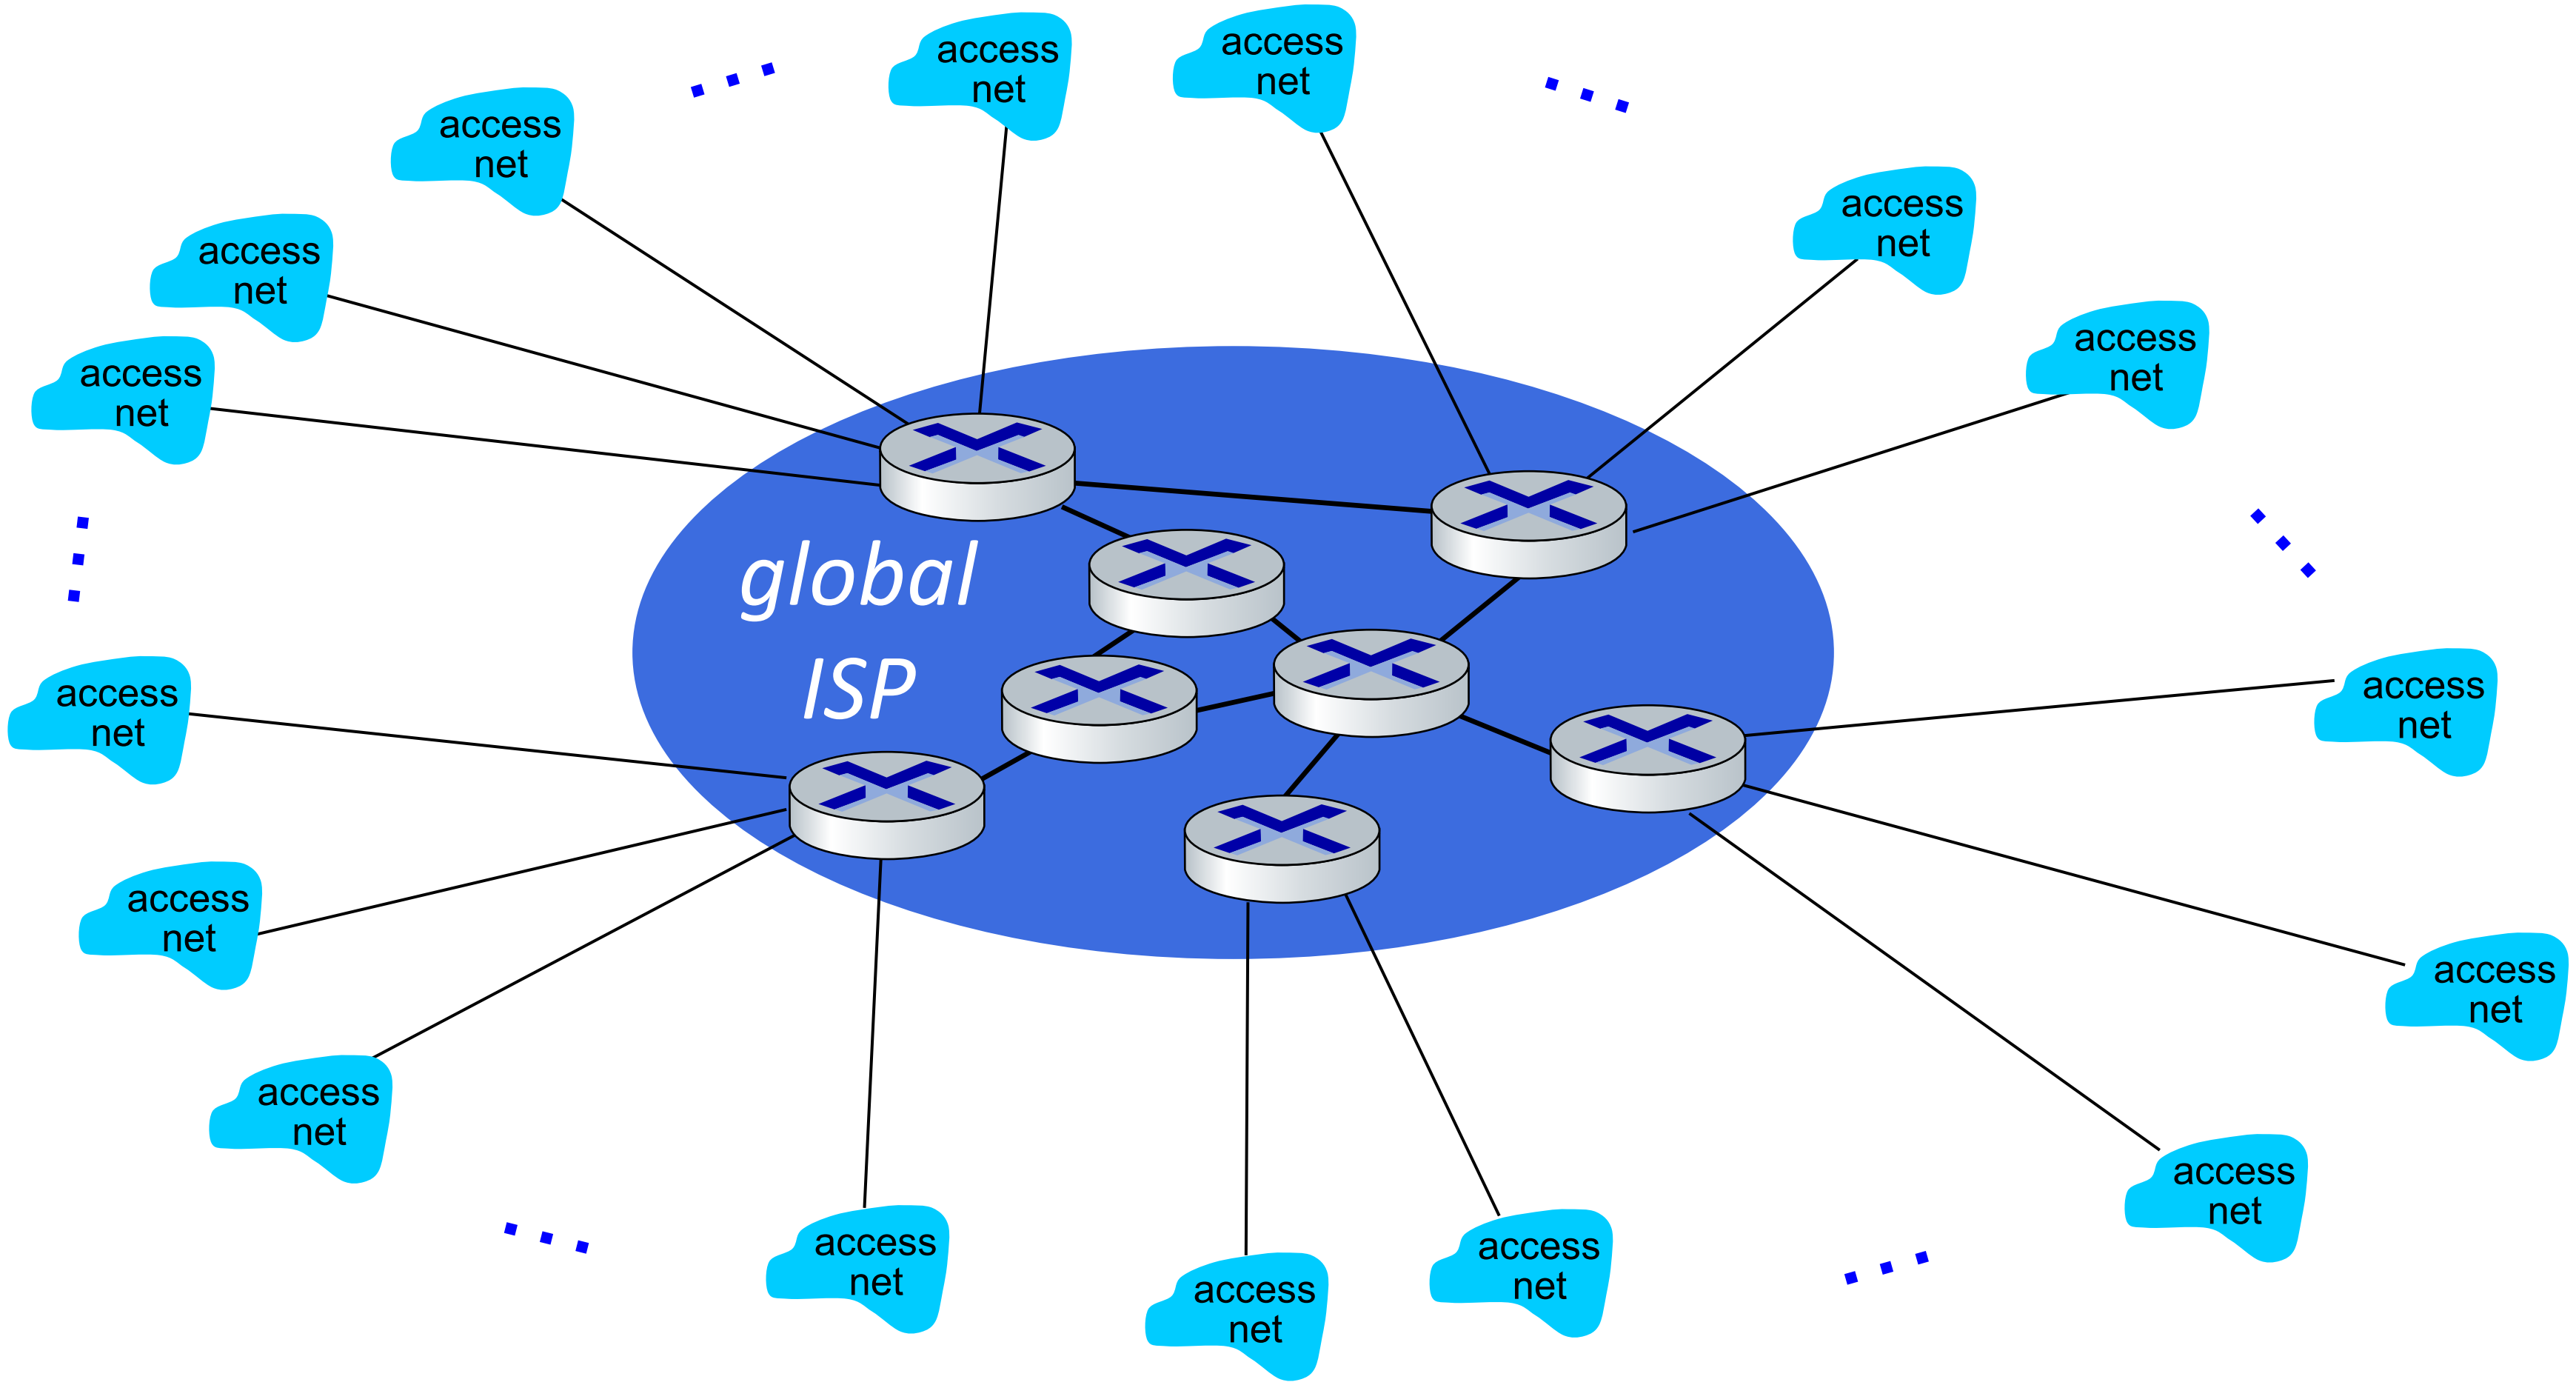

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors ….

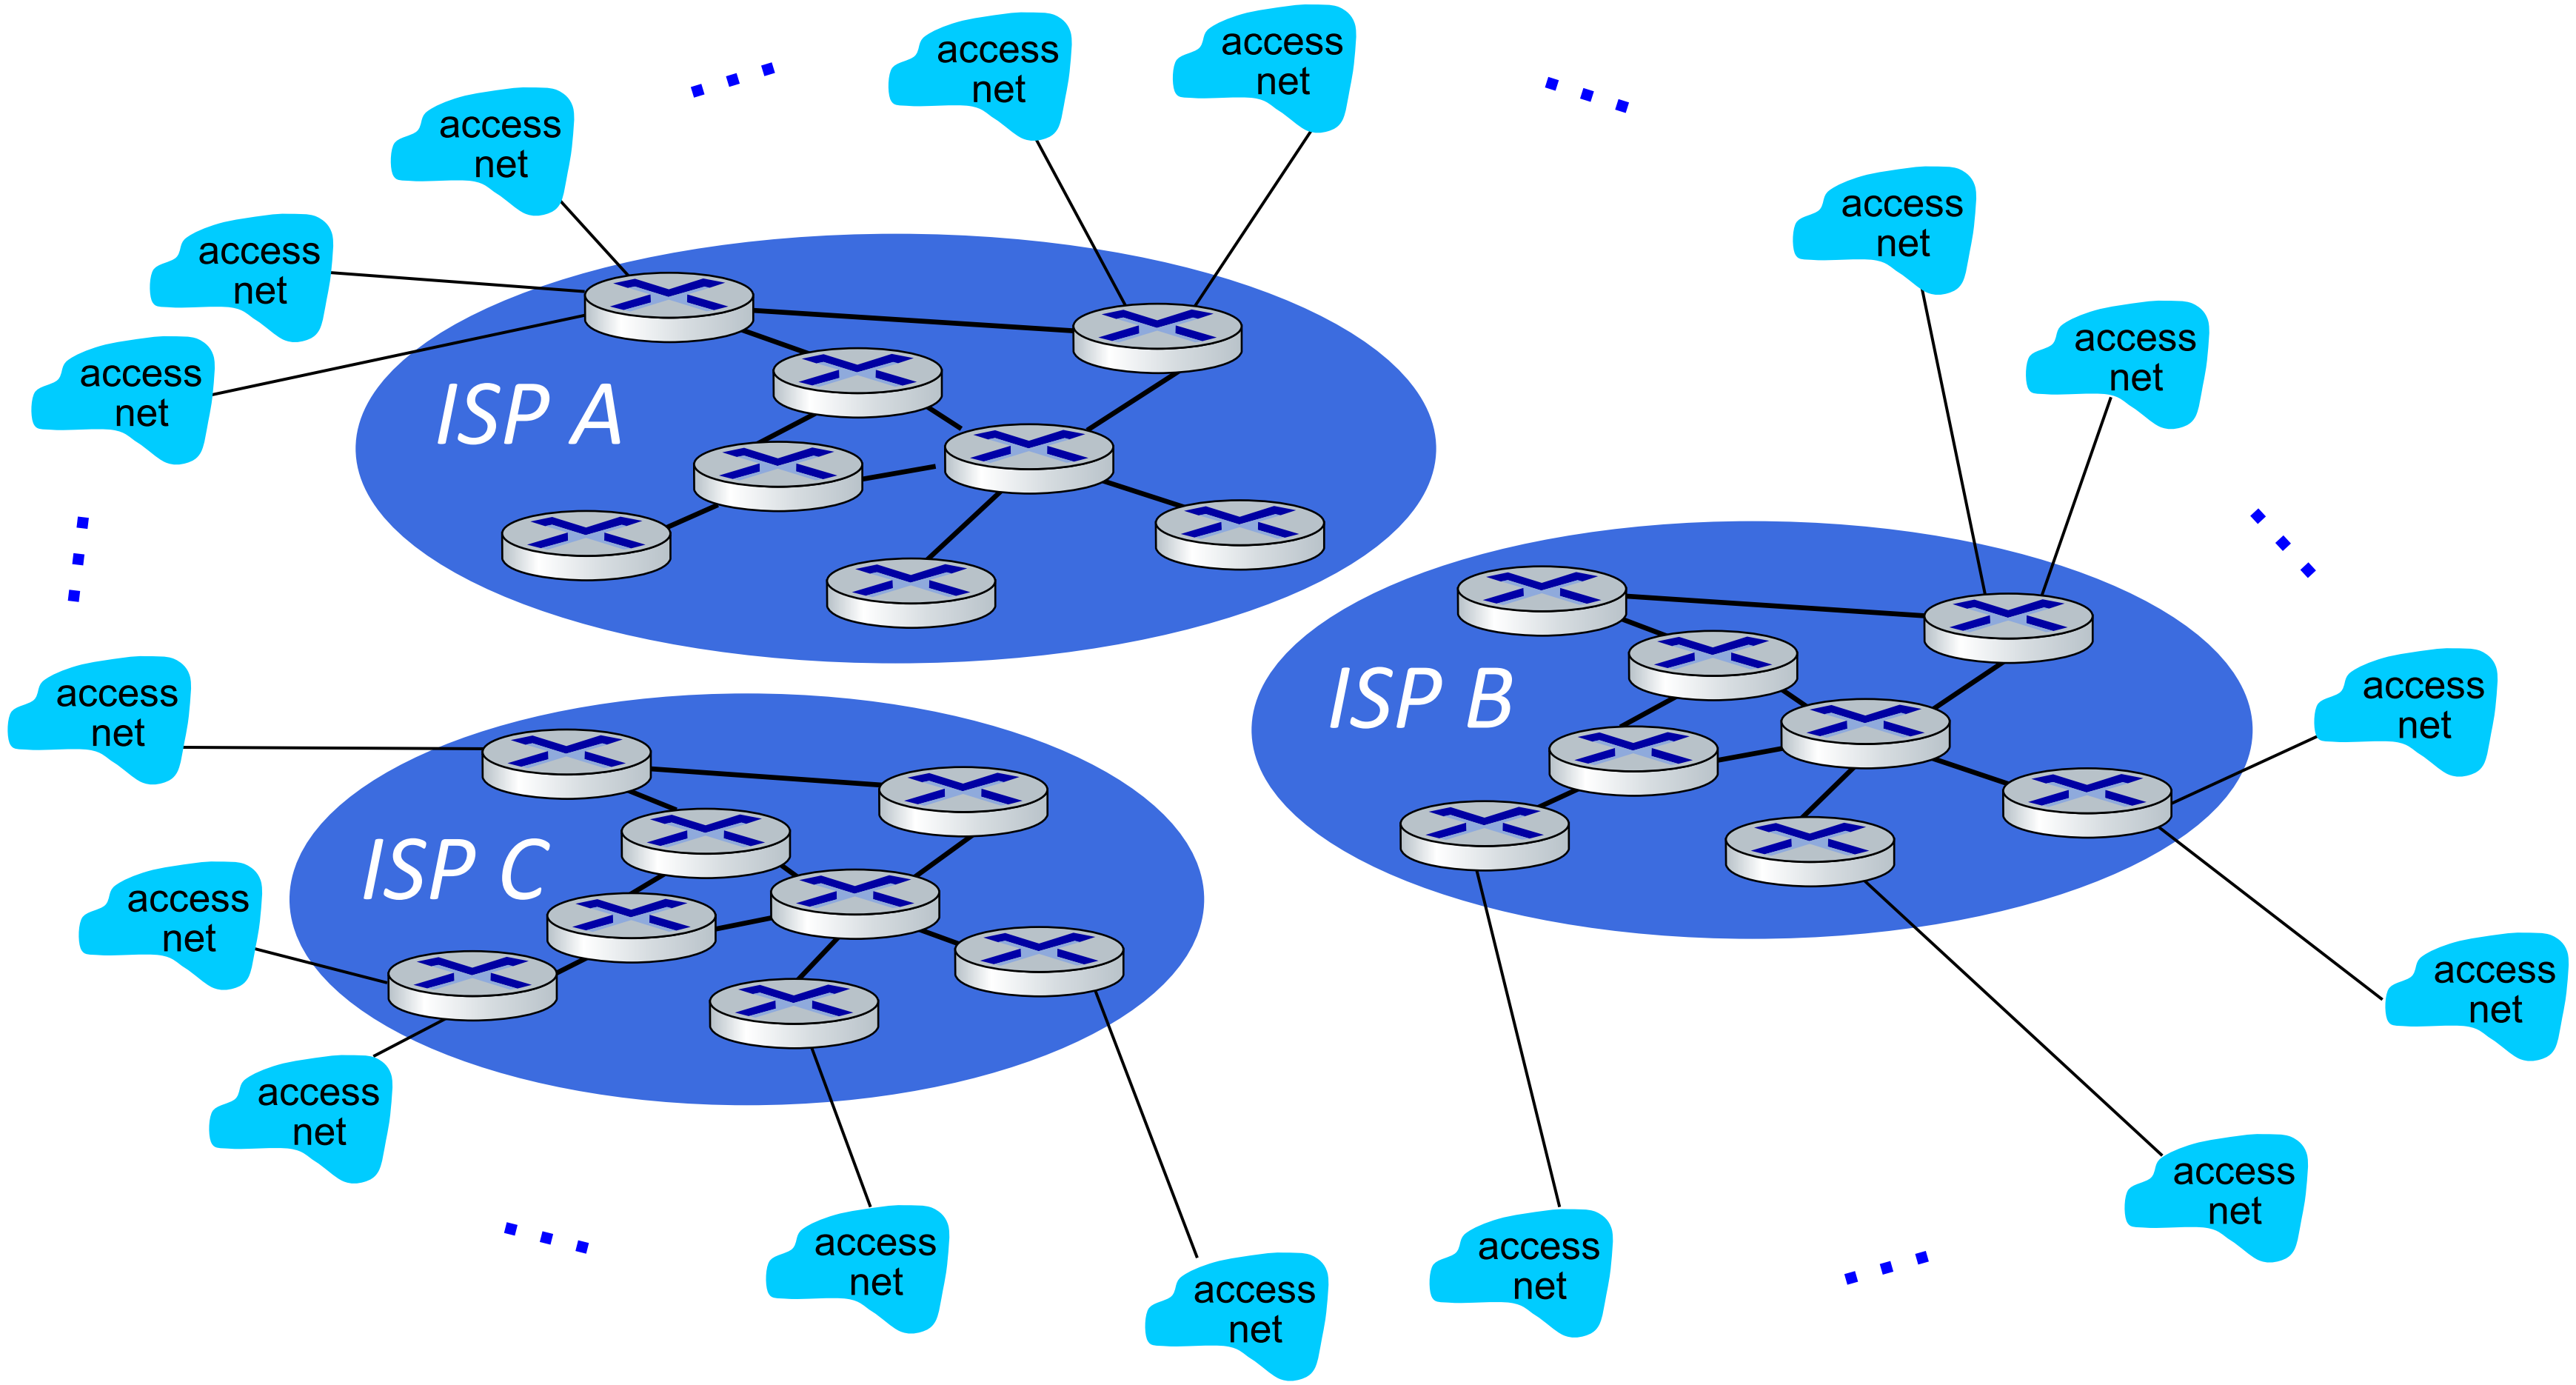

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors …. who will want to be connected

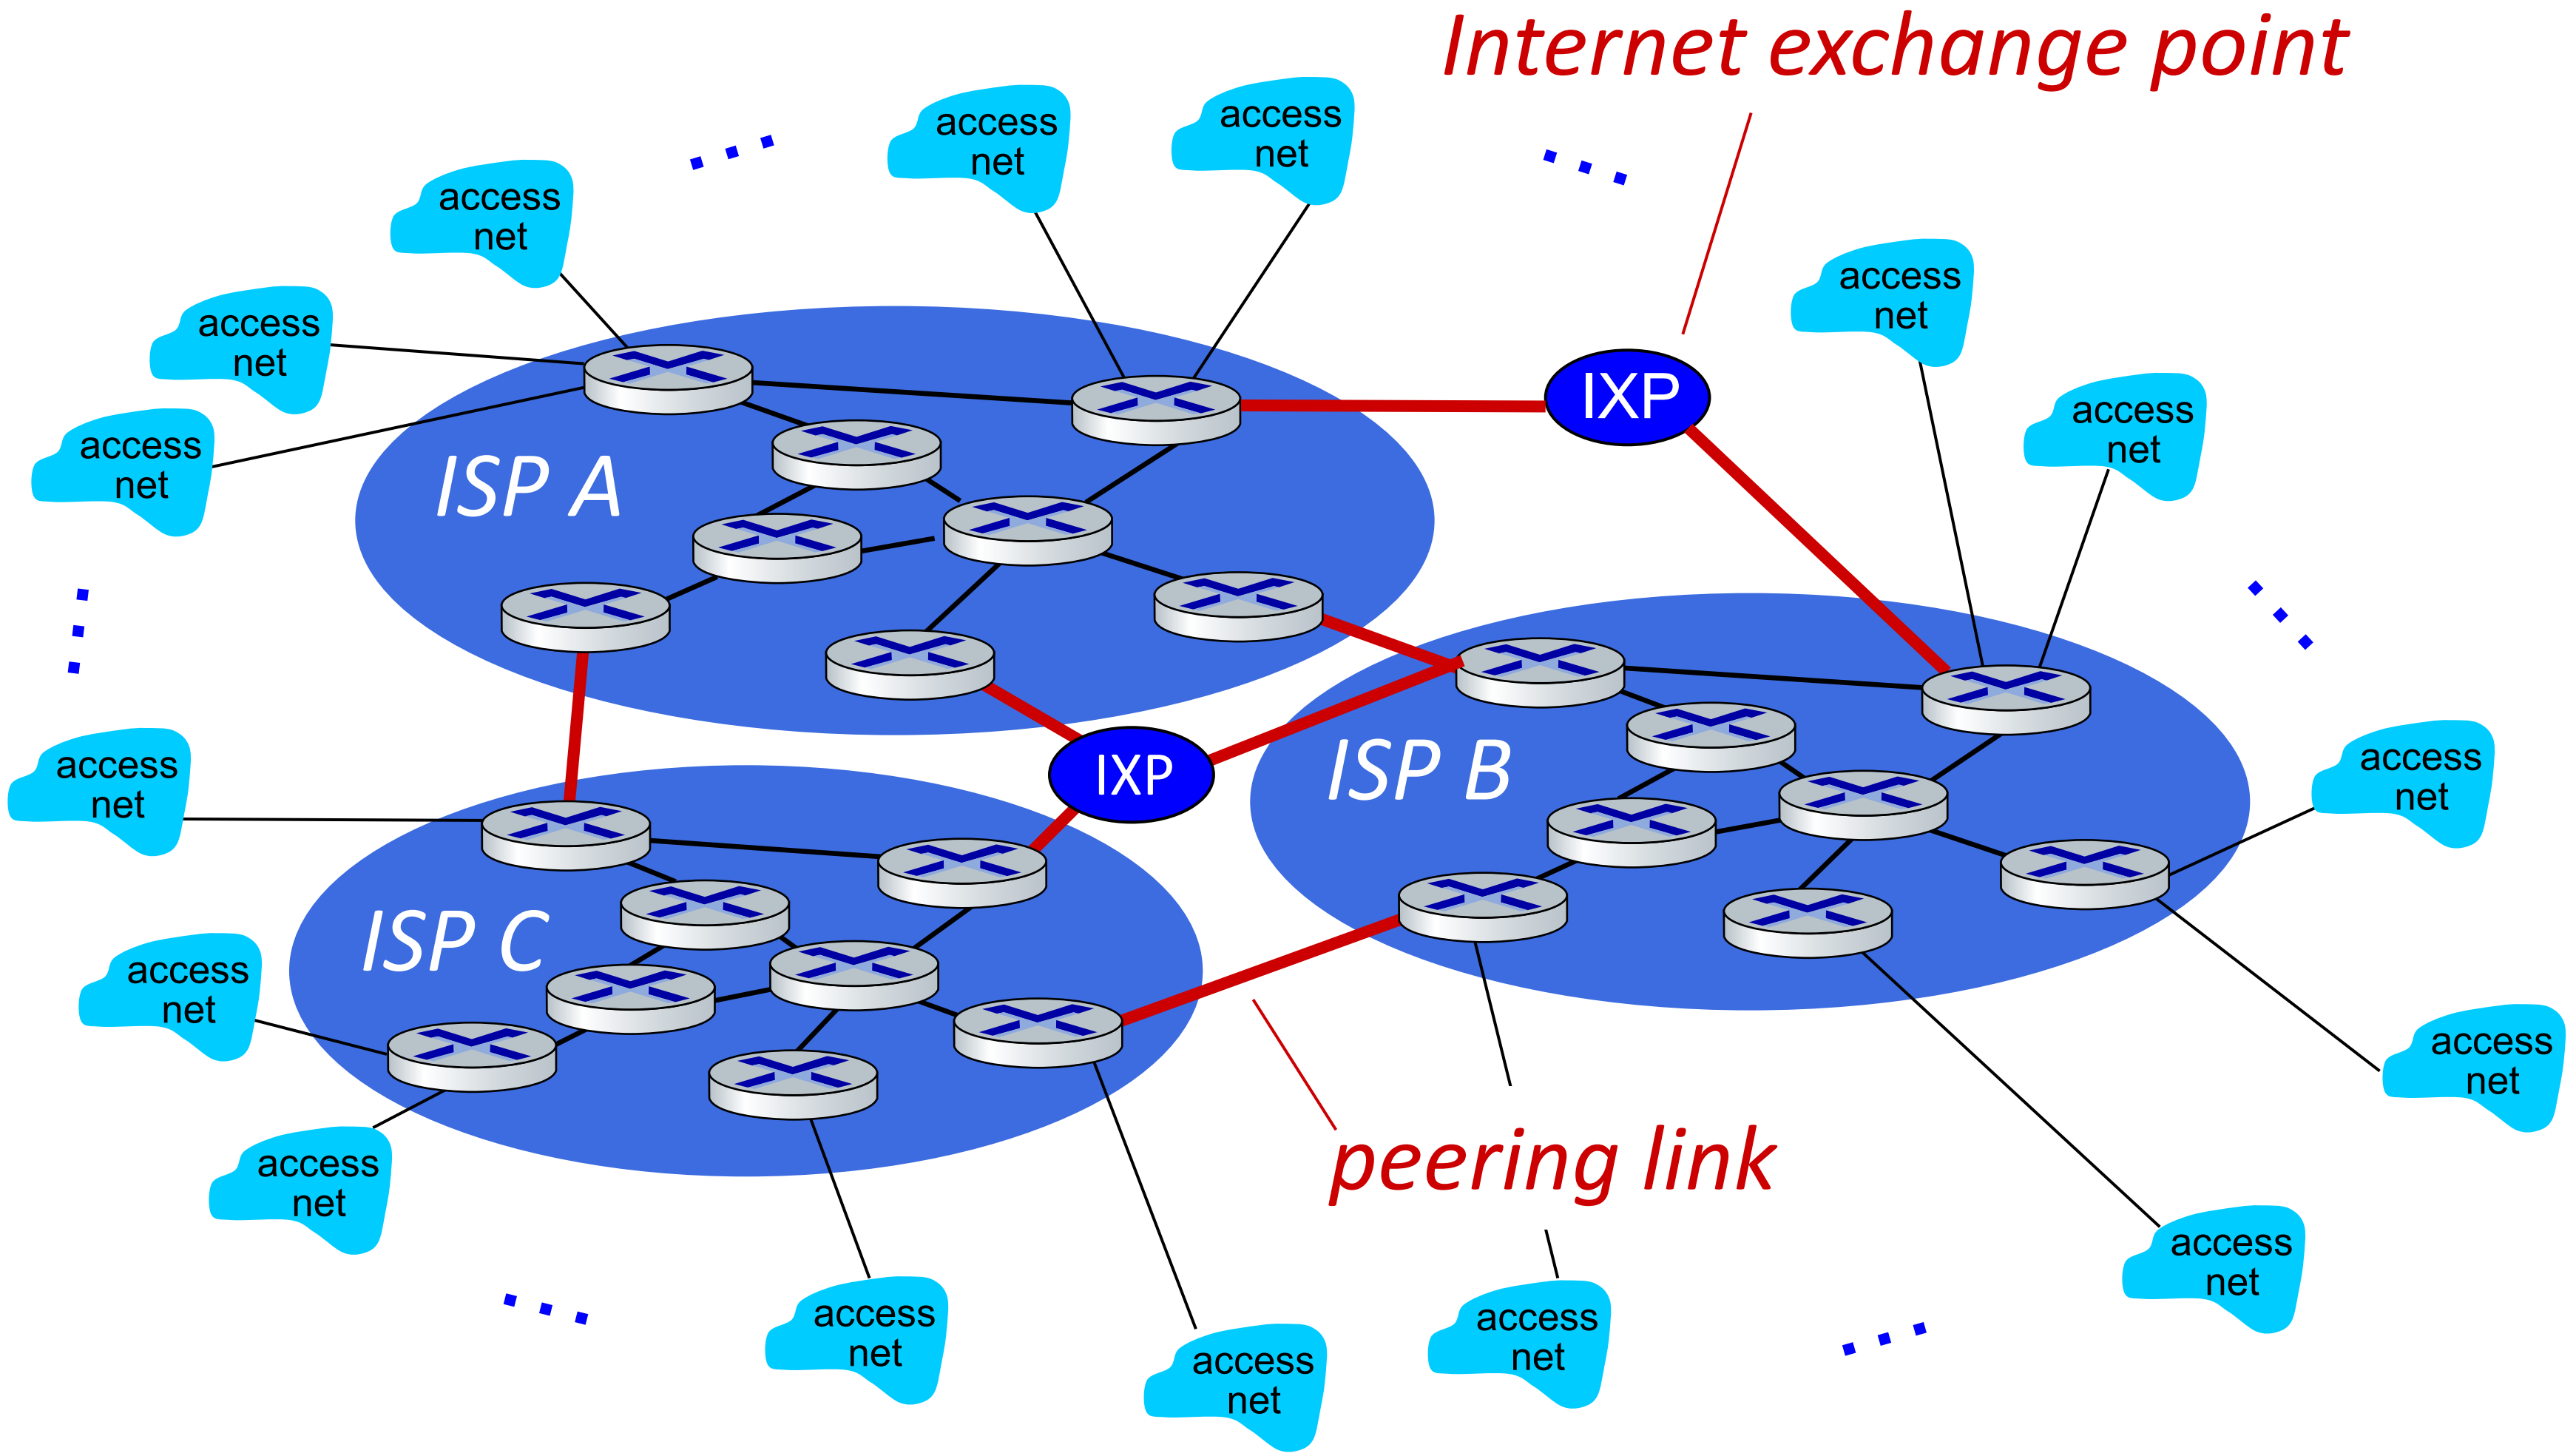

Internet structure: a "network of networks"

… and regional networks may arise to connect access nets to ISPs

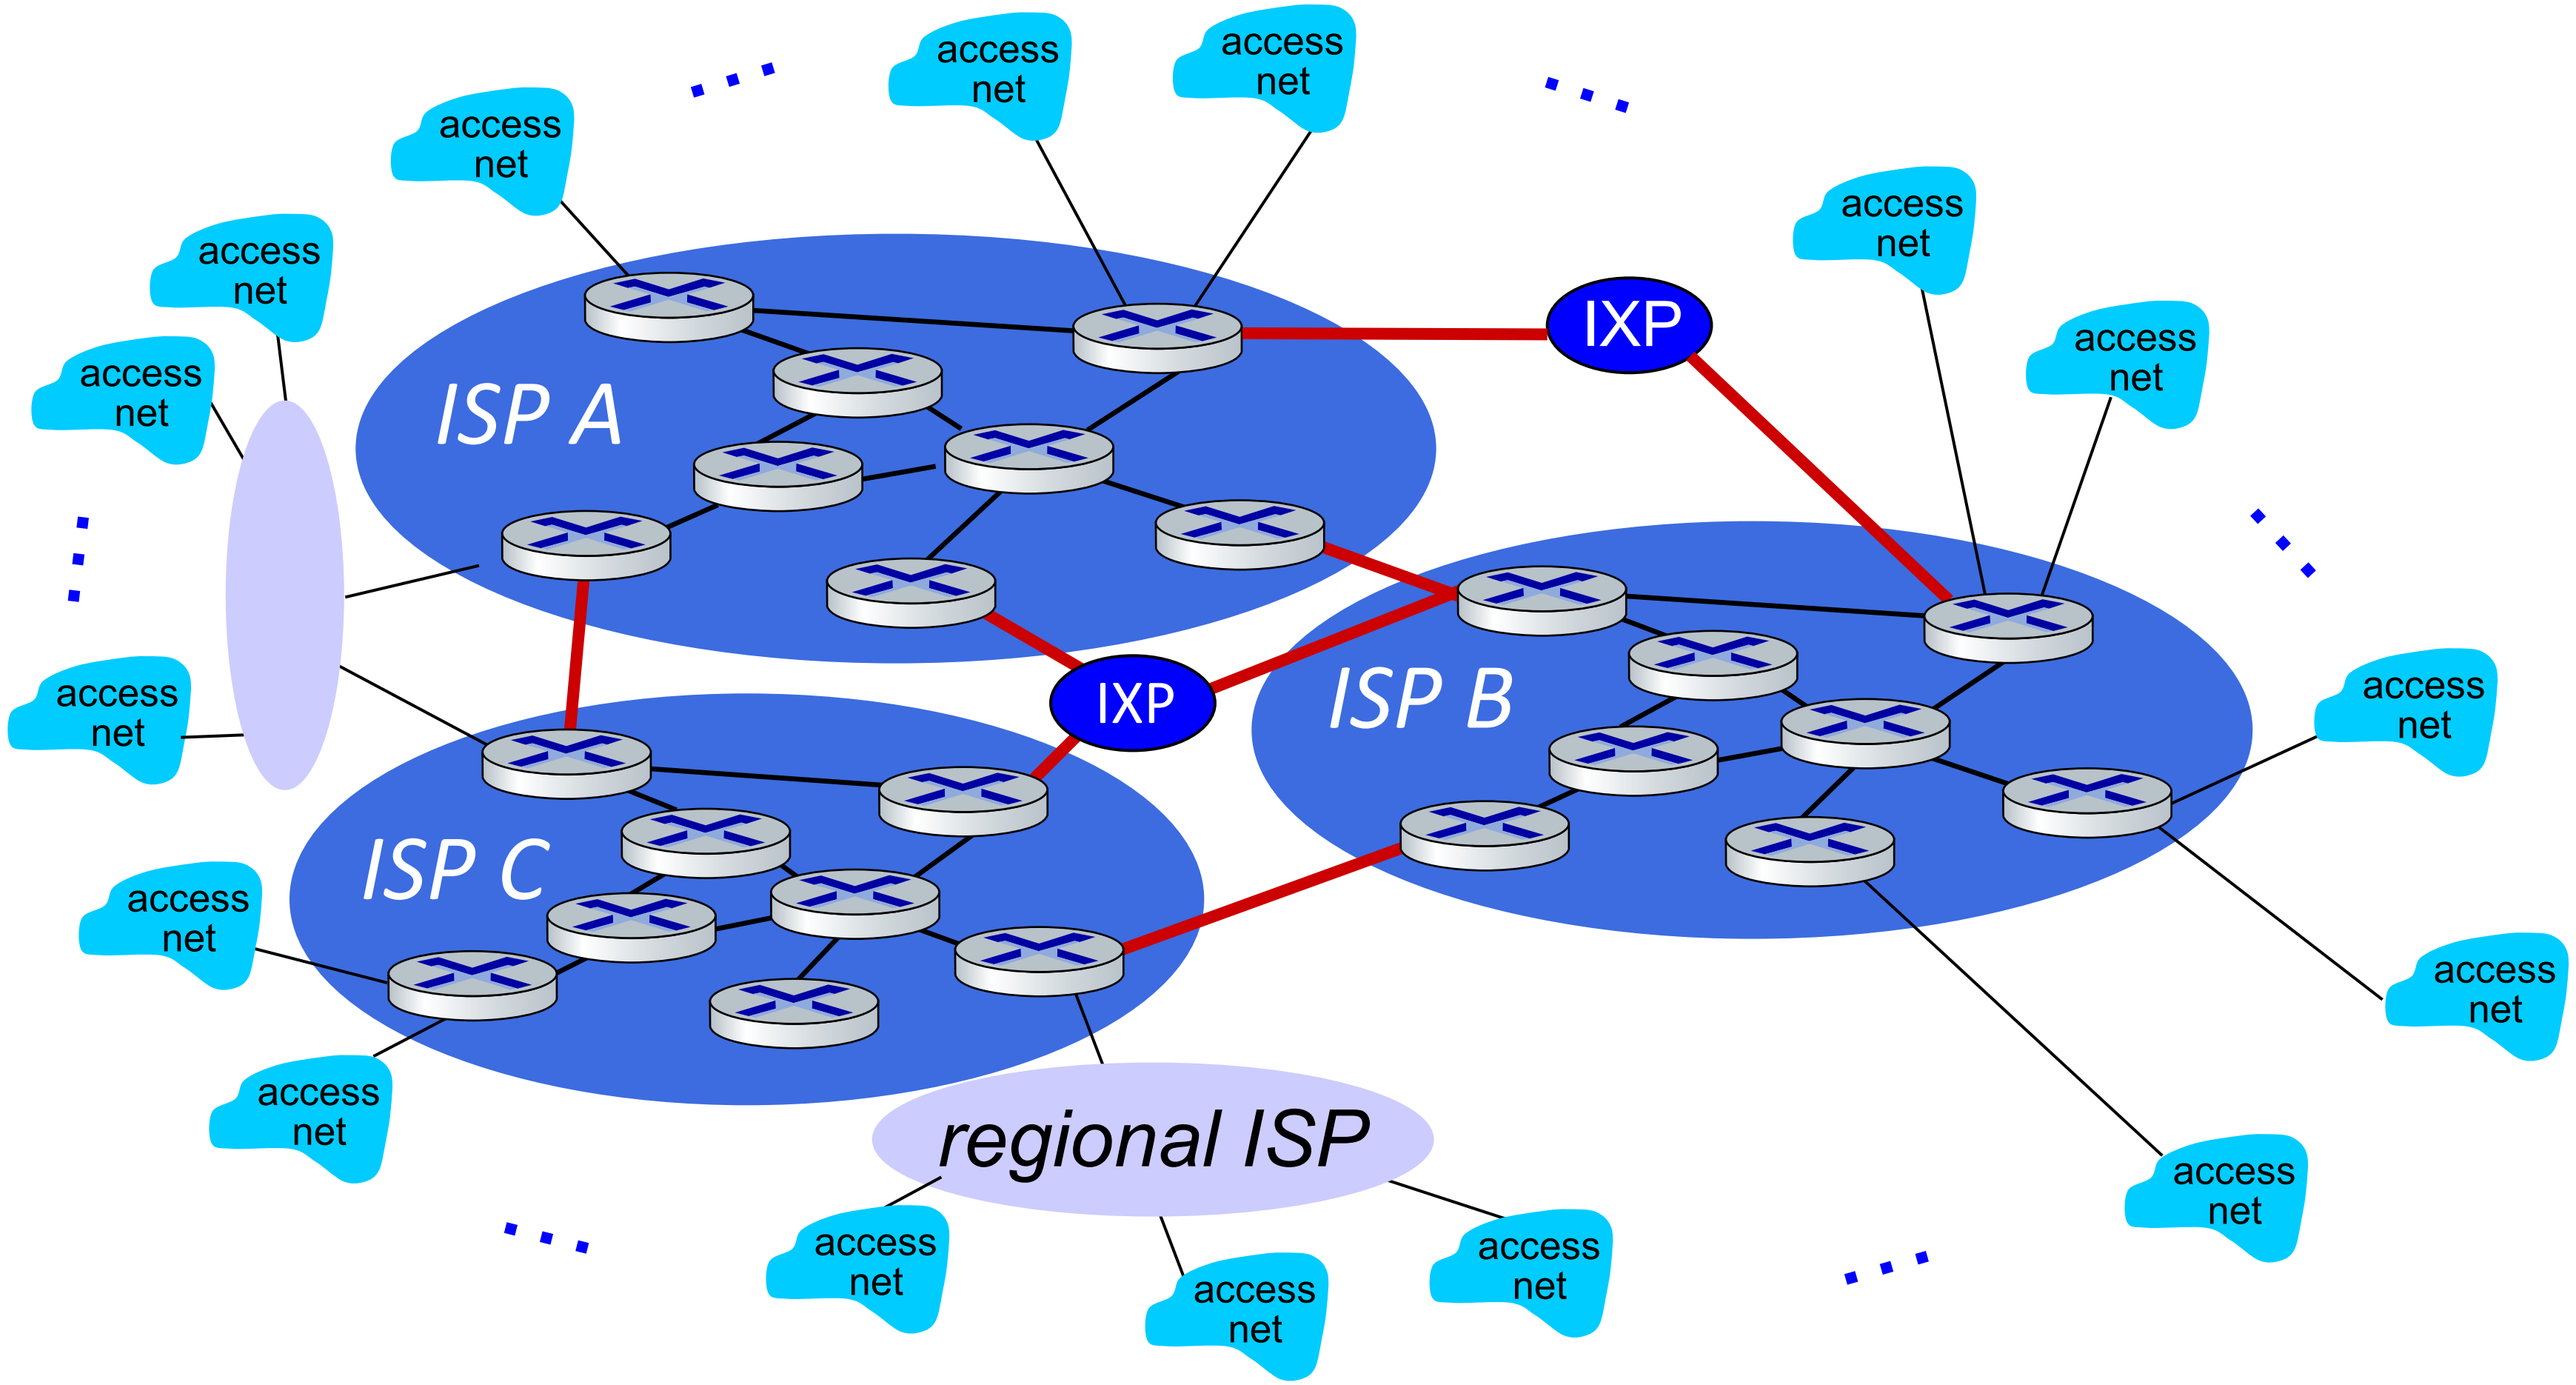

Internet structure: a "network of networks"

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

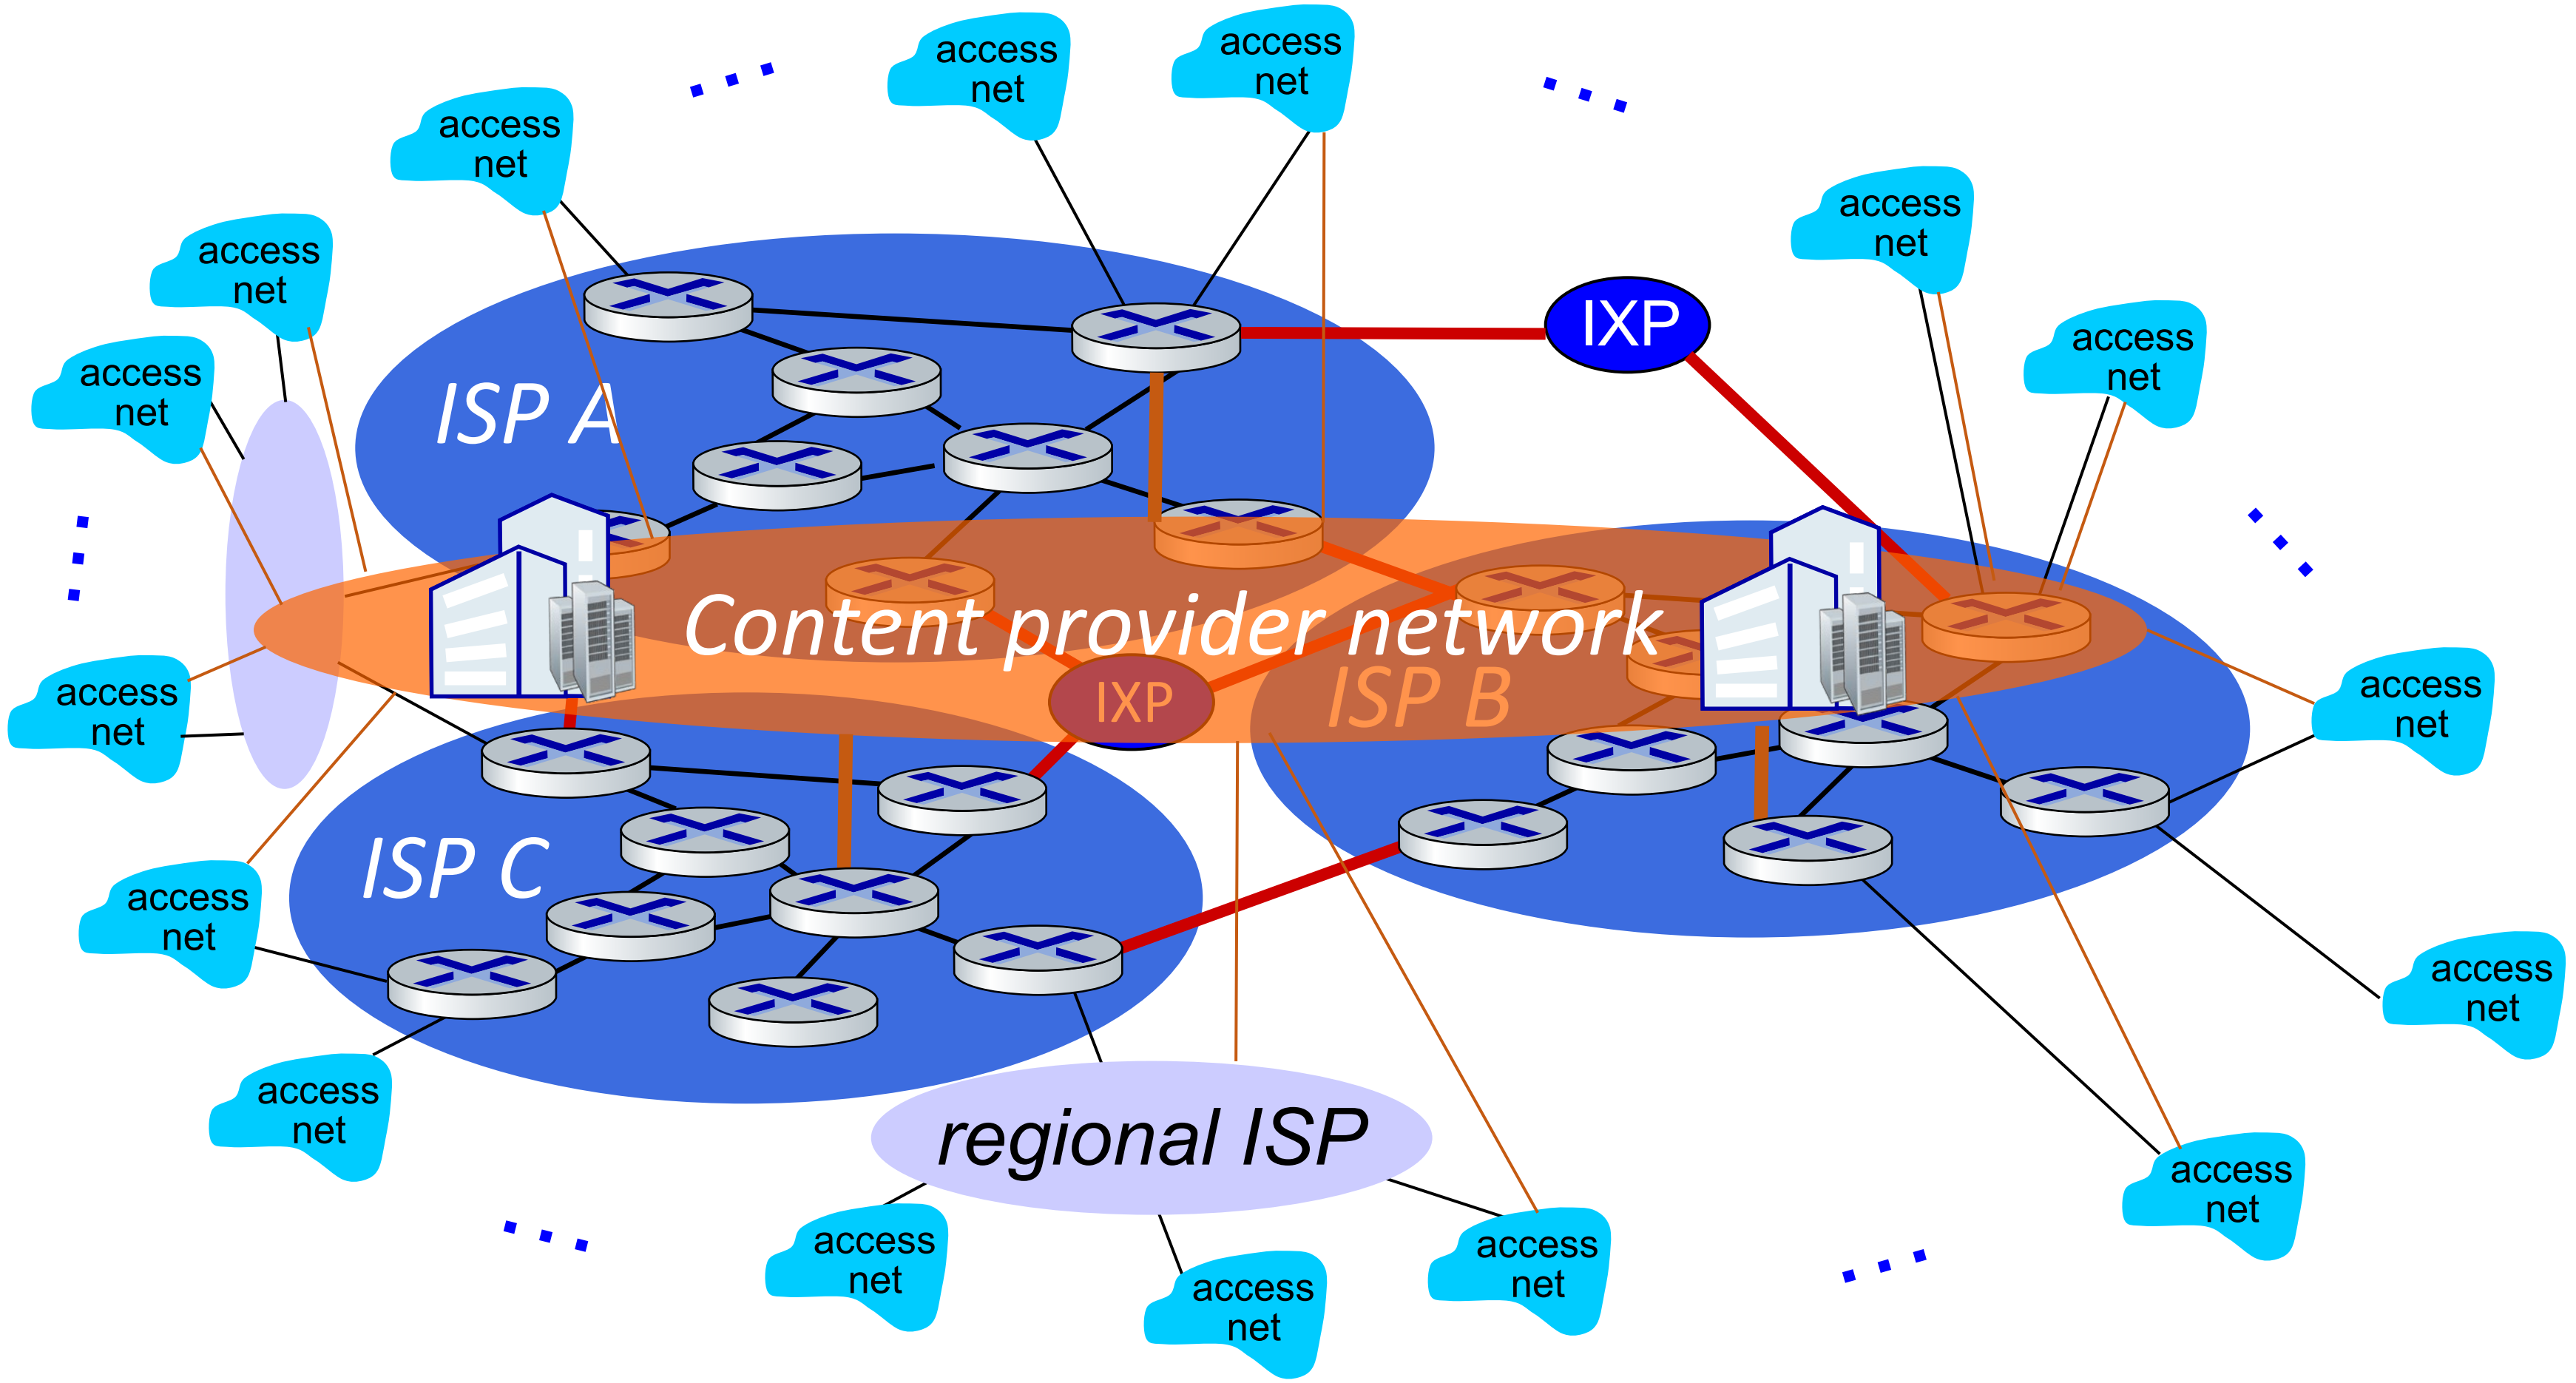

Internet structure: a "network of networks"

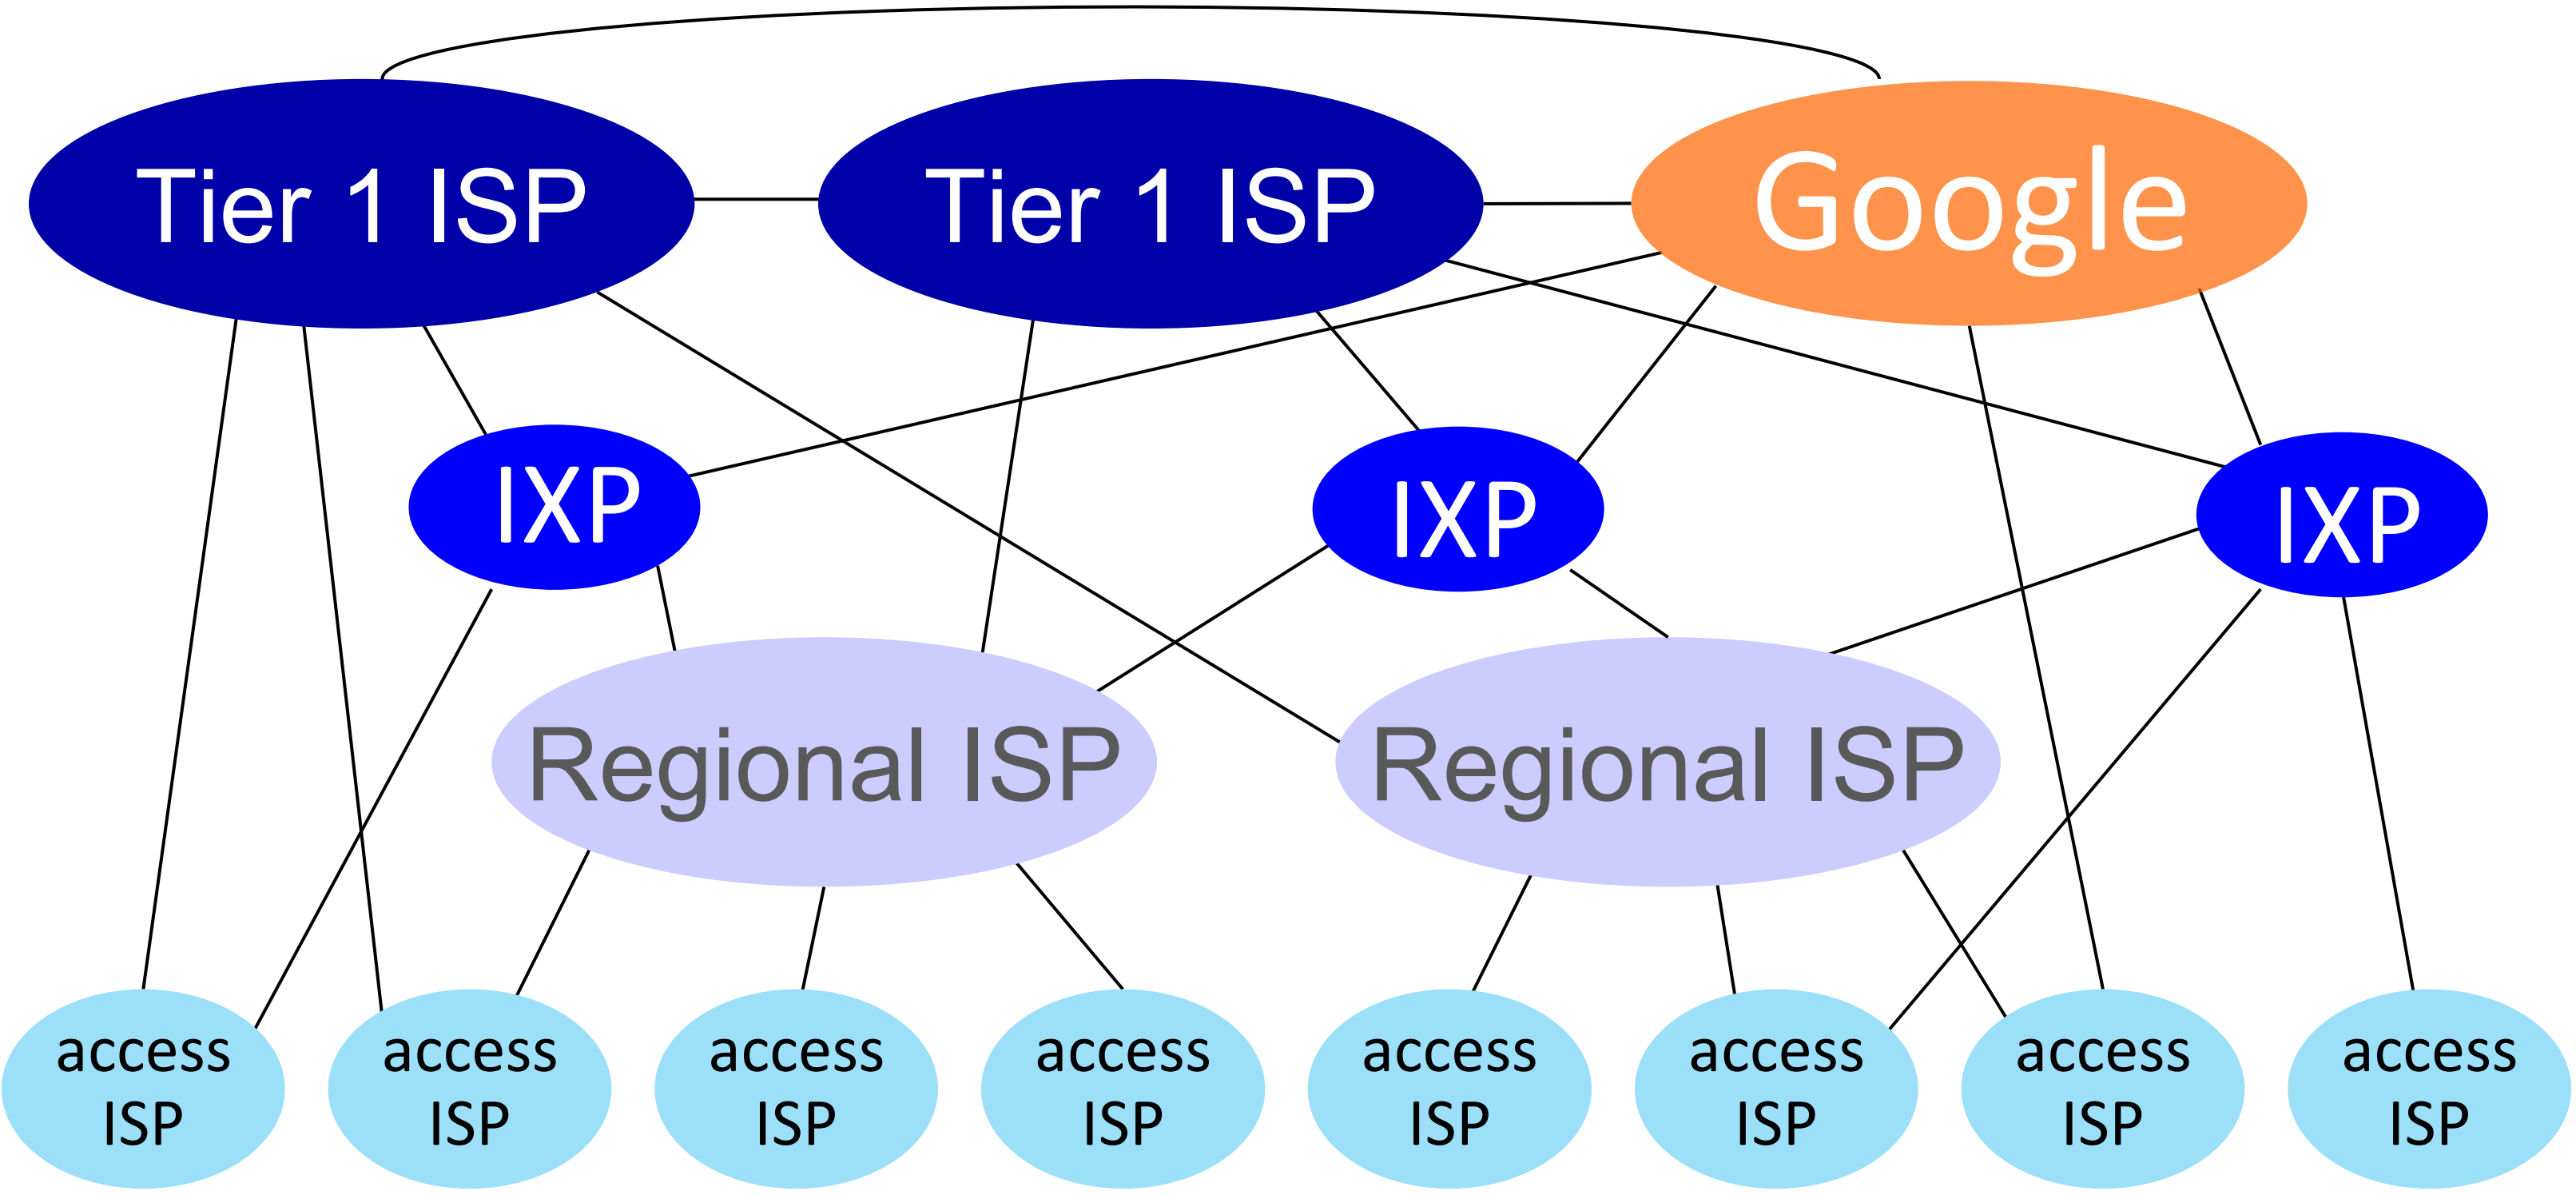

At "center": small # of well-connected large networks

- "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs