


JointDiff: Denoiser

Joint Input

$\mathbf{X}_s = (Y_s, E_s)$ – noisy input
 $\mathbf{X}^{co}$ – conditioning states
 $\mathbf{M}$ – mask conditioning states
 $\mathcal{G}$ – Guidance signal

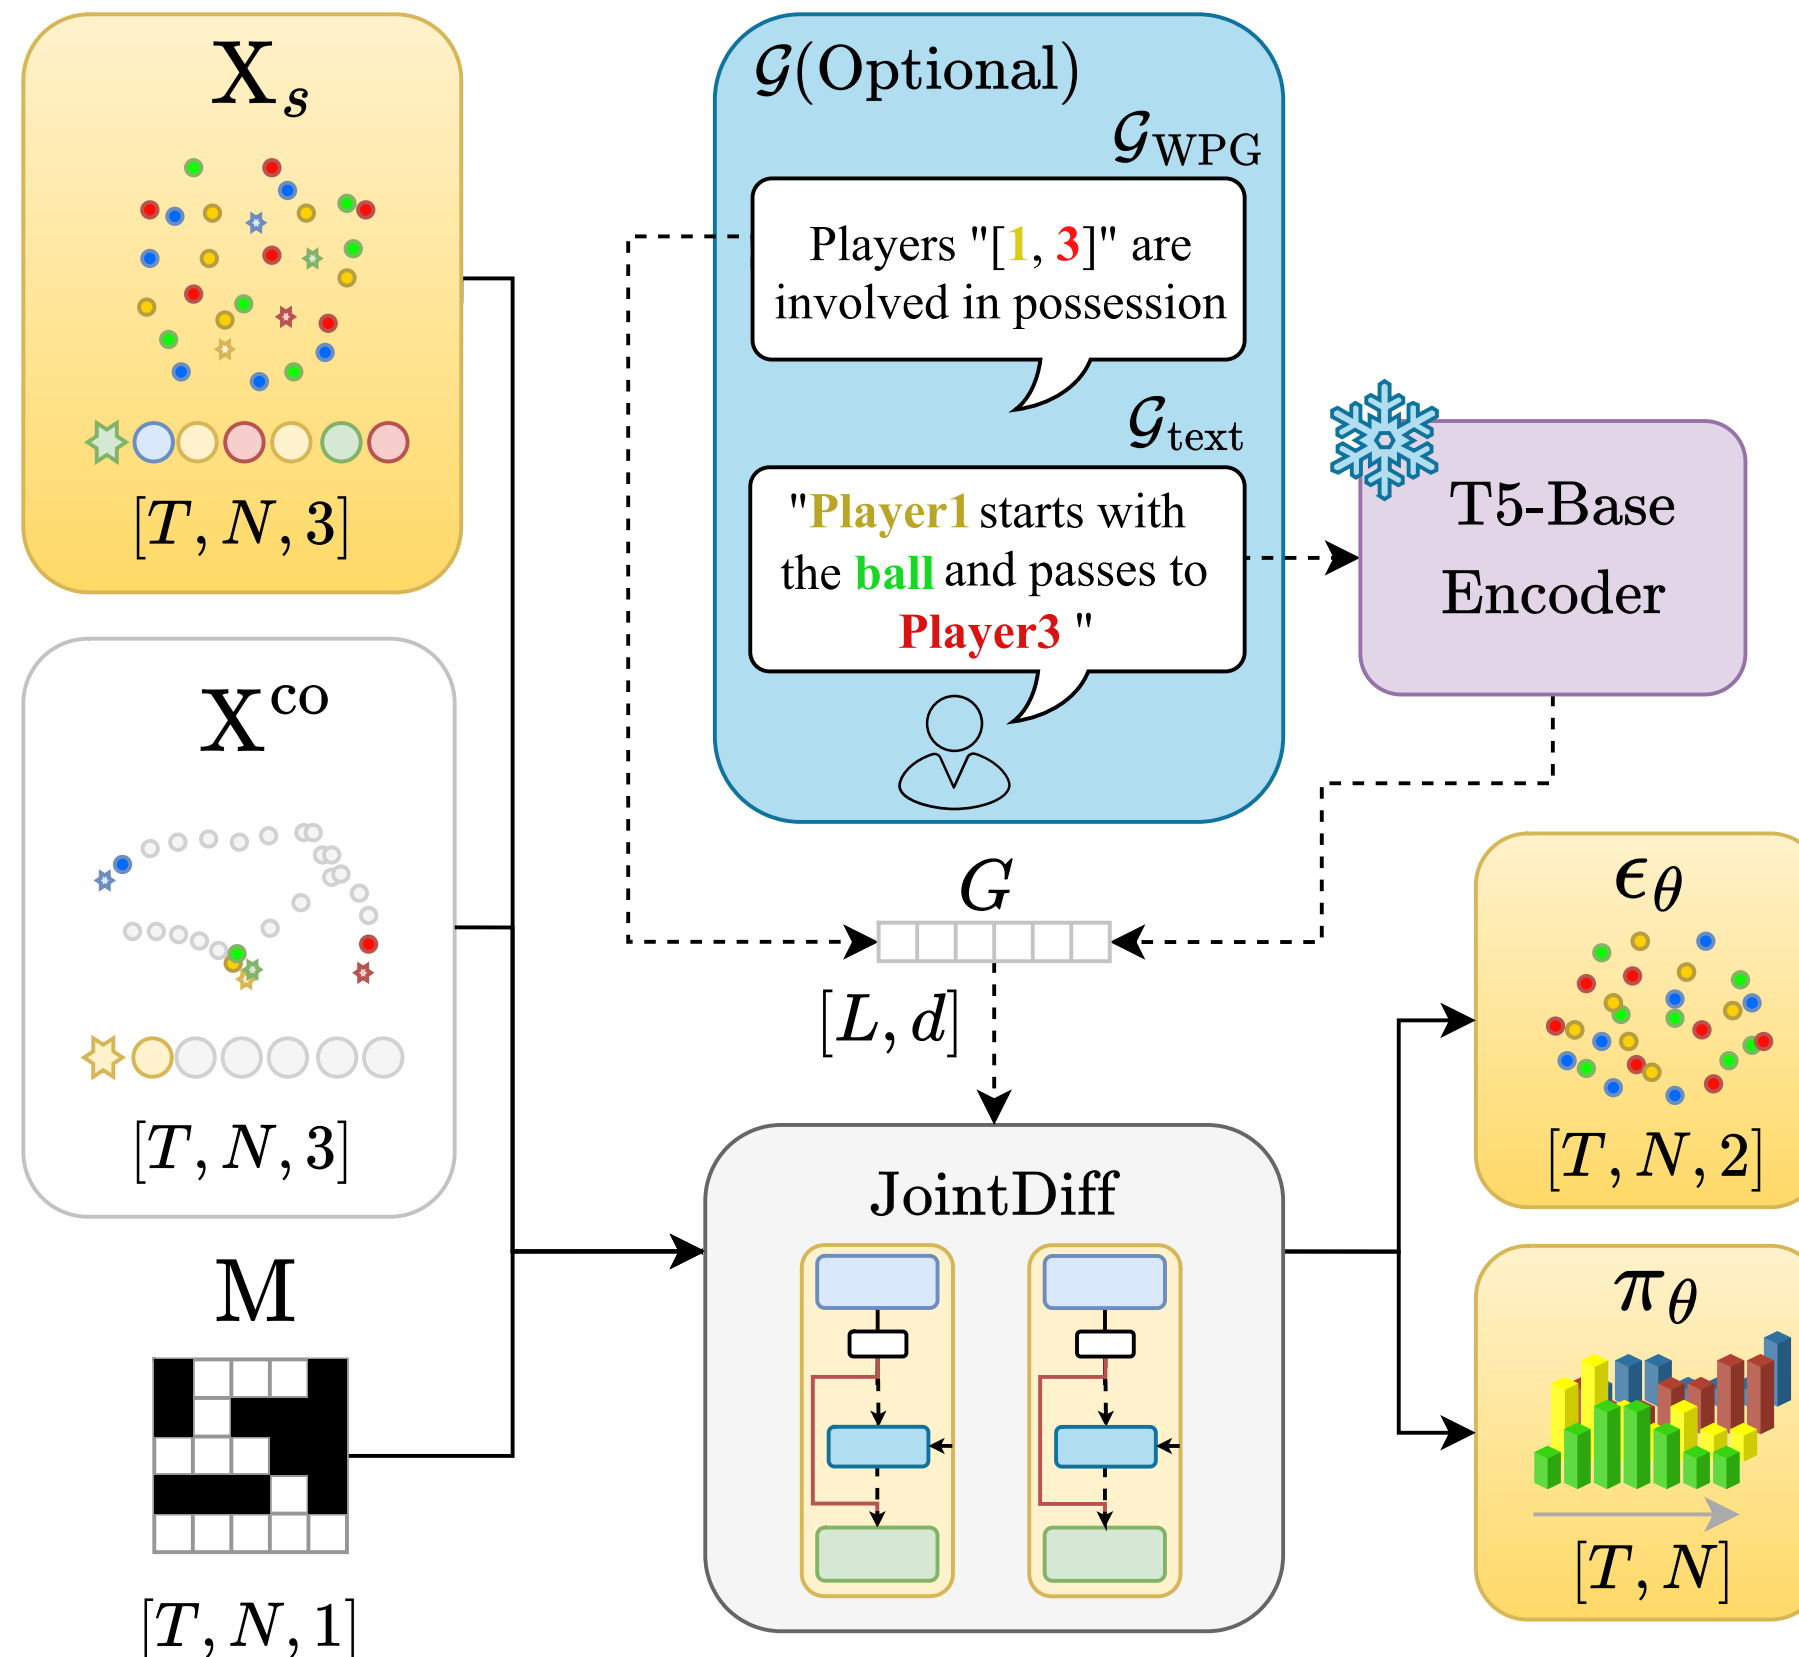

Continuous Head

Predict injected gaussian noise on trajectory coordinates $\rightarrow \epsilon_\theta$

Discrete Head

Predict possession events probabilities $\rightarrow \pi_\theta$