


|                          |        |                                                     |                        |
|--------------------------|--------|-----------------------------------------------------|------------------------|
| Felicitysolar®           |        | PCB技术要求                                             |                        |
| 板料                       | PCB板材  | FR-4                                                | (FR-4、CEM-1、FR-1...)   |
|                          | PCB板层  | 四层                                                  | (单面、双面、四层...)          |
|                          | PCB厚度  | 2.0mm                                               | (1.0mm、1.6mm、2.0mm...) |
|                          | 铜箔厚度   | 70um                                                | (35um、50um、70um...)    |
|                          | TG值    | ≥150°                                               | (≥130°、≥150°、≥170°...) |
|                          | CTI    | ≥175                                                | (≥175、≥300、≥600...)    |
| 工艺                       | 无铅喷锡   | HAL_LF                                              | (喷锡、OSP、沉金、蓝胶...)      |
| 丝网颜色                     | 厂家相关信息 | 生产周期、防火等级、CQC、UL标记、制版厂LOGO、标记                       |                        |
| 双面                       | 字符     | 白色                                                  | (白色、黑色...)             |
| 过孔                       | 过孔处理方式 | 0.5以下的过孔：塞孔<br>0.5以下的过孔双面开窗按开窗制作<br>0.5以下的过孔单面开窗按塞孔 | (开窗、盖油、绿油塞孔...)        |
|                          | 孔内铜厚   | ≥25um                                               | (≥20um、≥25um...)       |
| 阻焊层                      | 阻焊油墨   | 绿色                                                  | (绿色、白色、蓝色...)          |
| PCB规格尺寸                  |        |                                                     |                        |
| 拼版尺寸                     |        | 单板尺寸                                                | 出货方式                   |
| 264X208mm                |        | 264X104mm                                           | 默认按Gerber原稿            |
| 性能要求：无特殊要求按照 IPC II级标准制作 |        |                                                     |                        |


|        |                                                         |
|--------|---------------------------------------------------------|
| 网板     | 共用118-200150-02C                                        |
| 功能测试架  | 共用118-200150-00 BMS-200A-GD305 MAIN WIFI V1.1(20231031) |
| ICT测试架 | 可在118-200150-00的基础上修改（Q70、Q71位置处有两个测试点位置相对挪动0.5mm）      |
| 过炉治具   | 共用118-200150-00 BMS-200A-GD305 MAIN WIFI V1.1(20231031) |

|                                                                                                                                                     |                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 叠层细节                                                                                                                                                | 4层板                                                                                                                                                                                                                                                                                               |
| <div><div><div>TopOverlay</div><div>TopSolder</div><div>TopLayer</div></div><div><div>.GTO</div><div>.GTS</div><div>.GTL</div></div></div>          | <div><div><div>1</div><div>2</div><div>3</div><div>4</div></div><div><div><div>5~18um（范围管控）</div><div>10um~40um（范围管控）</div><div>≥70um（完成铜厚）</div><div>PP 76.2um</div><div>CORE</div><div>PP 76.2um</div><div>≥70um（完成铜厚）</div><div>10um~40um（范围管控）</div><div>5~18um（范围管控）</div></div></div></div> |
| <div><div><div>L2</div><div>L3</div></div><div><div>.G1</div><div>.G2</div></div></div>                                                             |                                                                                                                                                                                                                                                                                                   |
| <div><div><div>BottomLayer</div><div>BottomSolder</div><div>BottomOverlay</div></div><div><div>.GBL</div><div>.GBS</div><div>.GBO</div></div></div> |                                                                                                                                                                                                                                                                                                   |
| <div><div><div>KeepOutLayer</div></div><div><div>.GKO</div></div></div>                                                                             | <div>以上PP厚度为最小值（不能低于此值）,实际PP厚度以铜厚、板厚选择相应的PP厚度<br/>成品板厚以上方板厚为准</div>                                                                                                                                                                                                                               |



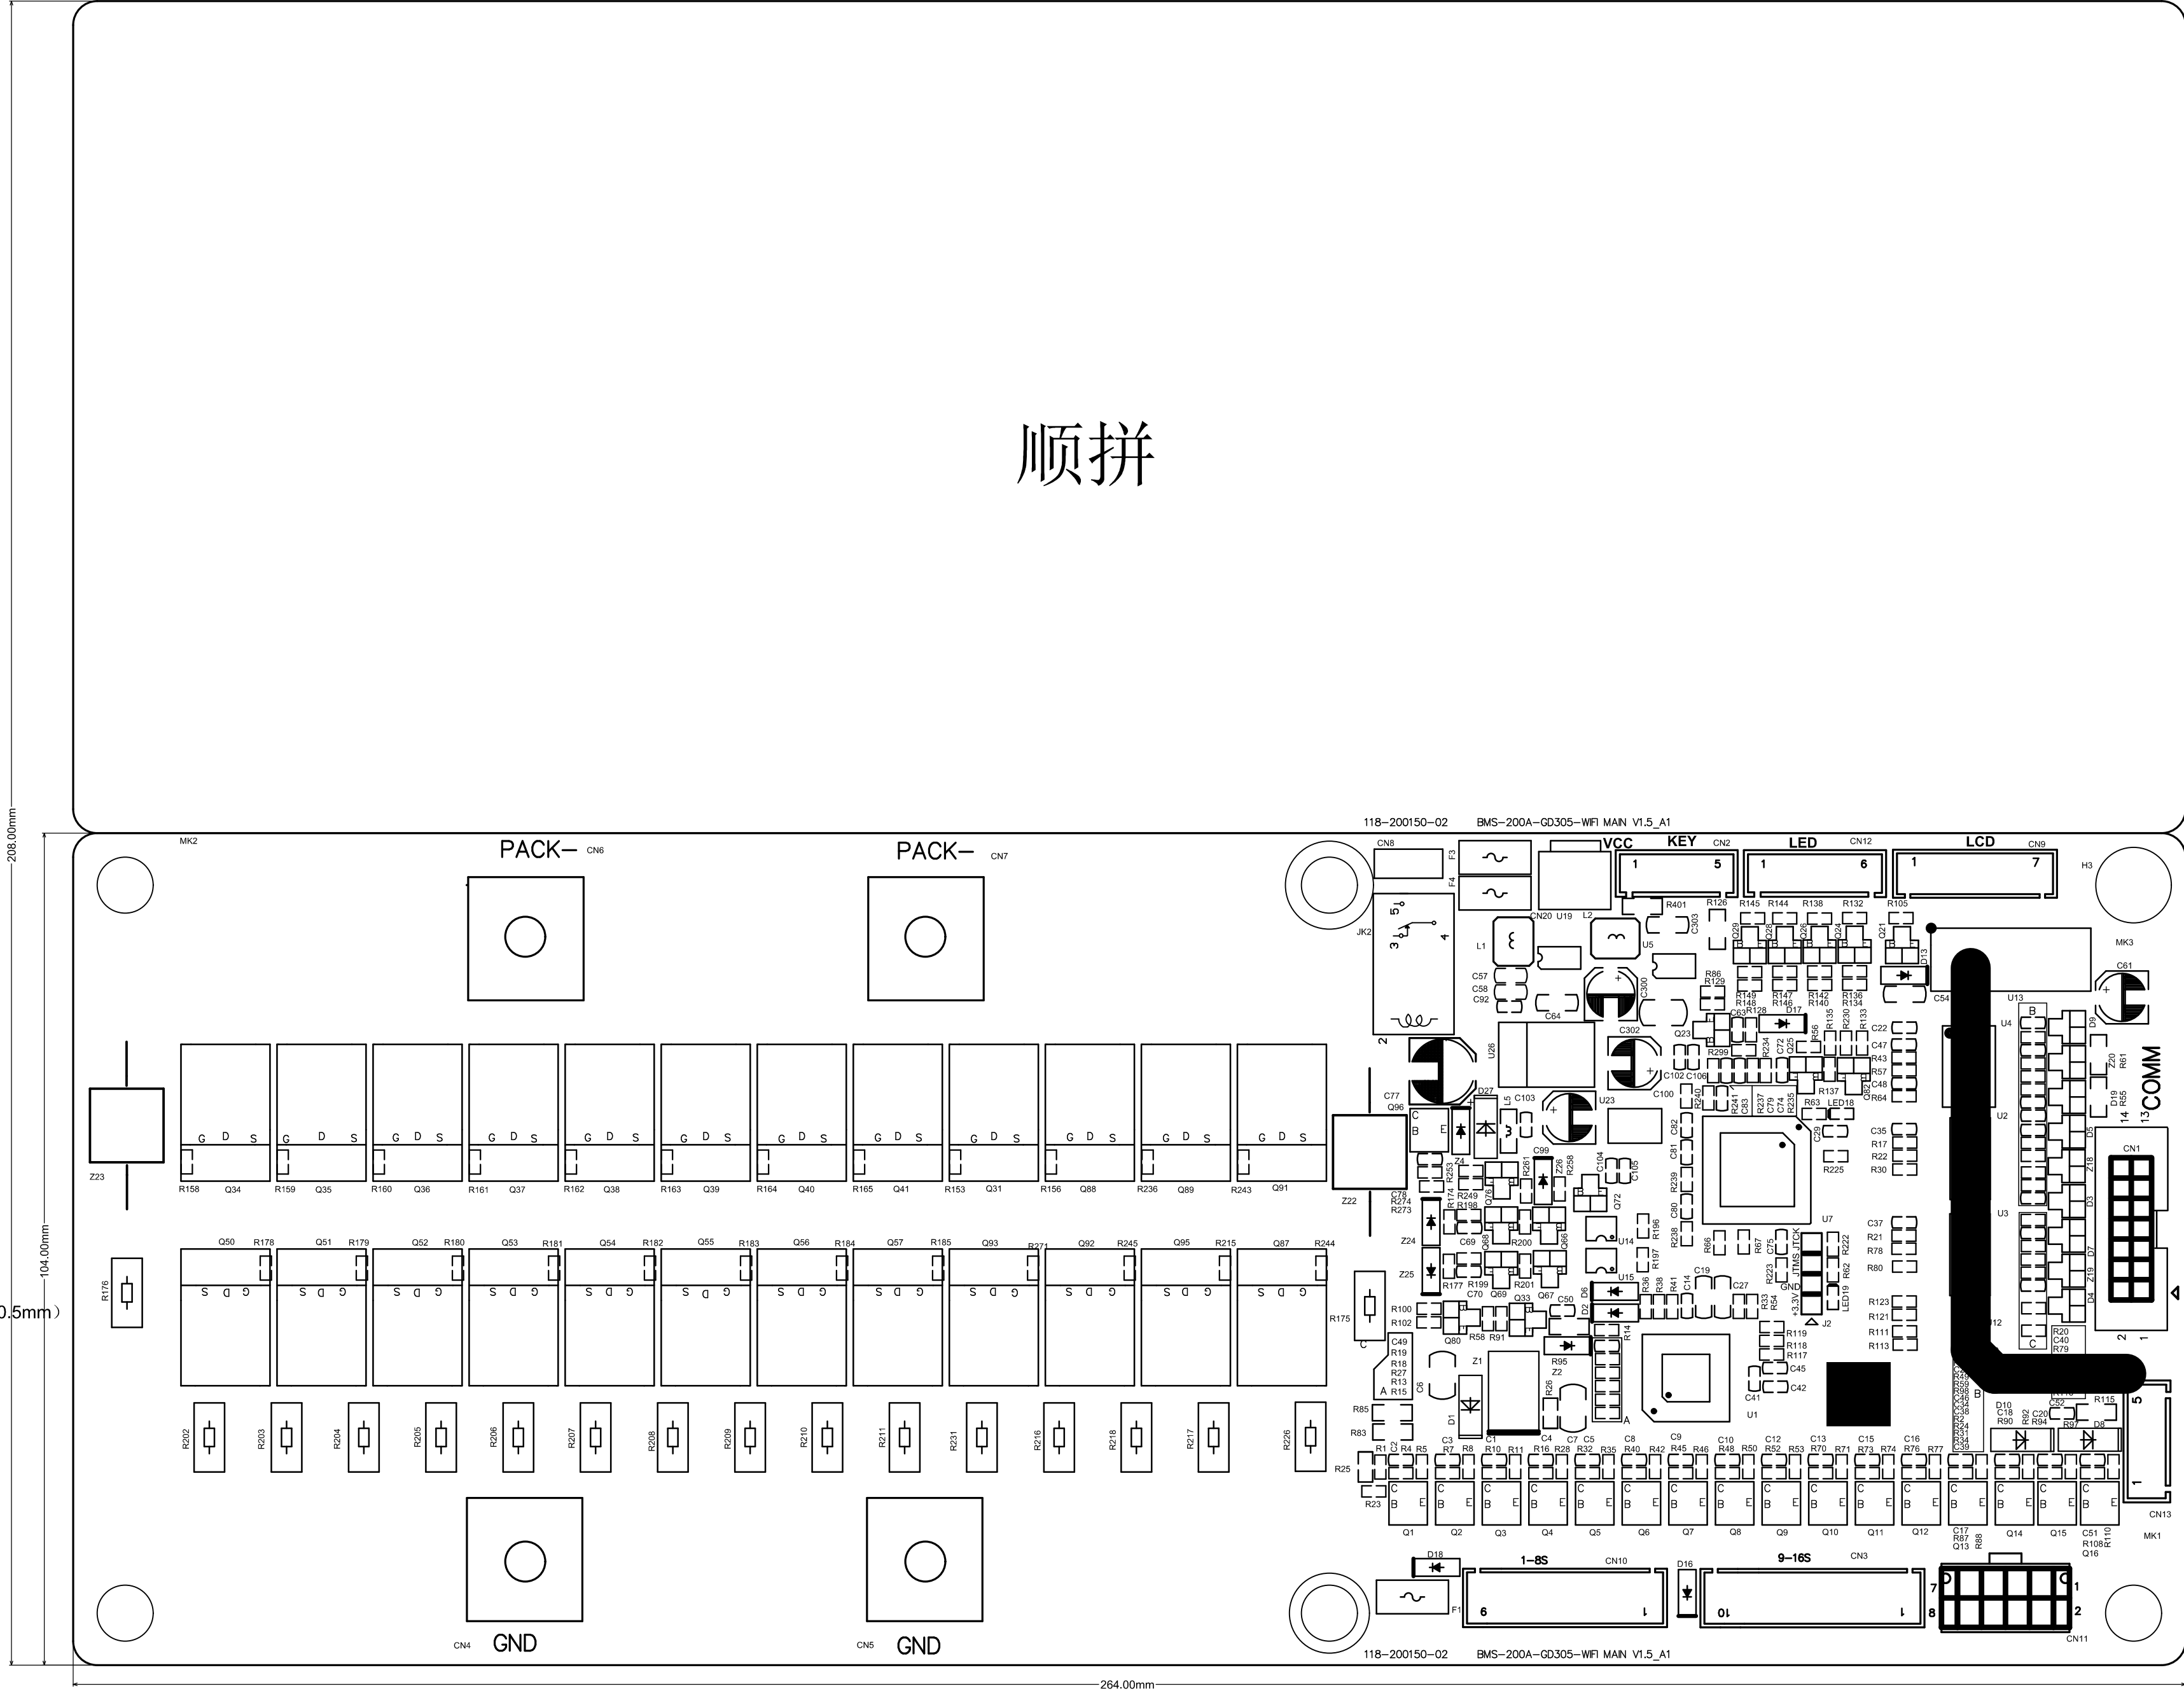

顺拼

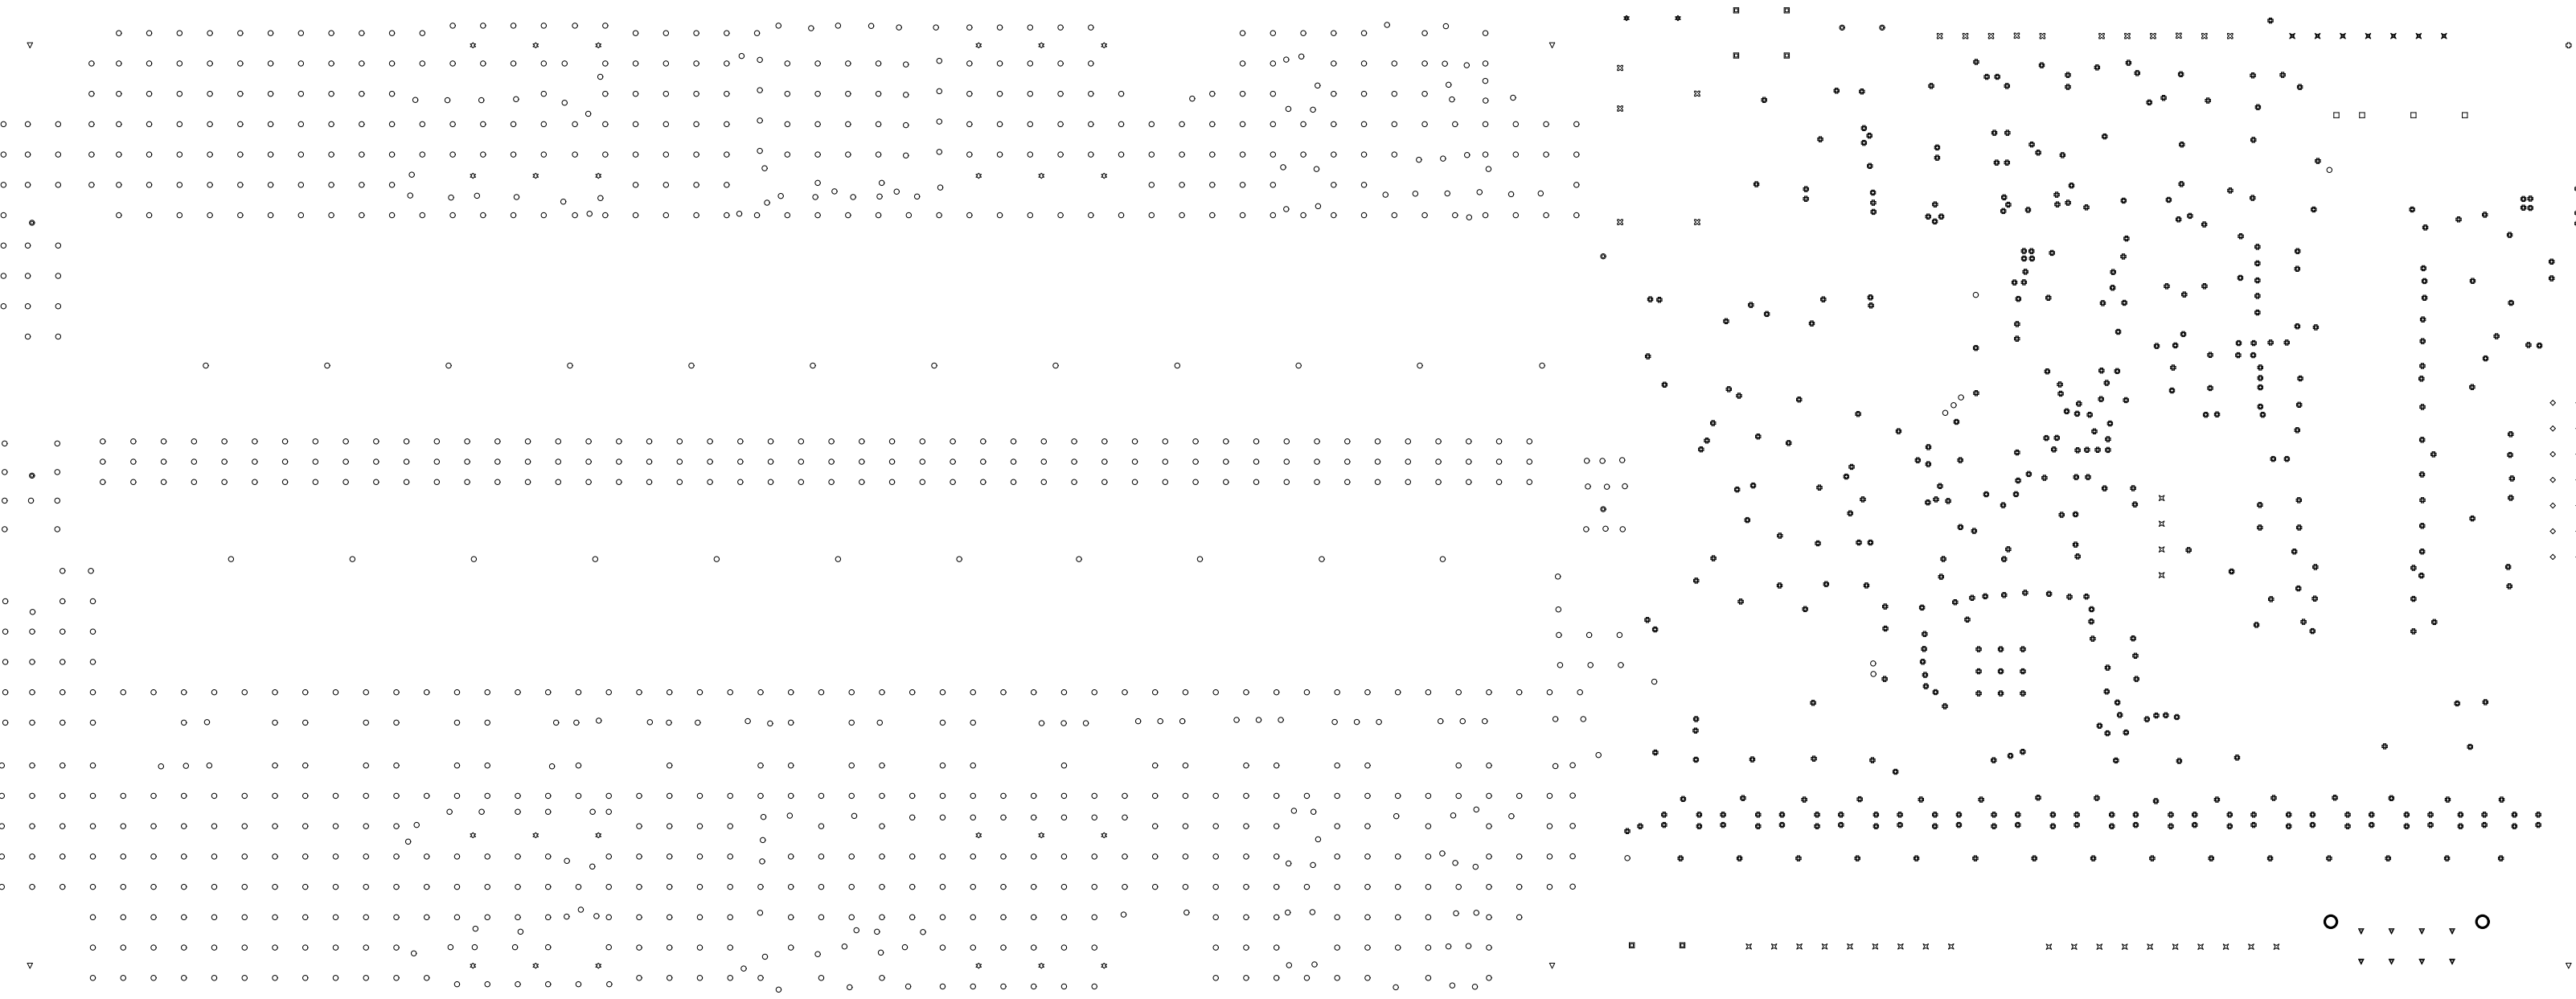

| Symbol     | Count | Hole Size           | Hole Length         | Routed Path Length | Plated | Hole Type |
|------------|-------|---------------------|---------------------|--------------------|--------|-----------|
| ⊙          | 1     | 141.73mil (3.600mm) | -                   | -                  | PTH    | Round     |
| ✱          | 2     | 59.06mil (1.500mm)  | -                   | -                  | PTH    | Round     |
| □          | 4     | 31.50mil (0.800mm)  | -                   | -                  | PTH    | Round     |
| ▽          | 5     | 141.73mil (3.600mm) | -                   | -                  | NPTH   | Round     |
| ■          | 6     | 35.43mil (0.900mm)  | -                   | -                  | PTH    | Round     |
| ●          | 6     | 70.87mil (1.800mm)  | -                   | -                  | PTH    | Round     |
| ✕          | 7     | 47.24mil (1.200mm)  | -                   | -                  | PTH    | Round     |
| ▼          | 8     | 39.37mil (1.000mm)  | 47.24mil (1.200mm)  | 7.87mil (0.200mm)  | PTH    | Slot      |
| ◇          | 14    | 40.00mil (1.016mm)  | -                   | -                  | PTH    | Round     |
| ⊠          | 21    | 43.31mil (1.100mm)  | -                   | -                  | PTH    | Round     |
| ✖          | 23    | 39.37mil (1.000mm)  | -                   | -                  | PTH    | Round     |
| ✧          | 24    | 74.80mil (1.900mm)  | 137.79mil (3.500mm) | 62.99mil (1.600mm) | PTH    | Slot      |
| ⊗          | 444   | 15.75mil (0.400mm)  | -                   | -                  | PTH    | Round     |
| ○          | 1081  | 19.69mil (0.500mm)  | -                   | -                  | PTH    | Round     |
| 1646 Total |       |                     |                     |                    |        |           |

Slot definitions : Routed Path Length = Calculated from tool start centre position to tool end centre position.  
Hole Length = Routed Path Length + Tool Size = Slot length as defined in the PCB layout