
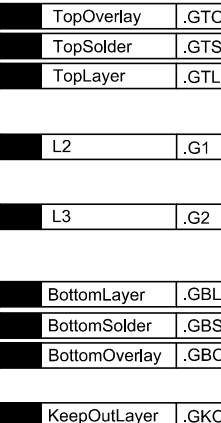
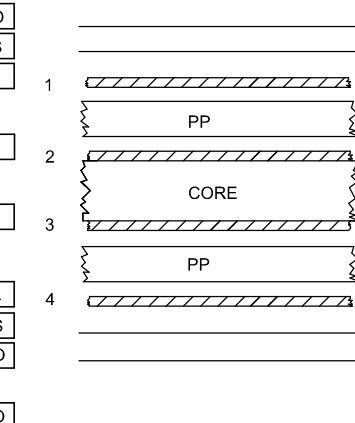









		PCB技术要求	
板料	PCB板材	FR-4	(FR-4、CEM-1、FR-1...)
	PCB板层	4层	(单面、双面、四层...)
	PCB厚度	2.0mm	(1.0mm、1.6mm、2.0mm...)
	铜箔厚度	70um	(35um、50um、70um...)
	TG值	≥150°	(≥130°、≥150°、≥170°...)
	CTI	≥175	(≥175、≥300、≥600...)
工艺	无铅喷锡	HAL_LF	(喷锡、OSP、沉金、蓝胶...)
丝网颜色	厂家相关信息	生产周期、防火等级、CQC、UL标记、制版厂LOGO、标记	
双面	字符	白色	(白色、黑色...)
	过孔处理方式	0.4以下的孔：塞孔 0.5以上的过孔：开窗	(开窗、盖油、绿油塞孔...)
过孔	孔内铜厚	≥20um	(≥20um、≥25um...)
	阻焊层	阻焊油墨	绿色
PCB规格尺寸			
拼版尺寸		单板尺寸	出货方式
285X244.5mm (1X3)		95X238.5mm	默认按Gerber原稿
性能要求：无特殊要求按照 IPC II级标准制作			


网板	共用118-400029-02A
功能测试架	共用118-400029-01
ICT测试架	共用118-400029-01
过炉治具	工艺可评估是否可与前版本治具共用，压敏电阻插件封装有修改
封装	JUP-L41MMD2.5MM为临时封装(已替换最新封装)

叠层细节		4层板
		
1		5~30um (范围管控) 5um~40um (范围管控)
2		≥70um (完成铜厚)
3		内层铜厚1oz时介厚按≥300um管控，内层铜厚2oz时按≥400um管控
4		≥55.7um (内层完成铜厚)
5		≥55.7um (内层完成铜厚)
6		内层铜厚1oz时介厚按≥300um管控，内层铜厚2oz时按≥400um管控
7		≥70um (完成铜厚)
8		5um~40um (范围管控)
9		5~30um (范围管控)
成品板厚以上方板厚为准		

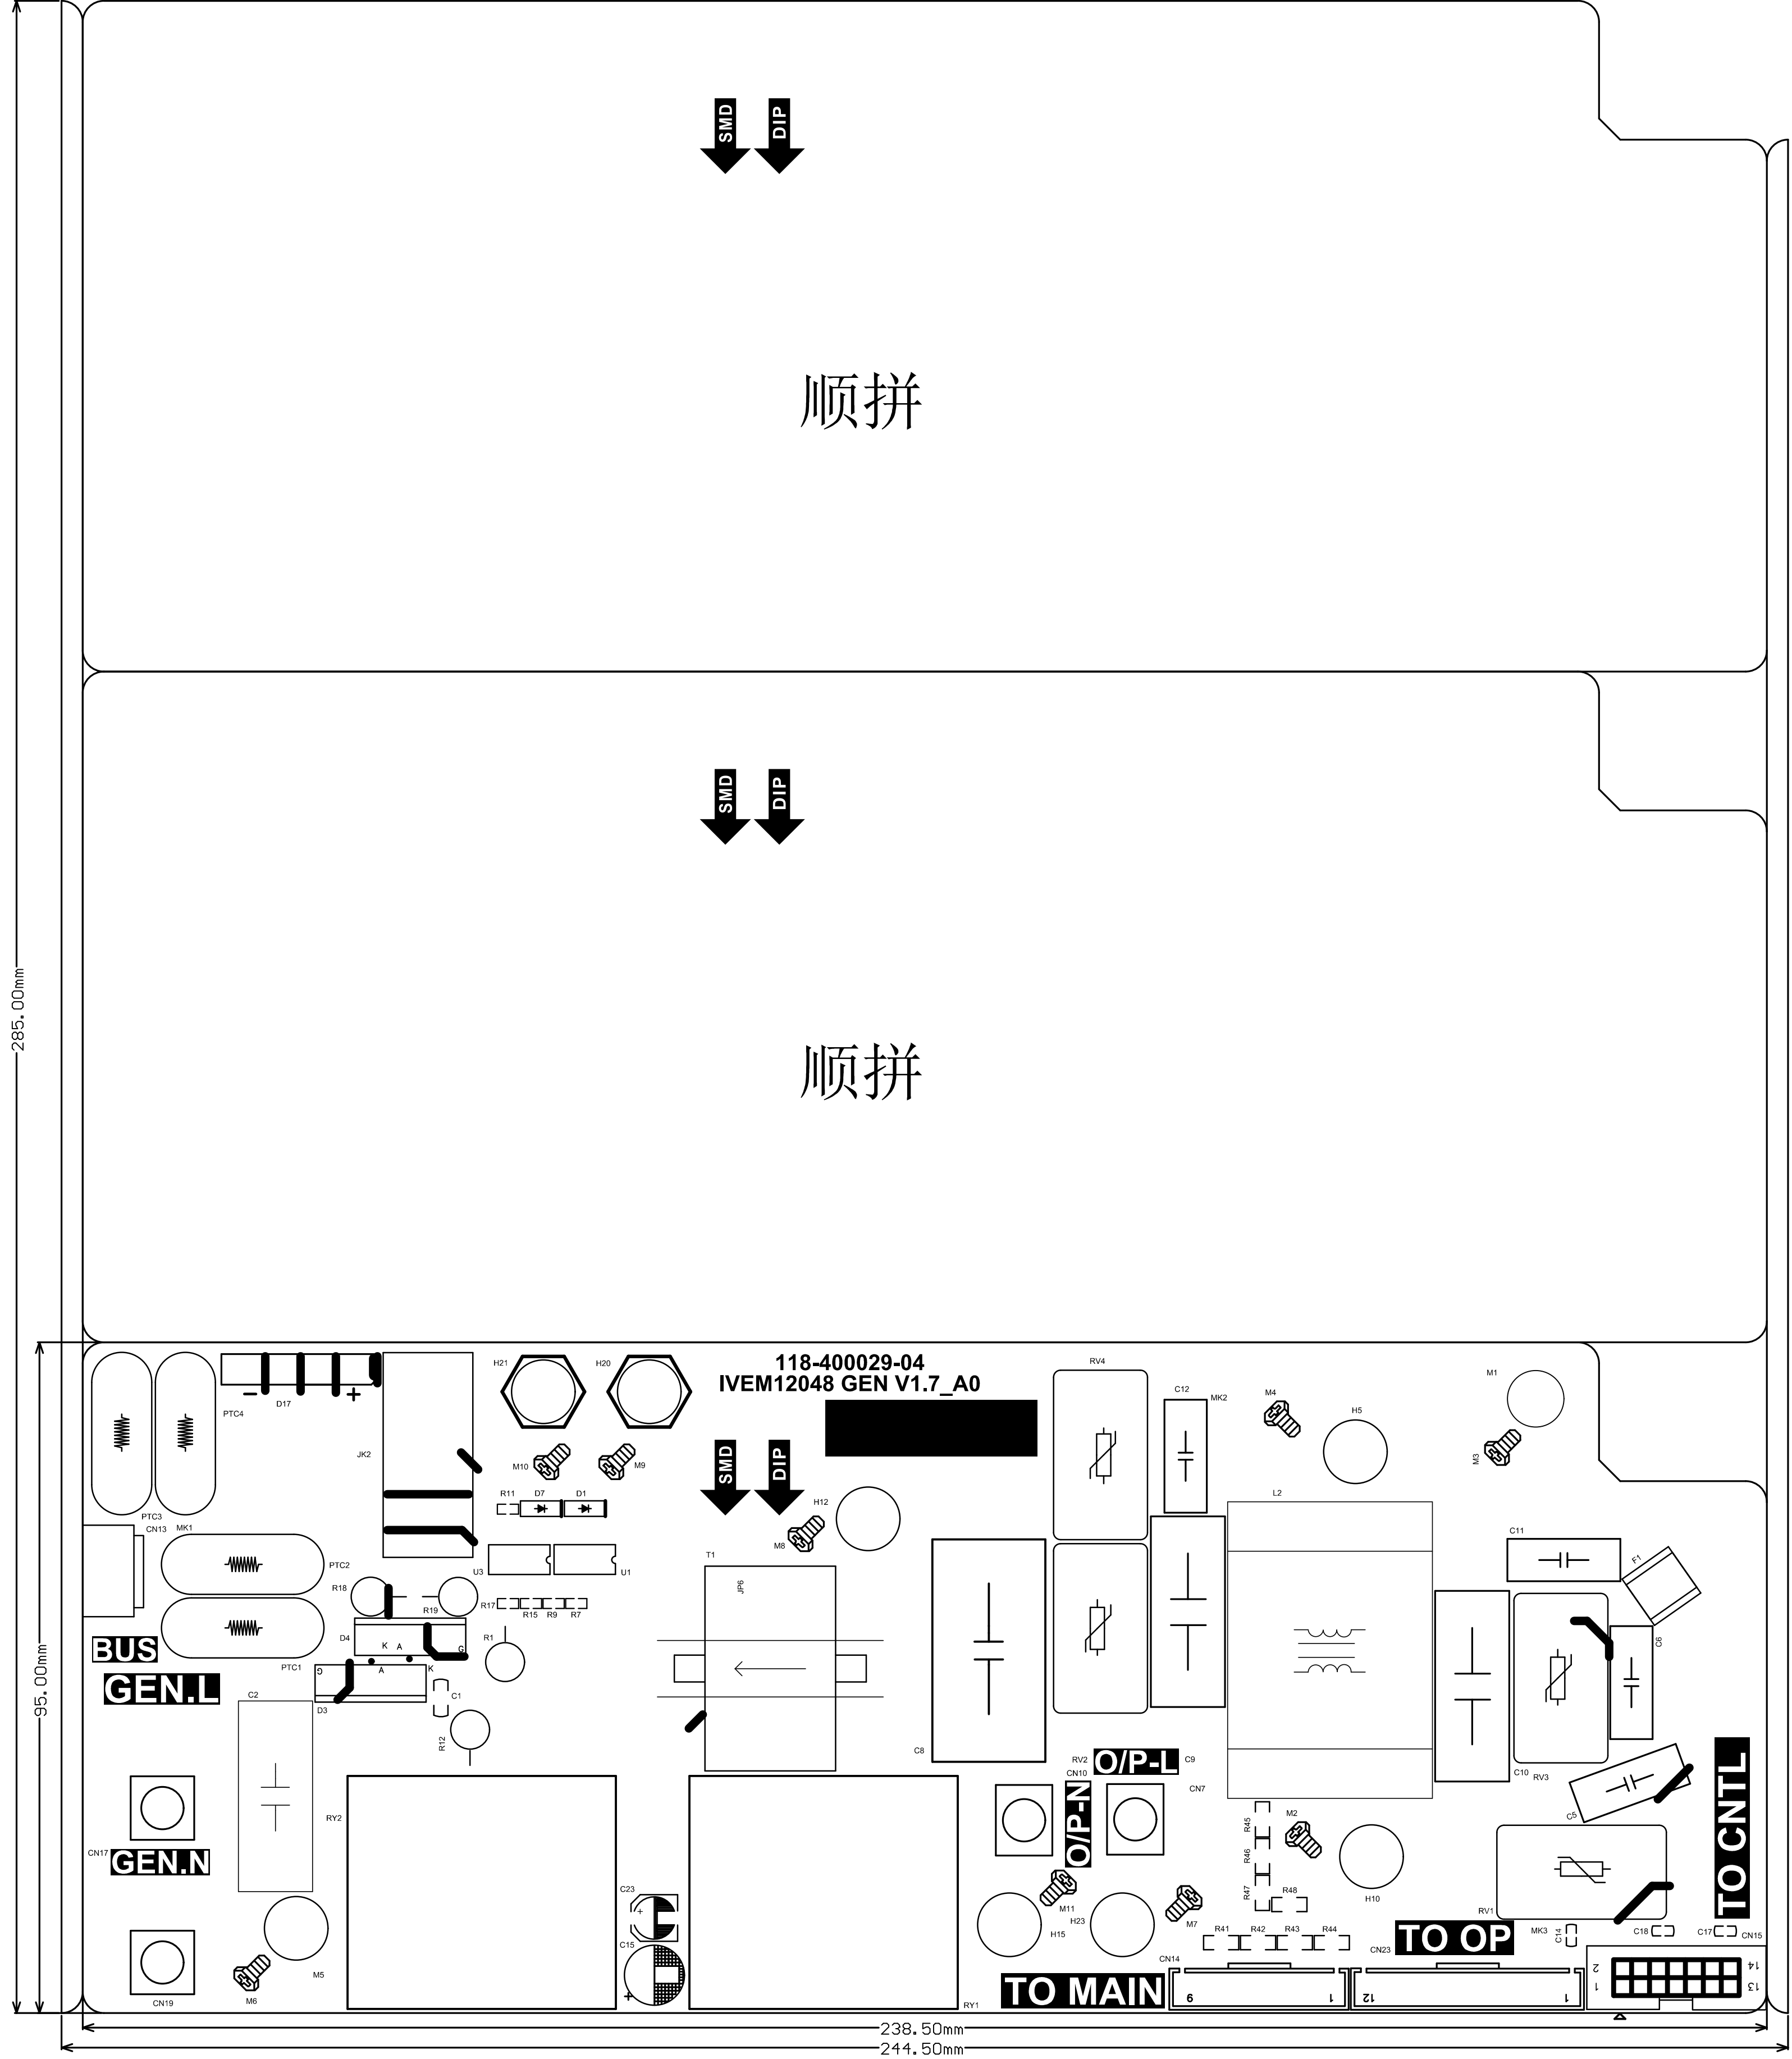

并例

并例

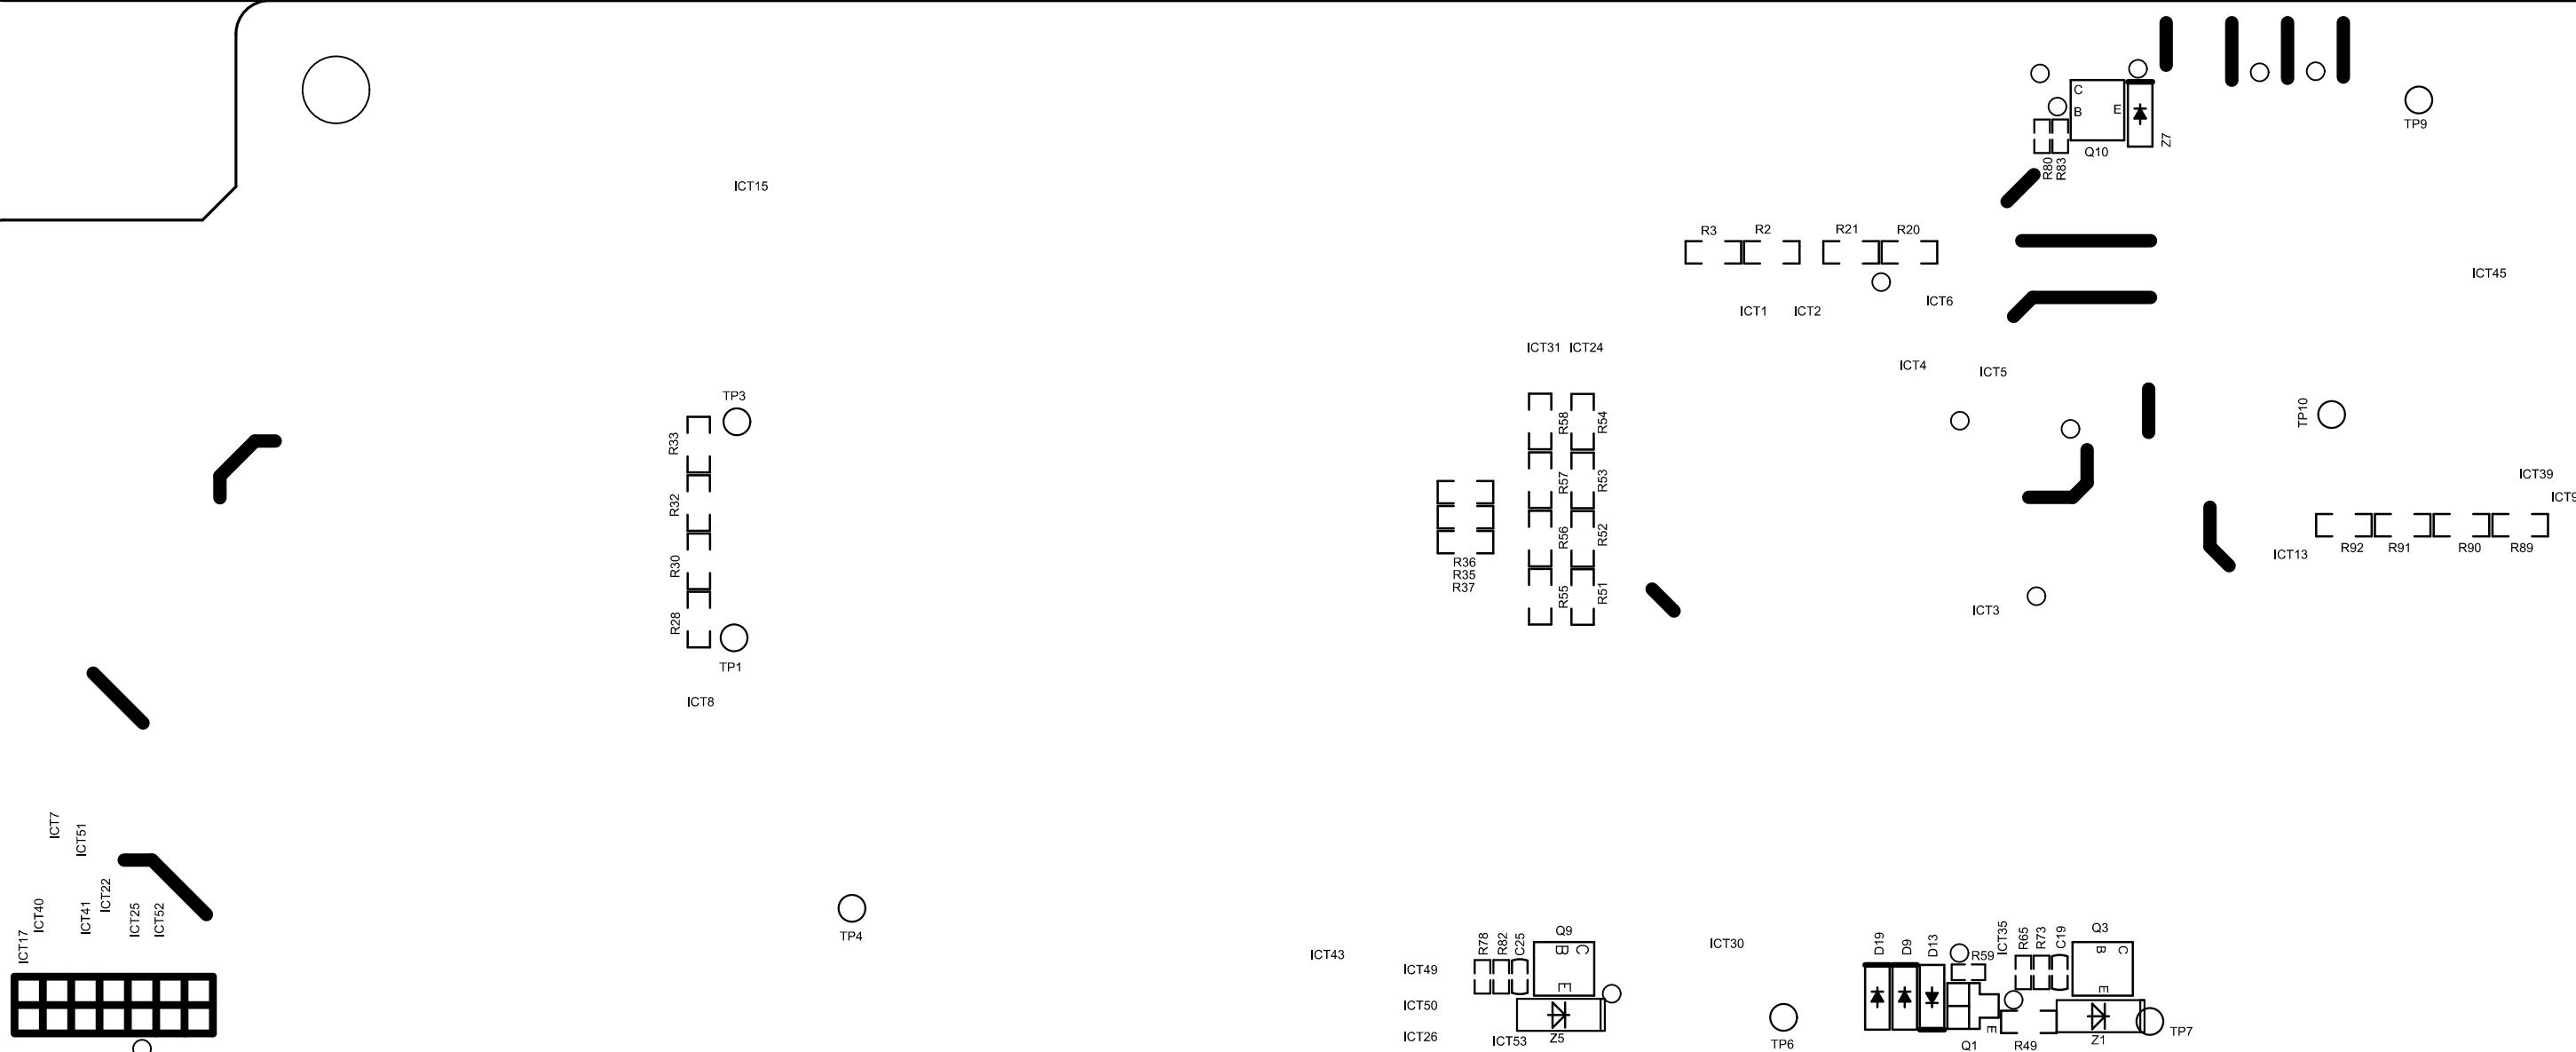


—mm02.832

—mm02.832

582° 00' W-

22° 00' W -

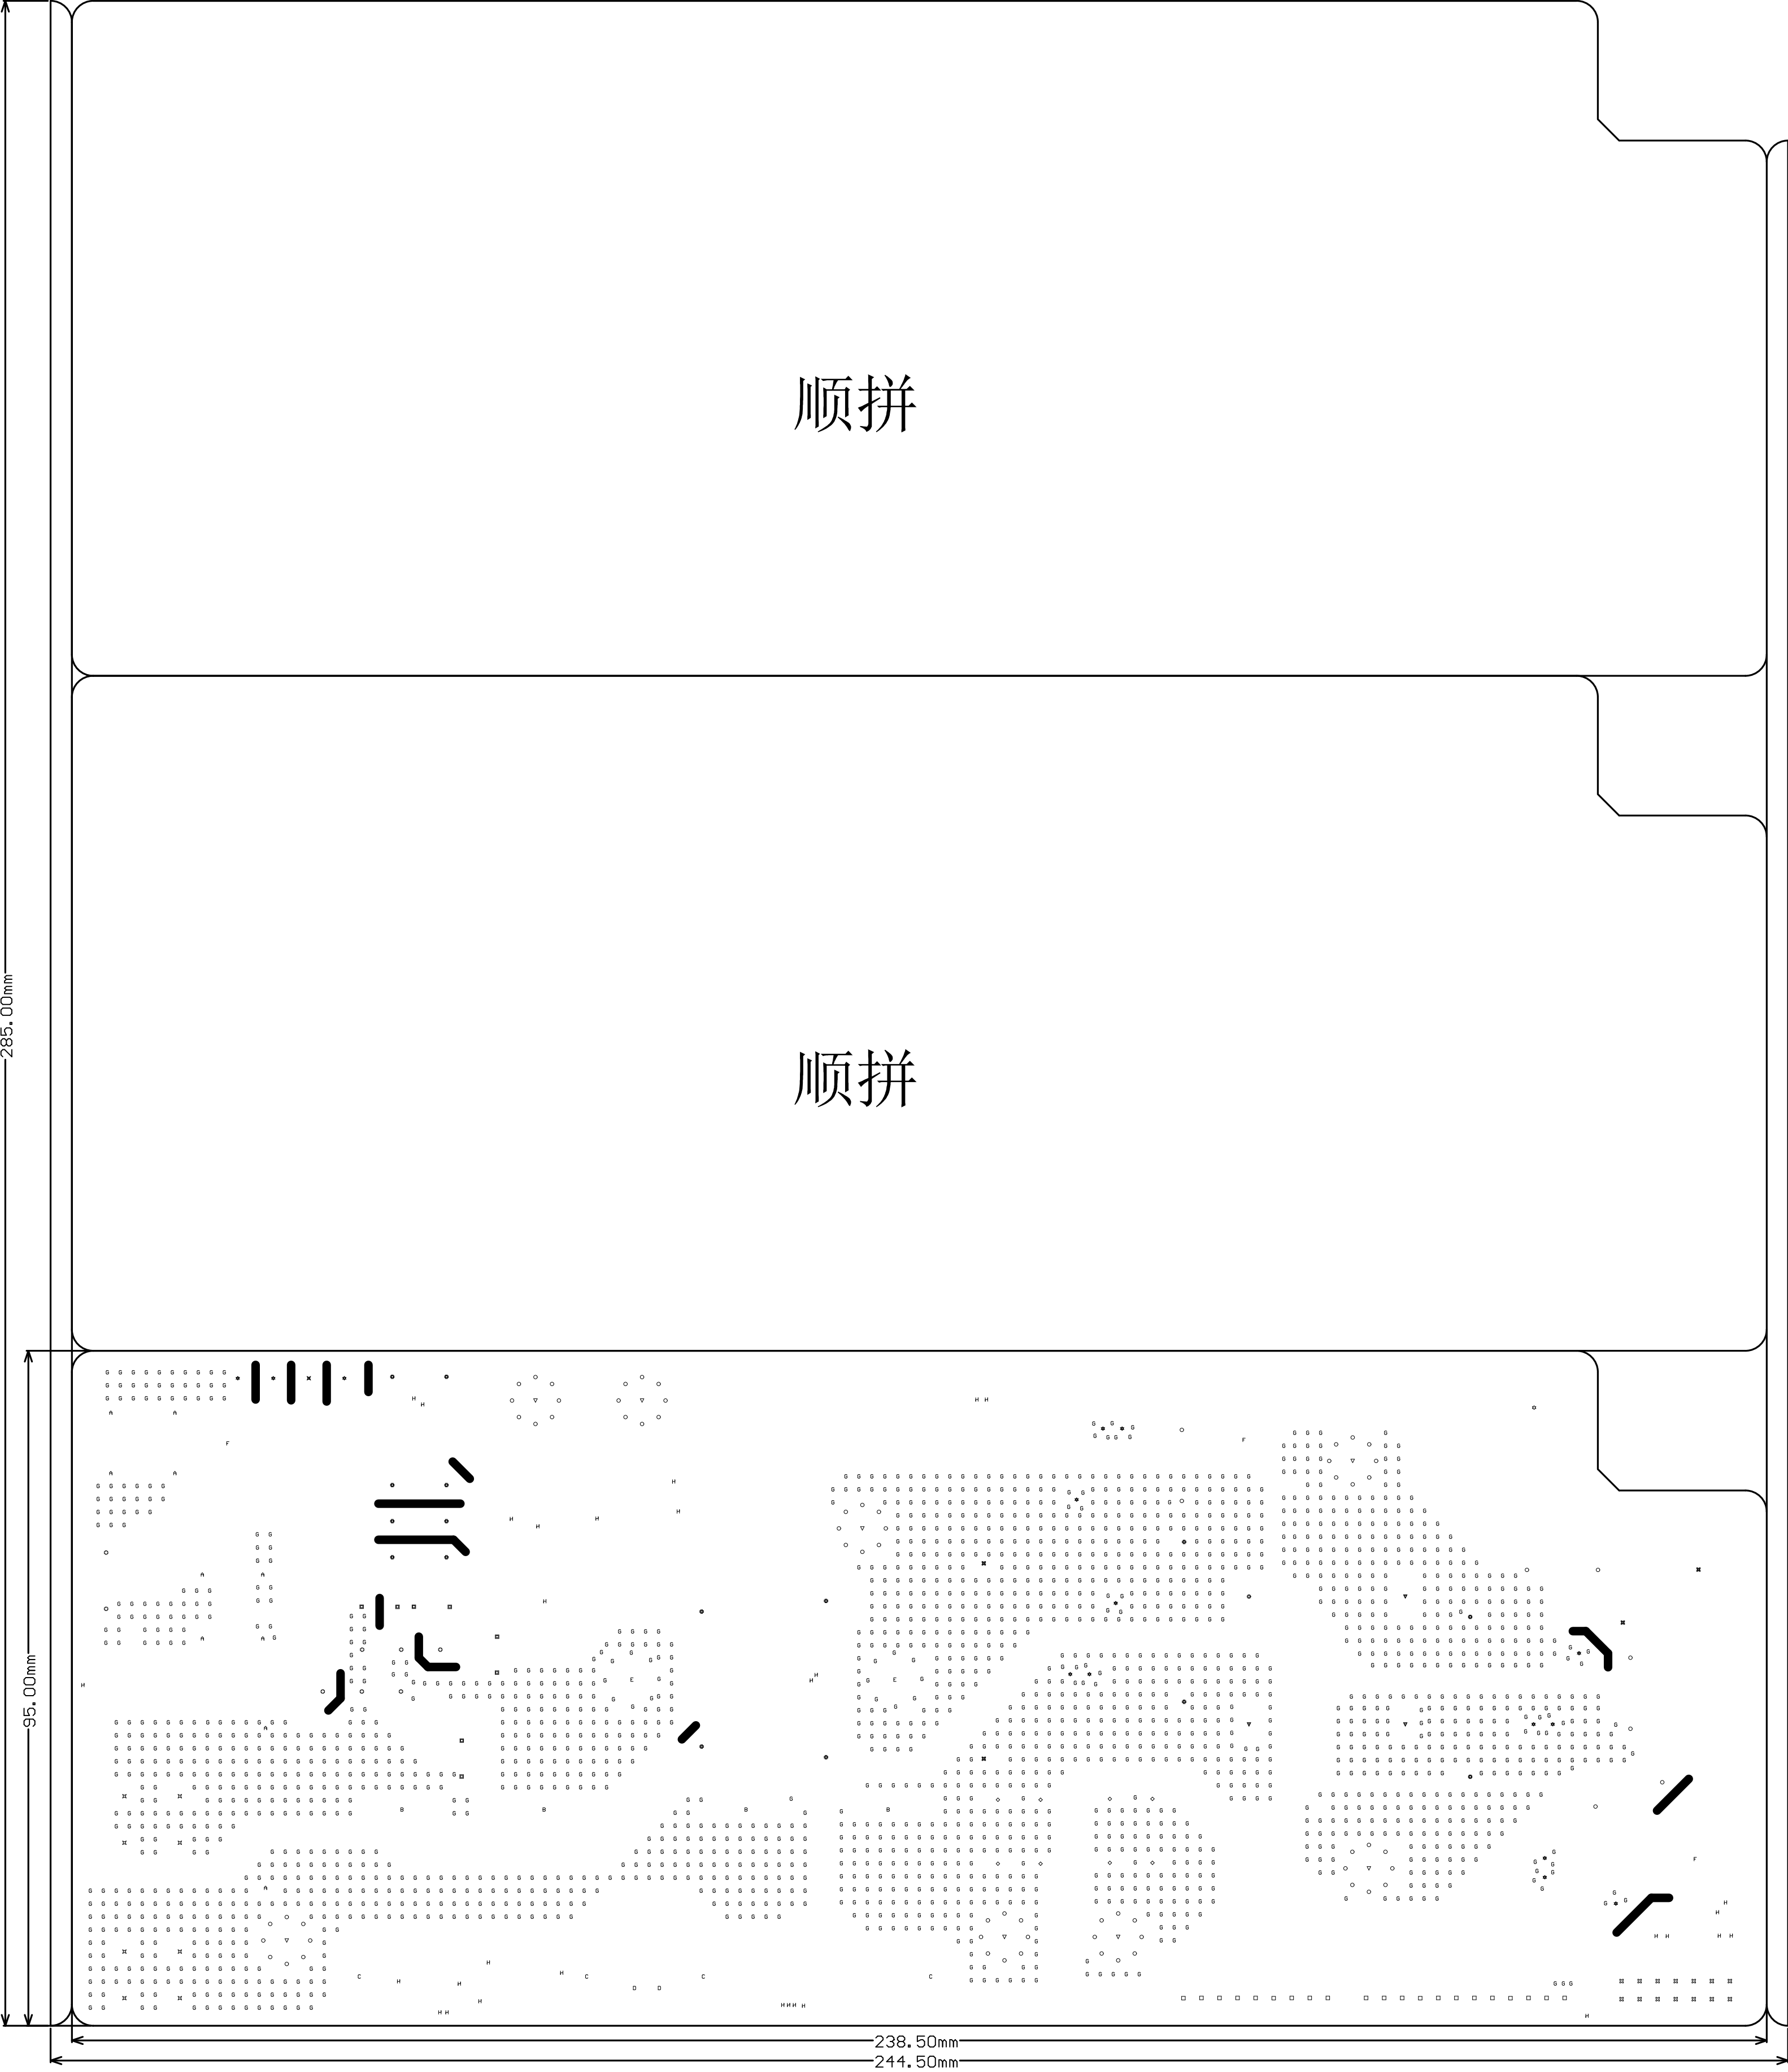

Slot definitions : Routed Path Length = Calculated from tool start centre position
Hole Length = Routed Path Length + Tool Size = Slot length

