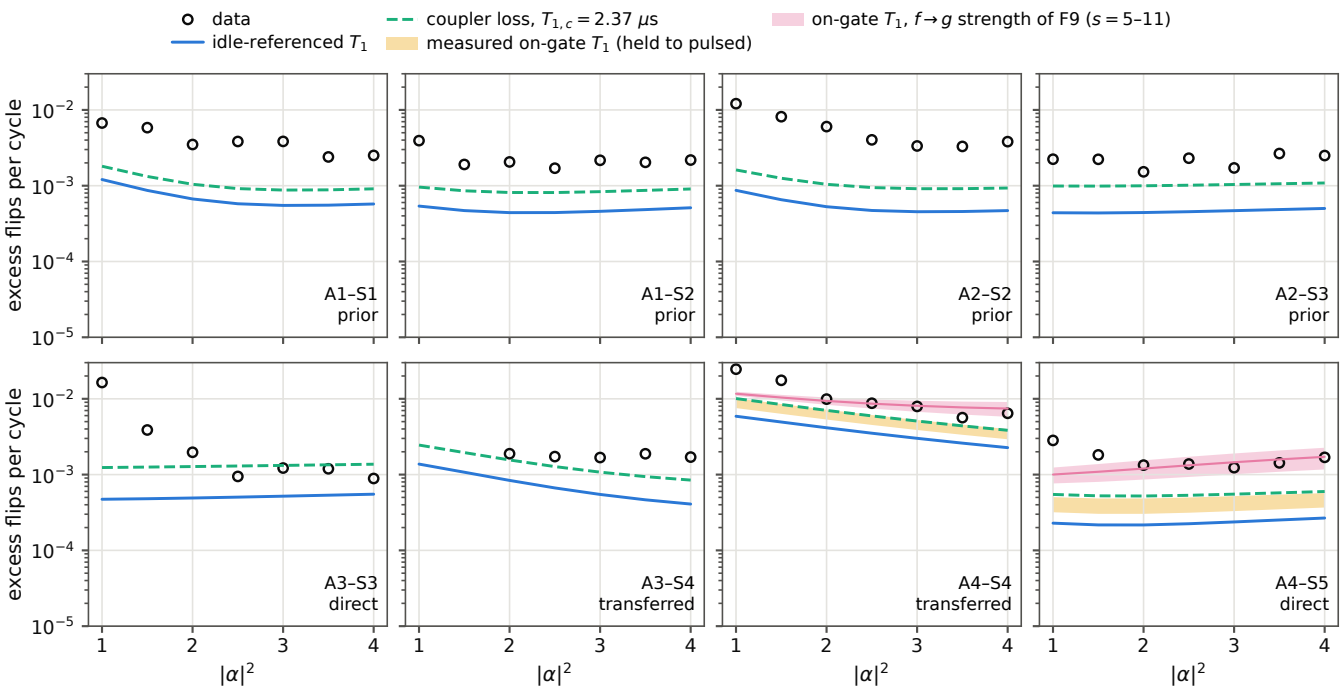
data
idle-referenced T_1
coupler loss, $T_{1,c} = 2.37\ \mu s$
measured on-gate T_1 (held to pulsed)
on-gate T_1, $f \to g$ strength of F9 ($s = 5$–11)
excess flips per cycle
10^{-2}
10^{-3}
10^{-4}
10^{-5}
A1–S1
prior
A1–S2
prior
A2–S2
prior
A2–S3
prior
A3–S3
direct
A3–S4
transferred
A4–S4
transferred
A4–S5
direct
1
2
3
4
$|\alpha|^2$