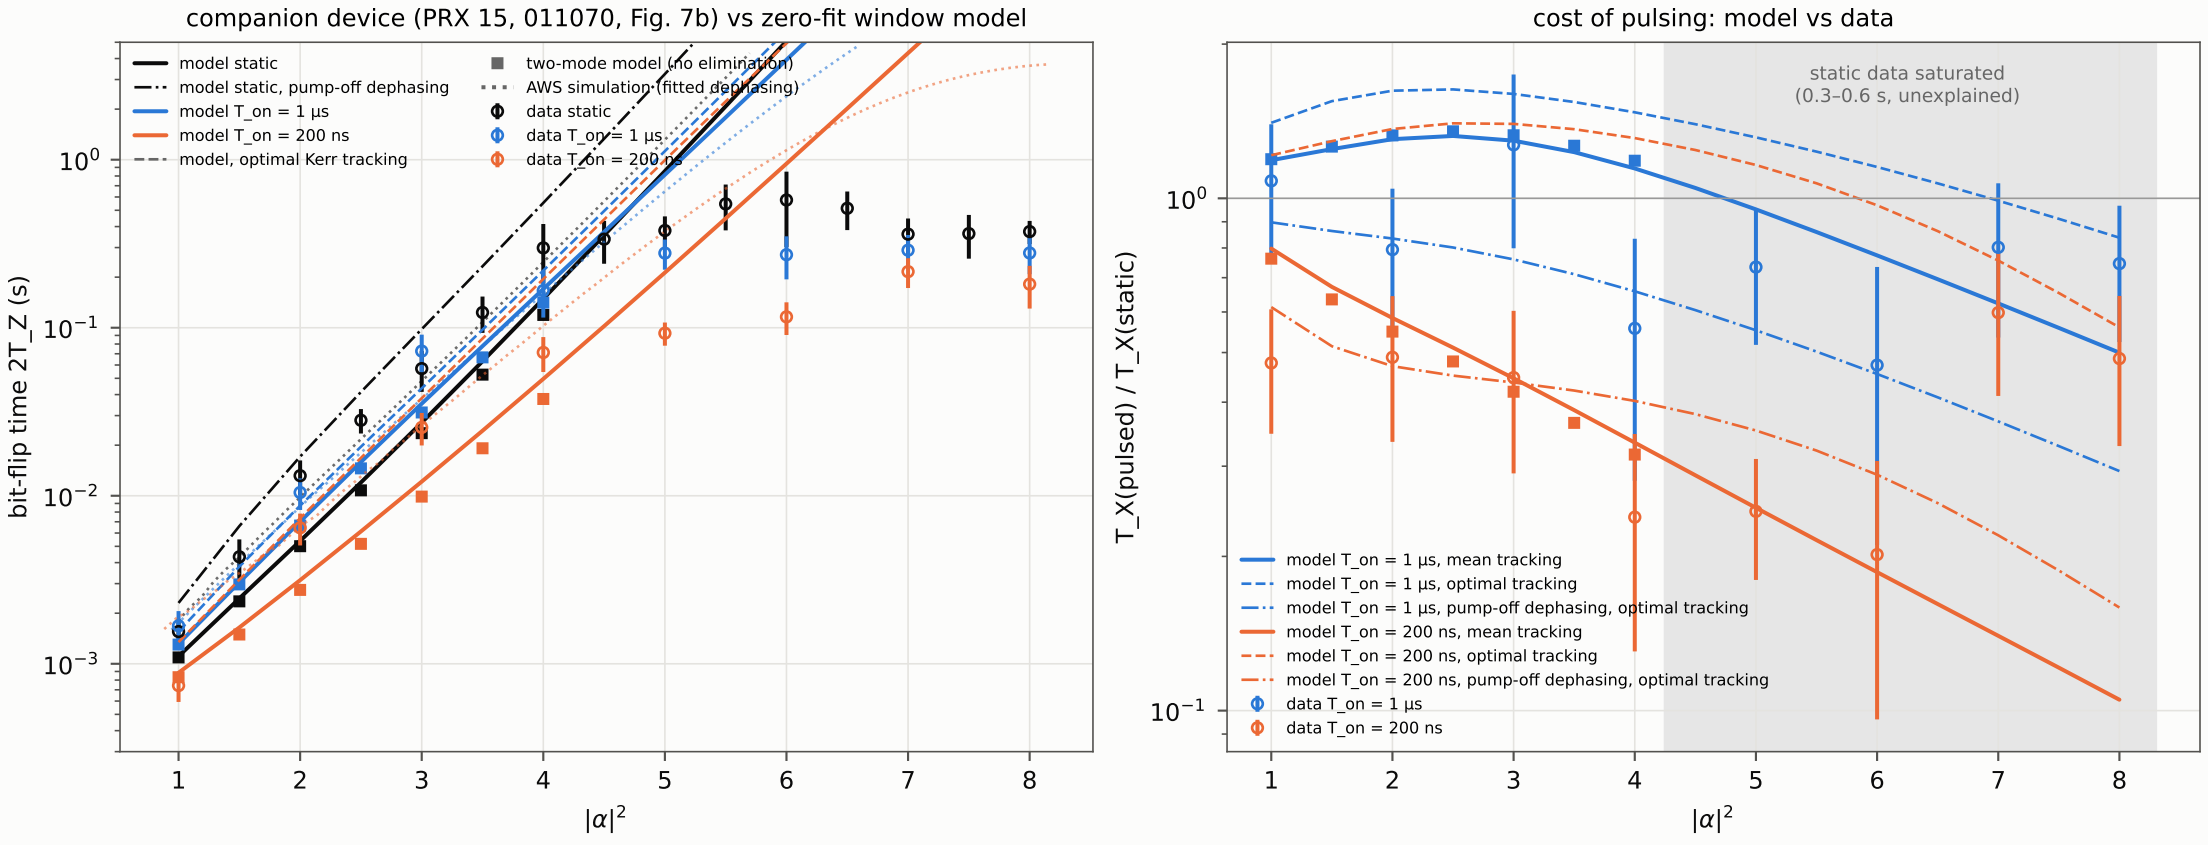
companion device (PRX 15, 011070, Fig. 7b) vs zero-fit window model
model static
model static, pump-off dephasing
model T_on = 1 μs
model T_on = 200 ns
model, optimal Kerr tracking
two-mode model (no elimination)
AWS simulation (fitted dephasing)
data static
data T_on = 1 μs
data T_on = 200 ns
bit-flip time 2T_Z (s)
$|\alpha|^2$
cost of pulsing: model vs data
static data saturated
(0.3–0.6 s, unexplained)
T_X(pulsed) / T_X(static)
model T_on = 1 μs, mean tracking
model T_on = 1 μs, optimal tracking
model T_on = 1 μs, pump-off dephasing, optimal tracking
model T_on = 200 ns, mean tracking
model T_on = 200 ns, optimal tracking
model T_on = 200 ns, pump-off dephasing, optimal tracking
data T_on = 1 μs
data T_on = 200 ns
$|\alpha|^2$