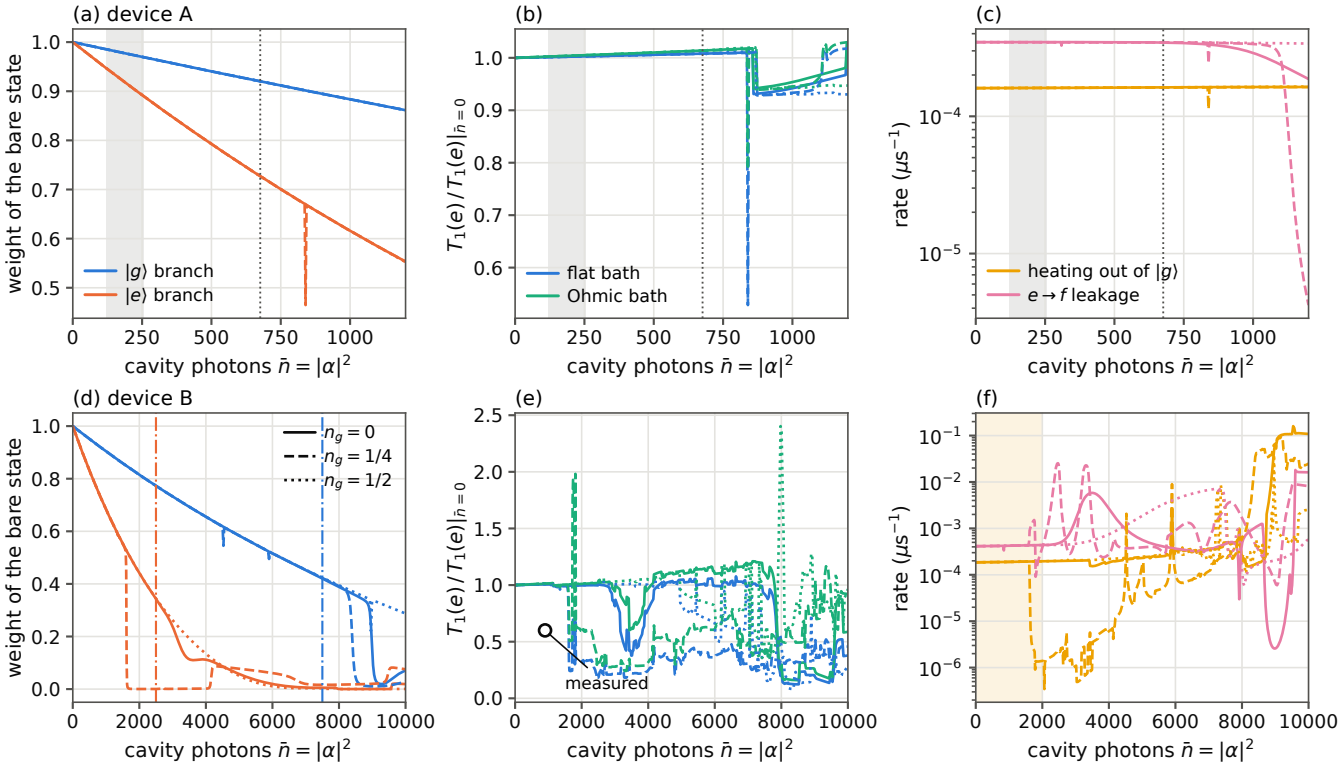
(a) device A
weight of the bare state
$|g\rangle$ branch
$|e\rangle$ branch
cavity photons $\bar{n} = |\alpha|^2$
(b)
$T_1(e)/T_1(e)|_{\bar{n}=0}$
flat bath
Ohmic bath
cavity photons $\bar{n} = |\alpha|^2$
(c)
rate (μs^{-1})
heating out of $|g\rangle$
$e \to f$ leakage
cavity photons $\bar{n} = |\alpha|^2$
(d) device B
weight of the bare state
$n_g = 0$
$n_g = 1/4$
$n_g = 1/2$
cavity photons $\bar{n} = |\alpha|^2$
(e)
$T_1(e)/T_1(e)|_{\bar{n}=0}$
measured
cavity photons $\bar{n} = |\alpha|^2$
(f)
rate (μs^{-1})
cavity photons $\bar{n} = |\alpha|^2$