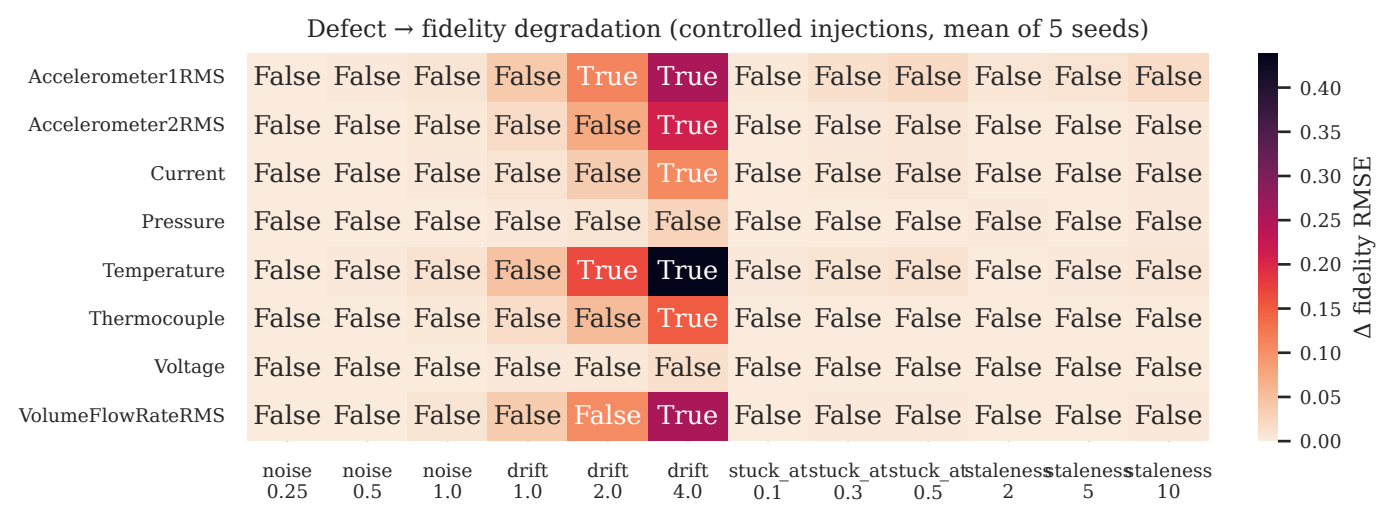
Defect → fidelity degradation (controlled injections, mean of 5 seeds)
Accelerometer1RMS
Accelerometer2RMS
Current
Pressure
Temperature
Thermocouple
Voltage
VolumeFlowRateRMS
False True
noise 0.25
noise 0.5
noise 1.0
drift 1.0
drift 2.0
drift 4.0
stuck_at 0.1
stuck_at 0.3
stuck_at 0.5
staleness 2
staleness 5
staleness 10
Δ fidelity RMSE
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0.35
0.40