



Britannicus Stone


Stoneycombe

Stoneycombe is a mixture of soft pinks and light reds with hints of grey and intricately shaped crustaceans and corals for added depth. Small cream coloured calcite veins make sure that this stone is always interesting. It is a Devonian Limestone, found in the same areas as two other Britannicus stones, Ashburton and Moorcroft.



Stoneycombe

In the quarry

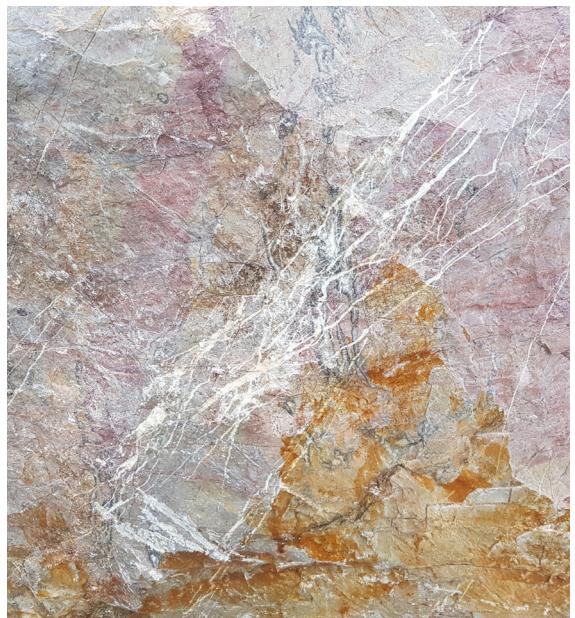


Britannicus Stone projects using Stoneycombe

Private residence, London



Stoneycombe

On the polishing line

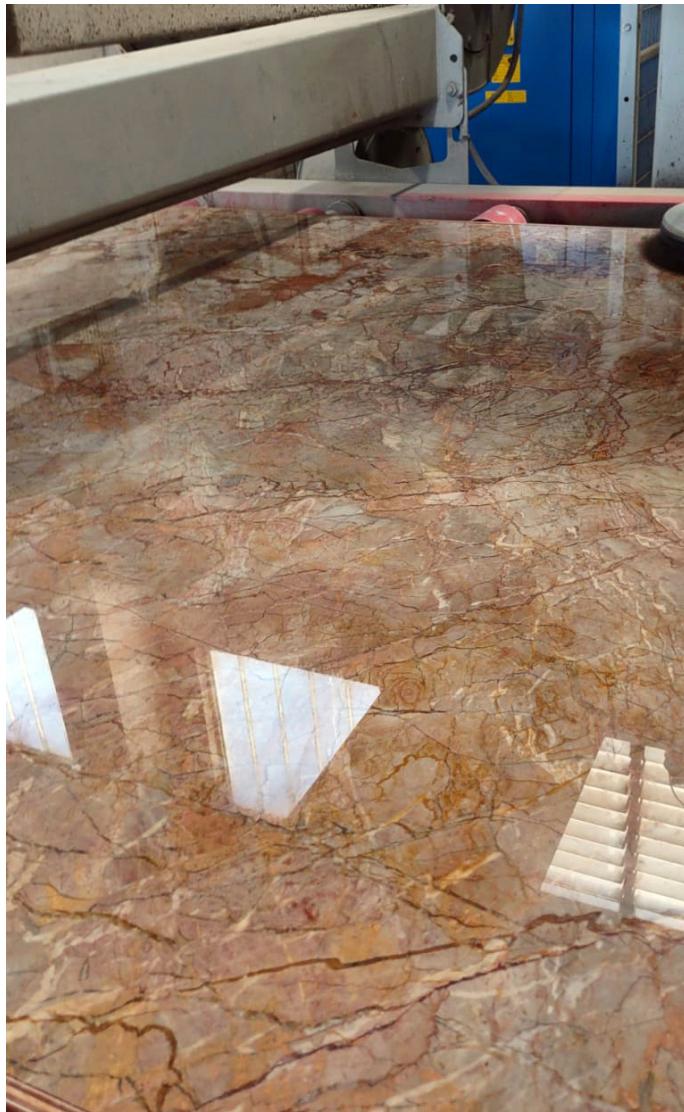

As can be seen on the right the surface gloss meter reading is 111. This shows how well Stonecombe takes a polish. Generally, the gloss of natural marble is mostly about 80GU. The majority of granite is about 90GU*.

*GU - Surface Gloss value

Stoneycombe

Slab Dimensions:

Typical marble slabs are 1.4m x 1.0m; however they can vary.


Tile sizes available:



Up to 600mm x 600mm

Finishes:

Polished, Honed, Aged, Sawn Cut, Sanded, Bushhammered, Tumbled and so on.

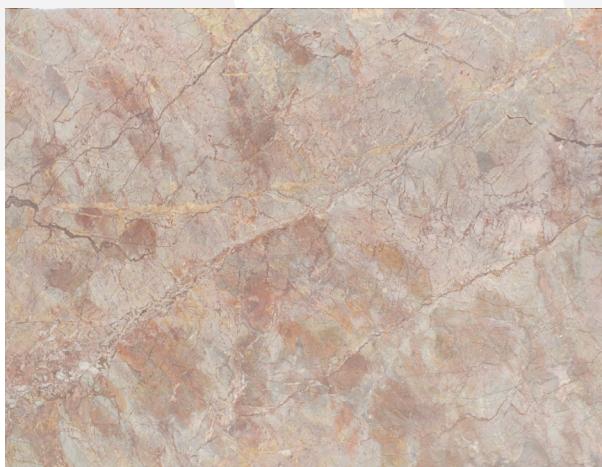

Stoneycombe

Specification:

Further more detailed specifications can be supplied on request.

AGGREGATE INDUSTRIES																																																																																																																																																																																																																					
AGGREGATE PROPERTIES DATA SHEET																																																																																																																																																																																																																					
Unit :-	WESTLEIGH																																																																																																																																																																																																																				
Address :-	Westleigh Quarry Burlescombe Tiverton DEVON EX16 7JA																																																																																																																																																																																																																				
Telephone :-	01823 672036																																																																																																																																																																																																																				
Westleigh Laboratory Westleigh Quarry Burlescombe Tiverton DEVON EX16 7JA																																																																																																																																																																																																																					
<table border="1"> <thead> <tr> <th>MECHANICAL/PHYSICAL PROPERTIES</th> <th>BS Ref.</th> <th>Result</th> <th>Frequency</th> <th>Date of Test</th> <th>Report No.</th> </tr> </thead> <tbody> <tr> <td>Apparent Relative Density</td> <td>BS EN 1097-6</td> <td>2.72 Mg/m³</td> <td>4 / Year</td> <td>4-Apr-22</td> <td>AGG22/044/1</td> </tr> <tr> <td>S.S.D. Relative Density</td> <td>BS EN 1097-6</td> <td>2.69 Mg/m³</td> <td>4 / Year</td> <td>4-Apr-22</td> <td>AGG22/044/1</td> </tr> <tr> <td>Oven Dry Relative Density</td> <td>BS EN 1097-6</td> <td>2.67 Mg/m³</td> <td>4 / Year</td> <td>4-Apr-22</td> <td>AGG22/044/1</td> </tr> <tr> <td>Water Absorption</td> <td>BS EN 1097-6</td> <td>>0.7%</td> <td>4 / Year</td> <td>4-Apr-22</td> <td>AGG22/044/1</td> </tr> <tr> <td>Aggregate Abrasion Value</td> <td>BS EN 1097-8</td> <td>5.0</td> <td>1 / Year</td> <td>11-Apr-22</td> <td>AGG22/044/2</td> </tr> <tr> <td>Water Soluble Chloride salt Content</td> <td>BS EN 1744-1</td> <td><0.001%</td> <td>2 Years</td> <td>30-Mar-21</td> <td>TR 799158</td> </tr> <tr> <td>Water Soluble Sulfate Content SO4</td> <td>TRL 447 Test 1</td> <td><50mg/l</td> <td>1 / Year</td> <td>30-Mar-22</td> <td>TR 870167</td> </tr> <tr> <td>Acid Soluble Sulfate Content SO4</td> <td>TRL 447 Test 2</td> <td>0.10%</td> <td>1 / Year</td> <td>29-Mar-22</td> <td>TR 870168</td> </tr> <tr> <td>Total Sulphur Content</td> <td>BS EN 1744-1</td> <td>>0.1%</td> <td>1 / Year</td> <td>29-Mar-22</td> <td>TR 870169</td> </tr> <tr> <td>Total Potential Sulfate Content</td> <td>TRL 447 Test 4</td> <td>0.10%</td> <td>1 / Year</td> <td>29-Mar-22</td> <td>TR 870190</td> </tr> <tr> <td>pH Value</td> <td>BS 1377 - 1990</td> <td>8.5</td> <td>1 / Year</td> <td>18-Mar-22</td> <td>TR 870191</td> </tr> <tr> <td>Chloride Ion Content</td> <td>BS EN 1097-6</td> <td>80.16%</td> <td>2 Years</td> <td>22-Mar-22</td> <td>TR 870193</td> </tr> <tr> <td>Carbon Dioxide Content</td> <td>BS EN 1097-2 2005</td> <td>35.27%</td> <td>2 Years</td> <td>23-Mar-22</td> <td>TR 870193</td> </tr> <tr> <td>Micro Devit Coefficient</td> <td>BS EN 1097-1</td> <td>1</td> <td>2 Years</td> <td>7-Apr-22</td> <td>AGG22/044/3</td> </tr> <tr> <td>Los Angeles Coefficient</td> <td>BS EN 1097-2</td> <td>21</td> <td>2 / year</td> <td>6-Apr-22</td> <td>AGG22/044/4</td> </tr> <tr> <td>Drying Shrinkage</td> <td>BS EN 1367-4</td> <td>0.026%</td> <td>5 years</td> <td>20-Jun-22</td> <td>TR 884003</td> </tr> <tr> <td>Petrographical Examination</td> <td>BSB12 - 104</td> <td>YES</td> <td>3 Years</td> <td>29-Mar-22</td> <td>TR 870195</td> </tr> <tr> <td>Alkaline Silica Reaction : ASR</td> <td>ASTM C 289 - 94</td> <td>Innocuous</td> <td>3 Years</td> <td>27-Feb-20</td> <td>TR 650046</td> </tr> <tr> <td>Magnesium Sulfate Soundness Value</td> <td>BS EN 1367-2</td> <td>2</td> <td>2 Years</td> <td>16-May-22</td> <td>AGG22/044/5</td> </tr> <tr> <td>Oxidisable Sulfides Content SO4</td> <td>TRL 447 Test 2 & 4</td> <td>0.04%</td> <td>1 / Year</td> <td>30-Mar-22</td> <td>TR 870196</td> </tr> <tr> <td>Loss on Ignition</td> <td>BS EN 1097-1</td> <td>37.10%</td> <td>1 / Year</td> <td>22-Mar-22</td> <td>TR 870197</td> </tr> <tr> <td>Resistance to Thermal Shock</td> <td>BS EN 1367-5</td> <td>5.4</td> <td>1 / Year</td> <td>6-May-21</td> <td>TR 870198</td> </tr> <tr> <td>Brinell Abrasion</td> <td>BS EN 12997-11</td> <td>30%</td> <td>1 / Year</td> <td>21-Jun-22</td> <td>AGG22/044/6</td> </tr> <tr> <td>Polished Stone Value</td> <td>BS EN 1097-8</td> <td>45</td> <td>1/Year (*)</td> <td>11-May-22</td> <td>AGG22/045</td> </tr> <tr> <td colspan="6"> <table border="1"> <thead> <tr> <th>Type 1</th> <th>OMC</th> <th>BS 812 - 124</th> <th>6.0%</th> <th>1 / Year</th> <th>19-Jul-22</th> <th>TR 883814</th> </tr> </thead> <tbody> <tr> <td></td> <td>Max Dry Denshy</td> <td>BS 812 - 124</td> <td>2.25 Mg/m³</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Plastic Limit</td> <td>BS 1377 - 2</td> <td>Non Plastic</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Frost Heave</td> <td>BS 812-124</td> <td>13.2mm</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="6"> <p>All tests carried out by UKAS approved Laboratory unless denoted by *.</p> <table border="1"> <thead> <tr> <th colspan="2">OTHER INFORMATION:-</th> <th colspan="4">For Aggregate Industries</th> </tr> </thead> <tbody> <tr> <td colspan="2"></td> <td colspan="4"></td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="6"> <p>(*) = unless Attestation Level 2+ source - then every 3 months</p> </td> </tr> </tbody> </table>						MECHANICAL/PHYSICAL PROPERTIES	BS Ref.	Result	Frequency	Date of Test	Report No.	Apparent Relative Density	BS EN 1097-6	2.72 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1	S.S.D. Relative Density	BS EN 1097-6	2.69 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1	Oven Dry Relative Density	BS EN 1097-6	2.67 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1	Water Absorption	BS EN 1097-6	>0.7%	4 / Year	4-Apr-22	AGG22/044/1	Aggregate Abrasion Value	BS EN 1097-8	5.0	1 / Year	11-Apr-22	AGG22/044/2	Water Soluble Chloride salt Content	BS EN 1744-1	<0.001%	2 Years	30-Mar-21	TR 799158	Water Soluble Sulfate Content SO4	TRL 447 Test 1	<50mg/l	1 / Year	30-Mar-22	TR 870167	Acid Soluble Sulfate Content SO4	TRL 447 Test 2	0.10%	1 / Year	29-Mar-22	TR 870168	Total Sulphur Content	BS EN 1744-1	>0.1%	1 / Year	29-Mar-22	TR 870169	Total Potential Sulfate Content	TRL 447 Test 4	0.10%	1 / Year	29-Mar-22	TR 870190	pH Value	BS 1377 - 1990	8.5	1 / Year	18-Mar-22	TR 870191	Chloride Ion Content	BS EN 1097-6	80.16%	2 Years	22-Mar-22	TR 870193	Carbon Dioxide Content	BS EN 1097-2 2005	35.27%	2 Years	23-Mar-22	TR 870193	Micro Devit Coefficient	BS EN 1097-1	1	2 Years	7-Apr-22	AGG22/044/3	Los Angeles Coefficient	BS EN 1097-2	21	2 / year	6-Apr-22	AGG22/044/4	Drying Shrinkage	BS EN 1367-4	0.026%	5 years	20-Jun-22	TR 884003	Petrographical Examination	BSB12 - 104	YES	3 Years	29-Mar-22	TR 870195	Alkaline Silica Reaction : ASR	ASTM C 289 - 94	Innocuous	3 Years	27-Feb-20	TR 650046	Magnesium Sulfate Soundness Value	BS EN 1367-2	2	2 Years	16-May-22	AGG22/044/5	Oxidisable Sulfides Content SO4	TRL 447 Test 2 & 4	0.04%	1 / Year	30-Mar-22	TR 870196	Loss on Ignition	BS EN 1097-1	37.10%	1 / Year	22-Mar-22	TR 870197	Resistance to Thermal Shock	BS EN 1367-5	5.4	1 / Year	6-May-21	TR 870198	Brinell Abrasion	BS EN 12997-11	30%	1 / Year	21-Jun-22	AGG22/044/6	Polished Stone Value	BS EN 1097-8	45	1/Year (*)	11-May-22	AGG22/045	<table border="1"> <thead> <tr> <th>Type 1</th> <th>OMC</th> <th>BS 812 - 124</th> <th>6.0%</th> <th>1 / Year</th> <th>19-Jul-22</th> <th>TR 883814</th> </tr> </thead> <tbody> <tr> <td></td> <td>Max Dry Denshy</td> <td>BS 812 - 124</td> <td>2.25 Mg/m³</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Plastic Limit</td> <td>BS 1377 - 2</td> <td>Non Plastic</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Frost Heave</td> <td>BS 812-124</td> <td>13.2mm</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> </tbody> </table>						Type 1	OMC	BS 812 - 124	6.0%	1 / Year	19-Jul-22	TR 883814		Max Dry Denshy	BS 812 - 124	2.25 Mg/m ³	1 / Year	19-Jul-22	TR 883814		Plastic Limit	BS 1377 - 2	Non Plastic	1 / Year	19-Jul-22	TR 883814		Frost Heave	BS 812-124	13.2mm	1 / Year	19-Jul-22	TR 883814	<p>All tests carried out by UKAS approved Laboratory unless denoted by *.</p> <table border="1"> <thead> <tr> <th colspan="2">OTHER INFORMATION:-</th> <th colspan="4">For Aggregate Industries</th> </tr> </thead> <tbody> <tr> <td colspan="2"></td> <td colspan="4"></td> </tr> </tbody> </table>						OTHER INFORMATION:-		For Aggregate Industries										<p>(*) = unless Attestation Level 2+ source - then every 3 months</p>					
MECHANICAL/PHYSICAL PROPERTIES	BS Ref.	Result	Frequency	Date of Test	Report No.																																																																																																																																																																																																																
Apparent Relative Density	BS EN 1097-6	2.72 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1																																																																																																																																																																																																																
S.S.D. Relative Density	BS EN 1097-6	2.69 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1																																																																																																																																																																																																																
Oven Dry Relative Density	BS EN 1097-6	2.67 Mg/m ³	4 / Year	4-Apr-22	AGG22/044/1																																																																																																																																																																																																																
Water Absorption	BS EN 1097-6	>0.7%	4 / Year	4-Apr-22	AGG22/044/1																																																																																																																																																																																																																
Aggregate Abrasion Value	BS EN 1097-8	5.0	1 / Year	11-Apr-22	AGG22/044/2																																																																																																																																																																																																																
Water Soluble Chloride salt Content	BS EN 1744-1	<0.001%	2 Years	30-Mar-21	TR 799158																																																																																																																																																																																																																
Water Soluble Sulfate Content SO4	TRL 447 Test 1	<50mg/l	1 / Year	30-Mar-22	TR 870167																																																																																																																																																																																																																
Acid Soluble Sulfate Content SO4	TRL 447 Test 2	0.10%	1 / Year	29-Mar-22	TR 870168																																																																																																																																																																																																																
Total Sulphur Content	BS EN 1744-1	>0.1%	1 / Year	29-Mar-22	TR 870169																																																																																																																																																																																																																
Total Potential Sulfate Content	TRL 447 Test 4	0.10%	1 / Year	29-Mar-22	TR 870190																																																																																																																																																																																																																
pH Value	BS 1377 - 1990	8.5	1 / Year	18-Mar-22	TR 870191																																																																																																																																																																																																																
Chloride Ion Content	BS EN 1097-6	80.16%	2 Years	22-Mar-22	TR 870193																																																																																																																																																																																																																
Carbon Dioxide Content	BS EN 1097-2 2005	35.27%	2 Years	23-Mar-22	TR 870193																																																																																																																																																																																																																
Micro Devit Coefficient	BS EN 1097-1	1	2 Years	7-Apr-22	AGG22/044/3																																																																																																																																																																																																																
Los Angeles Coefficient	BS EN 1097-2	21	2 / year	6-Apr-22	AGG22/044/4																																																																																																																																																																																																																
Drying Shrinkage	BS EN 1367-4	0.026%	5 years	20-Jun-22	TR 884003																																																																																																																																																																																																																
Petrographical Examination	BSB12 - 104	YES	3 Years	29-Mar-22	TR 870195																																																																																																																																																																																																																
Alkaline Silica Reaction : ASR	ASTM C 289 - 94	Innocuous	3 Years	27-Feb-20	TR 650046																																																																																																																																																																																																																
Magnesium Sulfate Soundness Value	BS EN 1367-2	2	2 Years	16-May-22	AGG22/044/5																																																																																																																																																																																																																
Oxidisable Sulfides Content SO4	TRL 447 Test 2 & 4	0.04%	1 / Year	30-Mar-22	TR 870196																																																																																																																																																																																																																
Loss on Ignition	BS EN 1097-1	37.10%	1 / Year	22-Mar-22	TR 870197																																																																																																																																																																																																																
Resistance to Thermal Shock	BS EN 1367-5	5.4	1 / Year	6-May-21	TR 870198																																																																																																																																																																																																																
Brinell Abrasion	BS EN 12997-11	30%	1 / Year	21-Jun-22	AGG22/044/6																																																																																																																																																																																																																
Polished Stone Value	BS EN 1097-8	45	1/Year (*)	11-May-22	AGG22/045																																																																																																																																																																																																																
<table border="1"> <thead> <tr> <th>Type 1</th> <th>OMC</th> <th>BS 812 - 124</th> <th>6.0%</th> <th>1 / Year</th> <th>19-Jul-22</th> <th>TR 883814</th> </tr> </thead> <tbody> <tr> <td></td> <td>Max Dry Denshy</td> <td>BS 812 - 124</td> <td>2.25 Mg/m³</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Plastic Limit</td> <td>BS 1377 - 2</td> <td>Non Plastic</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> <tr> <td></td> <td>Frost Heave</td> <td>BS 812-124</td> <td>13.2mm</td> <td>1 / Year</td> <td>19-Jul-22</td> <td>TR 883814</td> </tr> </tbody> </table>						Type 1	OMC	BS 812 - 124	6.0%	1 / Year	19-Jul-22	TR 883814		Max Dry Denshy	BS 812 - 124	2.25 Mg/m ³	1 / Year	19-Jul-22	TR 883814		Plastic Limit	BS 1377 - 2	Non Plastic	1 / Year	19-Jul-22	TR 883814		Frost Heave	BS 812-124	13.2mm	1 / Year	19-Jul-22	TR 883814																																																																																																																																																																																				
Type 1	OMC	BS 812 - 124	6.0%	1 / Year	19-Jul-22	TR 883814																																																																																																																																																																																																															
	Max Dry Denshy	BS 812 - 124	2.25 Mg/m ³	1 / Year	19-Jul-22	TR 883814																																																																																																																																																																																																															
	Plastic Limit	BS 1377 - 2	Non Plastic	1 / Year	19-Jul-22	TR 883814																																																																																																																																																																																																															
	Frost Heave	BS 812-124	13.2mm	1 / Year	19-Jul-22	TR 883814																																																																																																																																																																																																															
<p>All tests carried out by UKAS approved Laboratory unless denoted by *.</p> <table border="1"> <thead> <tr> <th colspan="2">OTHER INFORMATION:-</th> <th colspan="4">For Aggregate Industries</th> </tr> </thead> <tbody> <tr> <td colspan="2"></td> <td colspan="4"></td> </tr> </tbody> </table>						OTHER INFORMATION:-		For Aggregate Industries																																																																																																																																																																																																													
OTHER INFORMATION:-		For Aggregate Industries																																																																																																																																																																																																																			
<p>(*) = unless Attestation Level 2+ source - then every 3 months</p>																																																																																																																																																																																																																					



Sustainability:

We take our responsibility to be as environmentally sustainable as possible very seriously and even though Stone is already ahead of almost all building materials in its green credentials, this doesn't mean we shouldn't try to continue to innovate and drive the environmental costs of using stone ever downwards. Our message is clear: *British stone is environmentally the right choice and will continue to be so.*

The Stone Federation of Britain

As a responsible stone company, we have strengthened our relationship with the British Stone Federation and fully support the Stone Federation Sustainability Statement.

The Stone Federation is passionate about the natural stone industry playing its part in delivering a more carbon and environmentally responsible built environment and ensuring an ethical and responsible supply chain.

As part of this we have signed up to the revised version of the Sustainability Statement which all members are asked to sign up to. Stone Federation members are encouraged to:

Act - Be proactive in implementing sustainability, ethical sourcing, environmental and carbon reduction policies within their business.

Measure - Measure their carbon, environmental and supply chain impact including business operations, material extraction and production.

Disclose - Be transparent about their carbon, environmental and supply chain impact and the ways in which they are working to reduce this and ensure that the information is accessible to clients.



Target - Be specific in targeting areas where they can reduce the carbon and environmental impacts of their business. These target areas should be at least in line with the Government's own Net Zero Carbon targets for the construction industry (78% reduction in emissions by 2038, 100% reduction in emissions by 2050).

Adjust - Continue to measure and assess their progress against their carbon, environmental and supply chain goals and adjust practices where necessary.