





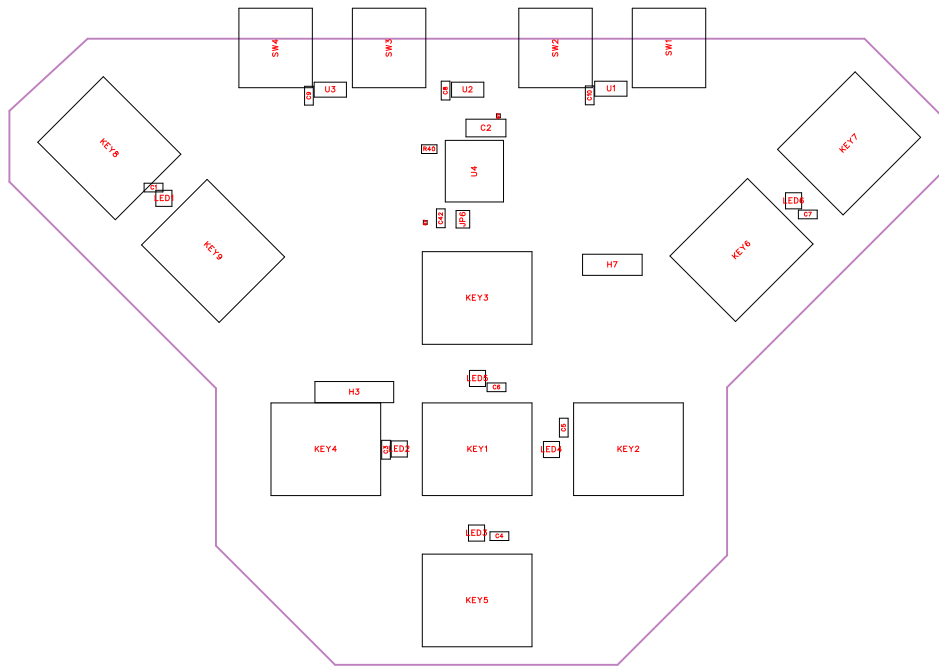

No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	Device	Name
1	2	Test-Point	5V,5V	Test-Point-0.5mm						Test-Point	
2	10	100nF	C1,C3,C4,C5,C6,C7,C8,C9,C10,C42	C0402	100nF	CL05B104K O5NNNC	SAMSUNG(三星)	C1525	LCSC	CL05B104K O5NNNC	100nF
3	1	100uF	C2	C1206	100uF	CL31A107M QHNNNE	SAMSUNG(三星)	C15008	LCSC	CL31A107M QHNNNE	100uF
4	9	B3F-4055	KEY1,KEY2,KEY3,KEY4,KEY5,KEY6,KEY7,KEY8,KEY9	KEY-TH_4P-L12.0-W12.0-P5.00-LS13.4-EH		B3F-4055	OMRON(欧姆龙)	C84931	LCSC	B3F-4055_C84931	B3F-4055
5	6	SK6805-EC15	LED1,LED2,LED3,LED4,LED5,LED6	LED-SMD_4P-L1.5-W1.5-BL		SK6805-EC15	OPSCO(欧思科)	C2890035	LCSC	SK6805-EC15	SK6805-EC15
6	1	10kΩ	R40	R0402	10kΩ	0402WGF10 02TCE	UNI-ROYAL(厚声)	C25744	LCSC	0402WGF10 02TCE	10kΩ
7	4	B3F-3152	SW1,SW2,SW3,SW4	KEY-TH_4P-L7.3-W10.2-P4.50-LS7.0		B3F-3152	OMRON(欧姆龙)	C231320	LCSC	B3F-3152	B3F-3152
8	3	SK6805SIDE-G-003	U1,U2,U3	LED-SMD_4P-L3.5-W1.6_SK6805SIDE-G-001		SK6805SIDE-G-003	OPSCO(欧思科)	C31452139	LCSC	SK6805SIDE-G-003	SK6805SIDE-G-003
9	1	PCA9555APW,118	U4	TSSOP-24_L7.8-W4.4-P0.65-LS6.4-BL		PCA9555APW,118	NXP(恩智浦)	C2652295	LCSC	PCA9555APW,118	PCA9555APW,118

Description	Resistance - Post Trip (R1) (Max)	Resistance - Initial (Ri) (Min)
Test Point 测试点		
Capacitance: Tolerance:±10% Tolerance:±10% Voltage Rated: Temperature Coefficient:		
Capacitance:100uF Tolerance:±20% Tolerance:±20% Voltage Rating:6.3V Temperature Coefficient:X5R		
Circuit:SPST Actuator Style:Rectangular Button Mounting Type:Through Hole Length:12mm Width:12mm Switch Height:7.3mm Contact Current:50mA Voltage Rating:24V With Lamp:- Life:-		
Dominant Wavelength - R:620nm~625nm Dominant Wavelength - R:620nm~625nm Dominant Wavelength - G:520nm~530nm Dominant Wavelength - G:520nm~530nm Dominant Wavelength - B:460nm~470nm Dominant Wavelength - B:460nm~470nm Data Transmission Rate:800Kbit/s Voltag		
Resistance:10000Ω Tolerance:±1% Tolerance:±1% Power\ (Watts\): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Type:Thick Film Resistors Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Circuit:SPST Actuator Style:Rectangle button Operating Force:150gf Mounting Style:Horizontal Plug Switch Height:3.9mm Contact Current:50mA Voltage Rating (DC):24V With Lamp:- Pin Style:PCPin Mechanical Life:- Operating Temperature:-25°C~+70°C Operating Temp		
Dominant Wavelength - G:520nm~530nm Dominant Wavelength - G:520nm~530nm Data Transmission Rate:800Kbit/s Voltage - Supply:3.7V~5.5V Voltage - Supply:3.7V~5.5V Quiescent Current:0.25mA Lens Color:Translucent Frosted Lens ESD Withstand Voltage:2000V Operati		
Interface:I2C ; SMBus Interrupt Output:有中断输出 Output Type: Supply Voltage:1.65V~5.5V Supply Voltage:1.65V~5.5V Output Source current:10mA Output Sink Current:25mA Clock Frequency:400kHz Operating Temperature:-40°C~+85°C Operating Temperature:-40°C~+85°C		

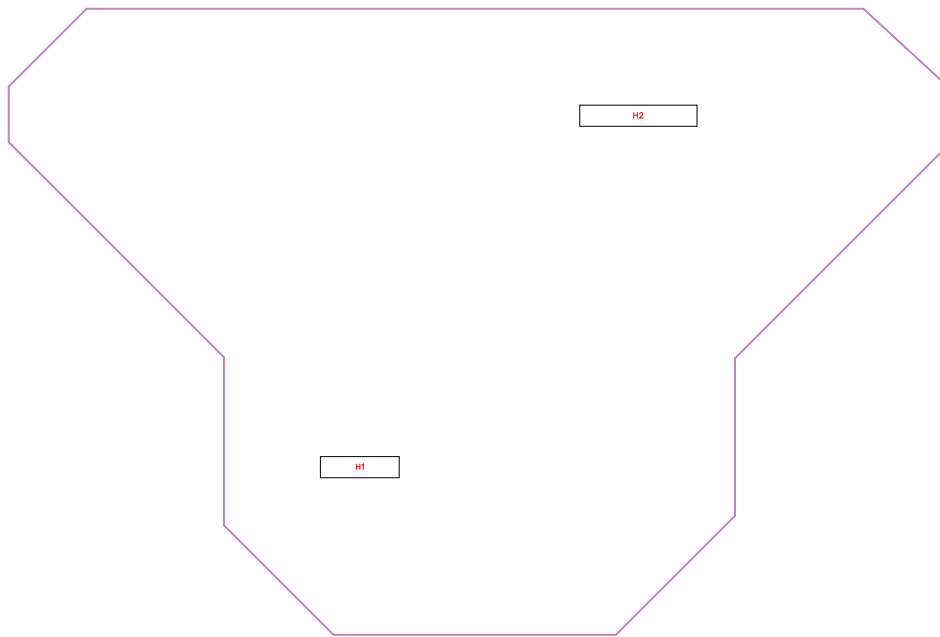