




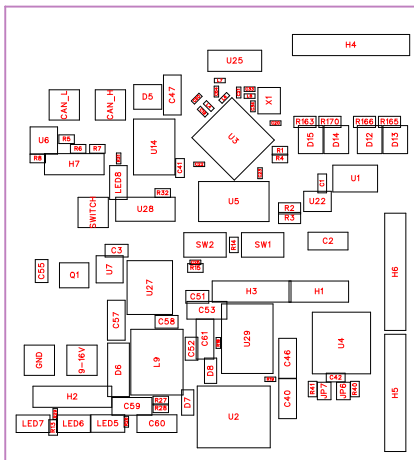

No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	Device	Name
1	2	100nF	C1,C42	C0402	100nF	CL05B104K O5NNNC	SAMSUNG(三星)	C1525	LCSC	CL05B104K O5NNNC	100nF
2	4	100uF	C2,C59,C60,C61	C1206	100uF	CL31A107M QHNNNE	SAMSUNG(三星)	C15008	LCSC	CL31A107M QHNNNE	100uF
3	5	100nF	C3,C51,C52,C55,C58	C0603	100nF	CC0603KRX 7R9BB104	YAGEO(国巨)	C14663	LCSC	CC0603KRX 7R9BB104	100nF
4	5	100nF	C19,C20,C21,C22,C23	R0402	100nF	GRM155R71 H104KE14D	muRata(村田)	C77020	LCSC	GRM155R71 H104KE14D	100nF
5	2	1uF	C25,C50	R0402	1uF	CL05A105KP 5NNNC	SAMSUNG(三星)	C14445	LCSC	CL05A105KP 5NNNC	1uF
6	2	10pF	C33,C34	R0402	10pF	CL05C100JB 5NNNC	SAMSUNG(三星)	C32949	LCSC	CL05C100JB 5NNNC	10pF
7	5	10uF	C40,C46,C47,C53,C57	C1206	10uF	CL31A106KB HNNNE	SAMSUNG(三星)	C13585	LCSC	CL31A106KB HNNNE	10uF
8	1	10nF	C41	C0402	10nF	CGA2B2X7R 1E103KT0Y0 F	TDK	C76702	LCSC	CGA2B2X7R 1E103KT0Y0 F	10nF
9	1	8.2pF	C54	r0402	8.2pF	0402CG8R2 C500NT	FH(风华)	C1579	LCSC	0402CG8R2 C500NT	8.2pF
10	1	PESD1CAN, 215	D5	SOT-23_L2.9-W1.3-P1.90-LS2.4-BR		PESD1CAN, 215	Nexperia(安世)	C15771	LCSC	PESD1CAN, 215	PESD1CAN, 215
11	1	SS54	D6	SMA_L4.4-W2.8-LS5.4-R-RD		SS54	MDD(辰达半导体)	C22452	LCSC	SS54_C22452	SS54
12	2	1N5819WS	D7,D8	SOD-323_L1.8-W1.3-LS2.5-RD		1N5819WS	Hottech(合科泰)	C191023	LCSC	1N5819WS_C191023	1N5819WS
13	4	BAV99	D12,D13,D14,D15	SOT-23_L2.9-W1.3-P1.90-LS2.4-BR		BAV99	BLUEROCK ET(蓝箭)	C305472	LCSC	BAV99_C305472	BAV99
14	1	PZ2.54-1x3P ZZ-L11.5	H1	HDR-TH_PZ 2.54-1X3PZZ-L11.5		PZ2.54-1x3P ZZ-L11.5	SHOUHAN(首韩)	C54876668	LCSC	PZ2.54-1x3P ZZ-L11.5	PZ2.54-1x3P ZZ-L11.5
15	3	PZ2.54-1x6P ZZ-L11.5	H4,H5,H6	HDR-TH_PZ 2.54-1X6PZZ-L11.5		PZ2.54-1x6P ZZ-L11.5	SHOUHAN(首韩)	C54876671	LCSC	PZ2.54-1x6P ZZ-L11.5	PZ2.54-1x6P ZZ-L11.5
16	1	2nH	L4	R0402	2nH	MLG1005S2 N0BT000	TDK	C76769	LCSC	MLG1005S2 N0BT000	2nH
17	1	39nH	L6	r0402	39nH	SDCL1005C 39NJTDF	Sunlord(顺络)	C26443	LCSC	SDCL1005C 39NJTDF	39nH
18	1	1.3nH	L7	r0402	1.3nH	SDCL1005C 1N3STD F	Sunlord(顺络)	C279756	LCSC	SDCL1005C 1N3STD F	1.3nH
19	1	24nH	L8	r0402	24nH	SDCL1005C 24NJTDF	Sunlord(顺络)	C74301	LCSC	SDCL1005C 24NJTDF	24nH
20	1	15uH	L9	IND-SMD_L7.0-W6.6_FXL0630	15uH	FXL0630-150-M	cjiang(长江微电)	C177243	LCSC	FXL0630-150-M	15uH

21	4	KT-0805G	LED5,LED6,LED7,LED8	LED0805-R-RD		KT-0805G	KENTO	C2297	LCSC	KT-0805G	KT-0805G
22	1	AON7544	Q1	DFN-8 L3.2-W3.1-P0.65-LS3.4-BL		AON7544	HXY MOSFET(华轩阳电子)	C5261066	LCSC	AON7544_C5261066	AON7544
23	7	220Ω	R1,R4,R5,R6,R7,R8,R32	R0402	220Ω	0402WGF2200TCE	UNI-ROYAL(厚声)	C25091	LCSC	0402WGF2200TCE	220Ω
24	2	10kΩ	R2,R3	R0603	10kΩ	0603WAF1002T5E	UNI-ROYAL(厚声)	C25804	LCSC	0603WAF1002T5E	10kΩ
25	4	4.7kΩ	R13,R14,R15,R27	R0402	4.7kΩ	0402WGF4701TCE	UNI-ROYAL(厚声)	C25900	LCSC	0402WGF4701TCE	4.7kΩ
26	2	5.1kΩ	R18,R19	R0402	5.1kΩ	0402WGF5101TCE	UNI-ROYAL(厚声)	C25905	LCSC	0402WGF5101TCE	5.1kΩ
27	3	15kΩ	R26,R29,R31	R0402	15kΩ	0402WGF1502TCE	UNI-ROYAL(厚声)	C25756	LCSC	0402WGF1502TCE	15kΩ
28	1	1.5kΩ	R28	R0402	1.5kΩ	0402WGF1501TCE	UNI-ROYAL(厚声)	C25867	LCSC	0402WGF1501TCE	1.5kΩ
29	2	10kΩ	R40,R41	R0402	10kΩ	0402WGF1002TCE	UNI-ROYAL(厚声)	C25744	LCSC	0402WGF1002TCE	10kΩ
30	4	1.2kΩ	R163,R165,R166,R170	R0603	1.2kΩ	0603WAF1201T5E	UNI-ROYAL(厚声)	C22765	LCSC	0603WAF1201T5E	1.2kΩ
31	2	TS-1088-AR02016	SW1,SW2	SW-SMD_L3.9-W3.0-P4.45		TS-1088-AR02016	XUNPU(讯普)	C720477	LCSC	TS-1088-AR02016	TS-1088-AR02016
32	1	ADS1115IDGSR	U1	MSOP-10_L3.0-W3.0-P0.50-LS5.0-BL		ADS1115IDGSR	TI(德州仪器)	C37593	LCSC	ADS1115IDGSR	ADS1115IDGSR
33	1	USB-TYPE-C-019	U2	TYPE-C-SMD_HX-TYPE-C-16PIN		USB-TYPE-C-019	DEALON(德艺隆)	C2927039	LCSC	USB-TYPE-C-019	USB-TYPE-C-019
34	1	ESP32-S3(R8)	U3	QFN-56_L7.0-W7.0-P0.40-TL-EP4.0		ESP32-S3(R8)	ESPRESSIF(乐鑫)	C2913194	LCSC	ESP32-S3(R8)	ESP32-S3(R8)
35	1	PCA9555APW,118	U4	TSSOP-24_L7.8-W4.4-P0.65-LS6.4-BL		PCA9555APW,118	NXP(恩智浦)	C2652295	LCSC	PCA9555APW,118	PCA9555APW,118
36	1	BY25Q64ASIG(T)	U5	SOIC-8_L5.3-W5.3-P1.27-LS8.0-BL		BY25Q64ASIG(T)	BOYAMICRO(博雅)	C484306	LCSC	BY25Q64ASIG(T)	BY25Q64ASIG(T)
37	1	SN74AHCT1G125DBVR(UMW)	U6	SOT-23-5_L3.0-W1.5-P0.95-LS2.8-BL		SN74AHCT1G125DBVR(UMW)	UMW(友台半导体)	C20617903	LCSC	SN74AHCT1G125DBVR(UMW)	SN74AHCT1G125DBVR(UMW)
38	1	LM74700QDBVRQ1	U7	SOT-23-6_L2.9-W1.6-P0.95-LS2.8-BL		LM74700QDBVRQ1	TI(德州仪器)	C2941042	LCSC	LM74700QDBVRQ1_C2941042	LM74700QDBVRQ1
39	1	MCP2562-E/SN	U14	SOIC-8_L5.0-W4.0-P1.27-LS6.0-BL		MCP2562-E/SN	MICROCHIP(美国微芯)	C53609	LCSC	MCP2562-E/SN	MCP2562-E/SN
40	1	PCA9306DCUR	U22	SSOP-8_L2.0-W2.3-P0.50-LS3.1-BR		PCA9306DCUR	TI(德州仪器)	C33196	LCSC	PCA9306DCUR	PCA9306DCUR

41	1	RFANT5220 110A0T	U25	FILTER-SMD _L5.2-W2.0-L		RFANT5220 110A0T	Walsin(华新 科)	C127611	LCSC	RFANT5220 110A0T	RFANT5220 110A0T
42	1	TPS5430DD AR	U27	ESOP-8 L4. 9-W3.9-P1.2 7-LS6.0-TL-E P		TPS5430DD AR	TI(德州仪器)	C9864	LCSC	TPS5430DD AR	TPS5430DD AR
43	1	EL3H7(B)(TA) -G	U28	SSOP-4 L4. 4-W2.7-P1.2 7-LS7.0-TL		EL3H7(B)(TA) -G	EVERLIGHT(亿光)	C5213653	LCSC	EL3H7(B)(TA) -G_C521365 3	EL3H7(B)(TA) -G
44	1	AMS1117-3. 3	U29	SOT-223-3 L 6.5-W3.4-P2. 30-LS7.0-BR		AMS1117-3. 3	AMS	C6186	LCSC	AMS1117-3. 3_C6186	AMS1117-3. 3
45	1	40MHz	X1	crystal-smd 4p-l2.5-w2.0- bl	40MHz	S224000010 1050JY	JGHC(晶光华)	C2885592	LCSC	S224000010 1050JY	40MHz

Description	Resistance - Post Trip (R1) (Max)	Resistance - Initial (Ri) (Min)
Capacitance: Tolerance:±10% Tolerance:±10% Voltage Rated: Temperature Coefficient:		
Capacitance:100uF Tolerance:±20% Tolerance:±20% Voltage Rating:6.3V Temperature Coefficient:X5R		
Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R		
容值:100nF;精度:±10%;额定电压:50V;材质(温度系数):X7R;		
容值:1uF;精度:±10%;额定电压:10V;材质(温度系数):X5R;		
容值:10pF;精度:±5%;额定电压:50V;材质(温度系数):C0G;		
Capacitance:10uF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X5R		
Capacitance: Tolerance:±10% Tolerance:±10% Voltage Rated: Temperature Coefficient:		
容值:8.2pF;额定电压:50V;材质(温度系数):C0G;		
Polarity:Bi-Directional Reverse Stand-Off Voltage (Vrwm):24V Breakdown Voltage (VBR):25.4V Peak Pulse Current(Ipp)@8/20us:3A Clamping Voltage@Ipp:70V Peak Pulse Power(Ppp)@8/20us:200W Junction Capacitance(Cj)@1MHz:11pF@1MHz Operating Temperature:-65°C~+150		
Diode Configuration:Independent Voltage - Forward(Vf@If):550mV@5A Voltage - DC Reverse(Vr):40V Current - Rectified:5A Reverse Leakage Current (Ir):1mA@40V Operating Junction Temperature Range:-55°C~+125°C Operating Junction Temperature Range:-55°C~+125°C		
Voltage - Forward(Vf@If):600mV@1A Voltage - DC Reverse(Vr):40V Current - Rectified:1A Non-Repetitive Peak Forward Surge Current:25A		
Pin Structure:1x3P Pitch:2.54mm Row Spacing:2.54mm Circular Pins/Square Pins:Pin Header Mounting Type:Through Hole Number of Rows:1 Number of Pins:3P Current Rating:3A Voltage Rating (Max):250V Length of Mating Pin:6mm Insulation Height:2.5mm Length of En		

Pin Structure:1x6P Pitch:2.54mm Row Spacing:2.54mm Circular Pins/Square Pins:Pin Header Mounting Type:Through Hole Number of Rows:1 Number of Pins:6P Current Rating:3A Voltage Rating (Max):250V Length of Mating Pin:6mm Insulation Height:2.5mm Length of En		
电感值:2nH;精度:-;额定电流:900mA;饱和电流(Isat):-;直流电阻(DCR):70mΩ;		
电感值:39nH;额定电流:200mA;直流电阻(DCR):1Ω;精度:±5%;		
电感值:1.3nH;精度:-;额定电流:400mA;直流电阻(DCR):100mΩ;饱和电流(Isat):-;		
电感值:24nH;精度:±5%;额定电流:-;饱和电流(Isat):-;直流电阻(DCR):-;		
Inductance:15uH Tolerance:±20% Tolerance:±20% Current Rating:3A Current - Saturation(Isat):4A DC Resistance(DCR):115mΩ Type:Molded Inductor Ratings:-		
Lamp Holder Type:- Illumination Color:Emerald Green Voltage - Forward(Vf):2.6V~3.1V Voltage - Forward(Vf):2.6V~3.1V Power(Watts):100mW Forward Current:5mA Wavelength - Dominant:513nm~528nm Wavelength - Dominant:513nm~528nm Peak Wavelength:525nm Diode Conf		
Number:1 N-Channel Drain to Source Voltage:30V Current - Continuous Drain(Id):100A RDS(on):5.5mΩ @10V,30A Pd - Power Dissipation:62.5W Gate Threshold Voltage (Vgs(th)):2.5V Gate Charge(Qg):31.6nC@4.5V Input Capacitance(Ciss):3.075nF@15V Reverse Transfer Ca		
Type:Thick Film Resistor Resistance:220Ω Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
Type:Thick Film Resistors Resistance: Tolerance:±1% Tolerance:±1% Power(Watts): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Overload Voltage (Max): Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		

Type:Thick Film Resistor Resistance:4.7kΩ Tolerance:±1% Tolerance:±1% Power\ (Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C		
电阻类型:厚膜电阻;阻值:5.1kΩ ;精度:±1%; 功率:62.5mW;		
电阻类型:厚膜电阻;阻值:15kΩ ;精度:±1%; 功率:62.5mW;		
Type:Thick Film Resistors Resistance:1.5kΩ Tolerance:±1% Tolerance:±1% Power\ (Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Resistance:10000Ω Tolerance:±1% Tolerance:±1% Power\ (Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Type:Thick Film Resistors Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Resistance:1200Ω Tolerance:±1% Tolerance:±1% Power\ (Watts): Overload Voltage (Max): Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Type:Thick Film Resistors Operating Temperature Range:-55°C~+155°C Operating Temperature Range:-55°C~+155°C		
Circuit:SPST Actuator Style:Round Button Operating Force:1.6N Mounting Type:Surface Mount,Vertical Length:4mm Width:3mm Switch Height:2mm with Bracket:Without Bracket Contact Current:50mA Voltage Rating:12V Actuator/Cap Color:Black Termination Style:SMD(S		
应用领域:蓝牙,WiFi;频率范围:2.412GHz~2.484GHz;数据速率:150Mbps;灵敏度:-98.4dBm;接口:I2C,I2S,SPI,UART,USB;		

Interface:I2C ; SMBus Interrupt Output:有中断输出 Output Type: Supply Voltage:1.65V~5.5V Supply Voltage:1.65V~5.5V Output Source current:10mA Output Sink Current:25mA Clock Frequency:400kHz Operating Temperature:-40°C~+85°C Operating Temperature:-40°C~+85°C		
Logic Type:- Number of Gates:1 Voltage - Supply:4.5V~5.5V Voltage - Supply:4.5V~5.5V Quiescent Current:10uA Current - Output Low(IOL):8mA Current - Output High(IOH):8mA Input Logic Level - High:2V Input Logic Level - High:2V Input Logic Level - Low:800mV		
Type:Transceiver Supply Voltage:4.5V~5.5V Supply Voltage:4.5V~5.5V		
Channel Type:Bi-Directional Number of Channels:2 Supply Voltage (VCCA):1.2V~3.3V Supply Voltage (VCCA):1.2V~3.3V Supply Voltage (VCCB):1.8V~5.5V Supply Voltage (VCCB):1.8V~5.5V Input Signal:- Output Signal:- Output Type:Open Drain, Push-pull Data Rate:- Op		
2.4 GHz 陶瓷天线		
Function:Buck Voltage - Supply:5.5V~36V Voltage - Supply:5.5V~36V Output Voltage:1.221V~32.04V Output Voltage:1.221V~32.04V Output Current:3A Frequency - Switching:500kHz Frequency - Switching:500kHz Operating Temperature:-40°C~+125°C@(TJ) Operating Tempera		
Input type:DC Output Type:Phototransistor Voltage - Forward(Vf):1.2V Output Current:50mA Isolation Voltage(Vrms):3.75kV Reverse Voltage:6V Load Voltage:80V Vce Saturation(VCE(sat)):200mV@10mA,1mA Rise time:5us Fall time:3us Operating Temperature:-55°C~+110		
Output Type:Fixed Voltage - Supply:16V Output Voltage:3.3V Output Voltage:3.3V Output Current:1A Power Supply Rejection Ratio (PSRR):72dB@(120Hz) Voltage Dropout:1.1V@(800mA) standby current:5mA Noise:0.003%Vout Features:Over Current Protection ; Over Tempe		
频率:40MHz;频率公差:±10ppm;负载电容:1 0pF;		

