Technische Universität Berlin

Fakultät VII - Volkswirtschaftslehre und Wirtschaftsrecht

Fachgebiet Wirtschafts- und Infrastrukturpolitik

Energy Economics - Energy Sector Modeling

Homework 2

Student:	Richard Hauschild	Claudia Günther	Christian Gentsch
Matr #:	358081	576419	349596

Examiner:	Prof.von Hirschhausen	Jens Weibezahn	Richard Weinhold

Berlin, June 4, 2018

Contents

List of Figures

1 Task 1: Data, Sets and Parameters

a) *Describe how information regarding technology and location of power plants is implemented in the model and how, meaning with what syntax, you can access it.*

External data is provided via csv files which are located in a subfolder named 'data'. These files contain information on technology and location of power plants as well as demand time series and renewable energy sources (RES) time series. Additionally zonal imformation includng network transfer capacities (NTC) and marginal costs are provided in these files.

All of these datasets are imported into by using the following syntax.

```
1  # load data from csv
2  plant_data = loadtable("data/plant_data.csv")
```

After importing the raw .csv files, data sets are derived from certain columns/rows that are selected and saved in an array format. On dictionary is created by filtering relevant information.

```
1  # select "plant" column
2  PLANTS = select(plant_data, :plant)
3  # convert to array
4  PLANTS = convert(Array, PLANTS)
5  # or create dictionary containing filtered
6  # information from data table
7  PLANT_TECH = Dict()
8  for tech in TECH
9      PLANT_TECH[tech] = convert(Array, select(
10     filter(row-> row.technology == tech, plant_data),
11     :plant))
12 end
```

Afterwards a dictionary containing all data sets is created to ensure easy access and readibility.

```
1  # create dictionary containing data arrays
2  sets = Dict("Plants" => PLANTS
3             "Plant_Tech" => PLANT_TECH)
```

The dictionary can be accessed by indexing. As an example: all biomass plants within the sets dictionary can be accessed with the following code.

```
1  # print all plants powered by biomass
2  println(sets["Plant_Tech"]["Biomass"])
```

b) *Describe and contrast the different sets PLANTS, DIPS, NONDISP, CONV and RES. Why can the distinction be useful and where is it used in the model?*

- PLANTS: Array of strings containing the name of each plant

- DISP: Array of strings containing all dispatchable plants.

- NONDISP: Array of string containing all plants that are non dispatchable.

- CON: Array of strings containing all conventional plants

- RES: Array of strings that contains all renewable energy plants

The sets DISP, NONDISP, CON and RES are all subsets of PLANTS. DISP and NONDISP dicrimina ge between dispatchable and non dispatchable power plants while CON and RES is referring to conventional and renewable energy plants. None of the subsets are mutually exclusive because all power plants fall in two subsets. The combinations are as follows:

- DISP - CONV (hard coal, lignite, nuclear, natural gas)

- DISP - RES (biomass)

- NONDISP - RES (solar, wind)

Distinction is useful to set up constraints and objective function properly. The objective function minimizes the sum of total costs incurred by dispatchable power plants, with nonzero marginal costs, whereas nondispatchables are not considered due to their zero marginal costs. As for constraints, it is more intuative to refer to a subset of certain power plants than to use a lookup table or search for all suitale power plants which are affected by the constraint. To evaluate power generation profiles from renewables, it is useful to dinstinguish between RES and CON.

c) *The maximum generation from renewables is defined by the installed capacity and the zonal availaility. Explain what information is needed to account for the zonal RES generation and how this is done in the data processing.*

To calculate zonal generation, information on the zonal availability, the technology type of each plant, maximum generation of each plant, a list of all pv and wind plants, as well as the zonal location of each power plant is necessary. Based on this input, RES generation is calculated for each RES plant on an hourly basis and stored in the array g_res. This RES generation is later fed into the model as a parameter.

Codewise, the availability time series are previously loaded into Julia as data tables and are now allocated to the zones. After that a combined wind and solar availability array is created and then converted to a named array. The power plant generation time series is then calculated by using the combined availability array and multiplying it with the installed capacity for each RES in every zone. The resulting array is again converted to a named array.

```
1  # array containing available wind energy in each zone
2  availability_wind_array = hcat([columns(wind_availability,
3      Symbol(z)) for z in ZONES]...)
4  # array containing available solar energy in each zone
5  availability_pv_array = hcat([columns(pv_availability,
6      Symbol(z)) for z in ZONES]...)
7  # combine wind and solar availability arrays
8  combined_avail_array = reshape(hcat(
9      availability_wind_array, availability_pv_array),
10     8760, 4, 2)
11 # NamedArray containing wind and solar availability
12 # for each zone
13 availability = NamedArray(combined_avail_array,
14     (hours, ZONES, ["Wind", "Solar"]),
15     ("Hour", "Zone", "Technology"))
16 # array with RES power generation for each zone
17 g_res_array = zeros(length(NONDISP), length(hours))
18 for (i,plant) in enumerate(NONDISP),
19  (j,hour) in enumerate(hours)
20     g_res_array[i, j] = availability[hour,
21     ZONE_PLANTS[plant], TECH_PLANTS[plant]].*g_max[plant]
22 end
23 # convert to NamedArray
24 g_res = NamedArray(g_res_array, (NONDISP, hours),
25         ("Plants", "Hours"))
```

2 Task 2: Equations and Variables

a) *Introduce a new positive variable EX to allow exchange between zones. There is a variable for all combinations between zones, therefore indices are (from-)zones, (to-)zones, hours.*

In Julia the new variable is implemented in the @variables section to allow zonal exchanges.

```
1  @variables transport_problem begin
2      ...
3      EX[ZONES, ZONES, HOUR] >= 0 #Exchange between zones
4  end
```

b) *Update the energy-balance to account for zonal demand and generation plus exchange to the considered zone from other zones, minus exchange from the considered tone to all other zones. Make sure this applies to generation and demand from storages and renewables.*

The updated energy balance constraint can be modelled as follows, so that it allows zonal exchange under the condition that the energy balance in the zones and in total is not violated.

```
1  @constraint(transport_problem, Market_Clearing[zone=ZONES,
2   hour=HOUR],
3      sum(G[disp, hour] for disp in intersect(
4       DISP, PLANT_ZONE[zone]))
5      + sum(G_RES[nondisp, hour] for nondisp in intersect(
6       NONDISP, PLANT_ZONE[zone]))
7      + sum(G_stor[stor, hour] for stor in intersect(
8       STOR, STOR_ZONE[zone]))
9      ==
10     demand[hour, zone]
11     - sum(EX[from_zone, zone, hour] for from_zone in ZONES)
12     + sum(EX[zone, to_zone, hour] for to_zone in ZONES)
13     + sum(D_stor[stor, hour] for stor in intersect(
14      STOR, STOR_ZONE[zone])));
```

c) *Implement a new constraint to upper-bound the exchange capacity. The parameter ntc is available from the param dictionary.*

To account for the exchange capacity between zones, the following constraint is added.

```
1  @constraint(transport_problem, NTC[to_zone=ZONES,
2   from_zone=ZONES,hour=HOUR],
3      EX[from_zone, to_zone, hour] <= ntc[from_zone, to_zone]);
```

3 Task 3: Results

a) *Set the net transfer capacities for all zones to zero and take a look at the resulting price for all zones.*

The network transfer capacity can be set to zero by multiplying the whole ntc array with zero. Since there is no way of exchanging energy between zones, each zone can only match their demand with the installed technologies in the zone. This results in large price differences due to the installed conventional technology, number of storages and installed renewables. Figure 1 shows the prices of all four zones for the first 168 hours. The overall lowest costs are in the eastern zone due to the availability of a pumped storage with no marginal costs.

Although the north has also a pumped storage available, the overall energy costs throughout all time steps are constant at $20 per MW h. Unfortunately the northern pumped storage never gets filled because of the high marginal costs of natural gas and lack of other, cheaper technologies in the zone.
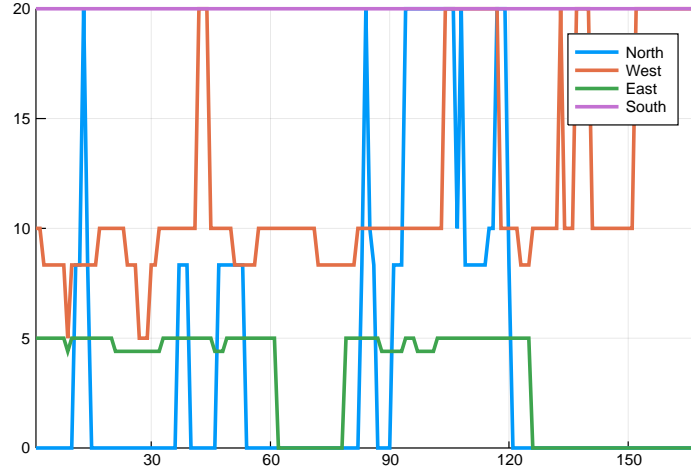
Figure 1: Price tendencies for all four zones in the first 168 hours

It is further notable that the northern region shows the highest volatility regarding its energy prices. Due to the lack of storages, expensive conventional technologies have to be used in times of low RES infeed.

b) *Set the network transfer capacities for all zones to a very high value, such that there is no upper bound for the exchange. How can you tell that there is no congestion?*

To simulate unlimited exchange capacities, the ntc values are multiplied by 10000. The model is then executed again to calculated the prices for all zones. Figure 2 shows the energy costs for all zones.
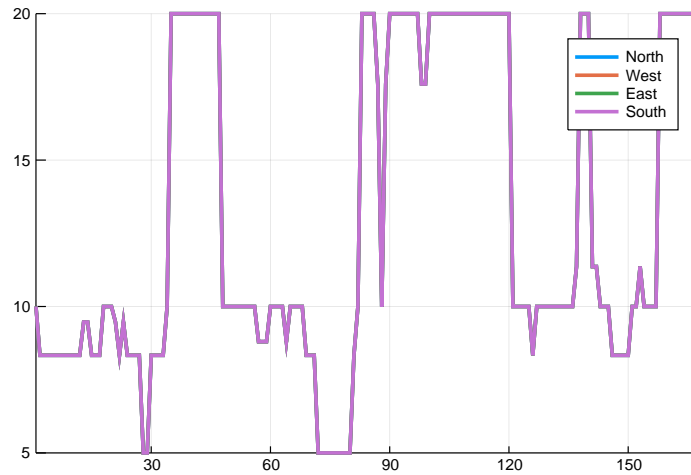

Figure 2: Price tendencies for all four zones in the first 168 hours with no exchange limitations

Since there is no limit for exchange, there is no congestion and all prices are exactly the same.

c) *Use the network transfer capabilities from the data-set at 100% and 50%. Compare the prices to the ones from sutasks a) and b). Describe and explain the differences.*

Lastly two cases are observed. The first case applies the nominal NTCs at 100%, while the second case applies them at 50% rate. Figure 3 shows the energy prices for all four zones with nominal network transfer capacities and fig. 4 shows them at half their value. It's clearly observable that in both cases prices are volatile and increase
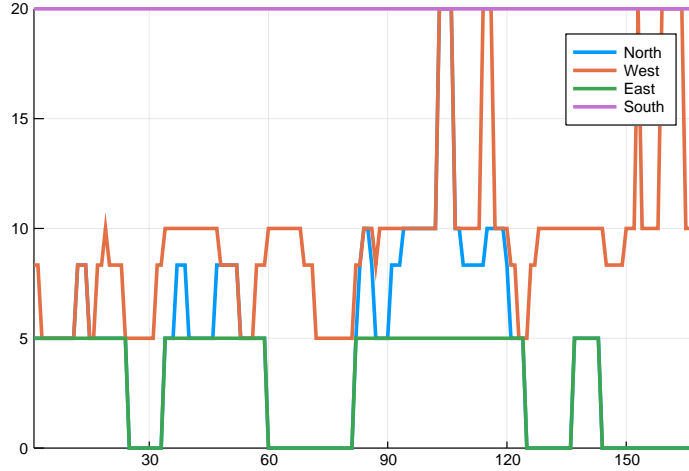

Figure 3: Price tendencies for all four zones in the first 168 hours with given NTCs

in times of peak load. When the transfer capacities reach their limits (transmission line constraint is binding), market splitting occurs, meaning all four zones have different energy prices. Comparing to the previous subtasks, energy prices are generally lower. Especially for the northern and western zone, the peak loads are not compensated by domestic generation but by obtaining energy from cheaper technologies from the other zones. Namely the eastern region has higher energy costs throughout the whole times series in favor of lowering the overall energy prices of all zones. The only region that doesn't profit from a joint market is the southern zone as it still serves almost all of its demand by domestic generators, keeping the price constant at \$20 per MW h.

Further comparing the two simulation cases, it becomes visible that market splitting occurs more often when NTCs are at half their value. This is a direct answer to congested transmission lines that are dedicated for exchange. Since they can carry only half the energy in contrast to the nominal NTC, congestion forces the markets to split up. Interestingly not all markets are splitted, more often it can be seen that two or three zones share the same market because their transmission lines have not been congested.

It is also notable that in the second case more wind curtailment can be seen in the northern zone, since excess energy can't be stored or transmitted due to congested lines.
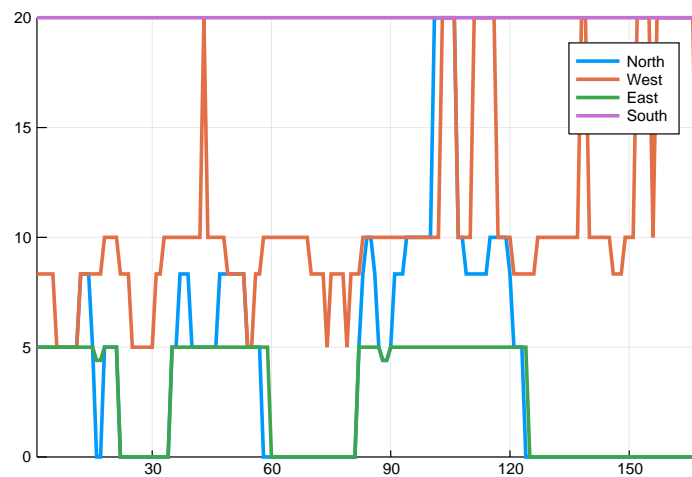
Figure 4: Price tendencies for all four zones in the first 168 hours with given NTCs at 50%

Lastly it can be observed that the energy prices in the first case with nominal NTCs are slightly less volatile compared to the second case with half the nominal NTC value.

d) *In the lecture we talked about the energy-only market, market-coupling and market splitting. Describe these concepts and put them into context to the modeled system. Explain how these concepts are represented in the model and if not, what additional constraints/representations are missing. Refer to the paper by Ehrenmann and Smeers.*

References

[1] Andreas Ehrenmann, Yves Smeers, *Inefficiencies in European Congestion Management Proposals*, Utilities policy journal, Volume 13, Pages 135-152, Pergamon, 2005.