### ASSUMPTION UNIVERSITY

#### SCHOOL OF ENGINEERING

### MIDTERM EXAMINATION 1/2021 (SET4: ID end with 7,9)

**SUBJECT** : MCE4101-Introduction to Robotics

LECTURER : Asst. Prof. Dr. Narong Aphiratsakun

DATE : 29 June 2021

TIME : 18.00-20.00 (2 Hr)

NAME	SURNAME	ID.NO	SEC
------	---------	-------	-----

Make sure you have all the questions.

• Total examination paper: 3 questions, 4 pages (not including cover page).

## **Instructions:**

- 1. This examination is worth a total of <u>100</u> points. This examination will contribute to <u>25% of your final grade</u>.
- 2. Open books Examination.
- 3. Any calculator can be used.
- 4. The University's examination regulations are on the reverse page. Students are expected to read and strictly observe them while the examination is in progress. Failure to do so would subject students to the terms of punishments.

#### This is to inform that

- Students are NOT allowed to use Smart Watches in examinations. Should they be brought into examination rooms, they are required to be placed on the floor under students' desk or chair.
- Violators will be subjected to the terms of punishment for violating examination regulations and/or cheating in the examination.

Other pertinent University's examination regulations are on the reverse page.

Students are expected to read and strictly observe them while the examination is in progress.

Failure to do so would subject students to the terms of punishments for violating examination regulations and/or cheating in the examination.

1. (30 Minute). Consider the VME robot shown in Figure 1.1 below.

a) (20 Marks) Evaluate the homogenous transformation matrices <u>values</u> for  $T_{drill}^0$  by using <u>CURRENT FRAME</u> method of defining reference frames, where reference frames starting from the base  $[x_0, y_0, z_0]$  to the end point  $[x_{end}, y_{end}, z_{end}]$  are given. Where  $L_4^* = 10$  and  $L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5$ .

# Show your working steps from base to end points.

b) (5 Marks) Compute the driller location (P<sub>drill</sub>) with reference to base where  $L_4^* = 10$  and  $L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5$ .

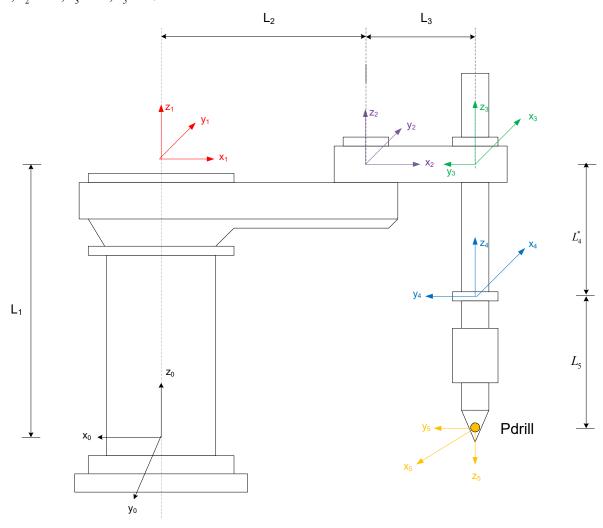


Figure 1.1: The VME robot.

Total 25 Marks

2. (30 Minute). Consider the VME robot shown in Figure 2.1 below.

a) (20 Marks) Evaluate the homogenous transformation matrices <u>values</u> for  $T_{drill}^0$  by using <u>FIXED</u> <u>FRAME</u> method of defining reference frames, where reference frames starting from the base [x<sub>0</sub>, y<sub>0</sub>, z<sub>0</sub>] to the end point [x<sub>end</sub>, y<sub>end</sub>, z<sub>end</sub>] are given. Where  $L_4^* = 10$  and  $L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5$ .

## Show your working steps from base to end points.

b) (5 Marks) Compute the driller location (P<sub>drill</sub>) with reference to base where  $L_4^* = 10$  and  $L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5$ .

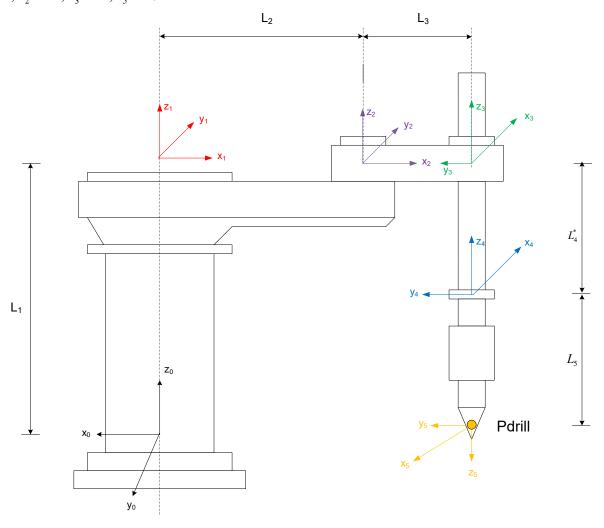


Figure 2.1: The VME robot.

Total 25 Marks

- 3. (60 Minute). Consider the VME robot shown in Figure 3.1 below. VME robot is initially pointing towards x0 axis.
- a) (30 Marks) Evaluate the homogenous transformation <u>matrices equations</u> (in term of variables  $\theta_1^*, \theta_2^*, L_4^*, \theta_6^*$  and  $L_1, L_2, L_3, L_5$ ) for  $T_1^0, T_2^1, T_3^2, T_4^3$ , and  $T_4^0$  by <u>Denavit-Hartenberg</u> (DH) method of defining reference frames, where reference frames starting from the base  $[x_0, y_0, z_0]$  to the driller are given.  $\theta_1^*, \theta_2^*, L_4^*, \theta_6^*$  and  $L_1, L_2, L_3, L_5$  are variables as shown in the Figure 3.1.
- b) (5 Marks) Determine the matrix  $T_4^0$  values when

$$\theta_1^* = 90^\circ, \theta_2^* = 0^\circ, L_4^* = 10, \theta_6^* = 0^\circ \text{ and } L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5.$$

c) (5 Marks) Compute the driller location (P<sub>drill</sub>) with reference to base when

$$\theta_1^* = 90^\circ, \theta_2^* = 0^\circ, L_4^* = 10, \theta_6^* = 0^\circ \text{ and } L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5.$$

d) (5 Marks) Determine the matrix  $T_4^0$  values when

$$\theta_1^* = 90^\circ, \theta_2^* = 90^\circ, L_4^* = 10, \theta_6^* = 0^\circ \text{ and } L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5.$$

e) (5 Marks) Compute the driller location (P<sub>drill</sub>) with reference to base when

$$\theta_1^* = 90^\circ, \theta_2^* = 90^\circ, L_4^* = 10, \theta_6^* = 0^\circ \text{ and } L_1 = 50, L_2 = 25, L_3 = 10, L_5 = 5$$
 .

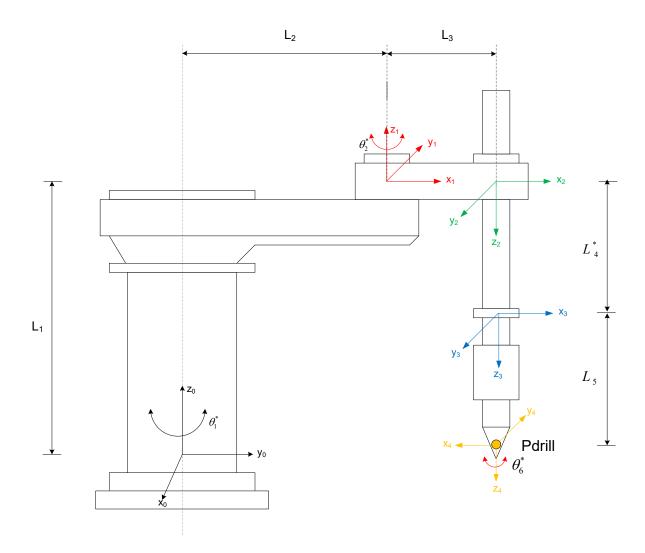


Figure 3.1: The VME robot.

Total 50 Marks