

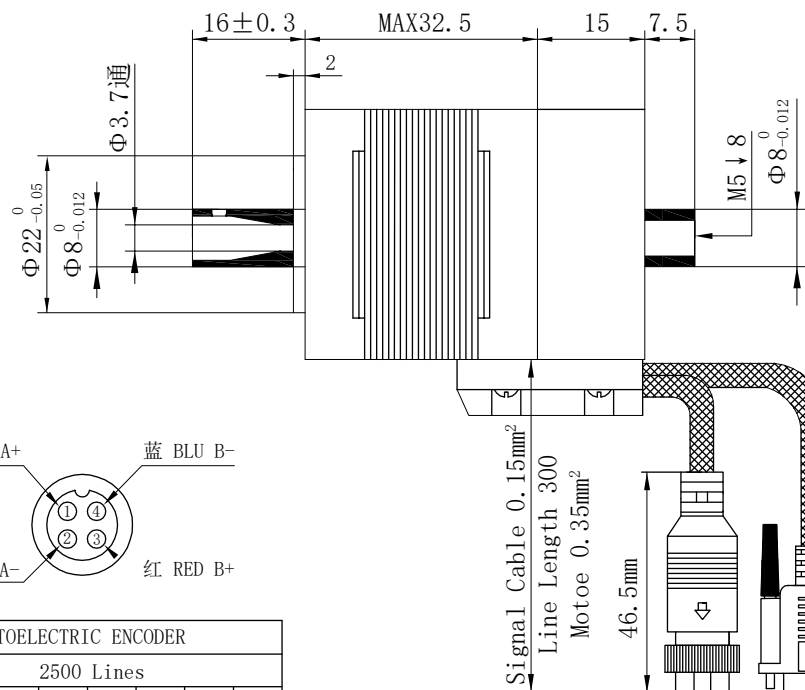
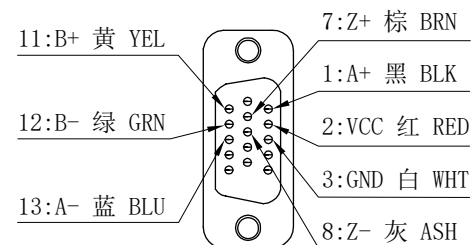
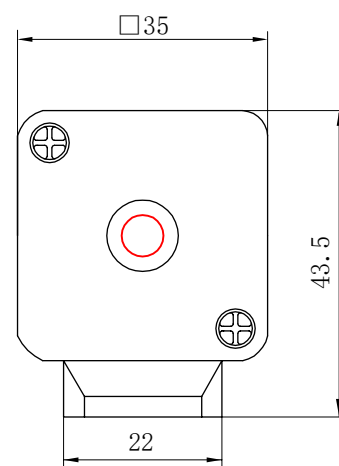


光电编码器 PHOTOELECTRIC ENCODER								
NUMBER OF PULSES	2500 Lines							
DEFINITION	+5V	GND	A+	A-	B+	B-	Z+	Z-
颜色	红	白	黑	蓝	黄	绿	橙	灰
COLOUR	RED	WHT	BLK	BUL	YEL	GRN	BRN	ASH



备注:电机线编码器线拖链线
1500万次/15 million drag chains

步距角/STEP ANGLE	1.8°
相数/NUMBER OF PHASE	2
相电压/PHASE VOLTAGE	2.7 V
相电流/PHASE CURRENT	1.5 A
相电阻/PHASE RESISTANCE	1.8 Ω ± 10% (At 20°C)
相电感/PHASE INDUCTANCE	1.9 mH ± 20%
保持力矩/HOLDING TORQUE	0.13 N·m
绝缘耐压/DIELECTRIC STRENGTH	500V A.C
绝缘等级/INSULATION CLASS	Class B
绝缘电阻/INSULATION RESISTANCE	100MΩ min.
转子惯量/ROTOR INERTIA	—g·cm ²
电机重量/MOTOR WEIGHT	Approx 0.2 Kg
环境温度/AMBIENT TEMPERATURE	-30° — +55°
环境湿度/AMBIENT HUM	15%—95%
使用电压/USE VOLTAGE	VDC:12~24V
寿命/LIFE	5000 HOURS




从安装面看为顺时针方向 COUNTERCLOCKWISE VIEW FROM MOUNTING SIDE


SS1403A15GF2500-L



SAMS R MOTOR

第三角画法
First Angle View



F					批 准	审 核	设 计	材 质			
E					Approved	Checked	Designed	Material	-----		
D								表面处理	-----		
C				Finish				-----			
B				公差 Tolerance				±0.2	NO.	056217	
A	初版/First Edition										
版本 Edition	变更内容 Revisions	设计 Designed	日期 Date	制 图 Drawn	WY	2024.09.04	比例 Scale	1:2	页 Sheet	1/1	