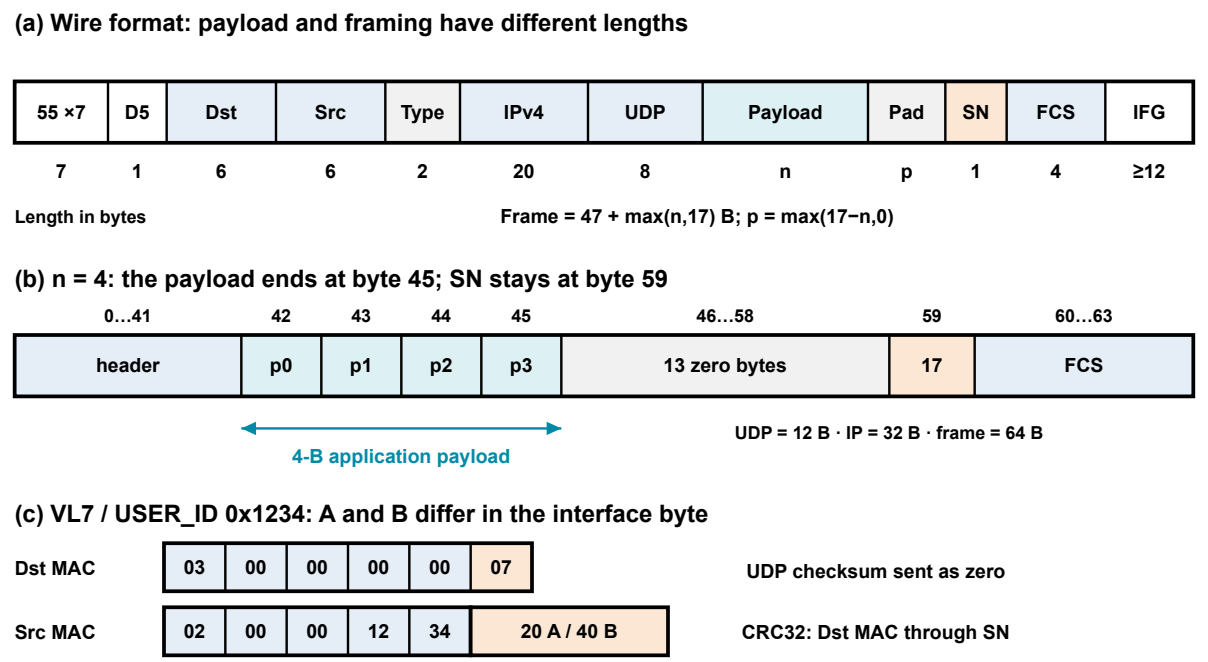
(a) Wire format: payload and framing have different lengths
55 ×7
D5
Dst
Src
Type
IPv4
UDP
Payload
Pad
SN
FCS
IFG
7
1
6
6
2
20
8
n
p
1
4
≥12
Length in bytes
Frame = 47 + max(n,17) B; p = max(17−n,0)
(b) n = 4: the payload ends at byte 45; SN stays at byte 59
0…41
42
43
44
45
46…58
59
60…63
header
p0
p1
p2
p3
13 zero bytes
17
FCS
4-B application payload
UDP = 12 B · IP = 32 B · frame = 64 B
(c) VL7 / USER_ID 0x1234: A and B differ in the interface byte
Dst MAC
03
00
00
00
00
07
UDP checksum sent as zero
Src MAC
02
00
00
12
34
20 A / 40 B
CRC32: Dst MAC through SN