
(a) Dual-network reception



(b) Same VL / SN: process A, then B

Net	SN	IC: local PSN=16	RM record	RM result	commit	Queue write
A	17	Pass	16 → 17	New frame	1	{A, 100, 4}
B	17	Pass	17 → 17	Duplicate	0	—

(c) Commit and rollback

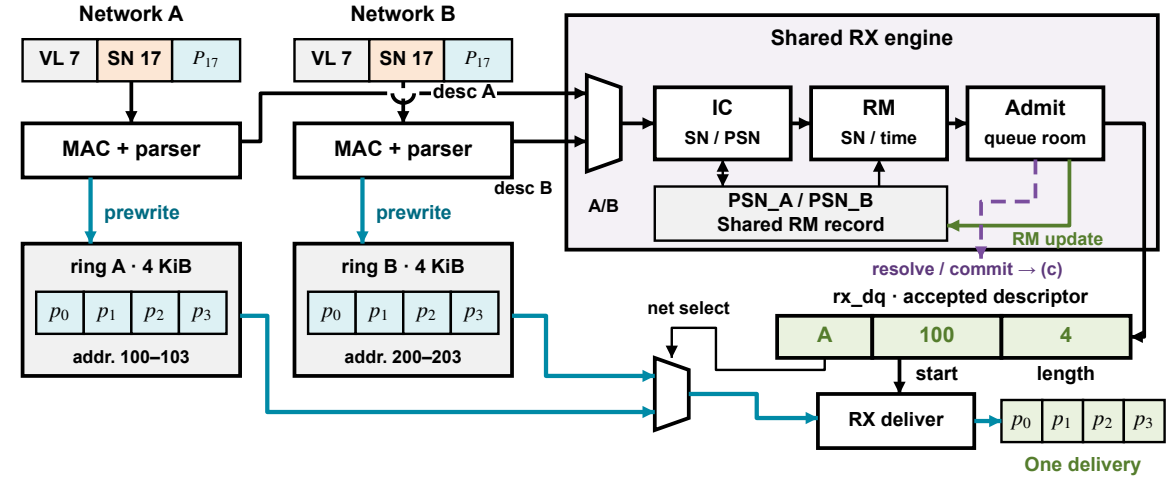