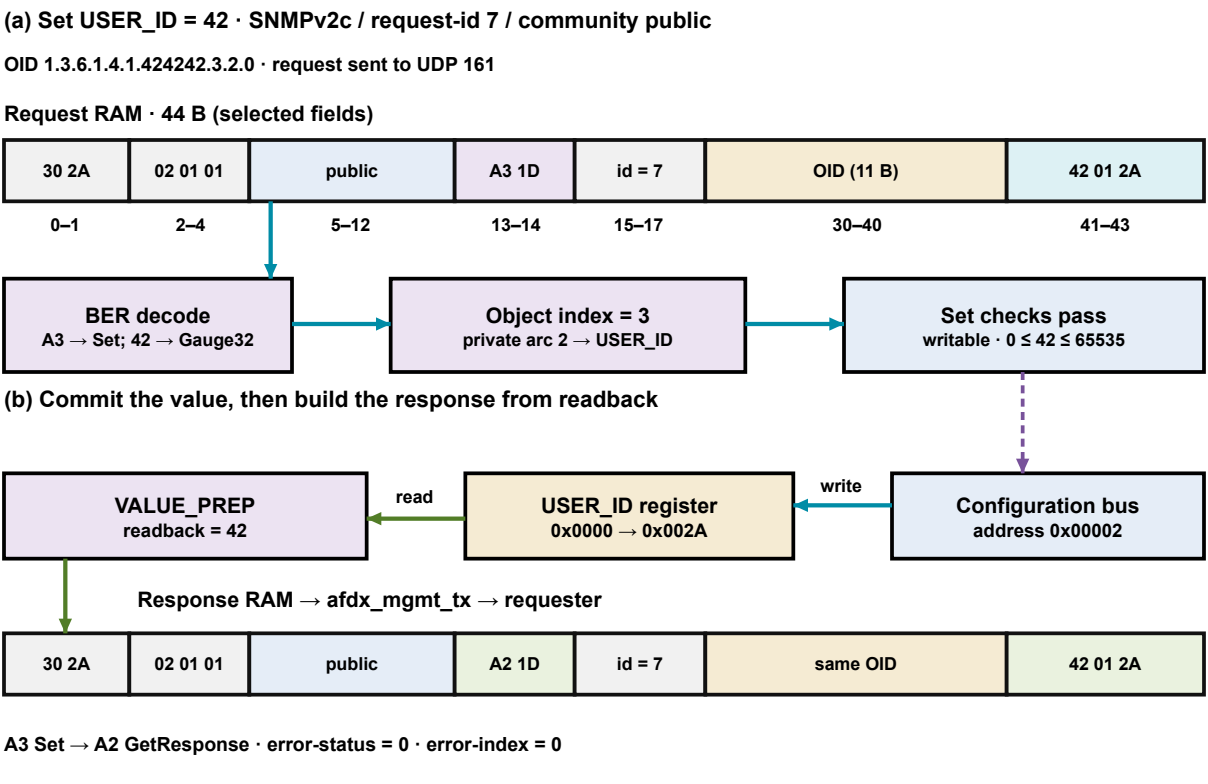
(a) Set USER_ID = 42 · SNMPv2c / request-id 7 / community public
OID 1.3.6.1.4.1.424242.3.2.0 · request sent to UDP 161
Request RAM · 44 B (selected fields)
30 2A
02 01 01
public
A3 1D
id = 7
OID (11 B)
42 01 2A
0–1
2–4
5–12
13–14
15–17
30–40
41–43
BER decode
A3 → Set; 42 → Gauge32
Object index = 3
private arc 2 → USER_ID
Set checks pass
writable · 0 ≤ 42 ≤ 65535
(b) Commit the value, then build the response from readback
VALUE_PREP
readback = 42
read
USER_ID register
0x0000 → 0x002A
write
Configuration bus
address 0x00002
Response RAM → afdx_mgmt_tx → requester
30 2A
02 01 01
public
A2 1D
id = 7
same OID
42 01 2A
A3 Set → A2 GetResponse · error-status = 0 · error-index = 0