(a) Single-frame / 1st-fragment wire format (non-1st frag omits 8-B UDP)



Length in bytes

Frame = 47 + max(n,17) B; p = max(17−n,0)

(b) n = 4: the payload ends at byte 45; SN stays at byte 59



UDP = 12 B · IP = 32 B · frame = 64 B

(c) VL7 / USER_ID 0x1234: A and B differ in the interface byte

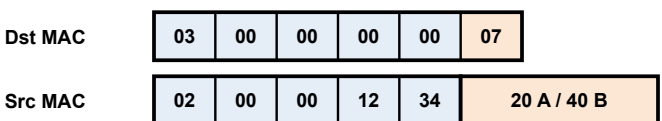

UDP checksum sent as zero

CRC32: Dst MAC through SN