

# State Estimation for Asynchronously Switched Sampled-Data Systems

Sharad C. Shankar, Guosong Yang, João P. Hespanha

**Abstract**—Asynchronously switched sampled-data systems can help model power systems and vehicles that evolve in continuous-time with switching behavior and discrete time measurements. We address the problem of jointly estimating a switching signal, with uncertainty in the exact switching times, as well as the continuous states of the system. We prove stability of the standard Kalman filter under uncertainty in the switching time, with statistical bounds relating to the sampling period. We then propose a method for estimation of switching times as well as a method for efficient joint estimation of the state and switching signal inspired by the interacting multiple-model extended-Viterbi algorithm. We validate our algorithms in simulation for a power converter and maneuvering vehicle.

## I. INTRODUCTION

Real-world systems are often best modeled in continuous time, for example using equations of motion, but with measurements taken at discrete instants [1]. Many systems also vary their behavior between discrete modes, either by their construction or to simplify control [2]; for example, a vehicle with a gearbox transmission, power systems using switched circuits or sources, or an aircraft with several trim conditions including cruising and banked turning. In real-world systems we must also consider noise in our measurements, usually represented by random additive noise. A practical formulation for such systems is a stochastic sampled-data switched system [3], given by

$$\begin{aligned}\dot{x}(t) &= f(\sigma(t), x(t), u(t)) + w(t) \\ y(t_k) &= h(\sigma(t_k), x(t_k)) + v(t_k),\end{aligned}$$

where  $x(t)$  is the state,  $u(t)$  is an input,  $w(t)$  is a disturbance,  $y(t_k)$  is a measured output subject to random noise  $v(t_k)$ ,  $\sigma(t)$  is a “switching signal” taking values in a finite set that tells us the active mode at time  $t$ , and  $t_k$  are discrete times indexed by  $k$ . The control of such systems is addressed in [4].

State estimation of discrete-time switched systems has attracted considerable attention, including works

by Alessandri et al [5]. In these papers, the unknown switching signal is estimated using a Maximum-Likelihood method combined with either Kalman filtering or Moving Horizon Estimation of the continuous states. In contrast, Interacting Multiple-Model (IMM) approaches to hybrid system state estimation have been suggested in [6] and [7]. Ho [8] augmented these methods using Viterbi algorithm concepts to obtain pseudo Maximum-A-Posteriori (MAP) solutions to the windowed estimation problem. In [9], a review of estimation methods for switched systems is provided.

In these prior works, it is always assumed that switches occur only at times that measurements are obtained, in other words the sampling times. There are papers that consider estimation of continuous-time switched systems like [10], [11], and [12]. In [13], the authors consider switches that occur at a constant offset from the measurement times. However we could not find prior works that consider the problem of fully asynchronous switches with sampled measurements.

In this paper we address state estimation when switches can occur at any time between measurement samples. In Section III we provide results on the convergence of Kalman filtering methods in the setting where the switching signal is known at sampling times, but exact switching times are unknown. We build upon analysis first done by Anderson and Moore [14], and more recently extended by Zhang [15]. Our results provide bounds on the mean error and mean-squared (MSE) of the estimates, which can be useful in the context of control [16].

In Section IV we provide a method for simultaneously estimating the state  $x(t)$  and switching signal  $\sigma(t)$ . This method is inspired by the IMM extended-Viterbi (IMM-EV1) approach [8]. In Section V, we show simulations that demonstrate our theoretical results and validate the performance of our algorithm.

## II. PRELIMINARIES

We consider a linear sampled-data output-error switched system,

$$\dot{x}(t) = A(\sigma(t))x(t) + B(\sigma(t))u(t) \quad (1)$$

$$y(t_k) = Hx(t_k) + v_k, \quad (2)$$

S. C. Shankar, G. Yang, and J. P. Hespanha are with the Center for Control, Dynamical Systems, and Computation, University of California, Santa Barbara, CA 93106, USA. Email: {sharad, guosongyang, hespanha}@ucsb.edu.

for  $x(t) \in \mathbb{R}^n$ ,  $u(t) \in \mathbb{R}^\ell$ ,  $v_k, y_k \in \mathbb{R}^m$ , and  $A(\sigma(t)) \in \{A(1), \dots, A(L)\}$  a  $n \times n$  matrix,  $B(\sigma(t)) \in \{B(1), \dots, B(L)\}$  a  $n \times \ell$  matrix, with switching signal  $\sigma(t) \in \{1, \dots, L\}$ . Our goal is to jointly estimate the switching signal and state at discrete periodically sampled timesteps  $t_k = kT$ , where  $T$  is the sampling period. We denote the state, input, and active mode at the discrete timesteps as  $x_k = x(t_k)$ ,  $u_k = u(t_k)$  and  $\sigma_k = \sigma(t_k)$  respectively, as well as the active system matrices  $A_k = A(\sigma(t_k))$  and  $B_k = B(\sigma(t_k))$ . We impose a dwell time  $\tau_d > T$  so that switches occur at least  $\tau_d$  apart from each other and at most once per sample. We can then parametrize the signal  $\sigma_t$  by the sequences  $\{\sigma_k\}$  and  $\{\bar{t}_k\}$ , where the latter specifies the exact time at which a switch occurs within the interval  $[t_k, t_{k+1})$ .

### III. KALMAN FILTER CONVERGENCE

We assume a zero order hold (ZOH) for the input, so that we have an exact discrete time update equation

$$x_{k+1} = F_k x_k + G_k u_k, \quad (3)$$

where

$$F_k = e^{A_k (T - \bar{t}_k)} e^{A_k \bar{t}_k}. \quad (4)$$

and

$$G_k = F_k \int_0^{\bar{t}_k} e^{-A_k \tau} B_k d\tau + \int_{\bar{t}_k}^T e^{A_k (T - \tau)} B_{k+1} d\tau. \quad (5)$$

#### A. Conditions for Observability

We consider the following definition of observability for a time-varying discrete-time linear system [15].

**Definition 1 (Uniform Observability):** The sequence  $(F_k, H)$  is uniformly observable i.e. there exist constants  $h \in \mathbb{Z}_{>0}$  and  $\rho_1 \in \mathbb{R}_{>0}$  such that for all  $x \in \mathbb{R}^n$

$$\rho_1 \|x\|^2 \leq x' \left( \sum_{i=k}^{k+h} \Phi'_{k+h,i} H' R^{-1} H \Phi_{k+h,i} \right) x$$

where  $\Phi_{i,k} := F_{i-1} \cdots F_{k+1} F_k$ .

In many cases, uniform observability of time-varying systems like switched systems is difficult to verify for all possible switching signals [17]. By imposing a dwell time, uniform observability of each mode can generate uniform observability of the switched system.

**Assumption 1 (Each mode observable):**

Suppose that each unswitched pair  $\{(e^{A(1)T}, H), \dots, (e^{A(L)T}, H)\}$  represents a uniformly observable system with constants  $h_1, \dots, h_L$ ,  $\rho_1^1, \dots, \rho_1^L$ .

**Lemma 1:** Suppose that we have Assumption 1 and  $\tau_d > \bar{h}T$ , where  $\bar{h} := \max\{h_1, \dots, h_L\}$ , then the switched system in (3), (2) is uniformly observable for every admissible switching sequence with constants  $h = 2\bar{h} - 1$  and  $\rho_1 = \min\{\rho_1^1, \dots, \rho_1^L\}$ , that do not depend on the sequence.

*Proof.* Given that  $\tau_d > \bar{h}T$ , the system must spend greater than  $h_j$  timesteps in any mode  $j$ . In order to guarantee that the time window  $[t_k, t_{k+h})$  contains at least  $h_j$  samples uninterrupted in a single mode  $j$ , then our window must be at least  $h = 2\bar{h} - 1$  samples long. In any window of this length we must have,

$$\rho \|x\|^2 \leq x' \left( \sum_{i=k}^{k+2\bar{h}-1} \Phi'_{i,k} H' R^{-1} H \Phi_{i,k} \right) x$$

where  $\rho = \min\{\rho_1^1, \dots, \rho_1^L\}$ .  $\square$

#### B. Errors in System Matrices

A Kalman filter is the MAP state estimator of a discrete-time system. Kalman filters compute state estimates  $\hat{x}_k$  and their associated covariance matrices  $P_k$  at sample  $k$ . We assume that our initial condition is a random variable  $x(0) \sim \mathcal{N}(\hat{x}_0, P_0)$  and that  $v_k \sim \text{iid } \mathcal{N}(0, R)$  for  $R$  a  $m \times m$  symmetric positive-definite matrix. We compute the estimate at sample  $k+1$  by combining  $y_{k+1}$  with a prediction  $\hat{x}_{k+1|k}$  based on the previous estimate  $\hat{x}_k$ . These sources of information are combined through the Kalman gain matrix  $K_k$ , which depends on the system matrices as well as the measurement noise variance  $R$ . When we do not know system matrices  $F_k$  and  $G_k$  exactly, due to uncertainty in switching times, but have estimates  $\hat{F}_k$  and  $\hat{G}_k$ , then our output-error Kalman filter update equations are of the form,

$$\hat{x}_{k+1|k} = \hat{F}_k \hat{x}_k + \hat{G}_k u \quad (6)$$

$$P_{k+1|k} = \hat{F}_k P_k \hat{F}_k' \quad (7)$$

$$K_k = (\hat{F}_k P_k \hat{F}_k' H' (H (\hat{F}_k P_k \hat{F}_k' H' + R)^{-1} \quad (8)$$

$$\hat{x}_{k+1} = (I - K_k H) \hat{x}_{k+1|k} + K_k y_{k+1} \quad (9)$$

$$P_{k+1} = (I - K_k H) P_{k+1|k}. \quad (10)$$

First we provide error bounds for our estimated system matrices assuming that we know the correct sequence  $\{\sigma_k\}$  but not the exact switching times  $\{\bar{t}_k\}$ , instead using estimates  $\{\hat{t}_k\}$  plugged into (4), (5) to compute  $\hat{F}_k$  and  $\hat{G}_k$ . In this scenario we will bound the error of our state estimates using bounds on the error of the estimated state transition matrices due to switching time uncertainty.

*Lemma 2 (Error in Estimation of System Matrices):*

For a transition between modes  $i$  and  $j$ , let the error in switching time estimation be denoted  $\tilde{t} := \hat{t} - \bar{t}$ , then the estimation error,  $\tilde{F} := \hat{F} - F$  is bounded in norm as

$$\begin{aligned} \|\tilde{F}\| &\leq |\tilde{t}| \|A(j) - A(i)\| e^{(\|A(j) - A(i)\| + 3\|A(i)\| + \|A(j)\|)T} \\ &\leq T \|A(j) - A(i)\| e^{(\|A(j) - A(i)\| + 3\|A(i)\| + \|A(j)\|)T} \end{aligned} \quad (11)$$

and the estimation error,  $\tilde{G} := \hat{G} - G$  is bounded in norm as

$$\begin{aligned} \|\tilde{G}\| &\leq \|\tilde{F}\| e^{\|A(i)\|T} \|B(i)\| + |\tilde{t}| e^{\|A(j)\|T} \\ &\quad \cdot (e^{\|A(i)\|T} \|B(i)\| + e^{\|A(j)\|T} \|B(j)\|). \end{aligned} \quad (12)$$

*Proof.* Call  $F_j = e^{A(j)(T-\bar{t})}$ ,  $F_i = e^{A(i)\bar{t}}$ ,  $E_j := e^{-A(j)\bar{t}}$  and  $E_i := e^{A(i)\tilde{t}}$ . We then have that  $\hat{F} = \hat{F}_j \hat{F}_i = F_j E_j E_i F_i$ , so  $\tilde{F} = F_j (E_j E_i - I) F_i$ , then

$$\begin{aligned} \|\tilde{F}\| &\leq \|E_j E_i - I\| \|F_j\| \|F_i\| \\ &\leq \|(E_j - E_i^{-1}) E_i\| e^{(\|A(j)\| + \|A(i)\|)T} \\ &\leq \|(e^{-A(j)\tilde{t}} - e^{-A(i)\tilde{t}}) e^{A(i)\tilde{t}}\| e^{(\|A(j)\| + \|A(i)\|)T}. \end{aligned}$$

Then using the fact that  $\|e^{X+Y} - e^X\| \leq \|Y\| e^{\|X\| + \|Y\|}$  [18] where  $Y = -A(j)\tilde{t} - A(i)\tilde{t}$  and  $X = -A(i)\tilde{t}$ , we obtain (11).

Our error in  $G$ , after some manipulation, can be written as

$$\begin{aligned} \tilde{F} \int_0^{\hat{t}} e^{-A(i)\tau} B(i) d\tau + e^{A(j)(T-\bar{t})} \int_0^{\tilde{t}} e^{-A(i)\tau} B(i) d\tau \\ - e^{A(j)(T-\bar{t})} \int_0^{\tilde{t}} e^{A(j)\tau} B(j) d\tau \end{aligned}$$

from which we obtain

$$\begin{aligned} \|\tilde{G}\| &\leq \|\tilde{F}\| \int_0^{\hat{t}} e^{\|A(i)\|\tau} \|B(i)\| d\tau \\ &\quad + e^{\|A(j)\|T} \int_0^{|\tilde{t}|} (e^{\|A(i)\|\tau} \|B(i)\| \\ &\quad + e^{\|A(j)\|\tau} \|B(j)\|) d\tau \end{aligned}$$

which gives us (12) after computing integrals.  $\square$

The bounds in (11) and (12) guarantee that the errors in  $\hat{F}$  and  $\hat{G}$  go to zero as the error in  $\hat{t}$  goes to zero, which happens when our sampling period goes to zero. These bounds also improve as the  $A(i)$ 's become more similar to each other.

### C. Bounds on Estimation Errors

To bound the estimation error of our filter, we denote the filter error by  $e_k := \hat{x} - x$ , and the prediction error be  $z_{k+1} := x_{k+1} - \hat{F}_k \hat{x}_k - \hat{G}_k u_k$ . With switching time uncertainty, the error propagates as

$$e_{k+1} = (I - K_k H) z_{k+1} + K_k v_{k+1} \quad (13)$$

where in a sampling period in which no switch occurs,

$$z_{k+1} = \hat{F}_k e_k \quad (14)$$

and in a period where a switch occurs,

$$z_{k+1} = \hat{F}_k e_k + \tilde{F}_k x_k + \tilde{G}_k u_k. \quad (15)$$

We define the mean squared errors  $\Sigma_k := \mathbb{E}[e_k e_k']$  and  $\Omega_k := \mathbb{E}[z_k z_k']$ . These update as

$$\Sigma_{k+1} = (I - K_k H) \Omega_{k+1} (I - K_k H)' + K_k R K_k'. \quad (16)$$

where when no switch occurs,

$$\Omega_{k+1} = \hat{F}_k \Sigma_k \hat{F}_k' \quad (17)$$

and when a switch occurs,

$$\begin{aligned} \Omega_{k+1} &= \hat{F}_k \Sigma_k \hat{F}_k' + \hat{F}_k \mathbb{E}[e_k x_k'] \tilde{F}_k' + \tilde{F}_k \mathbb{E}[x_k e_k'] \hat{F}_k' \\ &\quad + \tilde{F}_k \mathbb{E}[x_k x_k'] \tilde{F}_k' + \tilde{F}_k \mathbb{E}[e_k] u_k' \tilde{G}_k' \\ &\quad + \tilde{F}_k \mathbb{E}[x_k] u_k' \tilde{G}_k' + \tilde{G}_k u_k \mathbb{E}[x_k]' \tilde{F}_k' \\ &\quad + \tilde{G}_k u_k \mathbb{E}[e_k]' \tilde{F}_k' + \tilde{G}_k u_k u_k' \tilde{G}_k'. \end{aligned} \quad (18)$$

We will need the following:

*Assumption 2:* Suppose that  $P_{k|k-1}$  is positive and bounded above for all  $k$ . The upper bound is shown in [15]. Let  $\bar{\lambda}$  denote the maximum, and  $\underline{\lambda}$  the minimum eigenvalue that  $P_{k|k-1}^{-1}$  can have.

*Fact 1 (Observability of error dynamics):* In [15] it is shown that if the sequence  $(\hat{F}_k, H)$  uniformly observable then the sequence  $(\hat{F}_k(I_n - K_{k-1}H), H)$  is also uniformly observable, i.e. there exists  $\rho_3 \in \mathbb{R}_{>0}$  such that for the same  $h$  as in Definition 1,

$$\rho_3 \|e\|^2 \leq e' \left( \sum_{i=k}^{k+h} \bar{\Phi}_{i,k}' H' R^{-1} H \bar{\Phi}_{i,k} \right) e$$

for all  $e$ , where  $\bar{\Phi}_{i,k} := F_{i-1}(I_n - K_{i-2}H) \cdots F_k(I_n - K_{k-1}H)$ .

We now present a theorem bounding the expected prediction error and mean-squared prediction error.

*Theorem 1 (Bounds on prediction error):* Given Assumptions 1 and 2, and suppose  $\mathbb{E}[x_k' x_k] < \gamma^2$ , and  $\|u_k\| < \delta$  for all  $k$ , let

$$d := \frac{\alpha_3}{\rho_3} \bar{\lambda} (\gamma^2 \|\tilde{F}_k\|^2 + 2\gamma\delta \|\tilde{F}_k\| \|\tilde{G}_k\| + \delta^2 \|\tilde{G}_k\|^2)$$

where  $\alpha_3 = 1 + \alpha_1/\alpha_2$ ,  $\alpha_1 > 0$  the largest possible eigenvalue of  $H'P_{k|k-1}H$  for all  $k$ , and  $\alpha_2 > 0$  the smallest eigenvalue of  $R$ . Then there exist constants  $\beta > 0$  and  $\xi > 0$  such that if

$$c(a) := \frac{\bar{\lambda}}{\lambda}(a + \beta\sqrt{a} + \xi)$$

for  $a \in \mathbb{R}_{>0}$ , then for any  $i \in \mathbb{Z}_{>0}$

$$\|\mathbb{E}[z_{k+i}]\|^2 \leq \max\{c(\|\mathbb{E}[z_k]\|^2), c(c(d))\} \quad (19)$$

Furthermore, there exist constants  $\omega_h > 0$  and  $\omega_{h-1} > 0$ , such that the prediction MSE is bounded for all times  $k + j$ ,  $j \in \mathbb{Z}_{>0}$ . as

$$\begin{aligned} & \text{tr}(\Omega_{k+j}) \\ & \leq \max\left\{\frac{\bar{\lambda}}{\lambda}(\text{tr}(\Omega_k) + 2\omega_{h-1}), \frac{\bar{\lambda}}{\lambda}\left(\frac{2\bar{\lambda}\sigma_3}{\rho_3}\omega_h + 2\omega_h\right)\right\} \end{aligned} \quad (20)$$

A proof is provided in the Appendix.

*Remark 1 (Estimation error bounds):* Given the bounds in Theorem 1, we can also bound  $\mathbb{E}[e_k]$  and  $\Sigma_k$  for arbitrary  $k$  using

$$\|\mathbb{E}[e_k]\| \leq \|I - K_{k-1}H\| \|\mathbb{E}[z_k]\| \quad (21)$$

and

$$\text{tr}(\Sigma_k) \leq \|I - K_{k-1}H\|^2 \text{tr}(\Omega_k) + \|K_{k-1}\|^2 \text{tr}(R) \quad (22)$$

which follow from (13) and (16) respectively.

Notably, the assumption  $\mathbb{E}[x'_k x_k] < \gamma^2$  also serves as a bound on  $\|\mathbb{E}[x_k]\|^2$  and variance of  $x_k$ . This theorem and remark state that the dwell time condition ensures that intermittent model uncertainties due to switching do not lead to unbounded growth in our state estimation errors. We will now present an algorithm that allows us to exploit this property.

#### IV. JOINT ESTIMATION OF STATE AND SWITCHING

In Theorem 1, the error in the state estimates is driven by the switching time errors appearing in Lemma 2. We will augment the IMM Extended-Viterbi Kalman filter (IMM-EV1 KF) [8] with the maximum likelihood problem of estimating switching time within a single sample interval given by

$$J_k(\tau) := p(y_{k+1}|x_{k+1} = \hat{x}_{k+1|k}, \bar{t} = \tau)$$

Where  $\hat{x}_{k+1|k}, \bar{t} = \tau$  is computed, for example using (4), (5). We can search for the optimum of this cost by gridding the sample period  $[t_k, t_{k+1})$  with  $g$  points  $\{\tau_i\}_1^g$  where  $\tau_i := \frac{iT}{g} - \frac{T}{2g}$ . We can then compute

$$\hat{t}_k = \arg \max_{\tau_i} J_k(\tau_i). \quad (23)$$




Fig. 1. Boost Converter Circuit

We can now state Algorithm 1, a heuristic method which builds on the IMM-EV1 Kalman filter by including our gridded switching time estimation. To ensure that  $\bar{\lambda}$  exists in Assumption 2, we add  $\epsilon I$  to each  $P_{k|k-1}$  for some small  $\epsilon > 0$ .

---

#### Algorithm 1 IMM-EV1 Kalman filter

---

filter bank  $\{(\hat{x}_k^1, P_k^1), \dots, (\hat{x}_k^L, P_k^L)\}$   
mode probabilities  $a_k^1, \dots, a_k^L$   
**for**  $i$  from 1 to  $L$  **do**  
  **for**  $j$  from 1 to  $L$  **do**  
    compute  $\hat{t}_k^{ij}$  for switch from  $i$  to  $j$  using (23)  
    let  $b_{ij} = J_k(\hat{t}_k^{ij})$   
  **end for**  
   $\hat{j} = \max_j b_{ij}$   
  compute  $\hat{x}_{k+1}^i$ , and  $P_{k+1}^i$  from  $\hat{x}_k^j$ ,  $P_k^j$ , and  $\hat{t}_k^{ij}$ ,  
   $a_{k+1}^i = b_{ij} \hat{a}_k^j$   
**end for**  
normalize  $a_{k+1}^i$ 's

---

#### V. SIMULATIONS

In this sections we provide simulations to validate our theory and joint estimation algorithms.

##### A. Boost Converter

A boost converter is a popular switching power converter for stepping up a DC voltage without transformers or amplifiers. This is necessary when a high-power source is not available to perform amplification. A model for a realistic boost converter is provided in [19]. We have dynamics as given in (1) where

$$\begin{aligned} A(1) &= \begin{bmatrix} -R_1/L_1 & 0 \\ 0 & -1/R_0 C_0 \end{bmatrix}, \\ A(2) &= \begin{bmatrix} -R_1/L_1 & -1/L_1 \\ 1/C_0 & -1/R_0 C_0 \end{bmatrix}, \\ B(1) &= B(2) = [1/L_1 \ 0]'. \end{aligned}$$

Here,  $x = [i_L \ v_0]'$  and  $u = v_{in}$ . We additionally choose  $y = v_0$ , or in other words  $H = [0 \ 1]$ . We use the values  $R_1 = 2$  ohms,  $L_1 = 500$  microhenrys,  $R_0 = 50$  ohms,

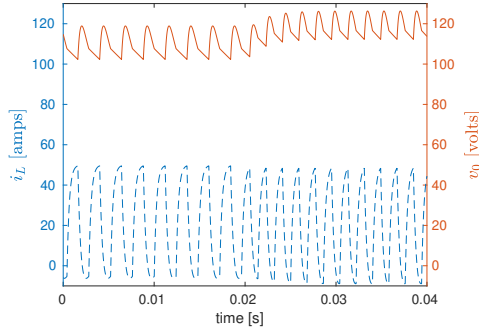


Fig. 2. Example state evolution for Boost Converter starting with switches every 1.2 ms then increasing to every 0.9 ms at 0.02 seconds, blue dashed line indicates  $i_L$  and red solid line indicates  $v_0$ .

$T/g$ (ms)	0.5	0.25	0.167	0.125	0.1
RMSE( $i_L$ ) (amps)	13.5	10.7	9.40	9.17	9.09
RMSE( $v_0$ ) (volts)	2.74	2.15	2.00	1.96	1.89

TABLE I

EFFECT OF INCREASINGLY PRECISE GRIDDED SWITCHING TIME ESTIMATION ON KALMAN FILTER RMSE, 100 TRIALS

$C_0 = 470$  microfarads, and  $v_{in} = 100$  volts from [19]. Figure 2 shows the result of simulating this system.

We simulated 10 seconds of operation with switch frequencies ranging from 1.2 to 0.9 ms/switch, and output voltages ranging between 100 and 120 volts, with measurement noise corresponding to  $R = 5$  volts<sup>2</sup>. Table I shows how effective the gridded estimation in (23) is when sampling at 0.5 ms for different values of  $g$  over 100 trials. As expected more precision in the switching time interval leads to more accuracy in the Kalman filter estimates, with diminishing returns.

### B. Vehicle Maneuver Tracking

A model of a continuous-time Switched System representing a vehicle moving in two dimensions with  $x = [x_1 \ \dot{x}_1 \ x_2 \ \dot{x}_2]'$  is given by,

$$\begin{aligned} A(1) &= A(2) = A(3) = I_2 \otimes \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \\ B(1) &= [0 \ 0 \ 0 \ 0]' \\ B(2) &= [0 \ -1 \ 0 \ 1]' \\ B(3) &= [0 \ 1 \ 0 \ -1]' \end{aligned}$$

where  $\otimes$  denotes the Kronecker product, with  $\tau_d > 1$  second and measurements sampled every 0.5 seconds. This double-integrator system corresponds to the discrete time switched systems used in [8], among others.

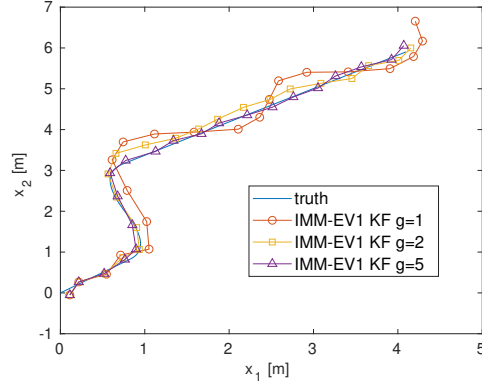


Fig. 3. Single trial of vehicle true and estimated trajectories using Algorithm 1 for  $g = 1, 2, 5$

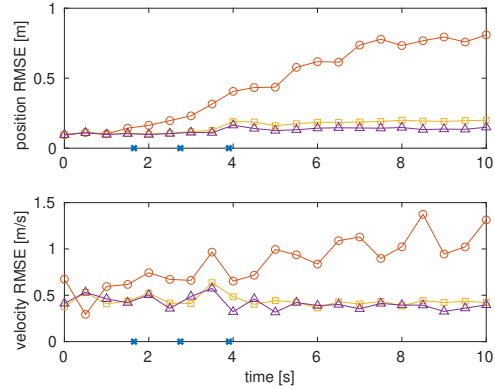


Fig. 4. Vehicle position and velocity estimation RMSE over 500 MC trials, Algorithm 1 with  $g = 2$  shown with red circles,  $g = 5$  with yellow squares, and  $g = 10$  with purple triangles. Blue x's mark the switching times.

Its discretization with ZOH over timestep  $T$  is given by

$$F(1) = F(2) = F(3) = I_2 \otimes \begin{bmatrix} 1 & T \\ 0 & 1 \end{bmatrix} \quad (24)$$

$$\begin{aligned} G(1) &= [0 \ 0 \ 0 \ 0]' \\ G(2) &= \begin{bmatrix} -\frac{T^2}{2} & -T & \frac{T^2}{2} & T \end{bmatrix}' \\ G(3) &= \begin{bmatrix} \frac{T^2}{2} & T & -\frac{T^2}{2} & -T \end{bmatrix}' \end{aligned}$$

We consider a single trajectory over 10 seconds, with  $u(t) = 1$ , starting in mode 1, switching to mode 2 at 1.65 seconds, to mode 3 at 2.75 seconds, and back to mode 1 at 3.9 seconds. The resulting trajectory is shown in Figure 3 along with a single trial of estimate trajectories



$$\exists \pi > 0 \text{ s.t. } \pi \begin{bmatrix} -I & 0 \\ 0 & d \end{bmatrix} - \begin{bmatrix} -\frac{\rho_3}{\alpha_3} I & \Lambda'_k (P_{k|k-1}^{-1})' q \\ q' P_{k|k-1}^{-1} \Lambda_k & q' P_{k|k-1}^{-1} (\tilde{F}_k x_k + \tilde{G}_k u_k) \end{bmatrix} > 0 \quad (31)$$

$$\exists \pi > 0 \text{ s.t. } \frac{\rho_3}{\alpha_3} - \pi > 0 \text{ and } \pi d - q' P_{k|k-1}^{-1} q - (\frac{\rho_3}{\alpha_3} - \pi) q' P_{k|k-1}^{-1} \Lambda_k \Lambda'_k (P_{k|k-1}^{-1})' q > 0 \quad (32)$$

computed using Algorithm 1 where

$$H = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}, \quad R = \begin{bmatrix} 0.05 & 0 \\ 0 & 0.05 \end{bmatrix}.$$

We compute the RMSE over 500 monte carlo trials, and the results for varying divisions,  $g$ , of our sampling time are show in Figure 4.

## VI. CONCLUSIONS

We showed stability under dwell-time constraints of Switched System Kalman filtering errors with intermittent uncertainty in system dynamics due to unknown switching times. The bounds developed, while conservative, give us guarantees and intuition about filter implementations like the IMM-EV1 KF. Simulations of a boost converter and maneuvering vehicle showed improvement in the accuracy of filtering algorithms when we improved the precision of switching time estimates.

An immediate extension is to consider requirements on control algorithms to satisfy the assumptions in Theorem 1. It would be interesting to extend these results to nonlinear problems, for which our analysis could be applied to linearized error dynamics.

## APPENDIX

### PROOF OF THEOREM 1

From (13)-(15) we get that

$$\mathbb{E}[z_{k+1}] = \hat{F}_k(I - K_{k-1}H)\mathbb{E}[z_k]$$

when no switch occurs between samples  $k$  and  $k+1$ , and

$$\mathbb{E}[z_{k+1}] = \hat{F}_k(I - K_{k-1}H)\mathbb{E}[z_k] + \tilde{F}_k\mathbb{E}[x_k] + \tilde{G}_k u_k$$

when a switch occurs. We use the Lyapunov function

$$V_k := \mathbb{E}[z_k]' P_{k|k-1}^{-1} \mathbb{E}[z_k]$$

which from Assumption 2 is positive definite and upper bounded. We have that

$$V_{k+1} - V_k = -\mathbb{E}[z_k]' H' S_k^{-1} H \mathbb{E}[z_k] \quad (25)$$

when no switch occurs, where  $S_k := H P_{k+1|k} H' + R$ . When a switch occurs,

$$V_{k+1} - V_k = -\mathbb{E}[z_k]' H' S_k^{-1} H \mathbb{E}[z_k] + 2q' P_{k+1|k}^{-1} \Lambda_k \mathbb{E}[z_k] + q' P_{k|k-1}^{-1} q. \quad (26)$$

where  $\Lambda_k := \hat{F}_k(I - K_k H)$  and  $q := \tilde{F}_k \mathbb{E}[x_k] + \tilde{G}_k u_k$ . It is derived in [15] that,

$$\mathbb{E}[z_k]' H' S_k^{-1} H \mathbb{E}[z_k] \leq -\frac{1}{\alpha_3} \mathbb{E}[z_k]' H' R^{-1} H \mathbb{E}[z_k] \quad (27)$$

for  $\alpha_3 > 0$  defined in our theorem. For a switch occurring between times  $k$  and  $k+1$  but no switches in the interval  $\{k+1, \dots, k+h\}$  we then know that  $V_{k+h} - V_k$  is bounded above by

$$-\frac{1}{\alpha_3} \mathbb{E}[z_k]' \left( \sum_{i=k}^{k+h} \bar{\Phi}'_{i,k} H' R^{-1} H \bar{\Phi}_{i,k} \right) \mathbb{E}[z_k] + 2q' P_{k+1|k}^{-1} \Lambda_k \mathbb{E}[z_k] + q' P_{k|k-1}^{-1} q.$$

From uniform observability and Fact 1 we have

$$V_{k+h} - V_k \leq -\frac{\rho_3}{\alpha_3} \|\mathbb{E}[z_k]\|^2 + 2q' P_{k+1|k}^{-1} \Lambda_k \mathbb{E}[z_k] + q' P_{k|k-1}^{-1} q. \quad (28)$$

In other words, we now know that

$$\bar{\Phi}'_{k+h,k} P_{k+h|k+h-1}^{-1} \bar{\Phi}_{k+h,k} - P_{k|k-1}^{-1} \leq -\frac{\rho_3}{\alpha_3} I. \quad (29)$$

We want to show that for a switch occurring between samples  $k$  and  $k+1$ , the expected prediction error at sample  $k+h$  satisfies,

$$\begin{cases} V_{k+h} < V_k & \text{if } \|\mathbb{E}[z(k)]\|^2 > d \\ \|\mathbb{E}[z(k+h)]\|^2 < c(d) & \text{if } \|\mathbb{E}[z(k)]\|^2 \leq d \end{cases}$$

for some constant  $d > 0$ , and positive continuous function  $c(\cdot)$ . We proceed by considering the two cases:

1) Suppose  $\|\mathbb{E}[z_k]\|^2 > d$ . We want to show that

$$\|\mathbb{E}[z_k]\|^2 > d \Rightarrow V_{k+h} - V_k < 0 \quad (30)$$

Applying S-procedure [20] to (28), we know that (30) is true if and only if (31) is true. By Schur complement, this is equivalent to (32). If we choose  $\pi = \frac{\rho_3}{\alpha_3} - \varepsilon$  for some small enough  $\varepsilon > 0$ , such that if

$$d > \frac{\alpha_3}{\rho_3} \bar{\lambda}(\gamma^2 \|\tilde{F}_k\|^2 + \gamma \delta \|\tilde{F}_k\| \|\tilde{G}_k\| + \delta^2 \|\tilde{G}_k\|^2)$$

then we satisfy the conditions in (32) and therefore show that the Lyapunov function decreases before the next

switch occurs. Then the maximum value attained by  $\|\mathbb{E}[z_{k+i}]\|^2$  for  $i > 0$  satisfies

$$\|\mathbb{E}[z_{k+i}]\|^2 \leq \frac{\bar{\lambda}}{\underline{\lambda}} (\|\mathbb{E}[z_k]\|^2 + \beta \|\mathbb{E}[z_k]\| + \xi) \quad (33)$$

where

$$\beta := 2\|\Lambda\|(\gamma\|\tilde{F}_k\| + \delta\|\tilde{G}_k\|) \quad (34)$$

$$\xi := \gamma^2\|\tilde{F}_k\|^2 + \gamma\delta\|\tilde{F}_k\|\|\tilde{G}_k\| + \delta^2\|\tilde{G}_k\|^2 \quad (35)$$

2) Suppose  $\|\mathbb{E}[z_k]\|^2 \leq d$ . Then by substituting  $d$  into (26) we get

$$V_{k+1} \leq (\bar{\lambda} - \lambda_{\min}(\|H'S_k^{-1}H\|))d + \bar{\lambda}\beta\sqrt{d} + \bar{\lambda}\xi. \quad (36)$$

Since we showed that the Lyapunov function is non-increasing over a timestep with no switch and must decrease over  $h$  or more timesteps with no switch, then (36) gives us an upper bound on  $V_i$  for  $k < i < k + j$  where  $k + j$  is the sample where the next switch occurs. Then

$$\|\mathbb{E}[z_{k+j}]\|^2 \leq c(d) := \frac{\bar{\lambda}}{\underline{\lambda}} (d + \beta\sqrt{d} + \xi) \quad (37)$$

which is a bound greater than  $d$ . If  $\|\mathbb{E}[z_{k+j}]\|^2 > d$  then applying (33) to (37) tells us the maximum value attained by  $\|\mathbb{E}[z_{k+i}]\|^2$  for  $i > 0$  must satisfy

$$\|\mathbb{E}[z_{k+i}]\|^2 \leq c(c(d)) \quad (38)$$

(33) and (38) produce (19).

To prove (20) we will use the following Lyapunov function,

$$W_k := \text{tr}(P_{k|k-1}^{-1} \cdot \Omega_k)$$

and proceed by similar analysis as with the expected error. We will use the following Ruhe trace inequality [21, Fact 5.12.4, p. 333]:

*Fact 2:* For positive semi-definite Hermitian matrices  $A$  and  $B$  with eigenvalues ordered largest to smallest,  $a_1 \geq a_2 \geq \dots \geq a_n \geq 0$  and  $b_1 \geq b_2 \geq \dots \geq b_n \geq 0$  respectively, the following holds

$$\sum_{i=1}^n a_{n-i+1} b_i \leq \text{tr}(AB) \leq \sum_{i=1}^n a_i b_i \quad (39)$$

which gives us

$$\underline{\lambda} \text{tr}(\Omega_k) \leq \text{tr}(P_{k|k-1}^{-1} \Omega_k) \leq \bar{\lambda} \text{tr}(\Omega_k) \quad (40)$$

where  $\bar{\lambda}$  and  $\underline{\lambda}$  are the maximum and minimum eigenvalues respectively attainable by  $P_{k|k-1}^{-1}$  which are given by Assumption 2. We can bound the update of our Lyapunov function,  $W_{k+1} - W_k$ , over the step after

a switch using (16)-(18), (39), (40), and the fact that  $2\mathbb{E}[e'e] \leq \varepsilon \mathbb{E}[e'e] + \frac{1}{\varepsilon} \mathbb{E}[x'x]$  for arbitrary  $\varepsilon > 0$  as

$$W_{k+1} - W_k \leq \text{tr} \left( (\bar{\Phi}'_{k+1,k} P_{k+1|k}^{-1} \bar{\Phi}_{k+1,k} - P_{k|k-1}^{-1}) \Omega_k \right) + \bar{\lambda} \varepsilon \|\hat{F}_k\| \|\tilde{F}_k\| \text{tr}(\Sigma_k) + \bar{\lambda} T_k \quad (41)$$

where

$$\begin{aligned} T_{k+1} &= (\hat{F}_k \mathbb{E}[e_k] + \tilde{F}_k \mathbb{E}[x_k])' \tilde{G}_k u_k \\ &\quad + u_k' \tilde{G}_k' (\hat{F}_k \mathbb{E}[e_k] + \tilde{F}_k \mathbb{E}[x_k]) \\ &\quad + \frac{1}{\varepsilon} \tilde{F}_k^2 \mathbb{E}[x_k' x_k] + \tilde{G}_k^2 \|u_k\|^2 \\ &\quad + \hat{F}_k K_{k-1} R K_{k-1}' \hat{F}_k' \end{aligned}$$

with a switch. The Lyapunov function change over  $h$  steps,  $W_{k+h} - W_k$ , is then bounded by

$$\begin{aligned} &\text{tr} \left( (\bar{\Phi}'_{k+h,k} P_{k+h|k}^{-1} \bar{\Phi}_{k+h,k} - P_{k|k-1}^{-1} + \varepsilon \eta I) \Omega_k \right) \\ &\quad + \text{tr} \left( P_{k+h|k}^{-1} \sum_{i=0}^{h-1} \bar{\Phi}'_{k+i|k} T_{k+h-1-i} \bar{\Phi}_{k+i|k} \right) \end{aligned}$$

where  $\eta := \bar{\lambda} \|\hat{F}_k\| \|\tilde{F}_k\| \|I - K_{k-1} H\|$  and  $T_i = \|\hat{F}_i K_{i-1} R K_{i-1}' \hat{F}_i'\|$  when  $i \neq k$ . From (40) and (29), we get

$$\begin{aligned} W_{k+h} - W_k &\leq \left( \frac{-\rho_3}{\alpha_3} + \varepsilon \eta \right) \text{tr}(\Omega_k) \\ &\quad + \bar{\lambda} \text{tr} \left( \sum_{i=0}^{h-1} \bar{\Phi}'_{k+h|k+i} T_{k+i} \bar{\Phi}_{k+h|k+i} \right) \end{aligned} \quad (42)$$

We choose  $\varepsilon = \rho_3 / (2\alpha_3 \eta)$ , which also affects the value of  $T_k$ . Therefore we see that over any  $h$  steps, if the MSE at time  $k$  satisfies

$$\text{tr}(\Omega_k) > \frac{2\bar{\lambda}\alpha_3}{\rho_3} \text{tr} \left( \sum_{i=0}^{h-1} \bar{\Phi}'_{k+h|k+i} T_{k+i} \bar{\Phi}_{k+h|k+i} \right) \quad (43)$$

then  $W_{k+h} - W_k \leq 0$ . We note that it might be possible to achieve a better bound with different choice of  $\varepsilon$ . We must then consider the fact that unlike for the expected error in (27), the Lyapunov function  $W_i$  can now increase even in non-switch intervals due to the  $T_k$  terms. We will again deal with this by splitting into two cases. First let  $\omega_j$  be defined as the upper bound derived from our upper bounds on  $F_k$ ,  $K_k$ , etc., as well as bounds on  $\tilde{F}$  and  $\tilde{G}$  from Lemma 2, and bound on  $\|\mathbb{E}[z_k]\|$  in (19), of the quantity

$$\text{tr} \left( \sum_{i=0}^{j-1} \bar{\Phi}'_{k+j|k+i} T_{k+i} \bar{\Phi}_{k+j|k+i} \right) \leq \omega_j,$$

for any  $k$ . We know that for any  $j > 0$ ,

$$W_{k+j} - W_k \leq \bar{\lambda} \omega_j$$

Let us consider the two cases:

1) Suppose  $\text{tr}(\Omega_k) > \frac{2\bar{\lambda}\alpha_3}{\rho_3}\omega_h$ . Then (41) and (42) tell us that  $W_{k+h} < W_k$  and the maximum value between  $k$  and  $k+h$  is bounded as

$$\text{tr}(\Omega_{k+j}) \leq \frac{\bar{\lambda}}{\underline{\lambda}} (\text{tr}(\Omega_k) + \omega_{h-1}) \quad \text{for } j \in \{k, \dots, k+h\}, \quad (44)$$

which is also the maximum value attained until some  $\text{tr}(\Omega_{k+j}) \leq \frac{\bar{\lambda}\alpha_3}{\rho_3}\omega_h$ , since the value cannot increase over  $h$  steps otherwise. This brings us to our next case:

2) Suppose  $\text{tr}(\Omega_k) \leq \frac{2\bar{\lambda}\alpha_3}{\rho_3}\omega_h$ . Now the maximum value that  $\text{tr}(\Omega_{k+1})$  could attain is

$$\text{tr}(\Omega_{k+1}) \leq \frac{\bar{\lambda}}{\underline{\lambda}} \left( \frac{2\bar{\lambda}\alpha_3}{\rho_3}\omega_h + \omega_1 \right)$$

If we achieved the maximum then  $\text{tr}(\Omega_{k+1}) > \frac{2\bar{\lambda}\alpha_3}{\rho_3}\omega_h$ , so  $W_{k+h+1} \leq W_{k+1}$  and therefore the maximum value of  $\text{tr}(\Omega_{k+j})$  for all  $j > 0$  is bounded as

$$\text{tr}(\Omega_{k+j}) \leq \frac{\bar{\lambda}}{\underline{\lambda}} \left( \frac{2\bar{\lambda}\alpha_3}{\rho_3}\omega_h + \omega_h \right) \quad j \in \mathbb{Z}_{>0} \quad (45)$$

with (44) and (45) combine to prove (20), with an additional  $\omega_{h-1}$  or  $\omega_h$  added to each to account for the case of starting in non-switch timestep.  $\square$

## REFERENCES

- [1] P. Shi, "Robust Kalman filtering for continuous-time systems with discrete-time measurements," *IMA J. Math. Control Inf.*, vol. 16, no. 3, pp. 221–232, 1999.
- [2] G. Yang and D. Liberzon, "Stabilizing a switched linear system with disturbance by sampled-data quantized feedback," in *2015 Am. Control Conf.*, 2015, pp. 2193–2198.
- [3] B. Shen, Z. Wang, and X. Liu, "A stochastic sampled-data approach to distributed  $H_\infty$  filtering in sensor networks," *IEEE Trans. Circuits Syst. I Regul. Pap.*, vol. 58, no. 9, pp. 2237–2246, 2011.
- [4] D. Liberzon, *Switching in Systems and Control*. Birkhäuser, 2003.
- [5] A. Alessandri, M. Baglietto, and G. Battistelli, "A maximum-likelihood Kalman filter for switching discrete-time linear systems," *Automatica*, vol. 46, no. 11, pp. 1870–1876, 2010.
- [6] Y. Bar-Shalom, K.-C. Chang, and H. A. P. Blom, "Tracking a maneuvering target using input estimation versus the interacting multiple model algorithm," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 25, no. 2, pp. 296–300, 1989.
- [7] L. A. Johnston and V. Krishnamurthy, "An improvement to the interacting multiple model (IMM) algorithm," *IEEE Trans. Signal Process.*, vol. 49, no. 12, pp. 2909–2923, 2001.
- [8] T.-J. Ho and B.-S. Chen, "Novel extended Viterbi-based multiple-model algorithms for state estimation of discrete-time systems with Markov jump parameters," *IEEE Trans. Signal Process.*, vol. 54, no. 2, pp. 393–404, 2006.
- [9] Y. Guo and B. Huang, "Moving horizon estimation for switching nonlinear systems," *Automatica*, vol. 49, no. 11, pp. 3270–3281, 2013.
- [10] W. Xiang, M. Che, C. Xiao, and Z. Xiang, "Observer design and analysis for switched systems with mismatching switching signal," in *2008 Int. Conf. Intell. Comput. Technol. Autom.*, 2008, pp. 650–654.
- [11] G. K. Kolotelo, L. N. Egidio, and G. S. Deaecto, " $H_2$  and  $H_\infty$  filtering for continuous-time switched affine systems," in *9th IFAC Symp. Robust Control Des.*, vol. 51, no. 25, 2018, pp. 184–189.
- [12] A. Tanwani, H. Shim, and D. Liberzon, "Observability for switched linear systems: Characterization and observer design," *IEEE Trans. Automat. Contr.*, vol. 58, no. 4, pp. 891–904, 2013.
- [13] W. Xiang, J. Xiao, and M. N. Iqbal, "Robust observer design for nonlinear uncertain switched systems under asynchronous switching," *Nonlinear Anal. Hybrid Syst.*, vol. 6, no. 1, pp. 754–773, 2012.
- [14] B. D. O. Anderson and J. B. Moore, "Detectability and stabilizability of time-varying discrete-time linear systems," *SIAM J. Control Optim.*, vol. 19, no. 1, pp. 20–32, 1981.
- [15] Q. Zhang, "On stability of the Kalman filter for discrete time output error systems," *Syst. & Control Lett.*, vol. 107, pp. 84–91, 2017.
- [16] R. Chinchilla and J. P. Hespanha, "Optimization-based estimation of expected values with application to stochastic programming," in *58th IEEE Conf. Decis. Control*, 2019, pp. 6356–6361.
- [17] M. Babaali and M. Egerstedt, "Pathwise observability and controllability are decidable," in *42nd IEEE Conf. Decis. Control*, vol. 6, 2003, pp. 5771–5776.
- [18] G. Yang and D. Liberzon, "Feedback stabilization of switched linear systems with unknown disturbances under data-rate constraints," *IEEE Trans. Automat. Contr.*, vol. 63, no. 7, pp. 2107–2122, 2018.
- [19] G. S. Deaecto, J. C. Geromel, F. S. Garcia, and J. A. Pomilio, "Switched affine systems control design with application to DC–DC converters," *IET Control Theory & Appl.*, vol. 4, no. 7, pp. 1201–1210, 2010.
- [20] F. Uhlig, "A recurring theorem about pairs of quadratic forms and extensions: A survey," *Linear Algebra Appl.*, vol. 25, pp. 219–237, 1979.
- [21] D. S. Bernstein, *Matrix Mathematics*. Princeton University Press, 2009.