

Indie

Pattern



Annie Dress

Before Starting


**You can print sizes separately.
You need to use ADOBE READER,
which is free to download.**

1 - Click the **layers icon** on the
le side.



2- Click the **eye icon** of the size
you want to hide. By default all
sizes will be printed.

3- Print.

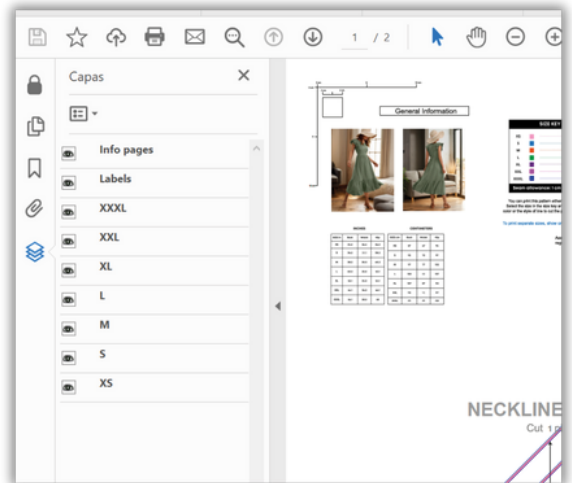

PRINTING OPTIONS:

Print Shop (A0 File):

Request a 100% scale print with no scaling or tiling. Verify accuracy using the test square on the pattern page.

Print at Home (A4 or US Letter File):

Our patterns are sized to fit correctly A4 and US Letter. Select "Actual Size." Print only the first page and measure the test box on the first page. If correct, proceed.

Need help printing?

Check this videotutorial, [click here](#).

USEFUL Sewing Tips



Use a straight stitch

A straight stitch is the most basic and versatile stitch. Start with a simple, **straight stitch** and then move on to more advanced stitches as you become more confident.



Practice on scraps first

Before you start your project, practice your stitches and techniques on scraps of the **same material**.



Press your seams

Use **an iron** to press your seams. Pressing your seams is a crucial step in the sewing process. It helps to set the seam and gives your project a professional, polished look.



Lock Your Stitches

It might seem obvious, but all new sewers should get into the habit of locking their stitches, or *backstitching*. **Reverse sew** at the beginning and end of each seam to **lock your stitches** in place.



Take breaks. It is okay to make mistakes

Sewing can be tiring. Make sure you have **good lighting** and a **comfortable workspace**. Take breaks when you need them, to rest your eyes and hands, and to avoid fatigue and back pain.

If you make a mistake, **don't panic!** A seam ripper is a tool that is specifically designed to help you remove stitches without damaging the fabric.




Experiment and have fun

Sewing is a creative and rewarding hobby, so **enjoy the process!**

Resources


Videotutorials

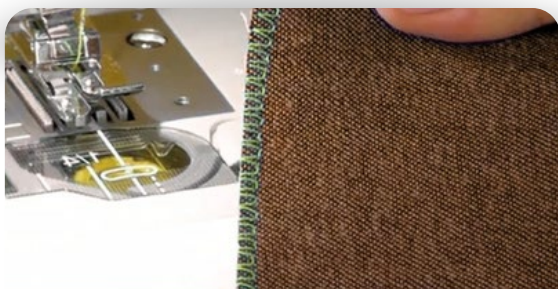

Overcast Stitch




How to Sew a Sleeve

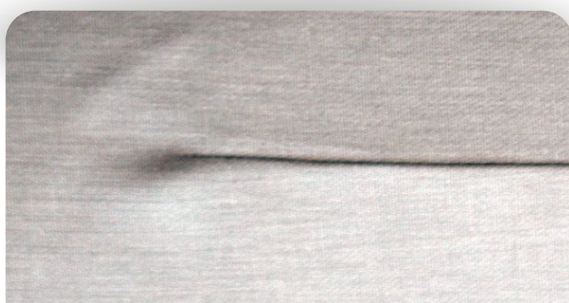

How to Sew Darts



How to Gather Fabric

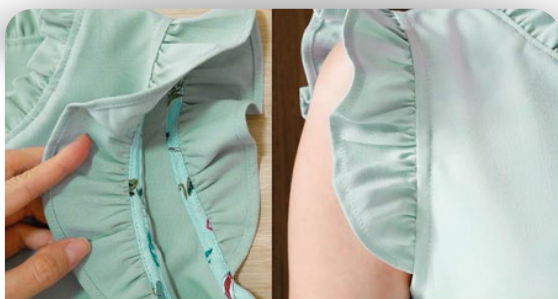

How to Sew Ruffled Sleeves



Techniques for Clean Edges

Click to open the videotutorials

FRONT



BACK



INCHES


SIZE in	Bust	Waist	Hip
XS	34.3	26.4	36.2
S	36.2	28.3	38.2
M	38.2	30.3	40.2
L	40.2	32.3	42.1
XL	42.1	34.3	44.1
XXL	44.1	36.2	46.1
XXXL	46.1	38.2	48

CENTIMETERS

SIZE cm	Bust	Waist	Hip
XS	87	67	92
S	92	72	97
M	97	77	102
L	102	82	107
XL	107	87	112
XXL	112	92	117
XXXL	117	97	122


Recommended fabrics: lightweight woven fabrics in general.

Examples: silk, cotton, lace, satin, polyeste

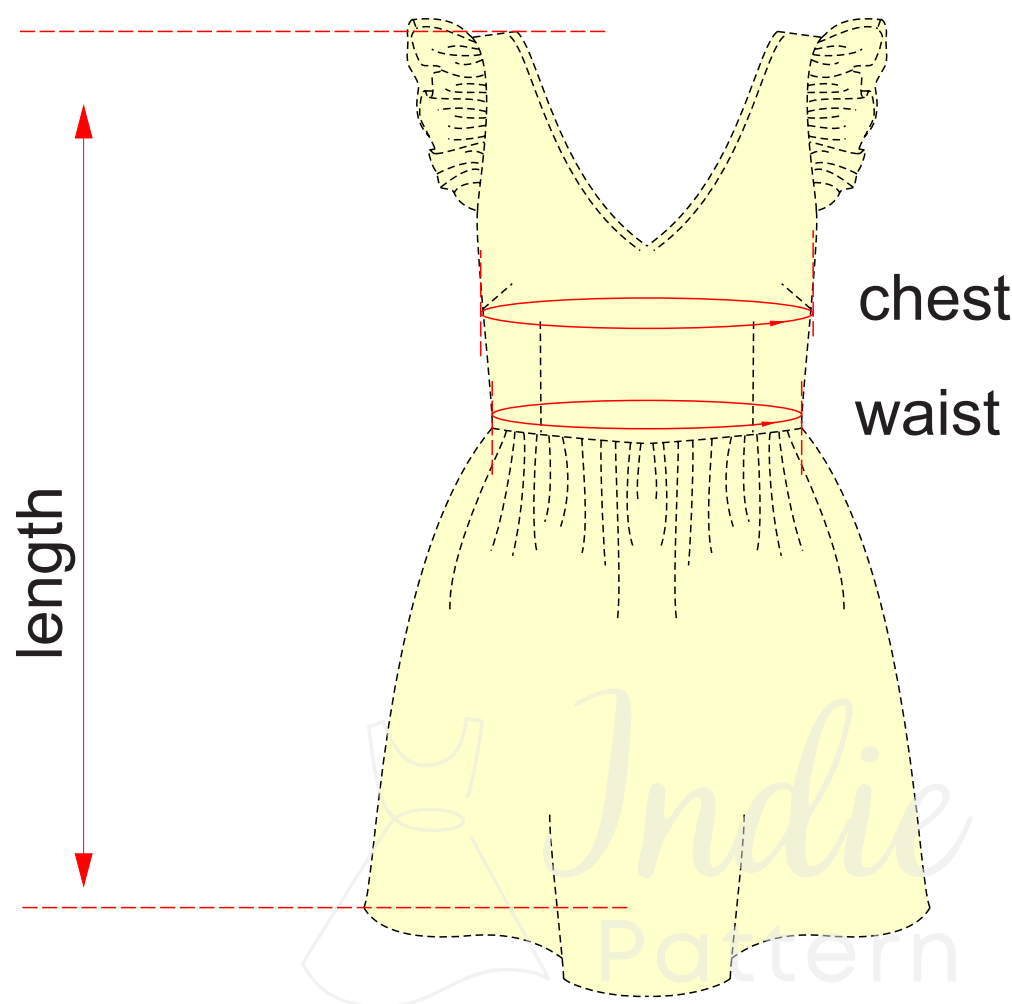

SIZE	Length	Chest	Waist
XS	34.1" (86.6 cm)	36.2" (92.0 cm)	28.1" (71.4 cm)
S	34.8" (88.4 cm)	38.2" (97.0 cm)	30.1" (76.5 cm)
M	35.7" (90.7 cm)	40.2" (102.1 cm)	32.0" (81.3 cm)
L	36.5" (92.7 cm)	42.1" (106.9 cm)	34.0" (86.4 cm)
XL	37.2" (94.5 cm)	44.1" (112.0 cm)	36.0" (91.4 cm)
XXL	38.0" (96.5 cm)	46.1" (117.1 cm)	38.3" (97.3 cm)
XXXL	38.8" (98.6 cm)	48.0" (121.9 cm)	40.6" (103.1 cm)

FABRIC PIECES

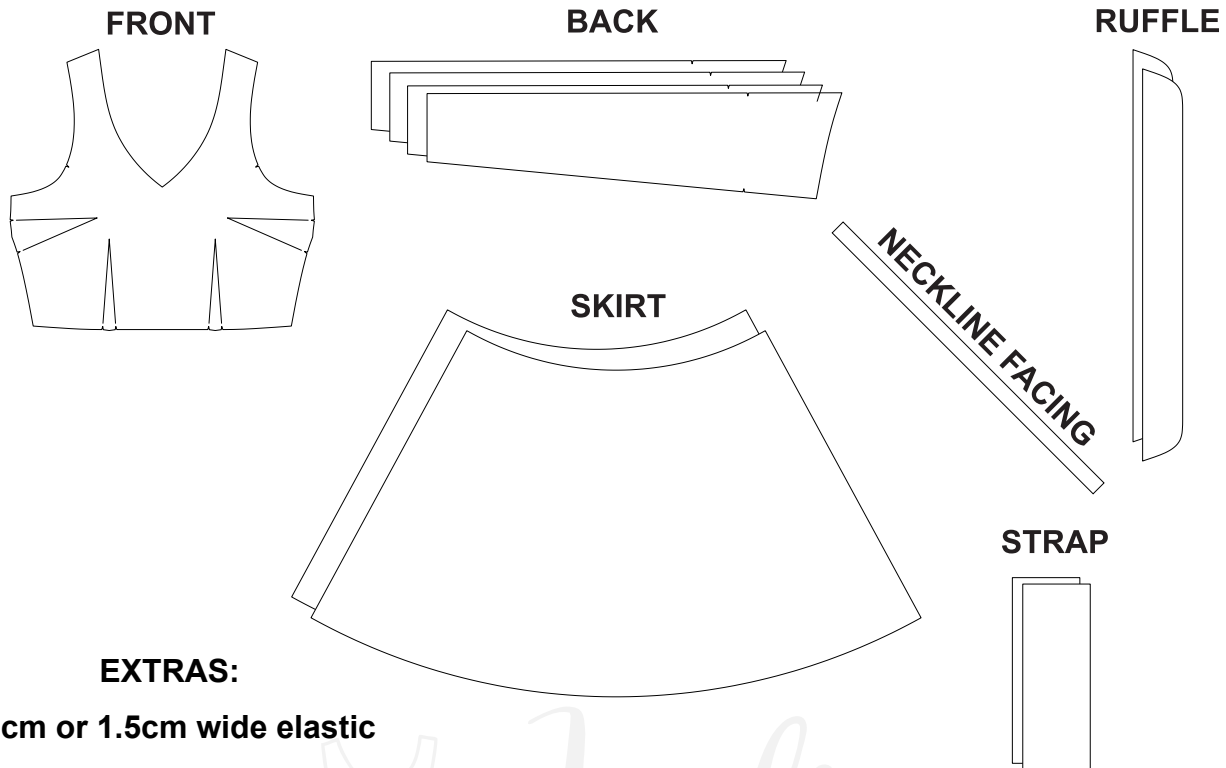


FABRIC CONSUMPTION

Fabric standard width: 1.65 yards / 150 cm

Minimum amount needed:

All sizes: 2.19 yards / 2.0 mts

Suggested patterns position

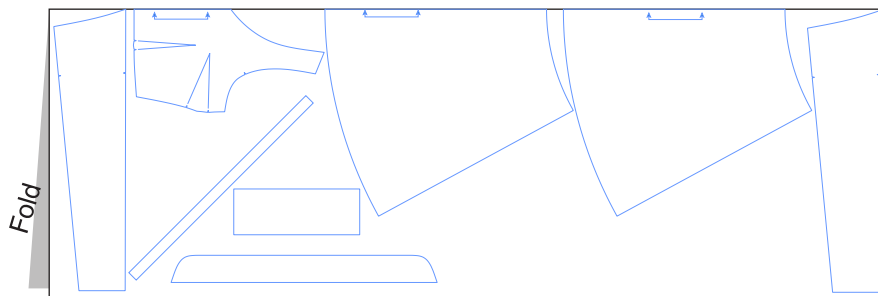



right side



wrong side




new straight seam




overlock stitching

1. Sew the darts on the front

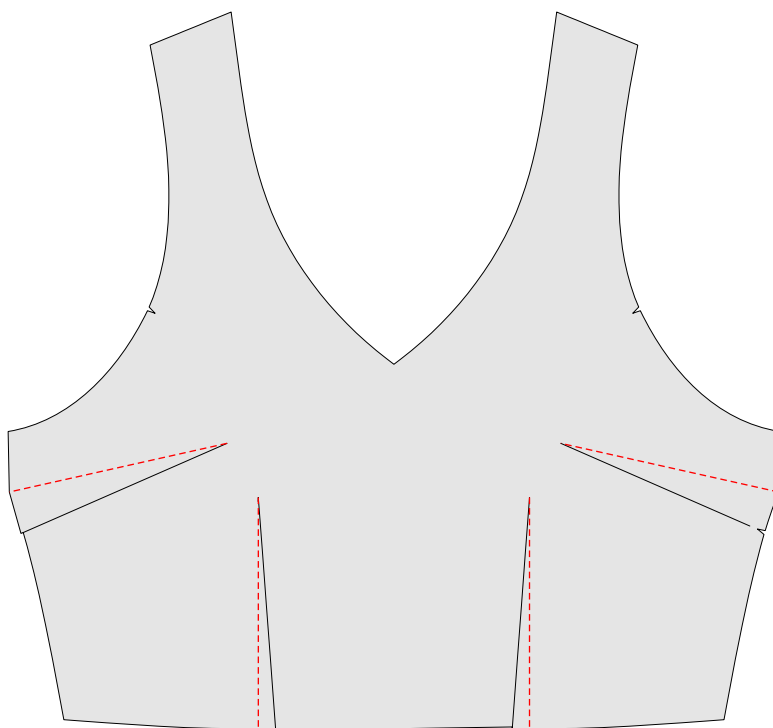


2. Cut a line to the width of the seam allowance

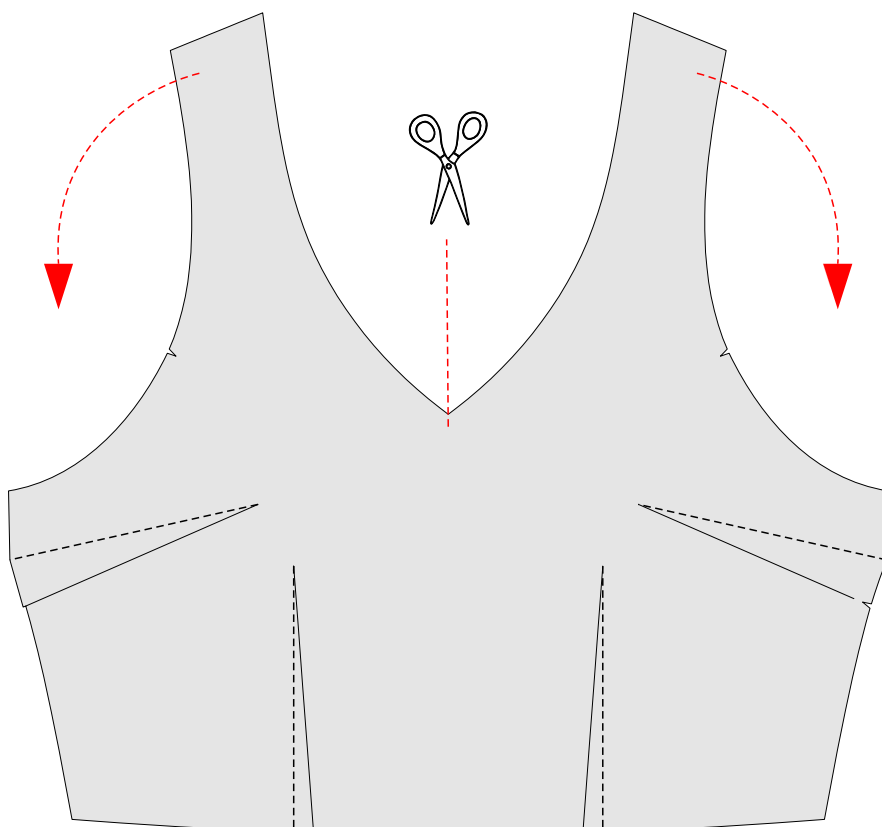


TIP:
Press the
garment before
and after every
sewing step for
a perfect finish


3. Press the seam allowances of the neck facing




4. Fold in half, iron




5. Sew the facing to the neckline, insert the edge of the neckline inside the facing

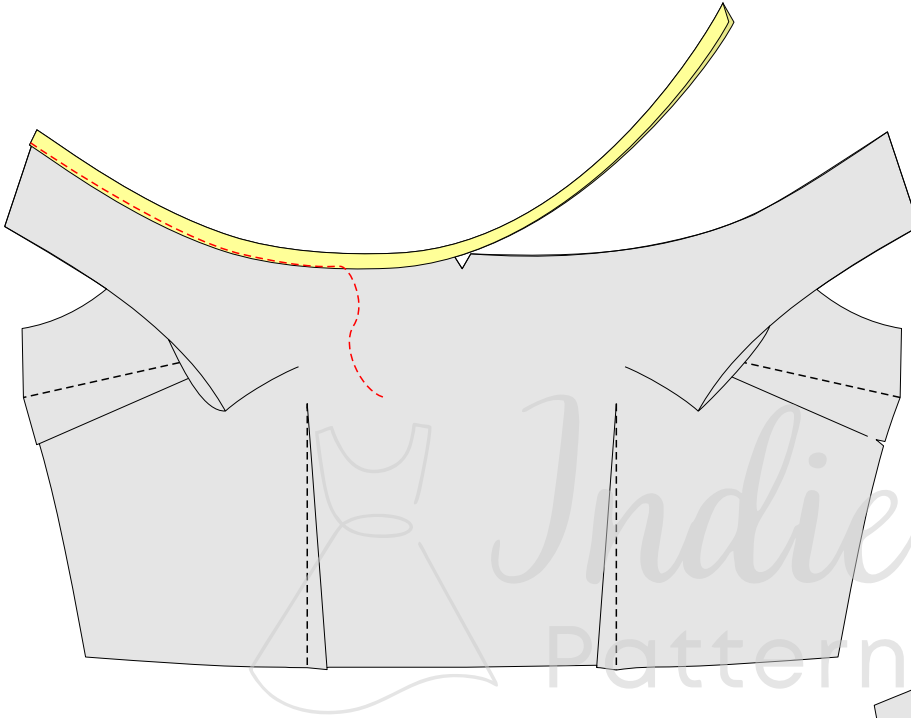


6. Fold the front, sew the facing in the middle

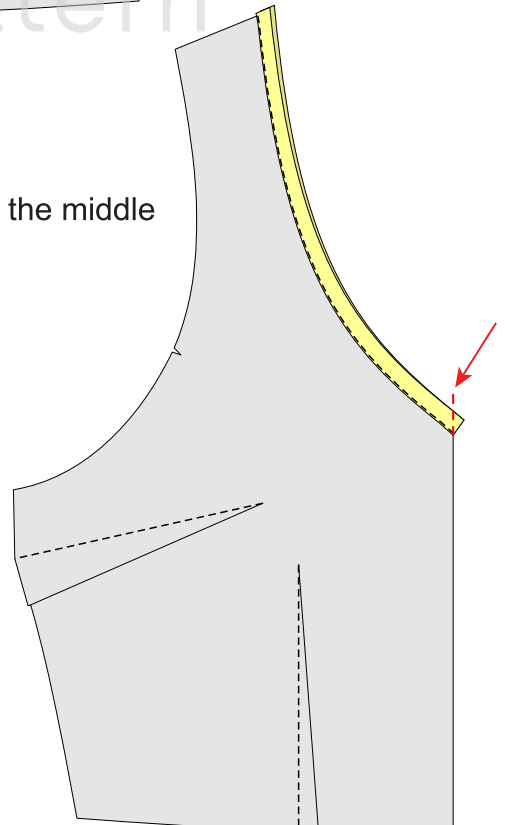

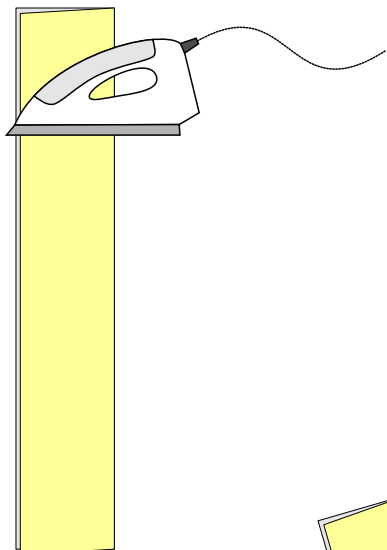


7. Fold the strap in half and iron it

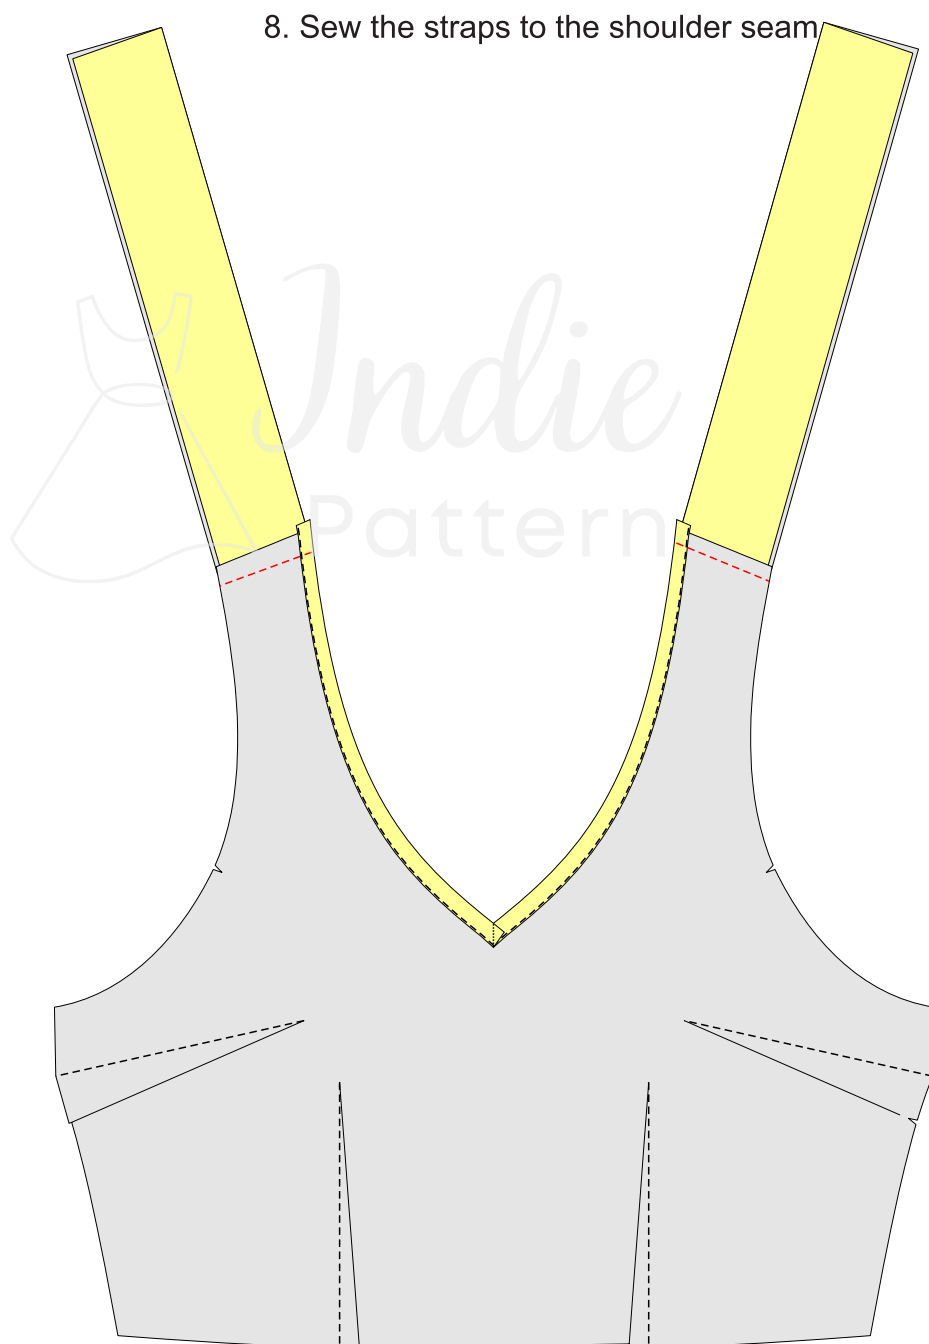

8. Sew the straps to the shoulder seam




9. Overcast the ruffles along the edge




10. Gather the edge of the ruffle


11. Sew the ruffles to the edge of the armhole from the notch and overcast.

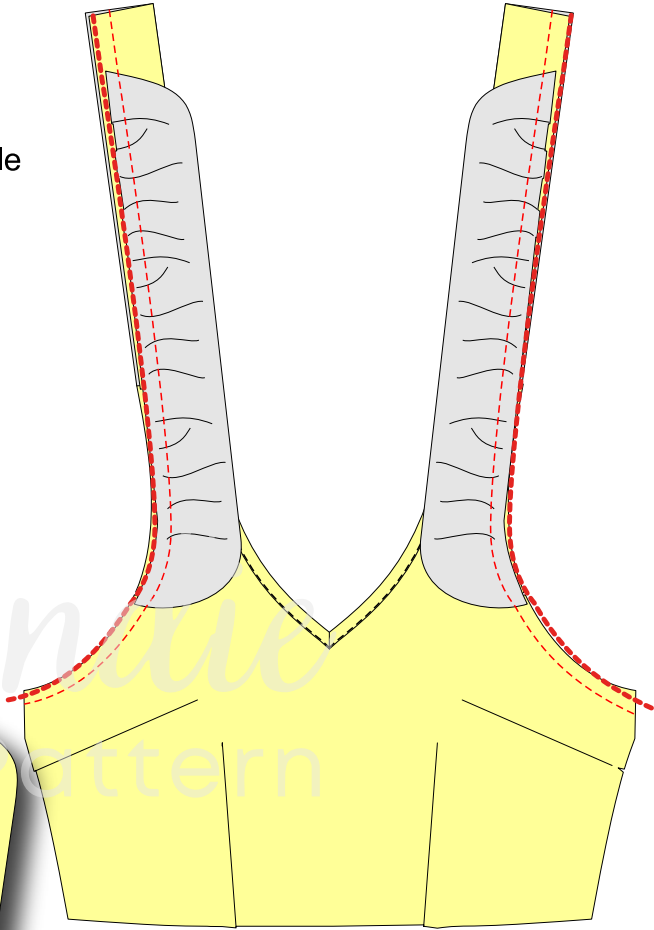

12. Turn this seam over and topstitch.

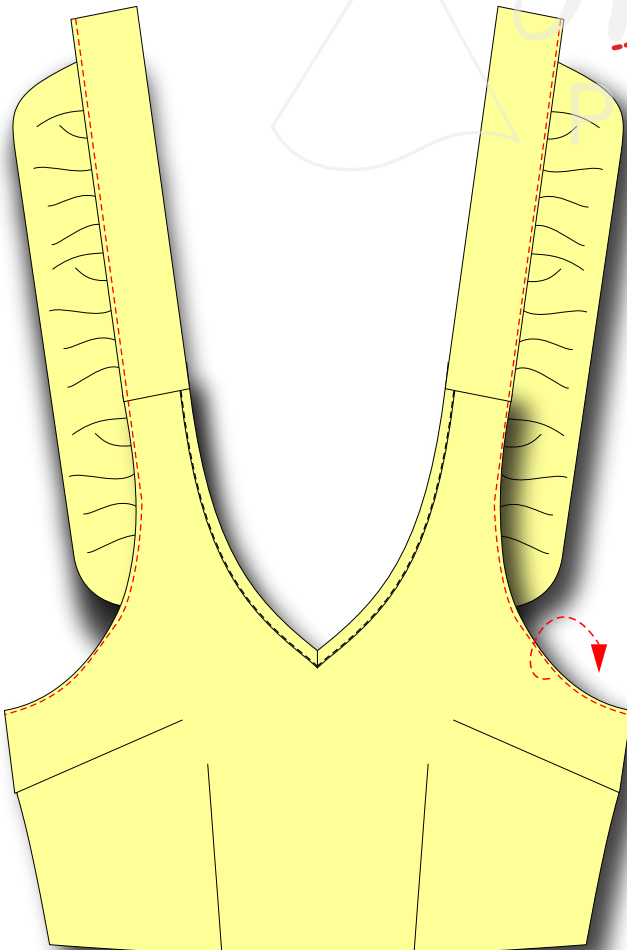


13. Sew the strap to the top edge of the back, from the notch.

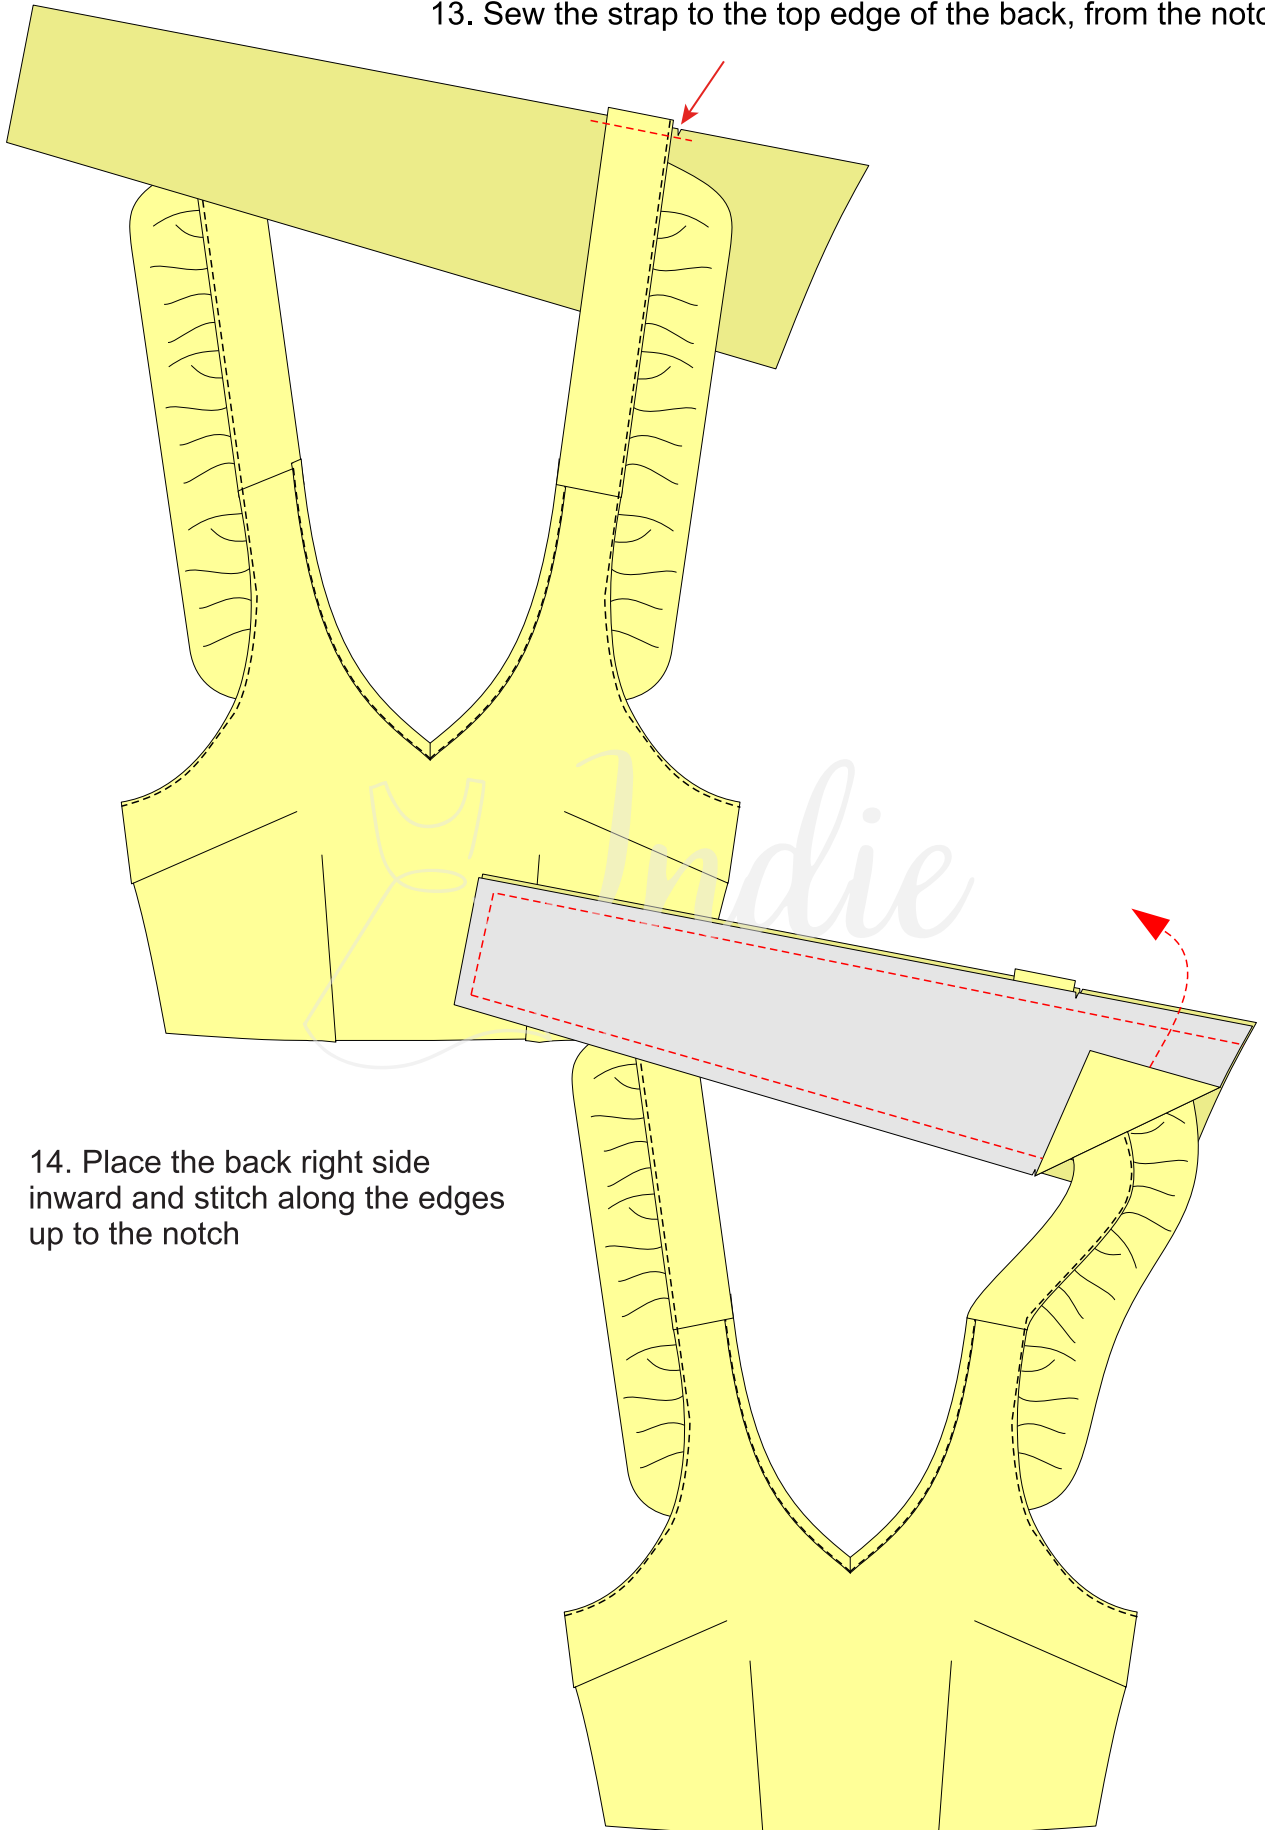


14. Place the back right side inward and stitch along the edges up to the notch


15. Turn the back to the right side, trim the seam allowance

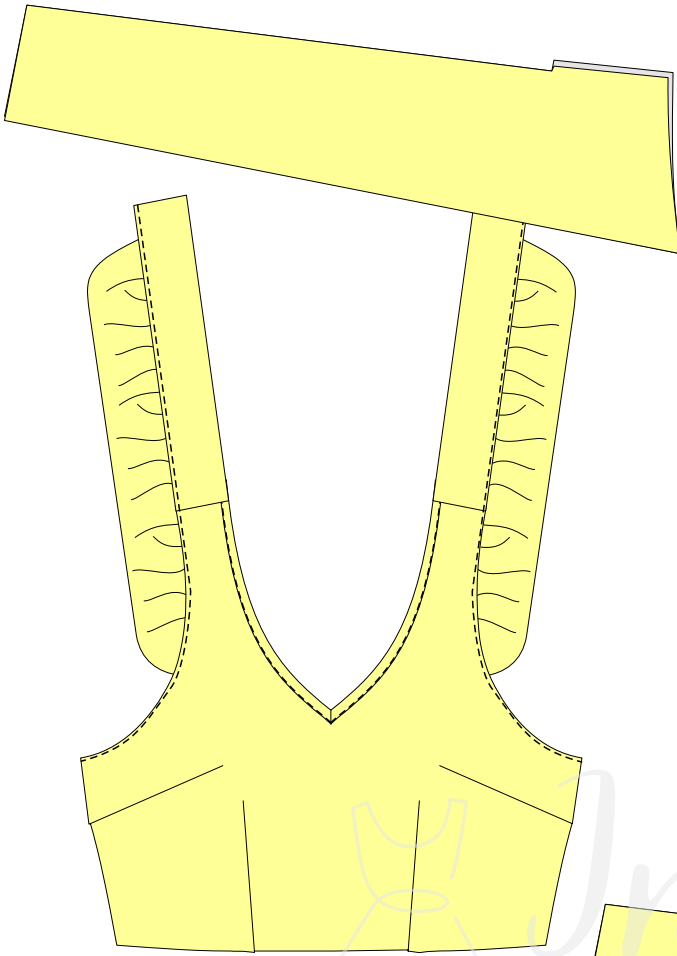


16. Sew the second back to the strap

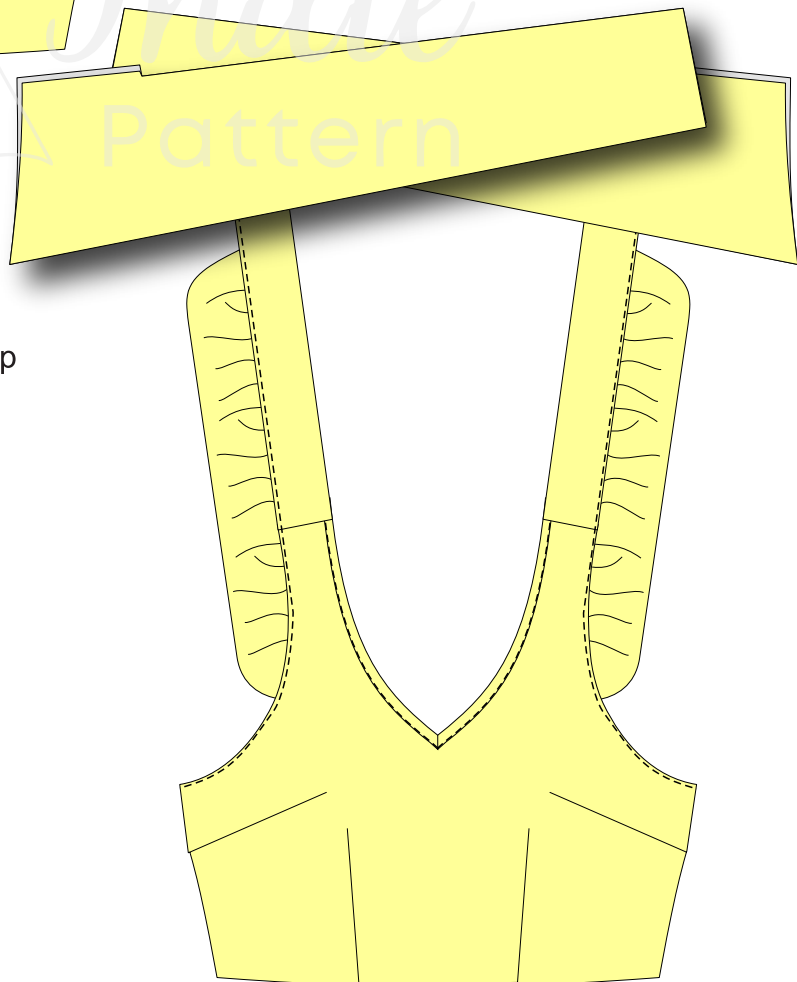



17. Sew and overcast the shoulder seams

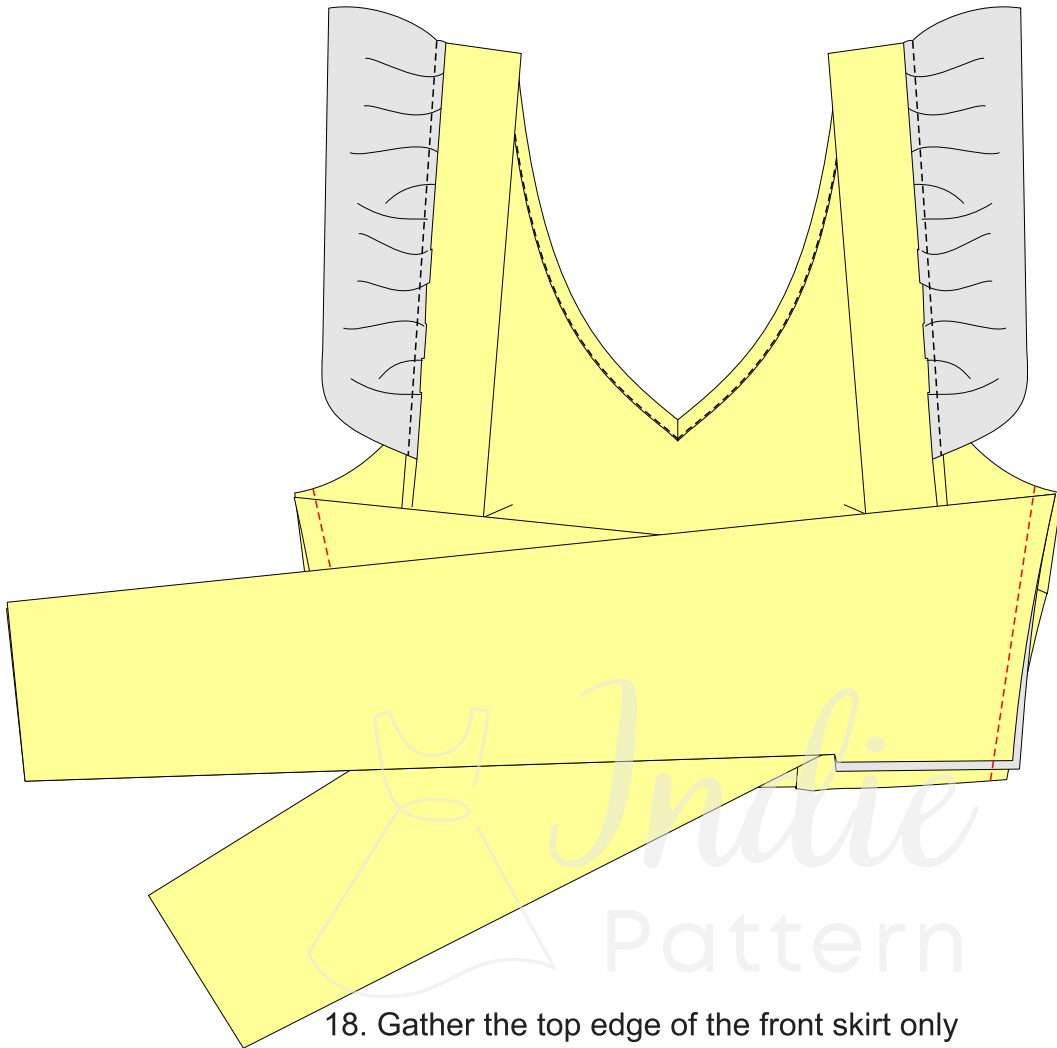

18. Gather the top edge of the front skirt only

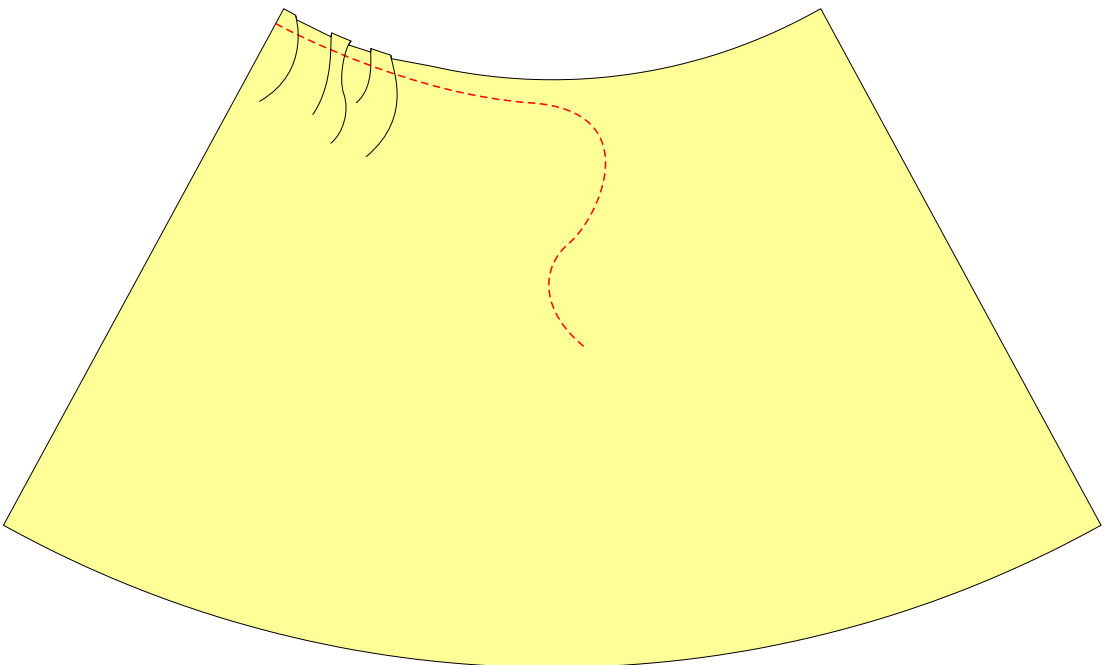



19. Sew and overcast the side seams of the skirt

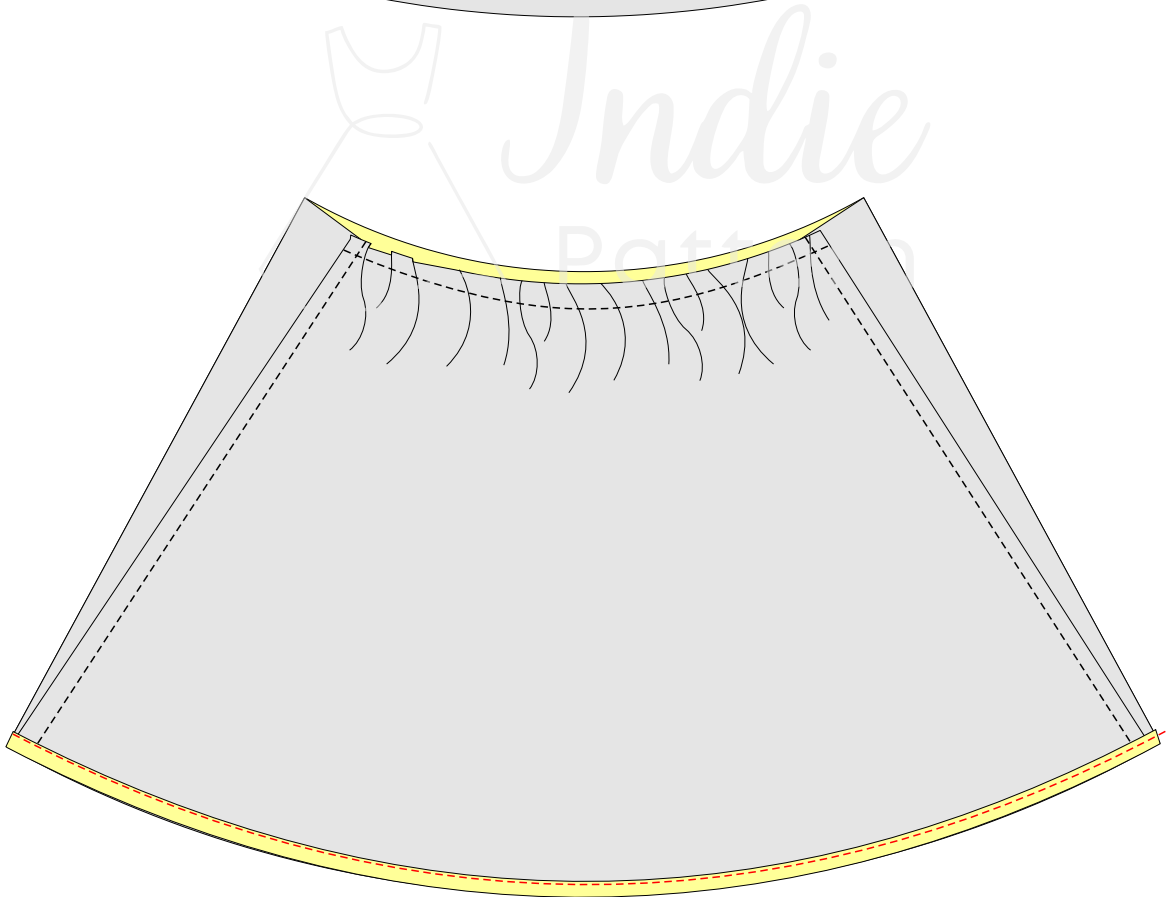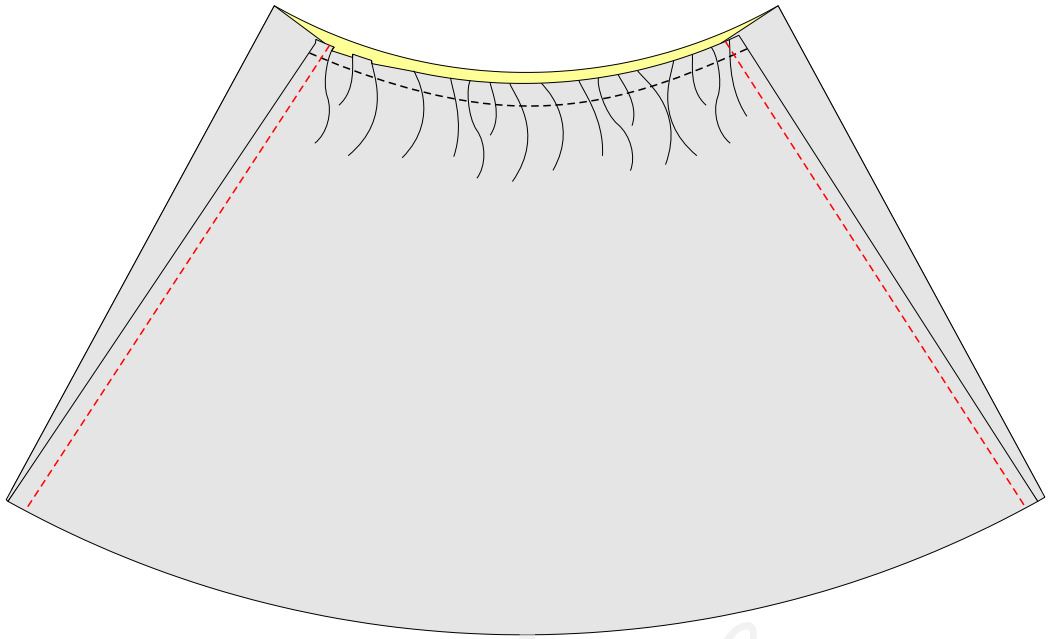


20. Fold the bottom of the skirt and topstitch

21. Sew the skirt to the top, overcast the seam allowance

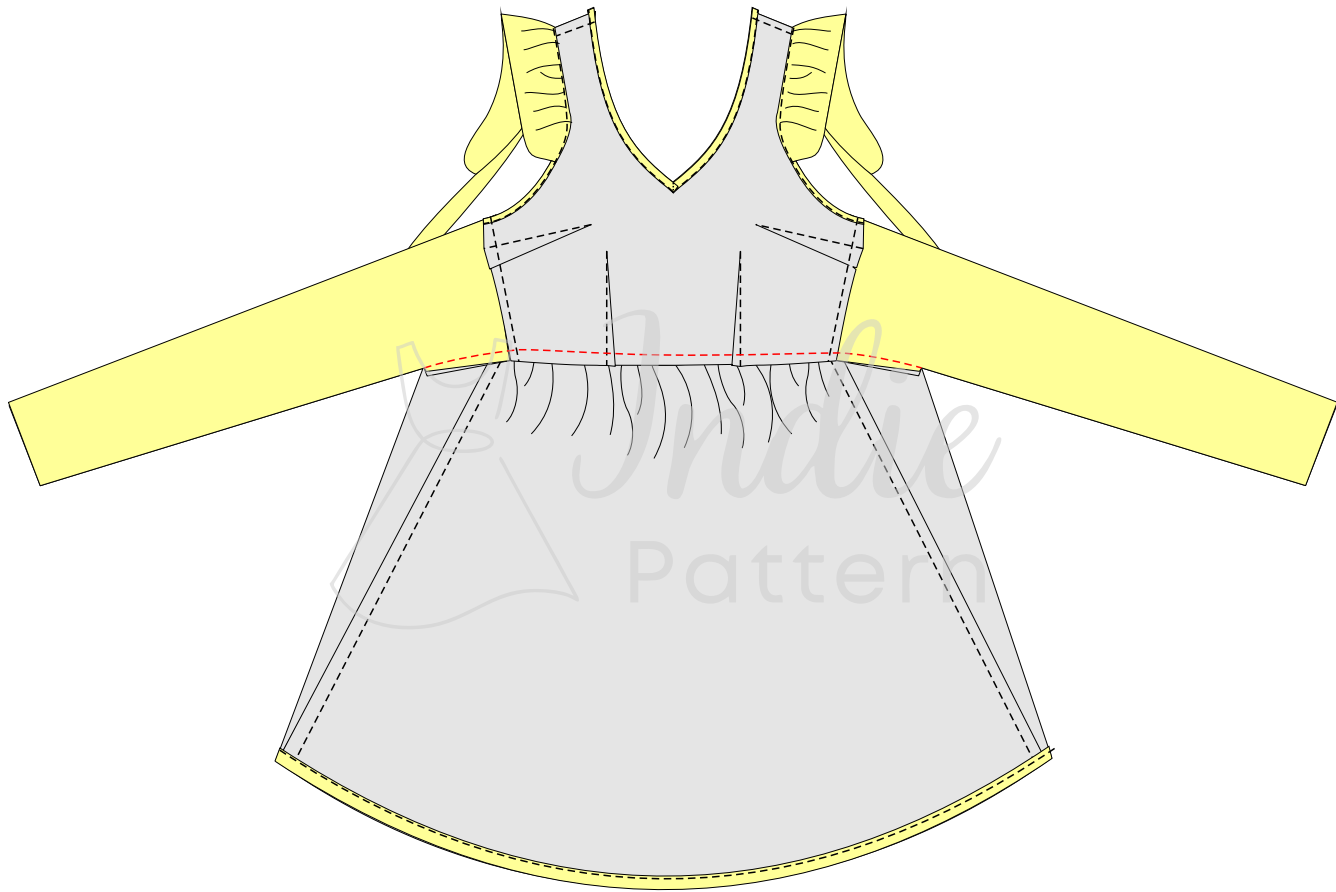


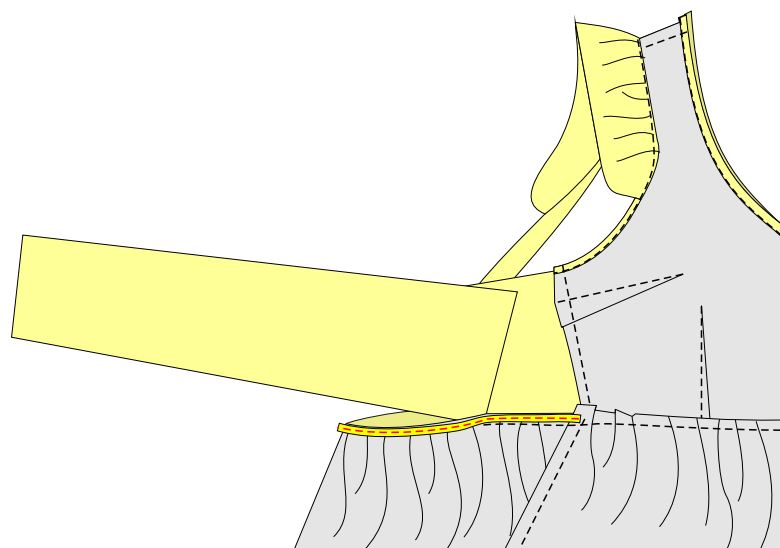

22. Sew the elastic to the top edge of the skirt, stretching the elastic as you sew it

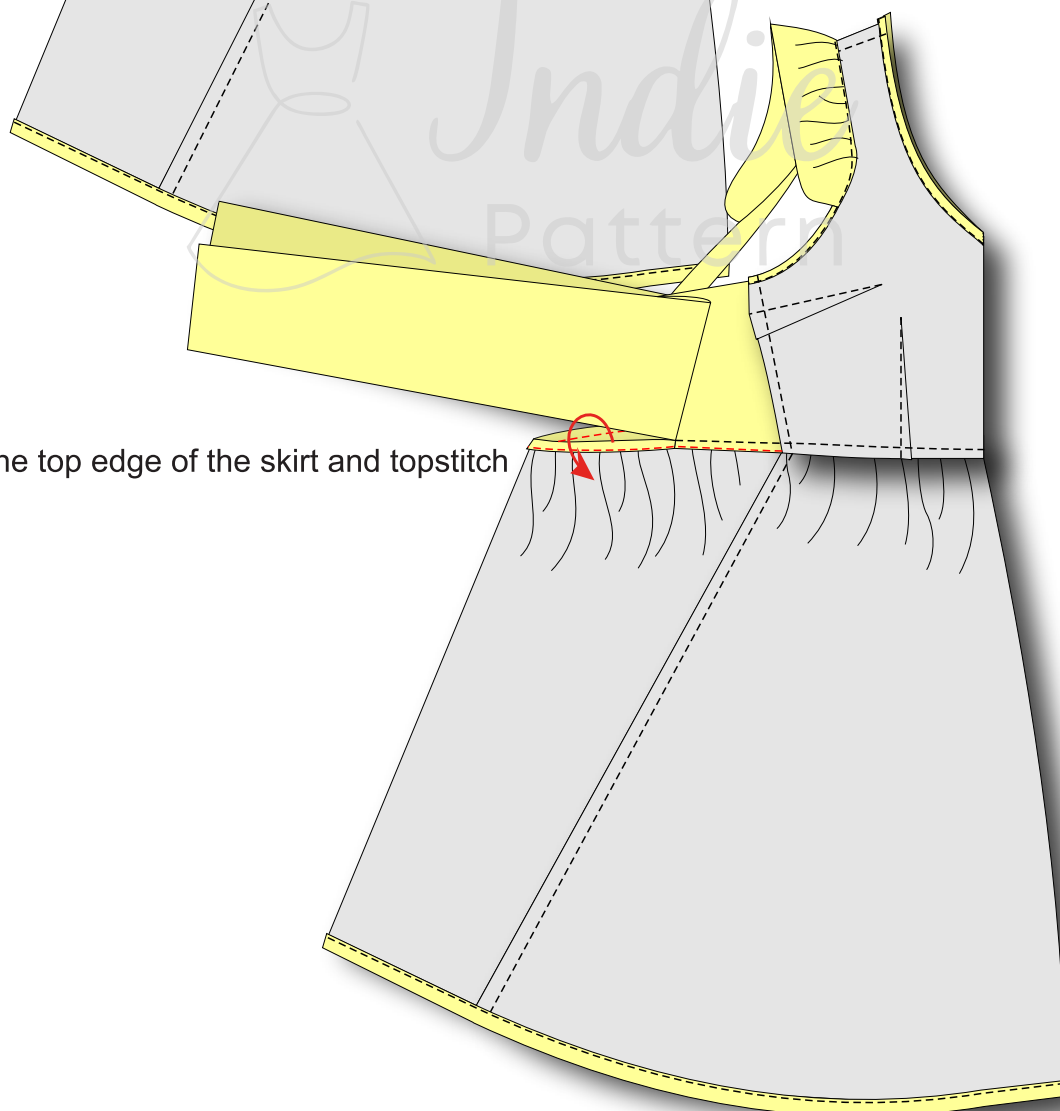

23. Fold the top edge of the skirt and topstitch

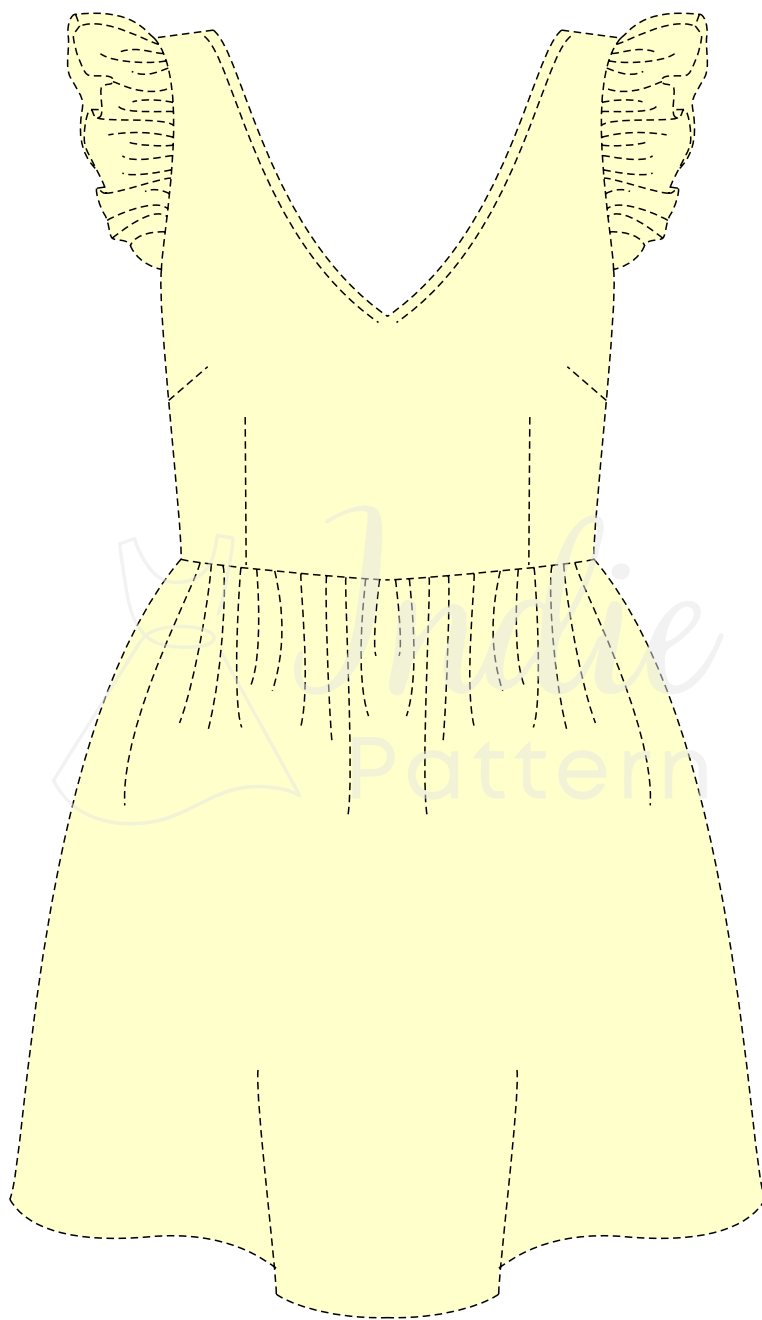

The dress is ready!