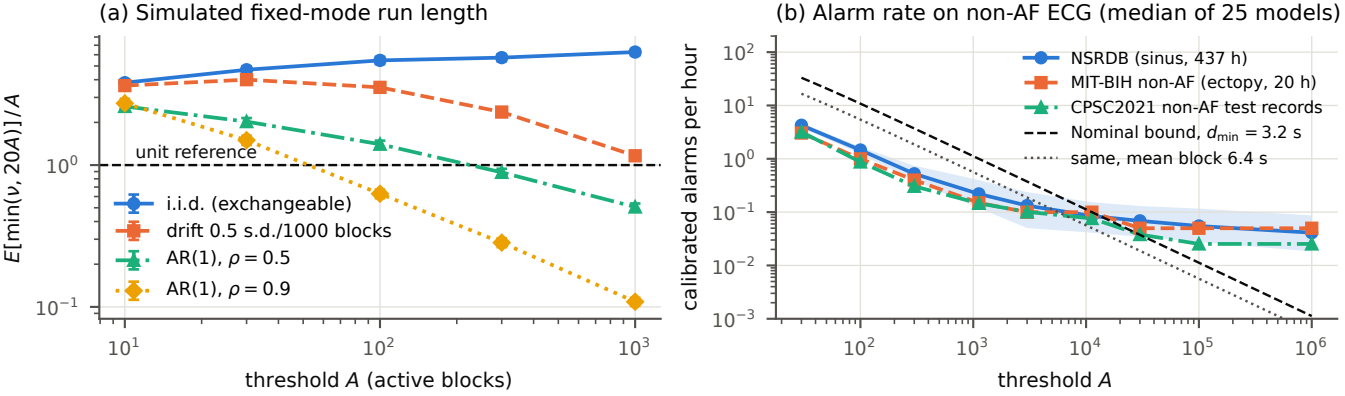
(a) Simulated fixed-mode run length
E[min(ν, 20A)]/A
unit reference
i.i.d. (exchangeable)
drift 0.5 s.d./1000 blocks
AR(1), ρ = 0.5
AR(1), ρ = 0.9
threshold A (active blocks)
(b) Alarm rate on non-AF ECG (median of 25 models)
calibrated alarms per hour
NSRDB (sinus, 437 h)
MIT-BIH non-AF (ectopy, 20 h)
CPSC2021 non-AF test records
Nominal bound, d_min = 3.2 s
same, mean block 6.4 s
threshold A