


**CUSTOMER BRIDGEWORK
MINIMUM REQUIREMENT**


1. TO BE CAPABLE OF HOLDING A SAFE WORKING LOAD OF 600kg MINIMUM.
2. TO BE MANUFACTURED FROM 75x75x5mm RHS (OR EQUIVALENT STRENGTH).
3. TO BE OF RIGID DESIGN.

NOTE TRACK NEEDS 3⁺mm GAP ON EITHER SIDE, ie, CUTOUT ON EXISTING TRACK TO BE 1206mm. ENSURE A MINIMUM OF 500mm OF STRAIGHT TRACK ON EITHER SIDE OF CUTOUT.

SYANDARD CABLE LENGTH IS 5m FROM CENTRE OF TRACK. IF LONGER CABLE IS REQUIRED CONTACT YOUR LOCAL A&D DEALER.

**UNCONTROLLED
DOCUMENT
REFERENCE ONLY**

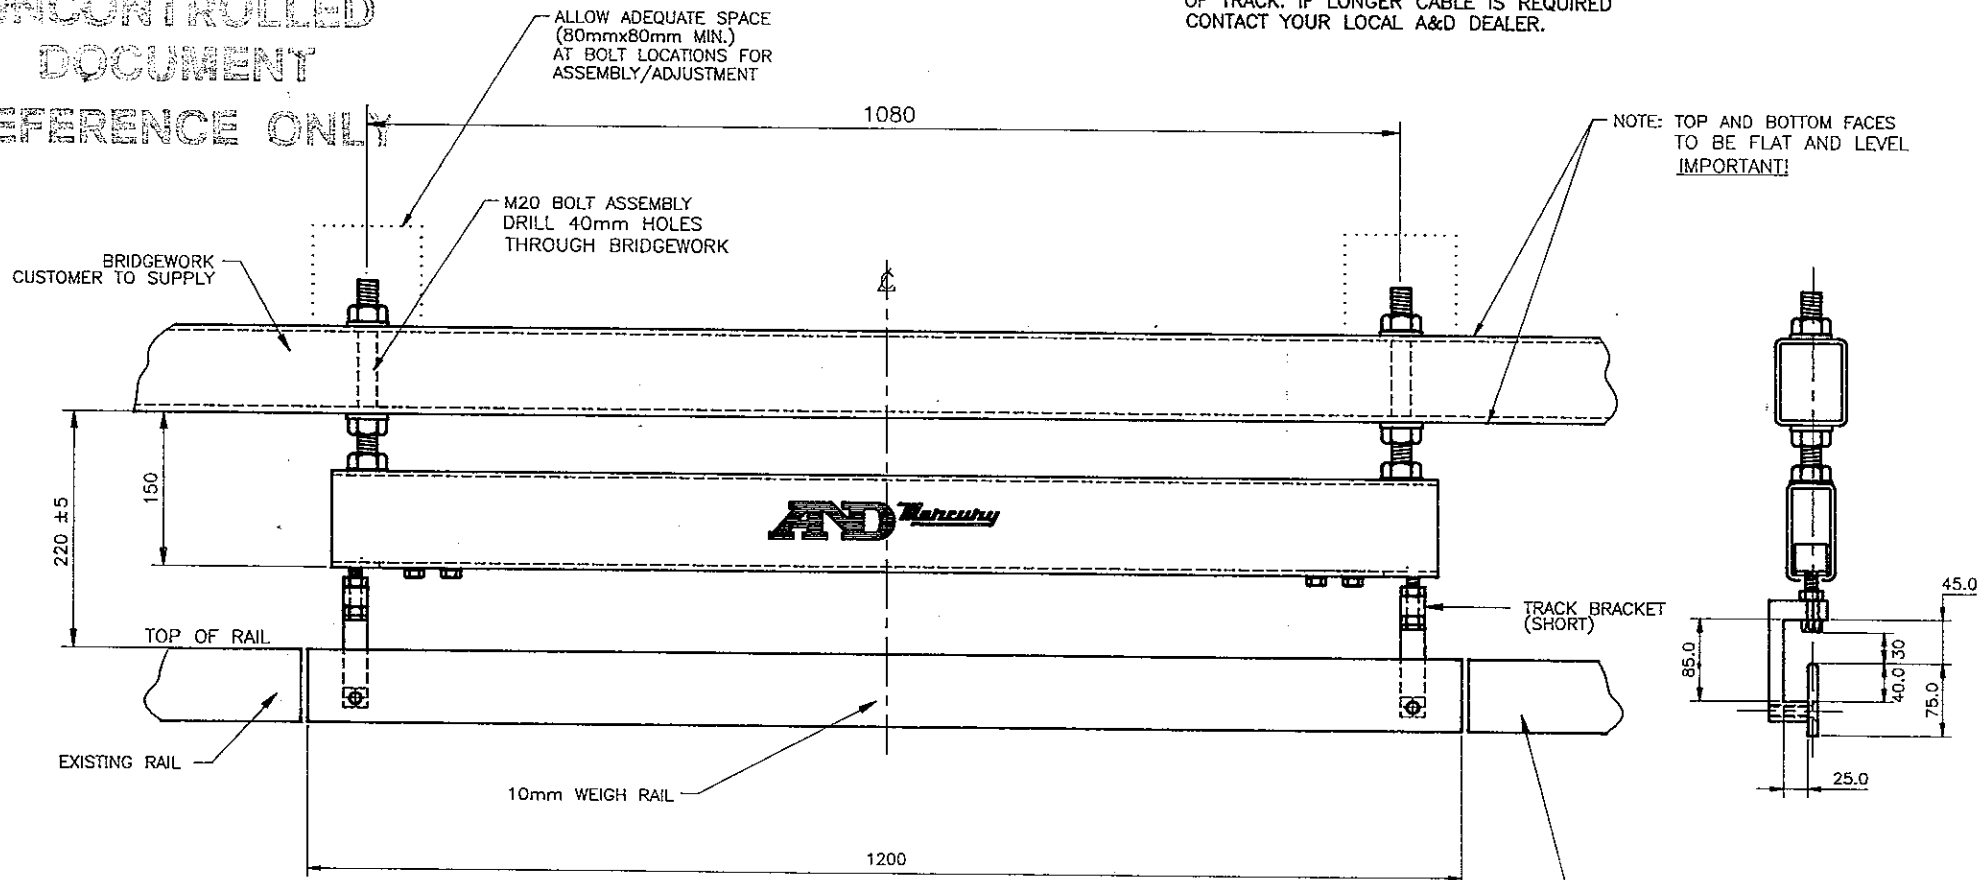

B	1080 DIMENSION WAS 825mm ECN-095	25/10/95	MT	SCALE: NTS	 A & D Mercury P / L 32 Dew St. Thebarton SA 5031 ph (08) 3523033 fax (08) 3527409	DRAWN: DJC
A	SUPPLEMENTARY DIMENSIONS ADDED ECN-082	16/11/94	VS	CHECKED:		DATE: 21/5/91
SYM.	REVISION	DATE	APPD	APPROVED: <i>re 25/10/95</i>		DWG NO: C91-097B
THIRD ANGLE PROJECTION		DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE		TITLE: OHT-600, 1200mm WEIGH RAIL, SHORT BRACKETS		