



CUSTOMER BRIDGEWORK
MINIMUM REQUIREMENT

1. TO BE CAPABLE OF HOLDING A SAFE WORKING LOAD OF 600kg MINIMUM.
2. TO BE MANUFACTURED FROM 75x75x5mm RHS (OR EQUIVALENT STRENGTH).
3. TO BE OF RIGID DESIGN.

NOTE TRACK NEEDS 3 \pm mm GAP ON EITHER SIDE. ie. CUTOUT ON EXISTING TRACK TO BE 606mm. ENSURE A MINIMUM OF 500mm OF STRAIGHT TRACK ON EITHER SIDE OF CUTOUT.

STANDARD CABLE LENGTH IS 5m FROM CENTRE OF TRACK. IF LONGER CABLE IS REQUIRED CONTACT YOUR LOCAL A&D DEALER.

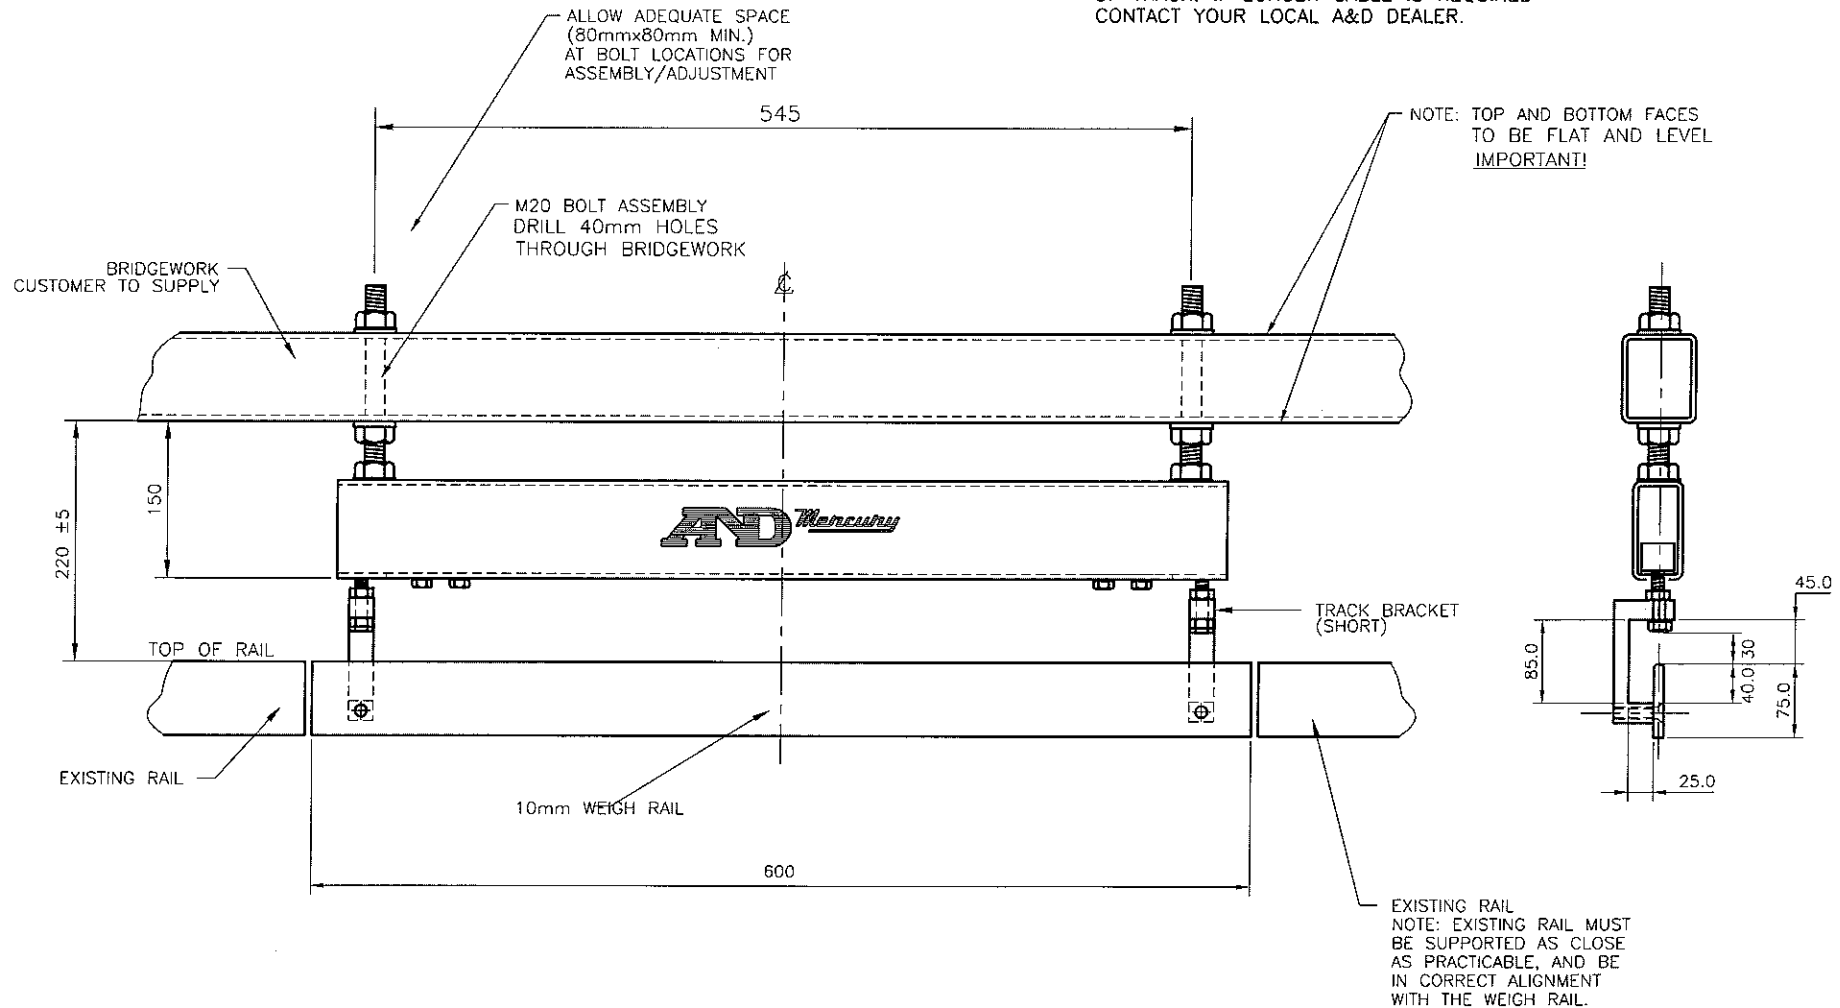

				SCALE: NTS	 A & D Mercury P / L 32 Dew St. Thebarton SA 5031 ph (08) 83523033 fax (08) 83527409	DRAWN: DJC	
SYM.	REVISION	DATE	APPD	CHECKED: M.Ch. 22/09/00		DATE: 22/6/00	
THIRD ANGLE PROJECTION		DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE		APPROVED: M.Ch. 22/09/00	TITLE: OHT-600, 600mm WEIGH RAIL, SHORT BRACKETS		DWG NO: C00-111