


# UNCONTROLLED DOCUMENT REFERENCE ONLY

## CUSTOMER BRIDGEWORK MINIMUM REQUIREMENT

1. TO BE CAPABLE OF HOLDING A SAFE WORKING LOAD OF 600kg MINIMUM.
2. TO BE MANUFACTURED FROM 75x75x5mm RHS (OR EQUIVALENT STRENGTH)
3. TO BE OF RIGID DESIGN.

**NOTE** TRACK NEEDS 3<sup>19</sup>mm GAP ON EITHER SIDE. ie, CUTOUT ON EXISTING TRACK TO BE 1206mm. ENSURE A MINIMUM OF 500mm OF STRAIGHT TRACK ON EITHER SIDE OF CUTOUT.

STANDARD CABLE LENGTH IS 5m FROM CENTRE OF TRACK. IF LONGER CABLE IS REQUIRED CONTACT YOUR LOCAL A&D DEALER.

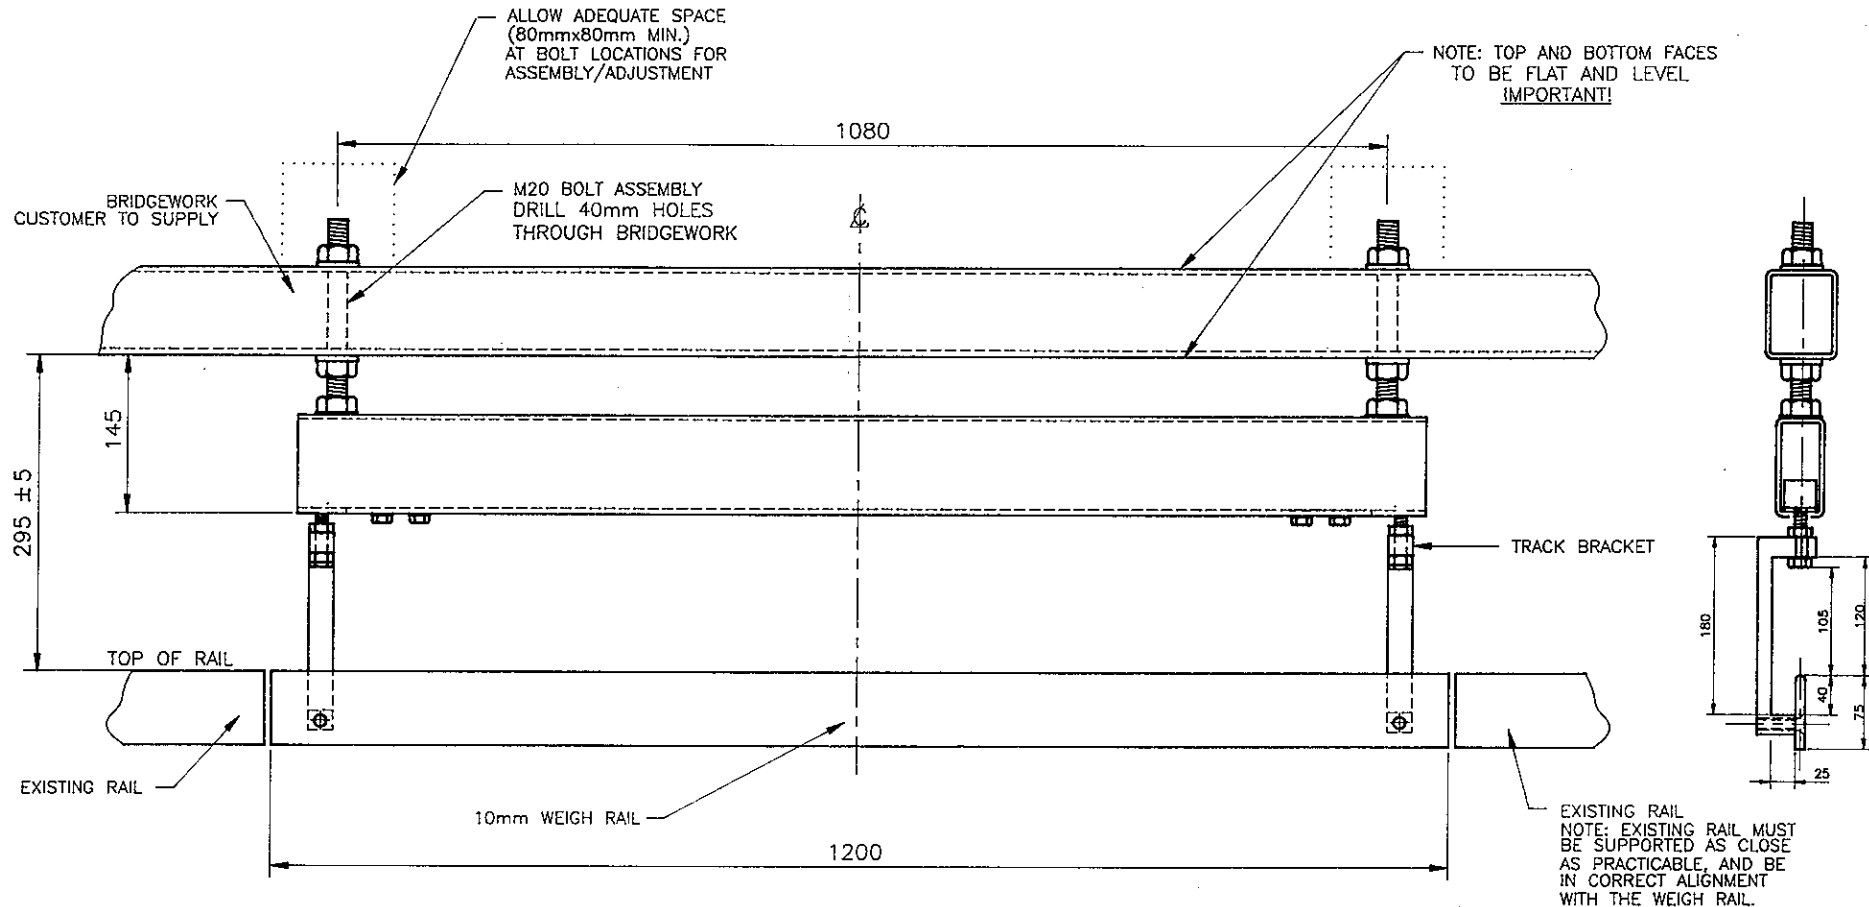

A & D Mercury P/L		DRAWN: DJC	
32 Dew St. Thebarton SA 5031		DATE: 6/9/91	
ph (08) 3523033 fax (08) 3527409		DWG NO: C91-194A	
SCALE: NTS		APPROVED: <i>[Signature]</i> 16/11/94	
CHECKED:		TITLE: OHT - 600, 1200mm RAIL, MED: INSTALLATION DETAIL	
THIRD ANGLE PROJECTION		DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE	
SYMBOL		REVISION	
A		ECN-082	
16/11/94		VS	
DATE		APPD	