

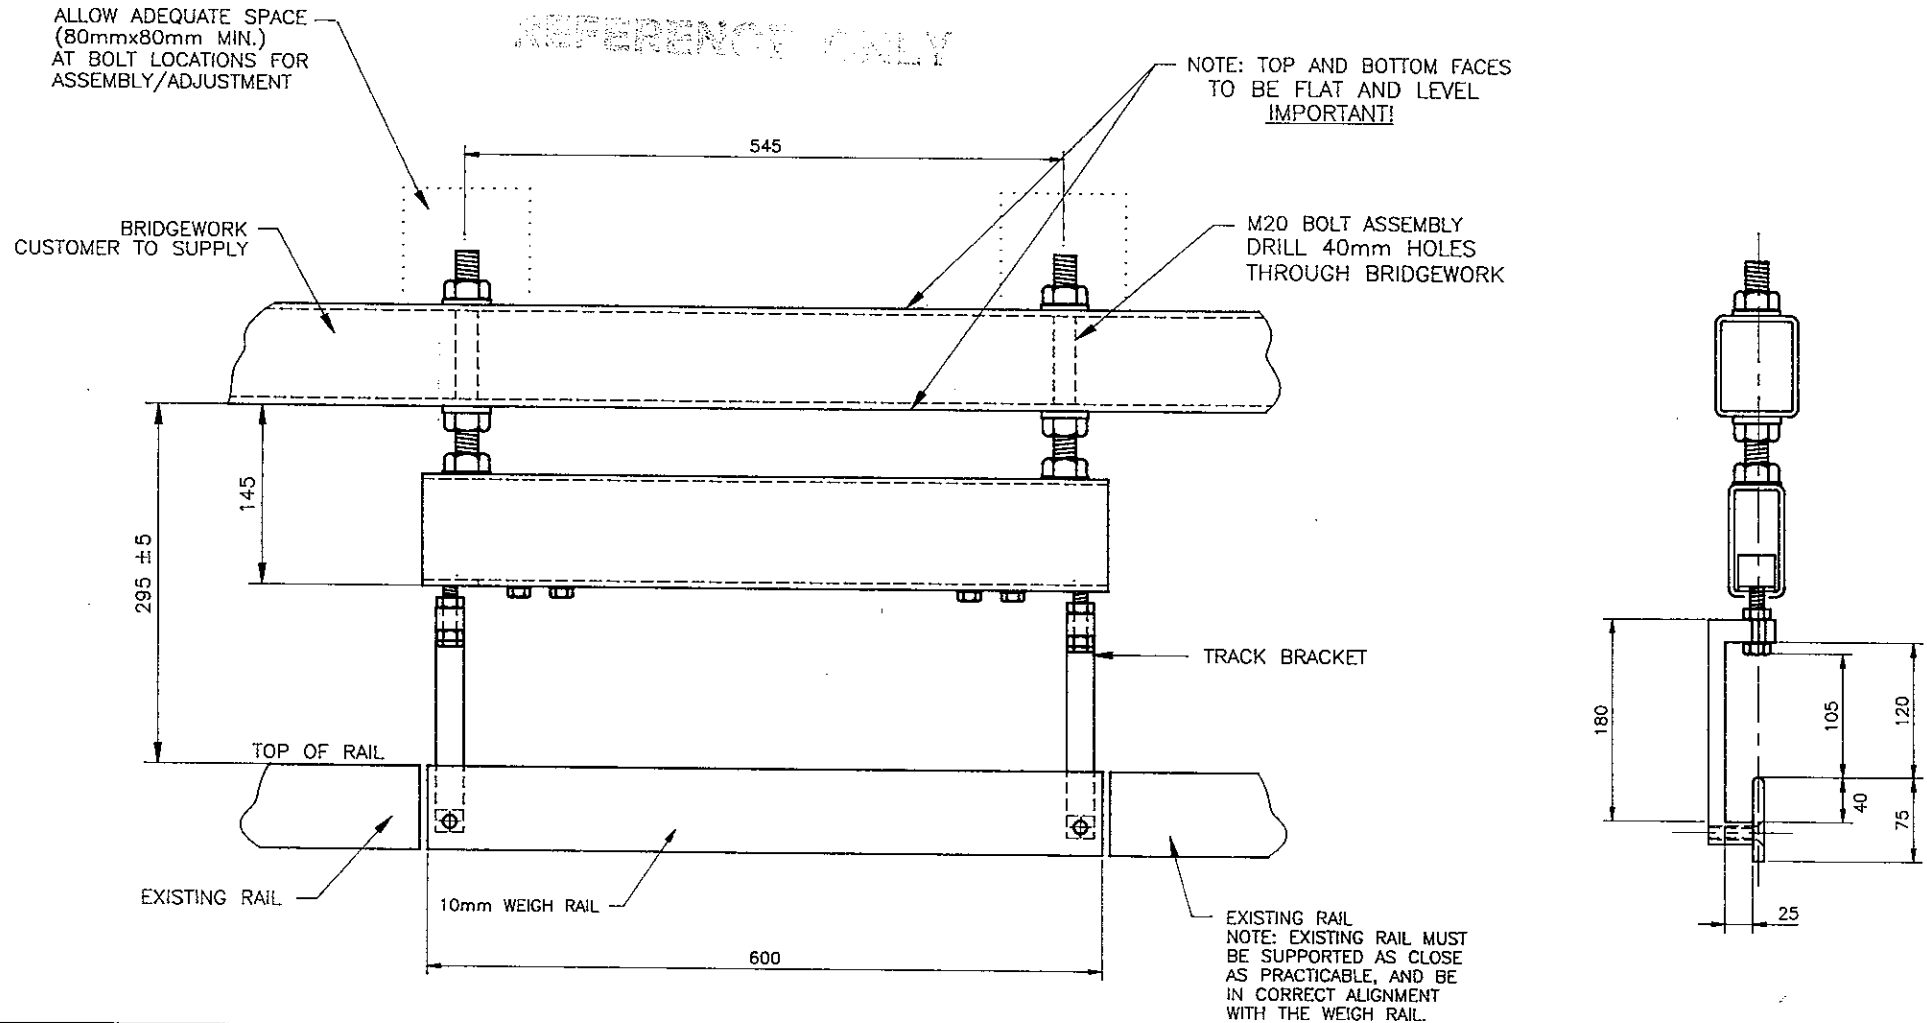
**CUSTOMER BRIDGEWORK  
MINIMUM REQUIREMENT**



1. TO BE CAPABLE OF HOLDING A SAFE WORKING LOAD OF 600kg MINIMUM.
2. TO BE MANUFACTURED FROM 75x75x5mm RHS (OR EQUIVALENT STRENGTH).
3. TO BE OF RIGID DESIGN.

**NOTE** TRACK NEEDS  $3 \pm 1$  mm GAP ON EITHER SIDE OF WEIGH RAIL. i.e. CUTOUT ON EXISTING TRACK TO TO BE 606mm. ENSURE A MINIMUM OF 500 mm OF STRAIGHT TRACK ON EITHER SIDE OF WEIGH RAIL.

STANDARD CABLE LENGTH IS 5m FROM CENTRE OF TRACK. IF LONGER CABLE IS REQUIRED CONTACT YOUR LOCAL A&D DEALER.

**UNCONTROLLED  
DOCUMENT  
REFERENCE ONLY**



				SCALE: NTS	 A & D Mercury P / L 32 Dew St. Thebarton SA 5031 ph (08) 3523033 fax (08) 3527409	DRAWN: DJC
A	SUPPLEMENTARY DIMENSIONS ADDED ECN-082	16/11/94	VS	CHECKED:		DATE: 15/4/93
SYM.	REVISION	DATE	APPD			
THIRD ANGLE PROJECTION		DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE		APPROVED:  16/11/94	TITLE: OHT - 600, 600mm RAIL, MED. : INSTALLATION DETAIL	DWG NO: C93-063A