

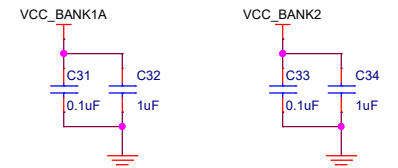
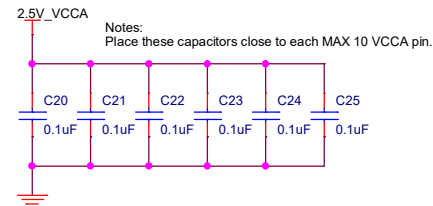
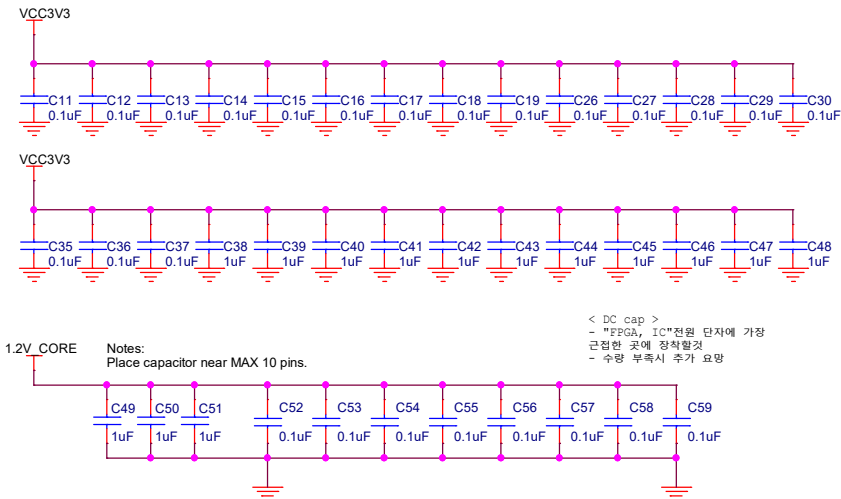
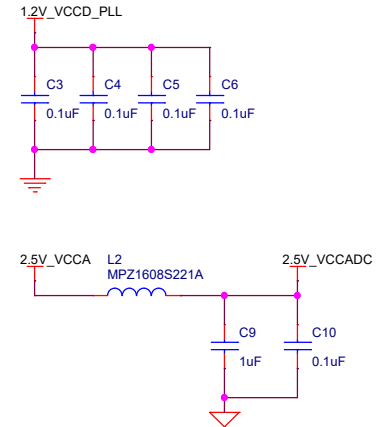
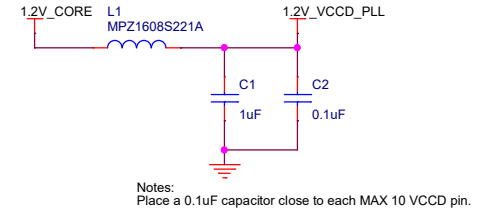
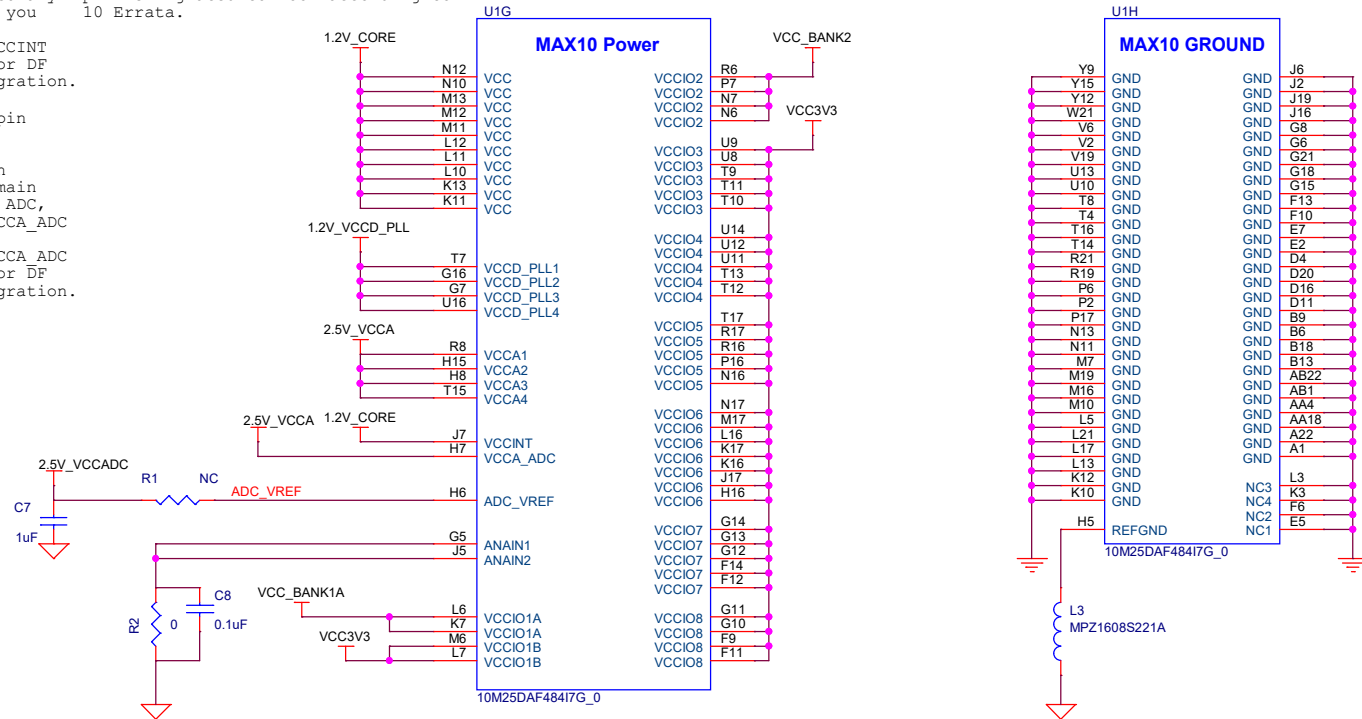
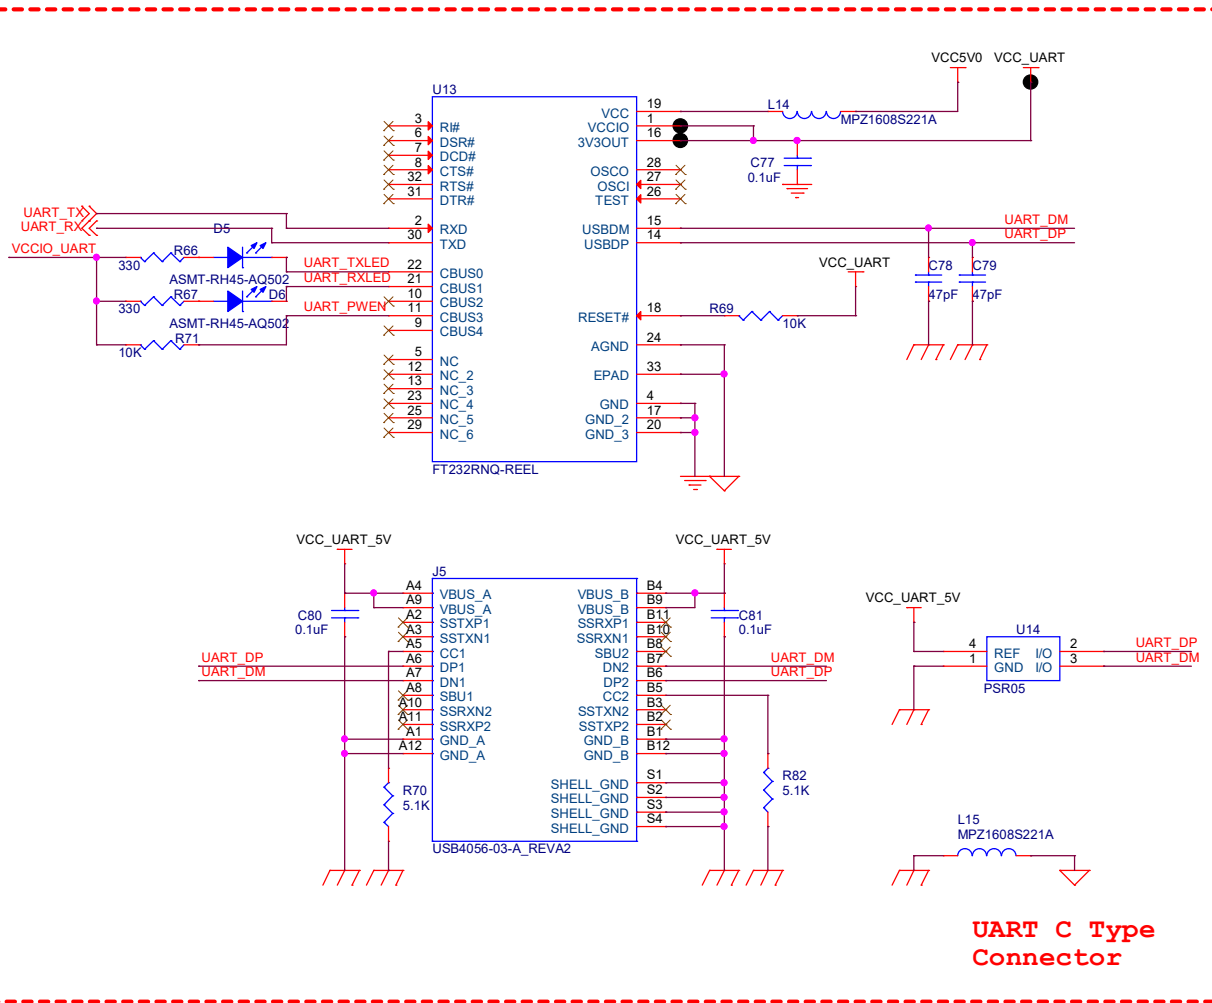


Note:
For ES device, connect ADC_VREF to NC when not using external voltage reference.
For DC/DF production device, ADC_VREF pin is migrated to VCCA according to MAX10 Errata.





Note:
According to MAX 10 pin
connection guideline
PCFG-01018-1.2,
"Tie the VCCA_ADC pin
to any 2.5V power domain
if you are not using ADC,
and do not tie the VCCA_ADC
pin to GND."
Therefore, connect VCCA_ADC
to 2.5V_CORE for DC or DF
production device migration.

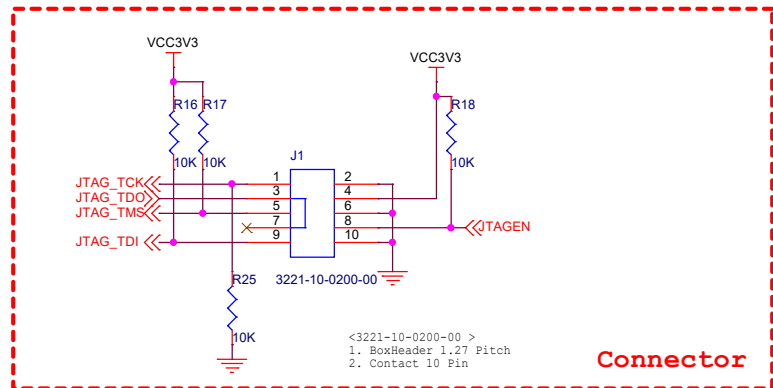


Title <COMMON_CTRL_MAX>			
Size B	Document Number <FPGA_POWER>		Rev V01
Date:	Thursday, June 26, 2025	Sheet	1 of 7




Title			
<COMMON_CTRL_MAX>			
Size B	Document Number		Rev
	<COMMON_CTRL_MAX>		V01
Date:	Thursday, June 26, 2025	Sheet 2 of 7	

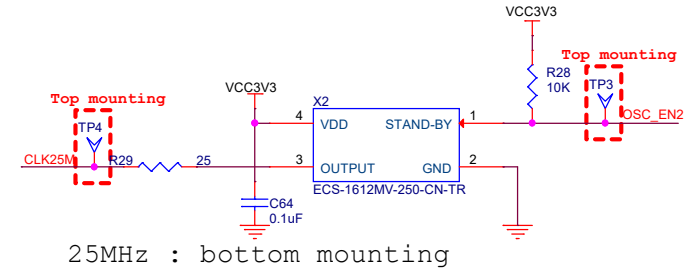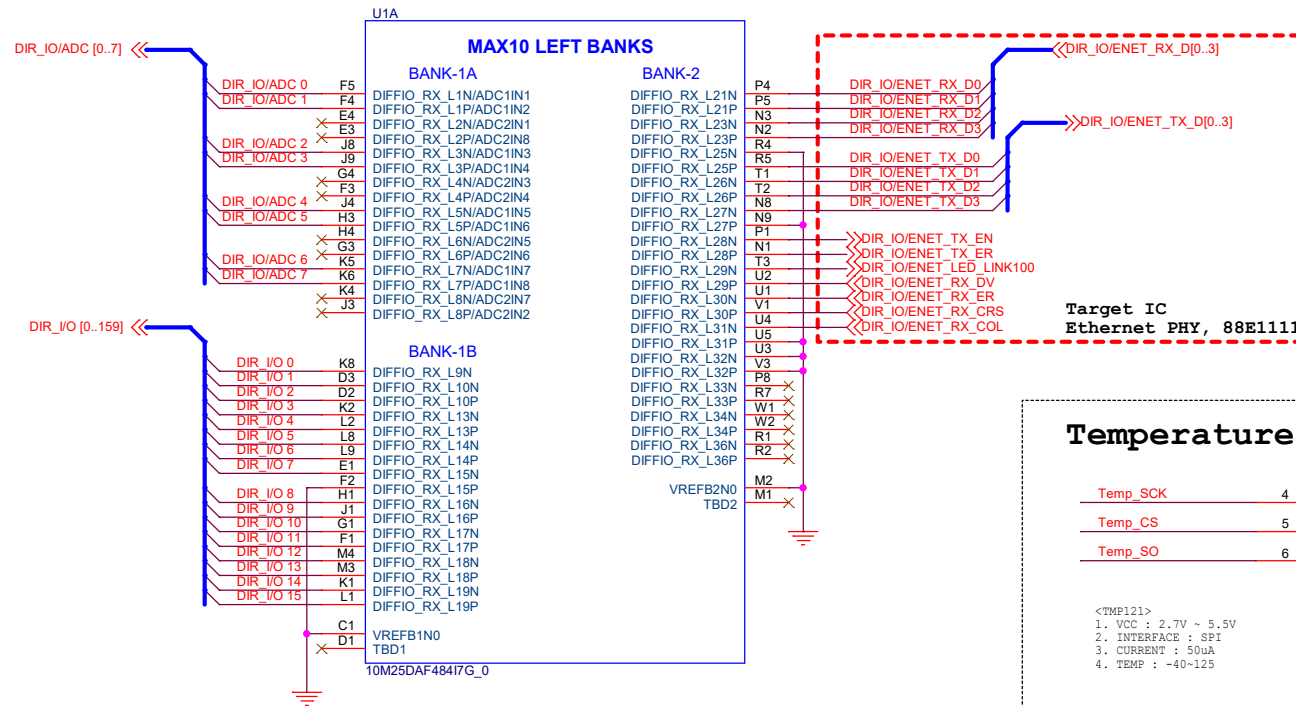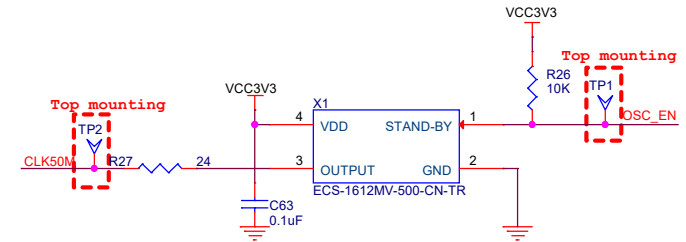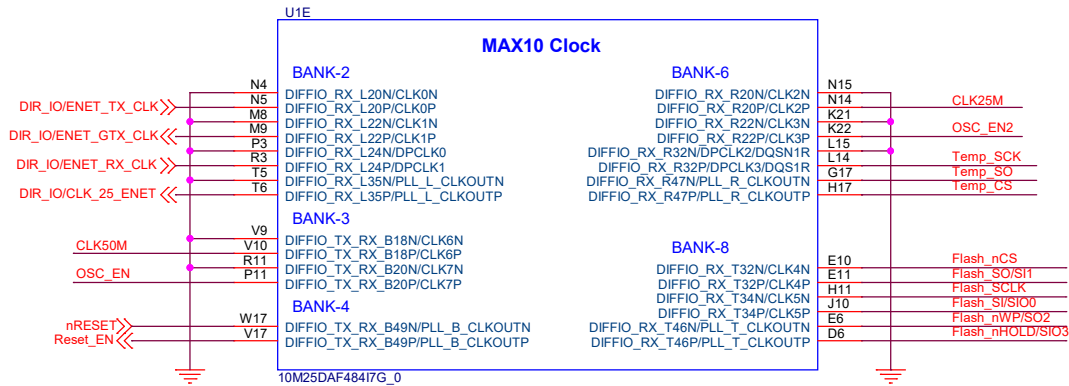


Temperature

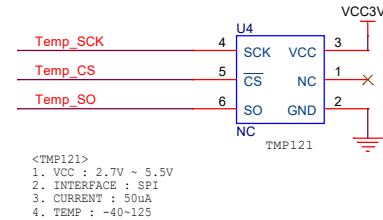








NOR FLASH IC FLASH 8MBIT SPI 108MHZ 8SOP

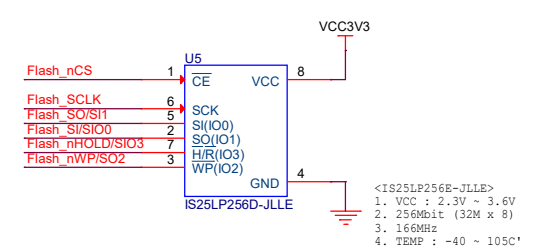

Title			<COMMON_CTRL_MAX>	
Size	Document Number	<COMMON_CTRL_MAX>		Rev
B				V01
Date:	Thursday, June 26, 2025	Sheet	3	of 7











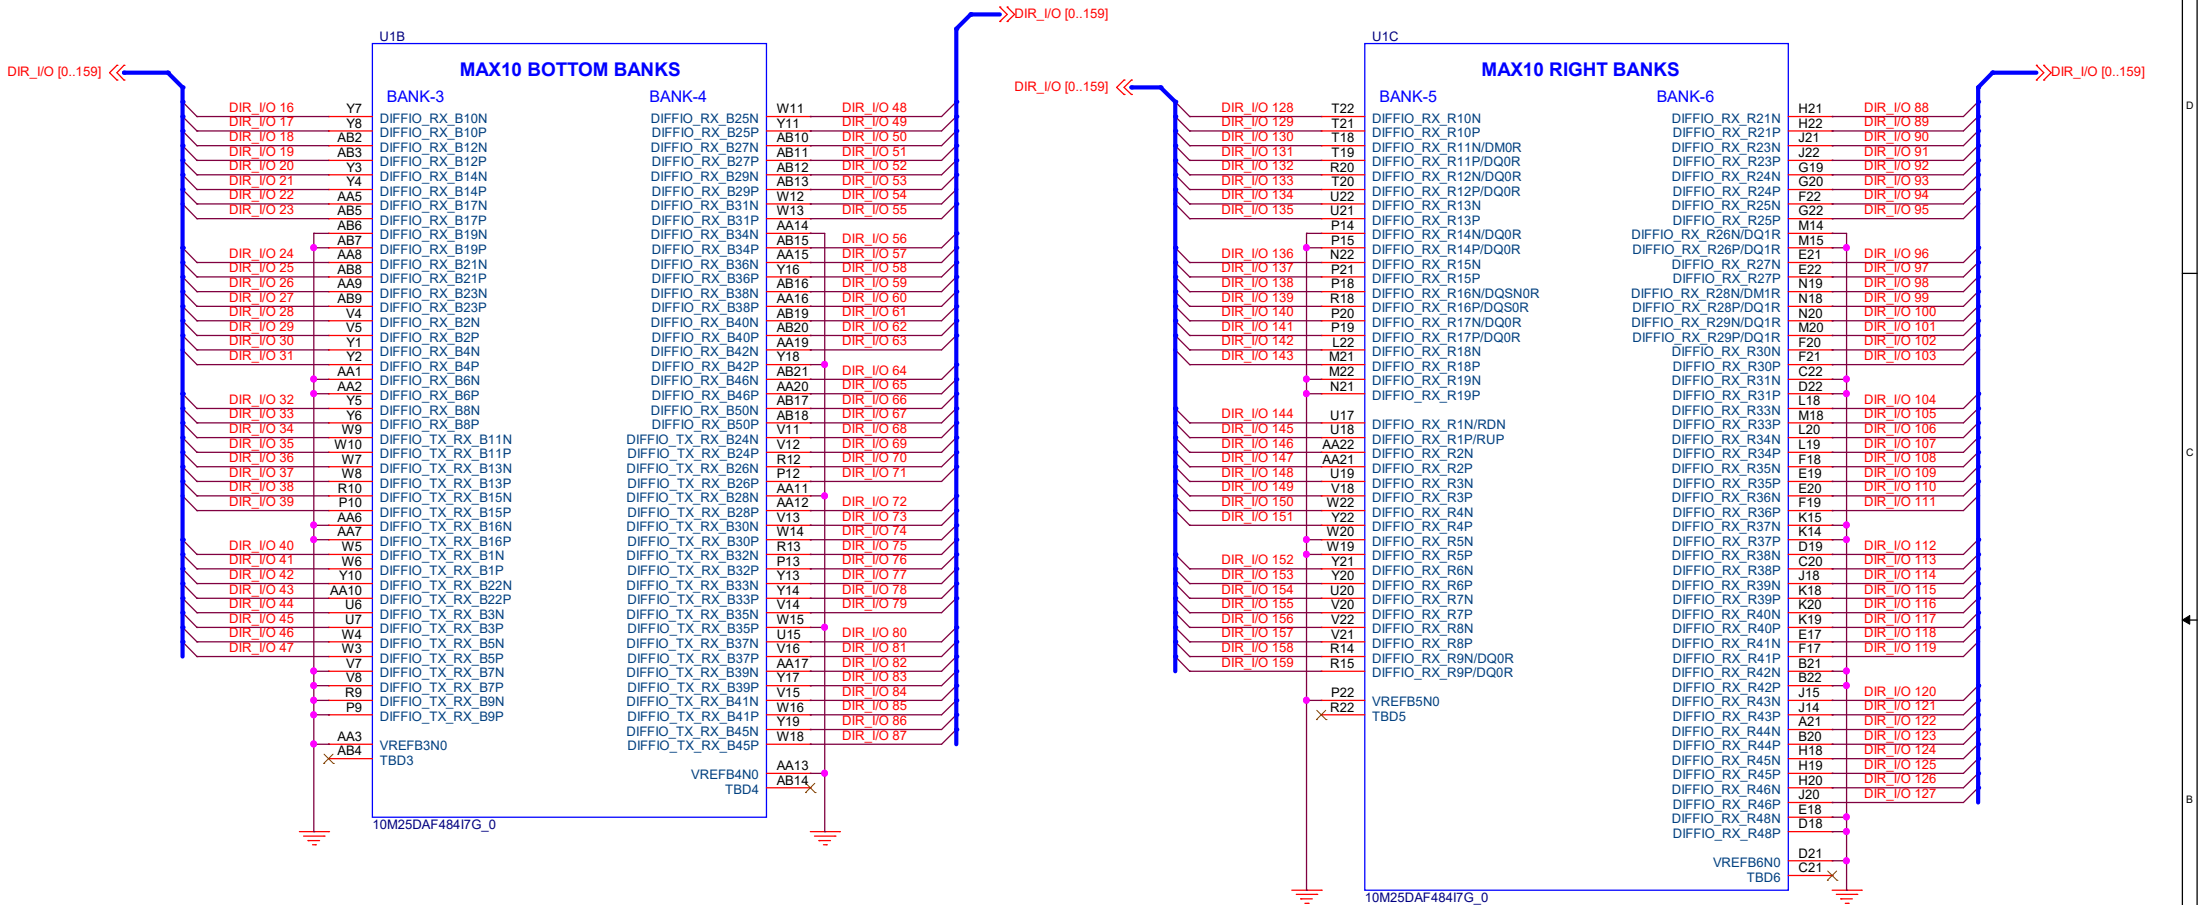


Title		
<COMMON_CTRL_MAX>		
Size	Document Number	Rev
B	<COMMON_CTRL_MAX>	V01
Date:	Thursday, June 26, 2025	Sheet 4 of 7

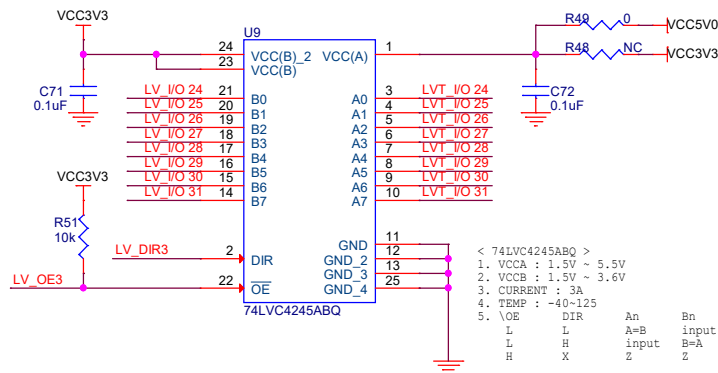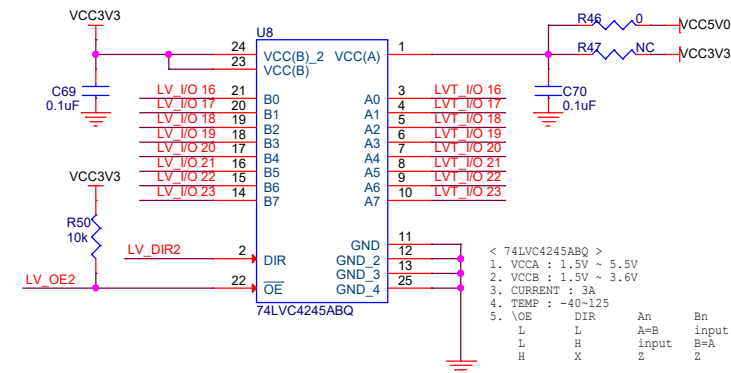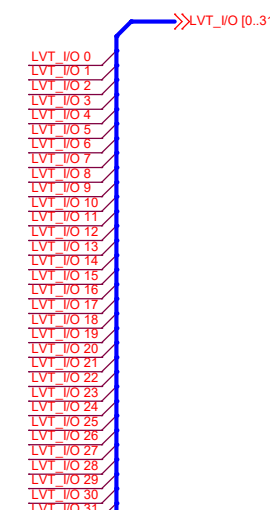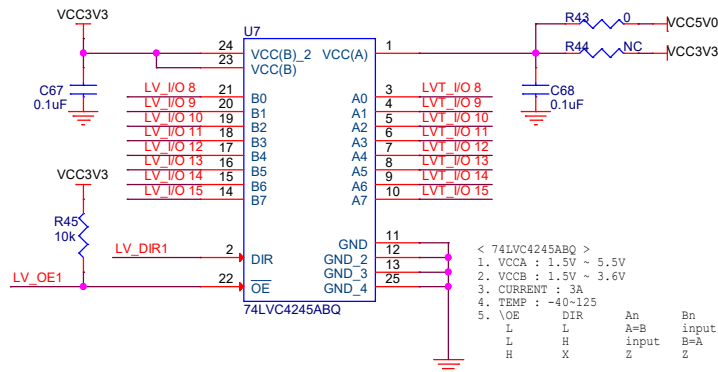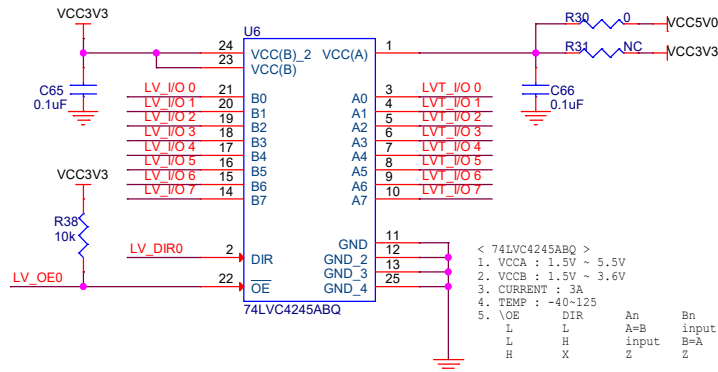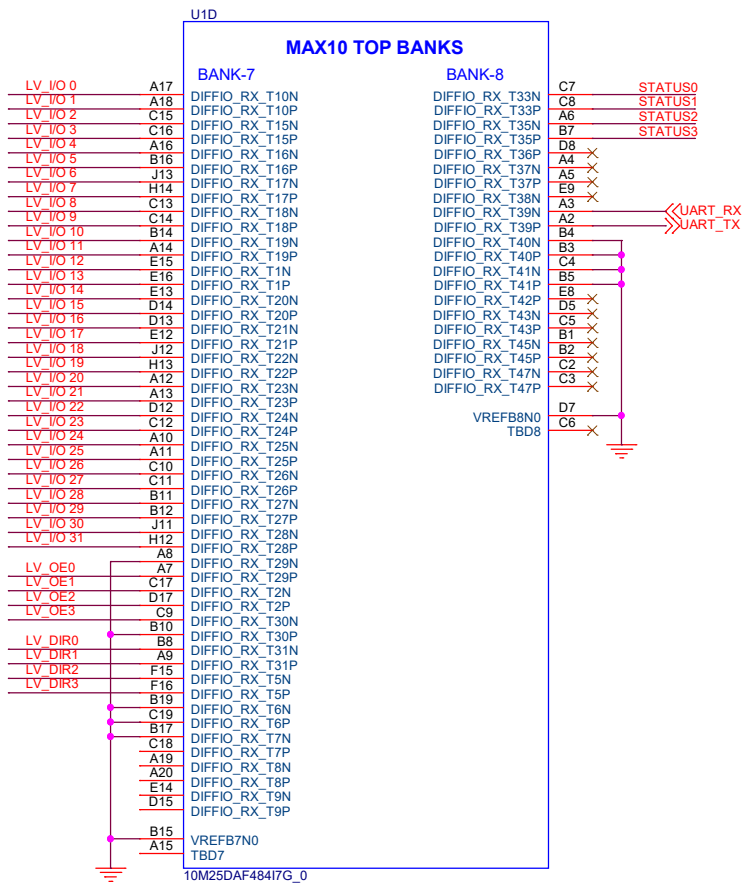

Title			<COMMON_CTRL_MAX>
Size	Document Number	Rev	
B	<COMMON_CTRL_MAX>	V01	
Date:	Thursday, June 26, 2025	Sheet	5 of 7

Positive Regulator for Digital Circuits

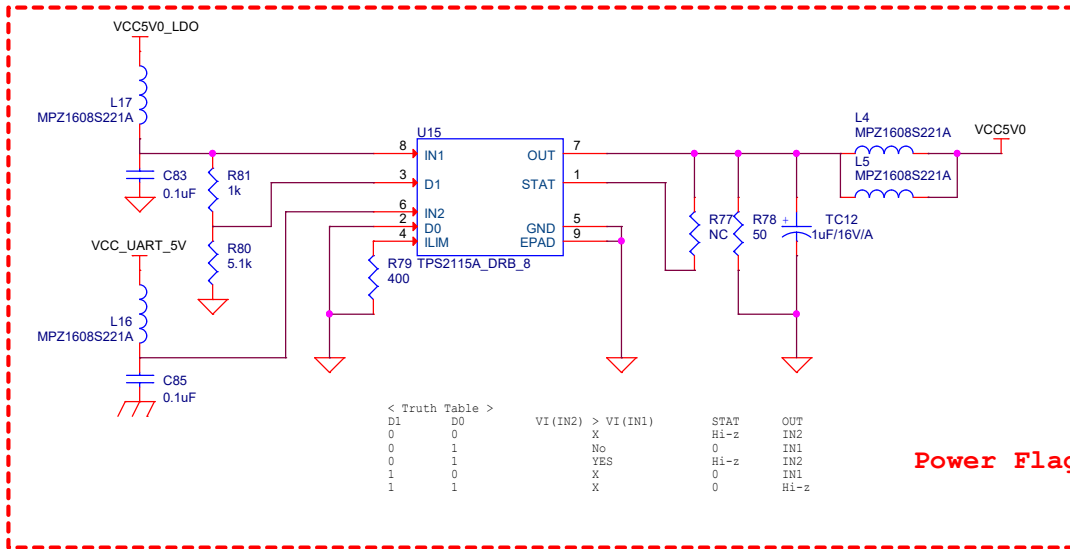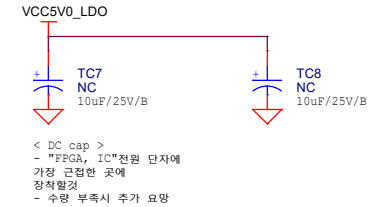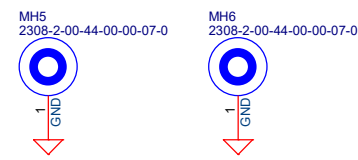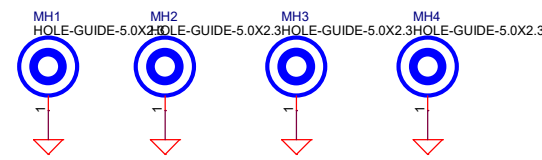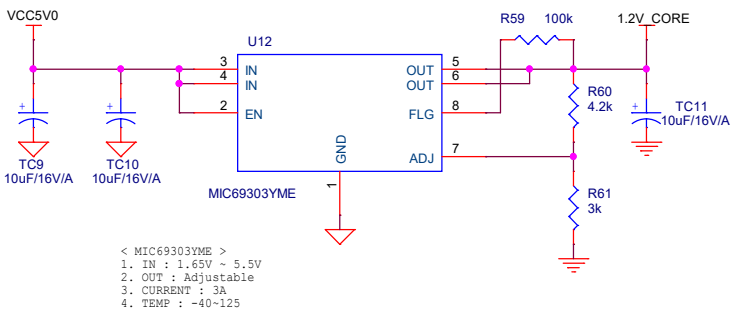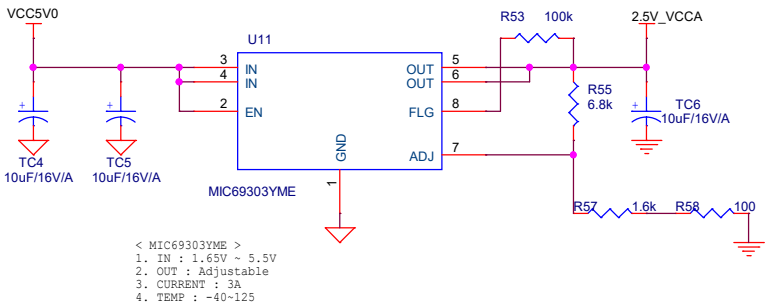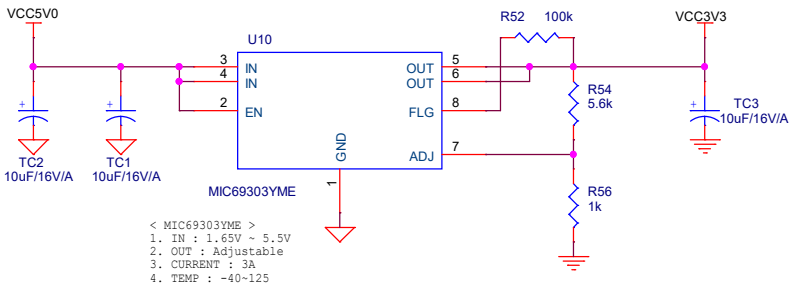

Title			<COMMON_CTRL_MAX>
Size	Document Number		Rev
B	<COMMON_CTRL_MAX>		V01
Date:	Thursday, June 26, 2025		Sheet 6 of 7

