


ESP32-S3 Linak motor controller

Linak TR-EM-208

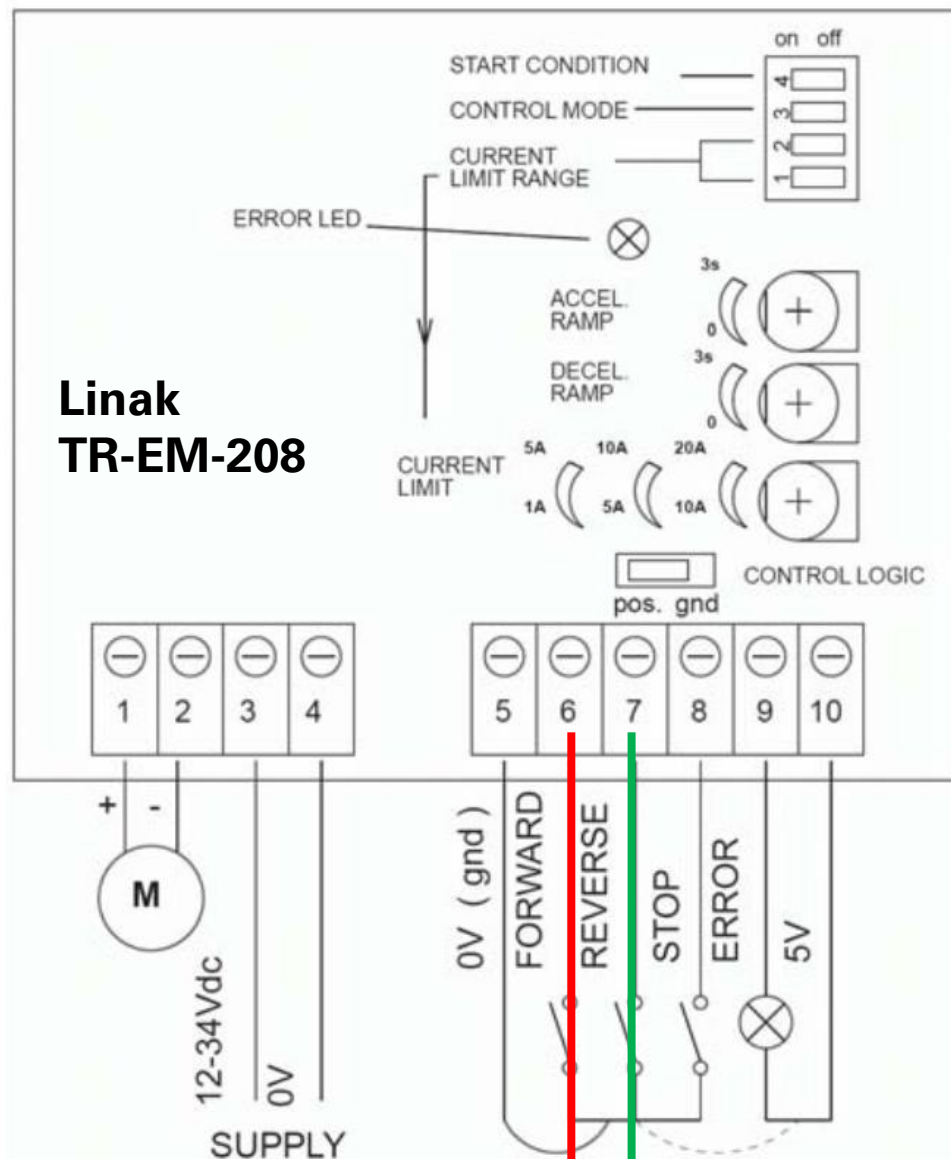


BROWN **Brown pin 2** **+24V pin 3**
BLUE **Blue pin 1** **GND pin 4**

Signal Cable:

White – connect to 24V (Works from 10V to 28V)




Black – GND

Violet - Signal 0-10V See next page

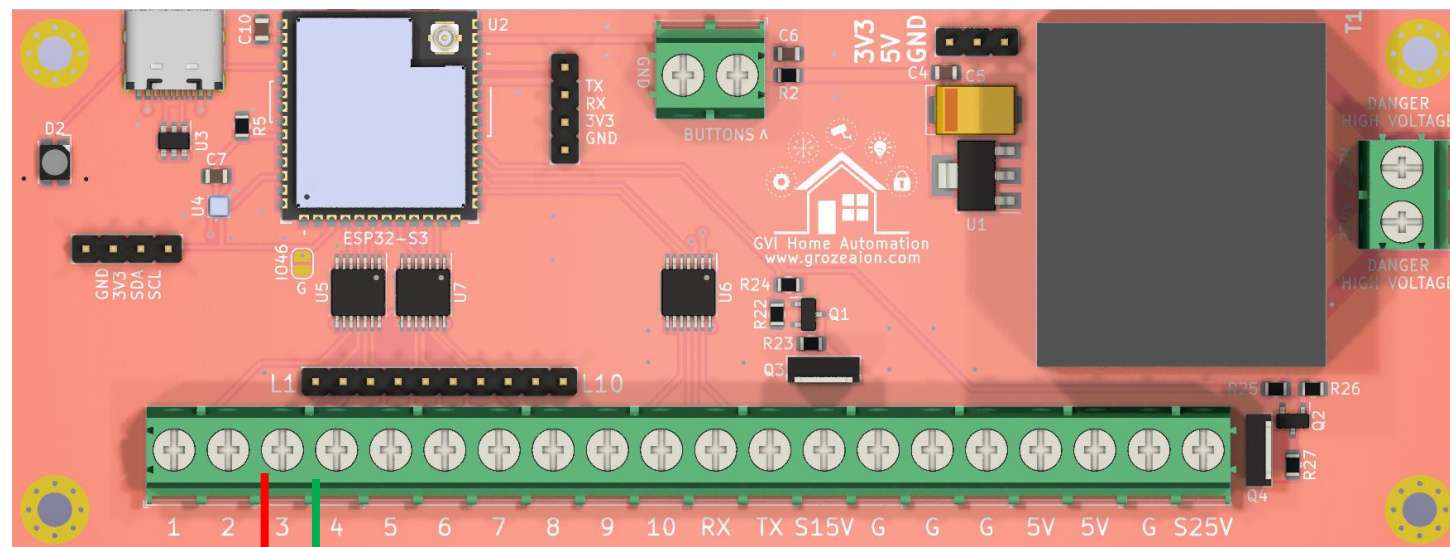

6 to 3

7 to 4

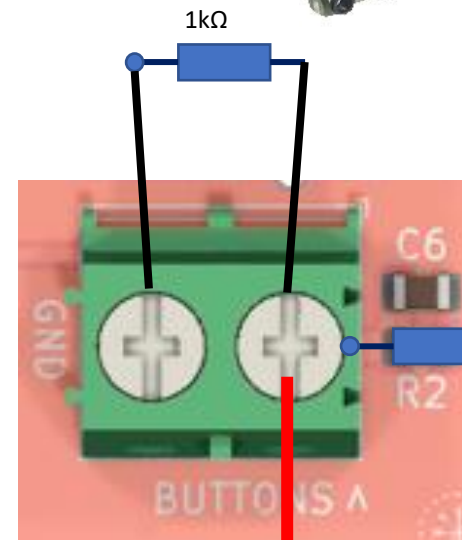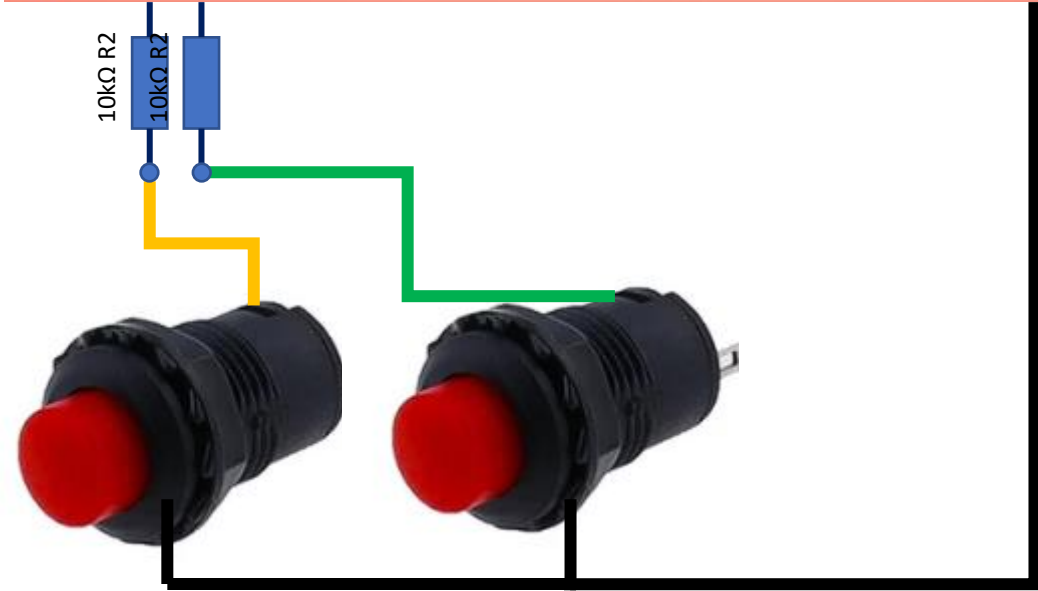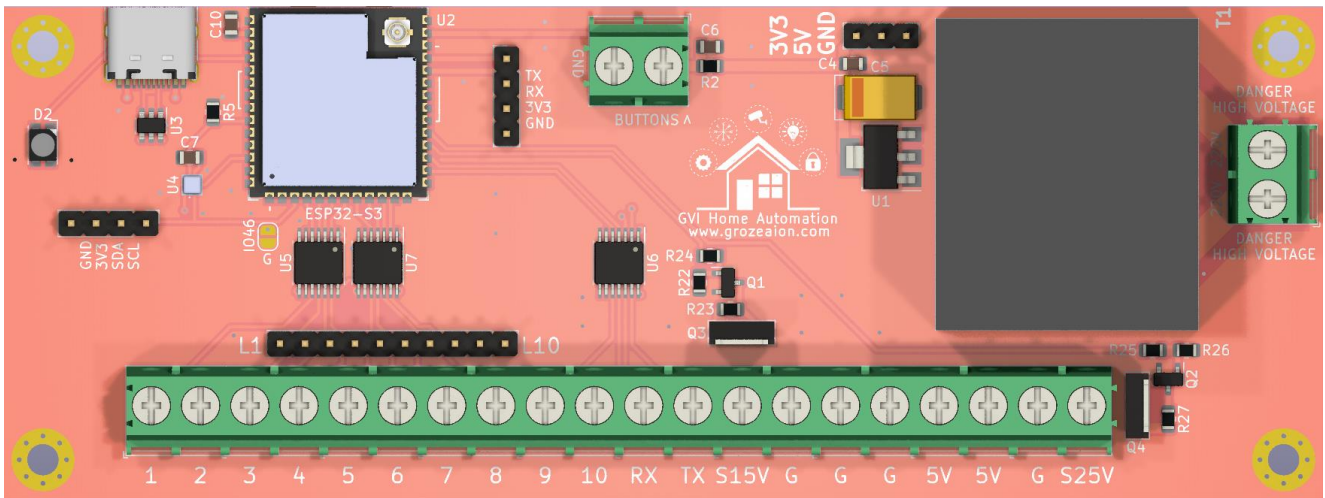

**Violet –
Motor
Position
Signal
0-10V**

**10V – Rod @
500mm
0V – Rod @ 0mm**

Maxim 1.1V