COGNEX

Verification Report

Unit Serial: 1A1903PP010754
Verified: Sun 24-May-2026 09:54:03(194ms) PM
Firmware Version: 6.1.16_sr4
Last Calibrated: 5/20/2026 1:14:58 AM

Report Summary	
Data	[]><RS>06<GS>18VD89536<GS>1P8902A<GS>S3122A02965<RS><EO>
Symbology	DataMatrix
Device Name	DM475-63530E-PIPS-Verif-Lab
Company	Product Identification and Processing Systems, Inc.
Operator	GW4

Verification Grades

Standard	Grade	Aperture	Wavelength	Lighting	Formal Grade
ISO 15415:2011	1.0 (D)	16	660	45Q	1.0/16/660/45Q
Custom	Fail (Quality)				

Image

General Characteristics

Matrix Size	16x36 (Data: 14x34)
Horizontal BWG	11%
Vertical BWG	11%
Encoded characters	38
Total Codewords	56
Data Codewords	32
Error Correction Budget	24
Errors Corrected	7
Error Capacity Used	14
Error Correction Type	ECC 200
Image	Black on white
Nominal X Dim	20.3 mil
Pixels per Module	15.86
Contrast Uniformity	73 at module(12,17)
MRD	67% (73% - 6%)

DataMatrix Quality Parameters

1. Unused Error Correction (UEC)		41.7%	2.0	C	PASS
2. Symbol Contrast (SC)	RI/Rd (83/4)	78%	4.0	A	PASS
3a. Modulation (MOD)			4.0	A	PASS
3b. Reflectance Margin (RM)			2.0	C	PASS
4. Axial Nonuniformity (ANU)		11.0%	1.0	D	FAIL
5. Grid Nonuniformity (GNU)		7.3%	4.0	A	PASS
6. Fixed Pattern Damage (FPD)			4.0	A	PASS
7. Left 'L' Side (LLS)			4.0	A	PASS
8. Bottom 'L' Side (BLS)			4.0	A	PASS
9. Left Quiet Zone (LQZ)			4.0	A	PASS
10. Bottom Quiet Zone (BQZ)			4.0	A	PASS
11a. Upper Left Quiet Zone (ULQZ)			4.0	A	PASS
11b. Upper Right Quiet Zone (URQZ)			4.0	A	PASS
12a. Right Upper Quiet Zone (RUQZ)			4.0	A	PASS
12b. Right Lower Quiet Zone (RLQZ)			4.0	A	PASS
13a. Left Top Transition Ratio (LQTTR)		0%	4.0	A	PASS
13b. Right Top Transition Ratio (RQTTR)		0%	4.0	A	PASS
14a. Left Right Transition Ratio (LQRTR)		0%	4.0	A	PASS
14b. Right Right Transition Ratio (RQRTR)		0%	4.0	A	PASS
15a. Left Top Clock Track (LQTCT)			4.0	A	PASS
15b. Right Top Clock Track (RQTCT)			4.0	A	PASS
16a. Left Right Clock Track (LQRCT)			4.0	A	PASS
16b. Right Right Clock Track (RQRCT)			4.0	A	PASS
17. Average Grade (AG)		4.0	4.0	A	PASS
18. DECODE			4.0	A	PASS

Data Format Check

GS1 Application Data Format: FAIL

Name	Data	Check
<F1> Required at beginning of data	[	FAIL

Error: Application Header is Expected.

Encodation Analysis

Codeword	Mode	Result
092	ASCII	[
042	ASCII	)
063	ASCII	>
031	ASCII	<RS>
136	ASCII	06
030	ASCII	<GS>
148	ASCII	18
087	ASCII	V
069	ASCII	D
219	ASCII	89
183	ASCII	53
055	ASCII	6
030	ASCII	<GS>
050	ASCII	1
081	ASCII	P
219	ASCII	89
132	ASCII	02
066	ASCII	A
030	ASCII	<GS>
084	ASCII	S
161	ASCII	31
152	ASCII	22
066	ASCII	A
132	ASCII	02
226	ASCII	96
054	ASCII	5
031	ASCII	<RS>
005	ASCII	<EO>
129	ASCII	ASCII PAD
045	ASCII	ASCII PAD
195	ASCII	ASCII PAD
090	ASCII	ASCII PAD
107, 149, 089, 060, 057, 044, 200, 195, 082, 134, 017, 211, 227, 021, 091, 158, 239, 024, 033, 160, 108, 040, 223, 204	ECC	

ASCII Values

091 041 062 030 048 054 029 049 056 086 068 056 057 053 051 054 029 049 080 056 057 048 050 065 029 083 051 049 050 050 065 048 050 057 054 053 030 004

Codewords

092 042 063 031 136 030 148 087 *069 *219 *183 *055 030 050 081 219 132 *066 *030 *084 161 152 066 132 226 054 031 005 129 045 195 090
107 149 089 060 057 044 200 195 082 134 017 211 227 021 091 158 239 024 033 160 108 040 223 204

*=Fixed by Error Correction
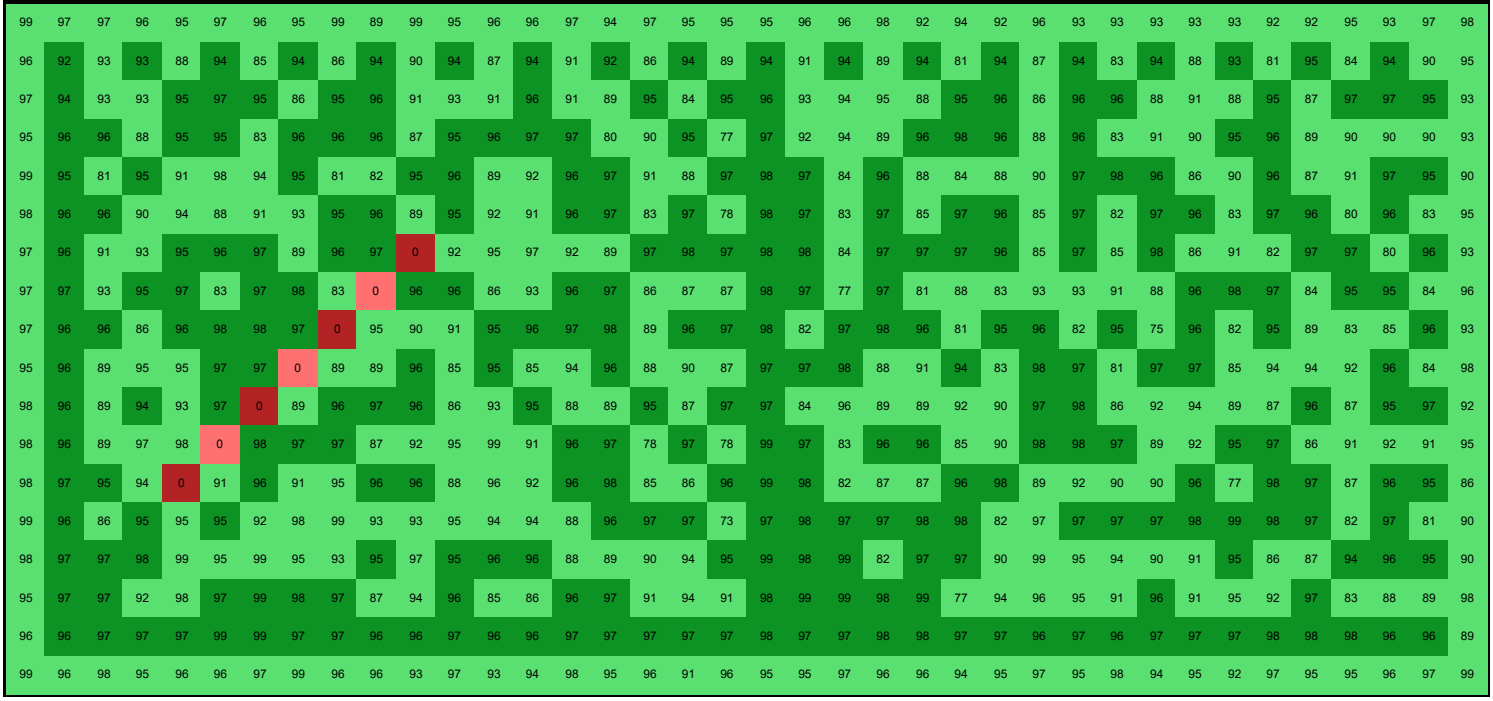
Modulation