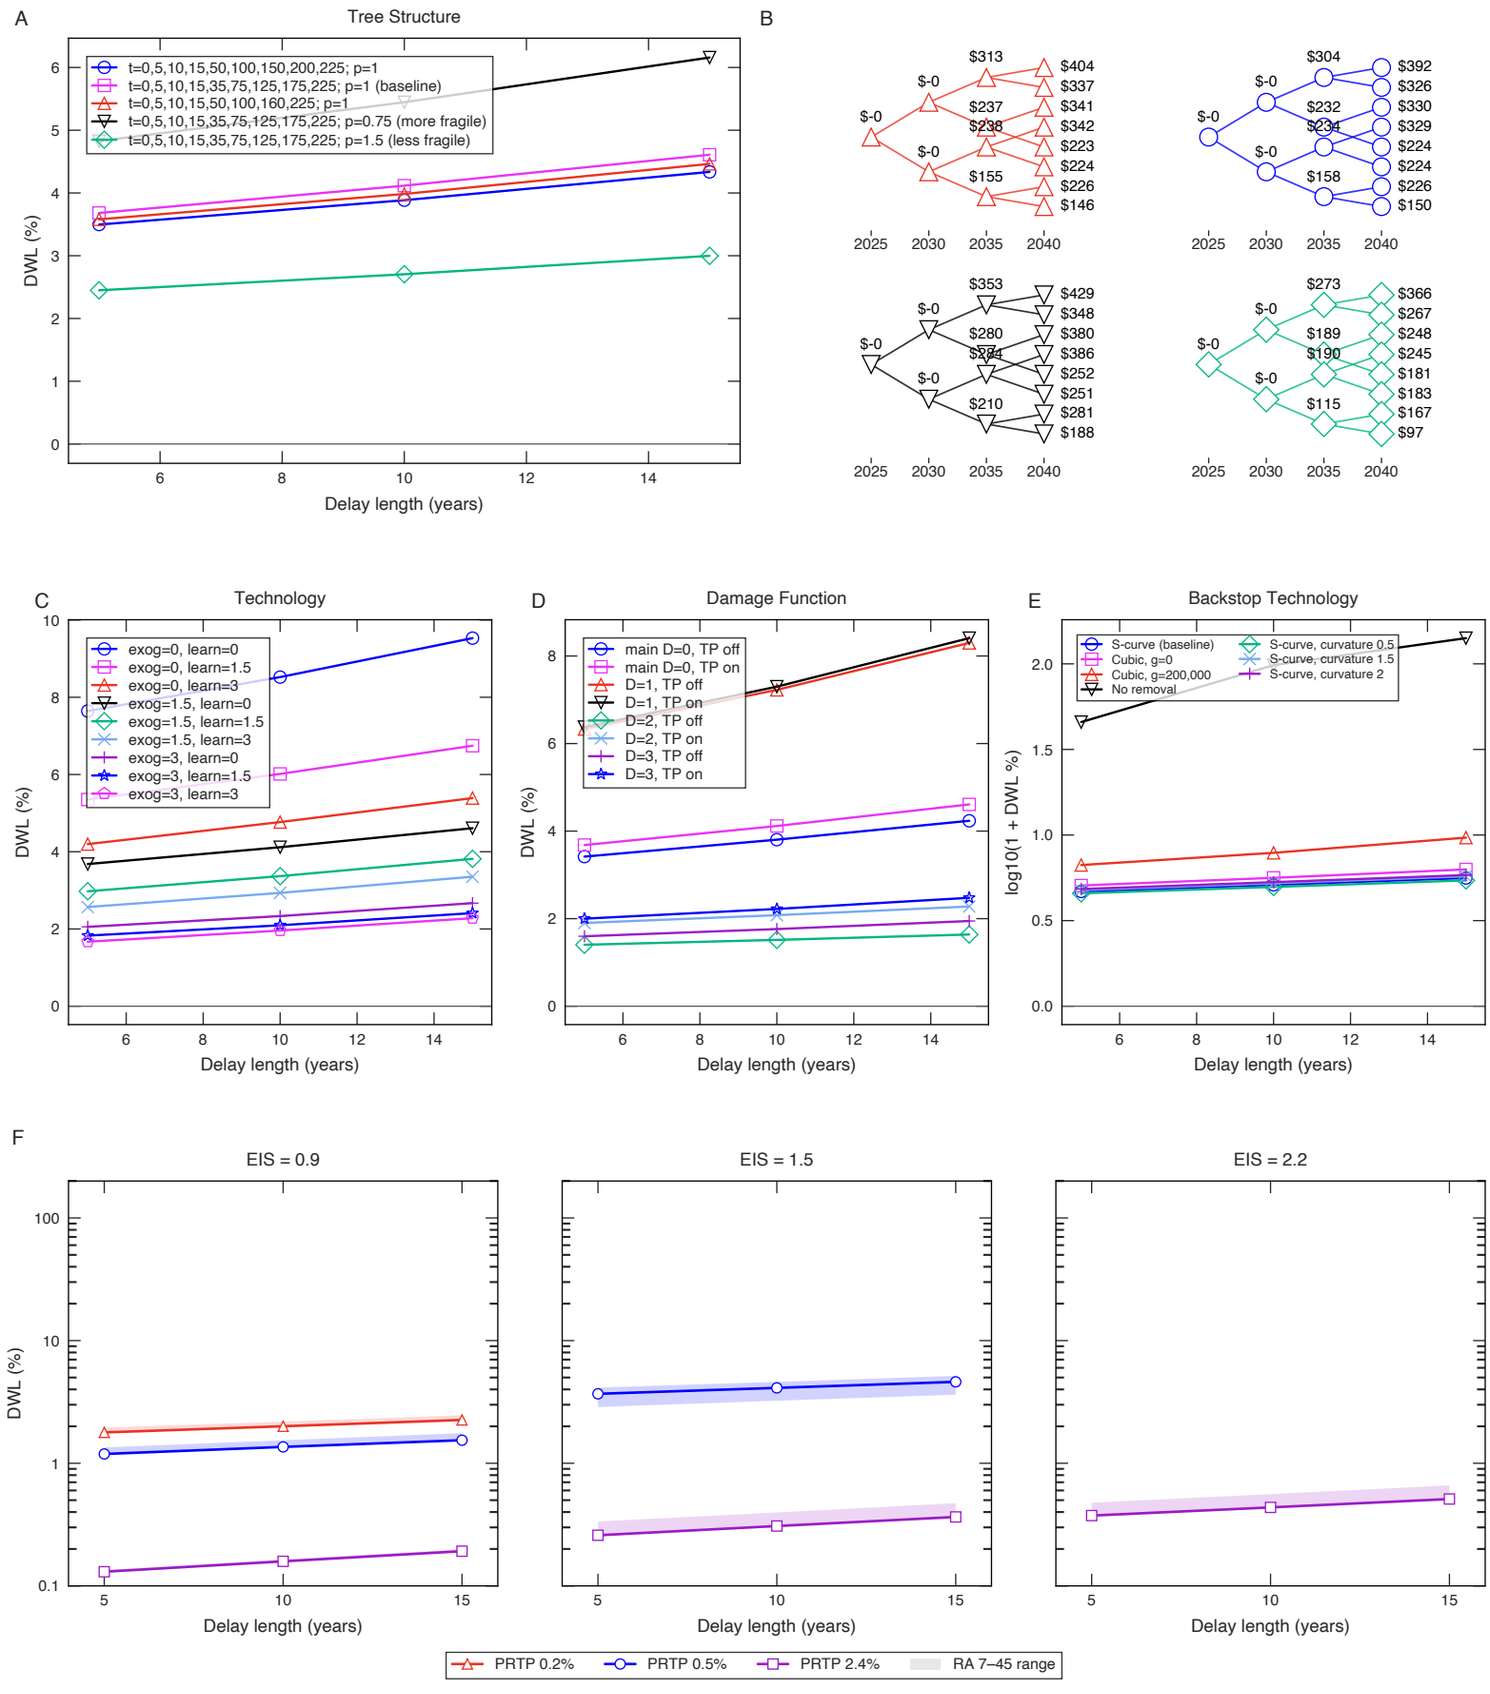
A
Tree Structure
t=0,5,10,15,50,100,150,200,225; p=1
t=0,5,10,15,35,75,125,175,225; p=1 (baseline)
t=0,5,10,15,50,100,160,225; p=1
t=0,5,10,15,35,75,125,175,225; p=0.75 (more fragile)
t=0,5,10,15,35,75,125,175,225; p=1.5 (less fragile)
DWL (%)
Delay length (years)
B
$-0
$313
$237
$238
$155
$404
$337
$341
$342
$223
$224
$226
$146
$304
$232
$234
$158
$392
$326
$330
$329
$224
$224
$226
$150
$353
$280
$284
$210
$429
$348
$380
$386
$252
$251
$281
$188
$273
$189
$190
$115
$366
$267
$248
$245
$181
$183
$167
$97
2025
2030
2035
2040
C
Technology
exog=0, learn=0
exog=0, learn=1.5
exog=0, learn=3
exog=1.5, learn=0
exog=1.5, learn=1.5
exog=1.5, learn=3
exog=3, learn=0
exog=3, learn=1.5
exog=3, learn=3
D
Damage Function
main D=0, TP off
main D=0, TP on
D=1, TP off
D=1, TP on
D=2, TP off
D=2, TP on
D=3, TP off
D=3, TP on
E
Backstop Technology
S-curve (baseline)
Cubic, g=0
Cubic, g=200,000
No removal
S-curve, curvature 0.5
S-curve, curvature 1.5
S-curve, curvature 2
log10(1 + DWL %)
F
EIS = 0.9
EIS = 1.5
EIS = 2.2
PRTP 0.2%
PRTP 0.5%
PRTP 2.4%
RA 7–45 range