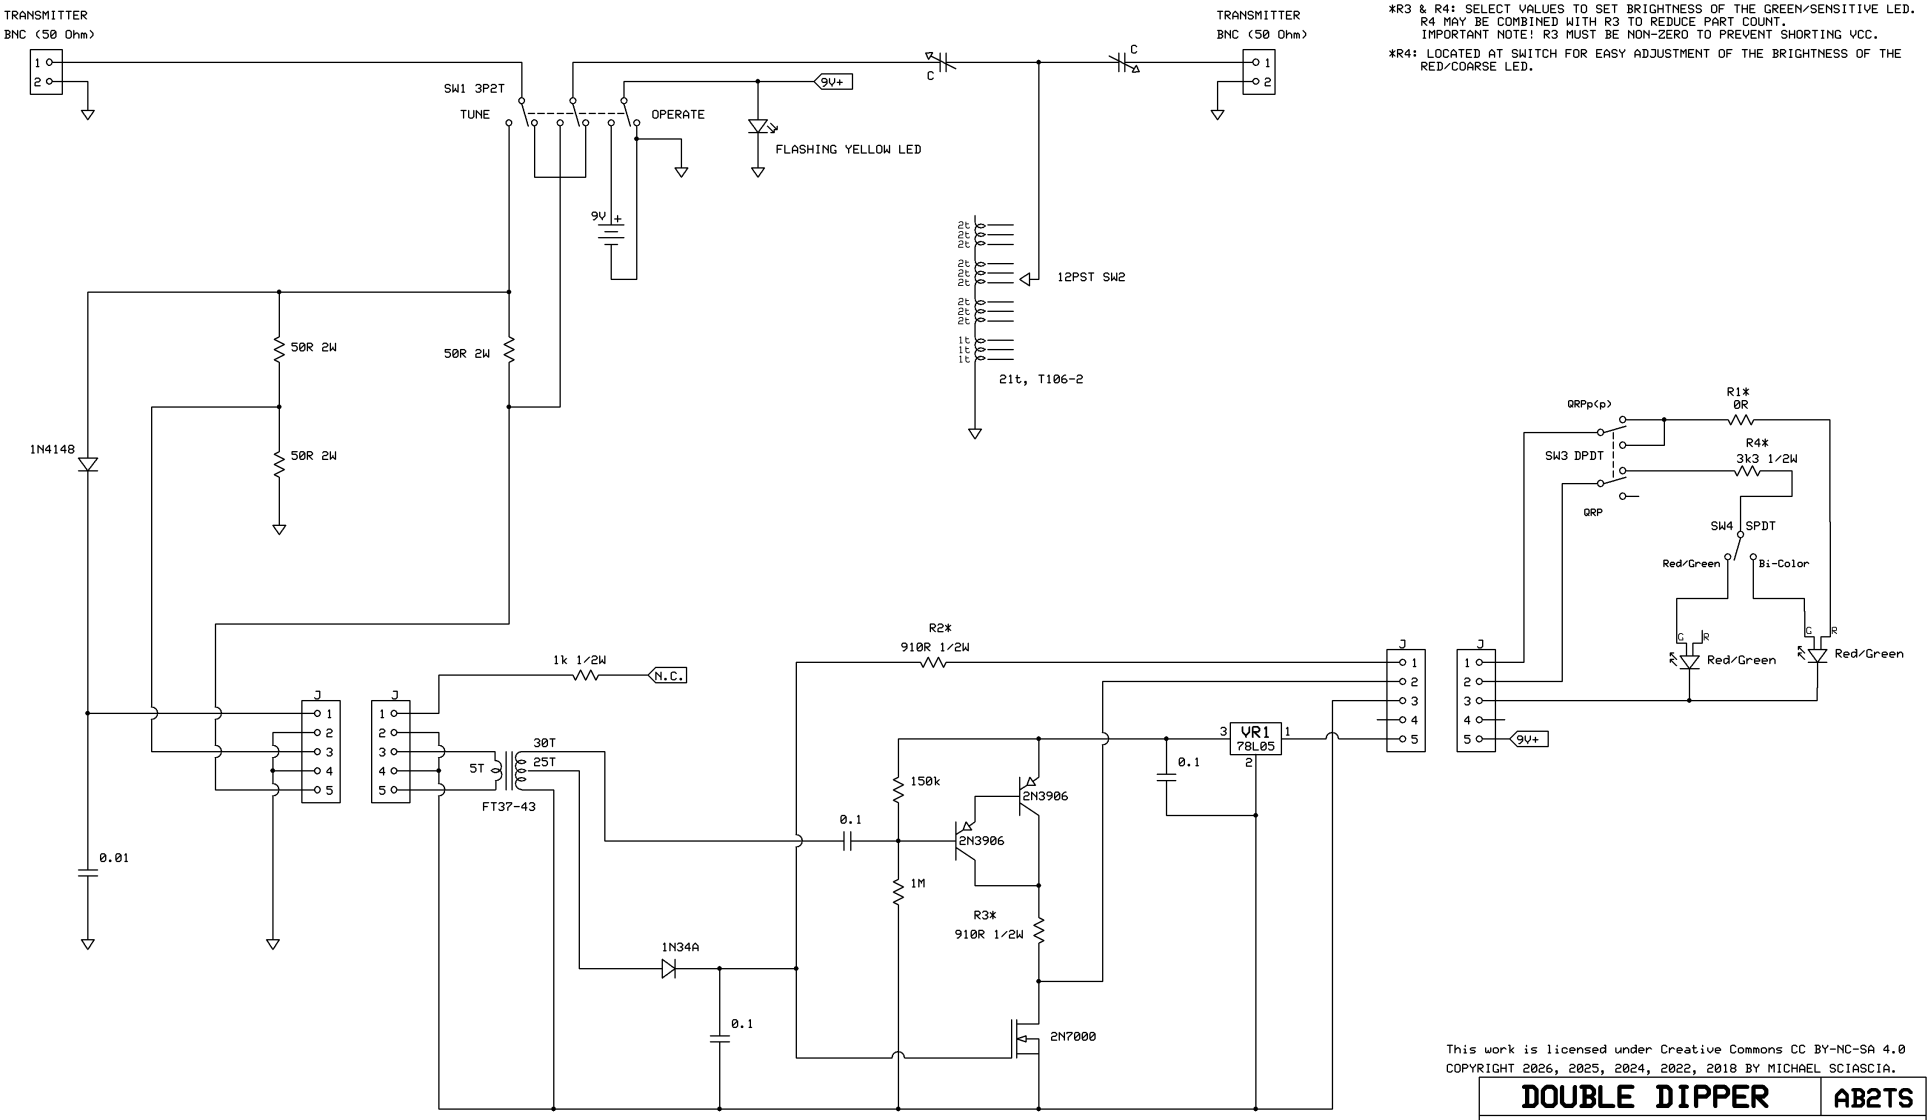


*R1: ULTIMATELY NOT USED. LOCATED AT SWITCH FOR EASY ADJUSTMENT OF THE BRIGHTNESS OF THE RED/COARSE LED

*R2: SELECT VALUE TO SET BRIGHTNESS OF THE RED/COARSE LED

*R3 & R4: SELECT VALUES TO SET BRIGHTNESS OF THE GREEN/SENSITIVE LED. R4 MAY BE COMBINED WITH R3 TO REDUCE PART COUNT. IMPORTANT NOTE! R3 MUST BE NON-ZERO TO PREVENT SHORTING VCC.

*R4: LOCATED AT SWITCH FOR EASY ADJUSTMENT OF THE BRIGHTNESS OF THE RED/COARSE LED.

This work is licensed under Creative Commons CC BY-NC-SA 4.0
COPYRIGHT 2026, 2025, 2024, 2022, 2018 BY MICHAEL SCIASCIA.

DOUBLE DIPPER

AB2TS

A QRP/QRPp/QRPpp LED SWR INDICATOR
THAT WORKS DOWN TO 10mW

MICHAEL SCIASCIA | Rev E | 10/10/2026 | PAGE 1 OF 1

THIS WORK IS LICENSED UNDER CREATIVE COMMONS: Attribution-NonComercial-ShareAlike 4.0 International / CC BY-NC-SA 4.0
COMMERCIAL AND NON-PROFIT USE BY WRITTEN PERMISSION ONLY.