


*HIGH-EFFICIENCY
R-32 PACKAGED HEAT PUMP
15.2 SEER2 / 6.7 HSPF2
2 TO 5 TONS*

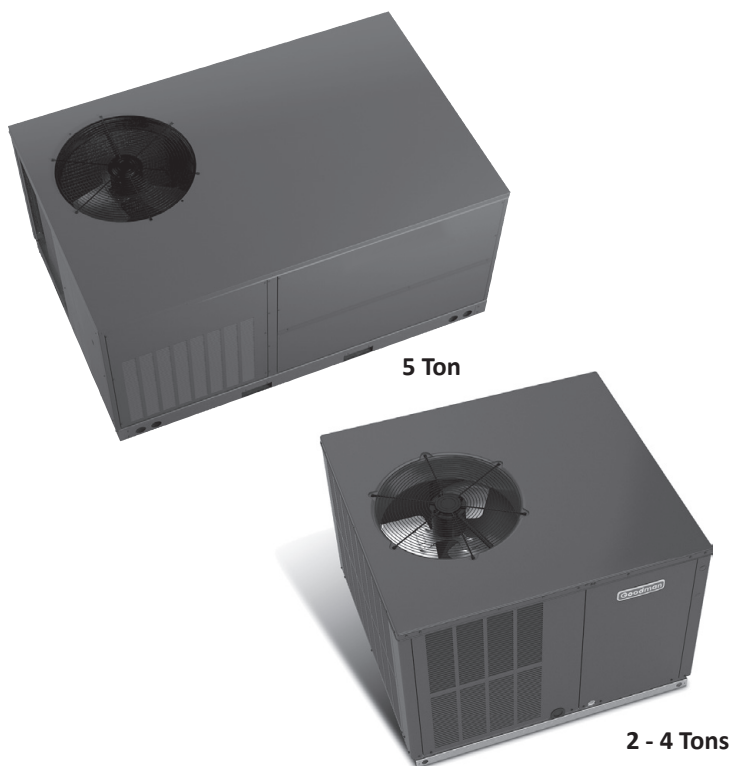

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Expanded Heating Data.....	26
Airflow Data	28
Heat Kit Electrical Specs	31
Dimensions	32
Wiring Diagrams	36
Accessories	38

R32

Standard Features

- One-stage scroll compressor for 2.0 ton
- High-efficiency two-stage scroll compressor for 2.5 to 5 ton
- Multi-Speed ECM indoor blower motor
- Copper tube/aluminum fin condenser coils
- All-aluminum evaporator coil on 2- to 4-ton units
- Aluminum-copper evaporator coil on 5-ton units
- Liquid-line filter drier
- Convertible airflow: horizontal or downflow
- Electric heat kit available as a field-installed option
- AHRI Certified; UL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive two-tone Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated air-handling compartment with convenient access panels
- Louvered condenser coil protection
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)



* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California, Florida, or Québec. The duration of warranty coverages in Texas and Florida differs in some cases. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

	G	P	H	M	5	24	3	1	A	A	
	1	2	3	4	5	6,7	8	9	10	11	
Brand	G Goodman brand								A		Minor Revision
Product Category											Major Revision
Unit Type	C Air Conditioner H Heat Pump								1 208/230 V/1 Phase/60 Hz		Electrical
Airflow											Refrigerant
	H Horizontal M Multi-Position										3 R-32
Efficiency											Nominal Capacity
	3 13.4 SEER2 5 15.2 SEER2						24 - 2.0 Tons 30 - 2.5 Tons		36 - 3.0 Tons 42 - 3.5 Tons		48 - 4.0 Tons 60 - 5.0 Tons

	GPHM5 2431	GPHM5 3031	GPHM5 3631	GPHM5 4231	GPHM5 4831	GPHM5 6031
COOLING CAPACITY						
Total BTU/h	24,000	29,600	36,000	42,000	45,500	58,000
Sensible BTU/h	18,720	22,200	26,640	29,820	34,580	45,000
SEER2	14.4	15.2	15.2	15.0	15.2	15.4
EER2	11.4	11.4	11.4	11.4	11.4	11.6
HEATING CAPACITY						
BTU/h (47°F)	22,600	28,600	35,400	41,000	41,000	58,000
C.O.P. (47°F)	3.60	3.48	3.60	3.50	3.70	3.60
BTU/h (17°F)	12,800	16,400	22,000	24,000	24,000	26,000
C.O.P. (17°F)	2.18	2.30	2.26	2.20	2.20	1.86
HSPF2	6.70	6.70	6.80	6.80	6.80	7.00
EVAPORATOR FAN / COIL						
Type	ECM	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	11 x 10
Indoor Nominal CFM	800	980	1200	1275	1575	1950
No. of Speeds	5	5	5	5	5	5
Indoor Blower FLA	3.8	3.8	3.8	5.4	5.4	6.9
HORSEPOWER - RPM	1/2	1/2	3/4	3/4	3/4	1
Face Area (ft2)	4.55	4.55	6.20	6.20	6.20	9.16
Rows Deep / Fins per Inch	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14	4 / 16
Metering Device Type	TXV	TXV	TXV	TXV	TXV	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	102	124	144	136	137	185
Condenser Fan / Coil						
OUTDOOR FAN FLA	1.3	1.3	1.4	1.4	1.4	3.5
Horsepower	¾	¾	¾	¾	¾	¾
Blade Diameter	22	22	22	22	22	22
Face Area (ft2)	15.24	15.24	19.05	19.05	19.05	19.01
ROWS DEEP / FINS PER INCH	2 / 16	2 / 16	2 / 16	2 / 16	2 / 16	2 / 16
Metering Device Type	TXV	TXV	TXV	TXV	TXV	TXV
Compressor						
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	1	2	2	2	2	2
RLA	10.62	13.06	18.37	23.23	23.23	27.07
LRA	56.5	88	126	128.4	128.4	178
Electrical Data						
Phase	1	1	1	1	1	1
Voltage (Frequency 60 Hz)	208-230	208-230	208-230	208-230	208-230	208-230
Min. Circuit Ampacity	18.7	21.5	22.8	31.7	33.3	39
MAX. OVERCURRENT PROTECTION	25	30	35	50	50	60
Decibels	76	76	76	78	78	78
Operating / Shipping Weights (lbs)	376	385	492	492	492	688

Note:

Always check the S&R plate for electrical data on the unit being installed.

Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Horizontal duct covers along with either a "Downflow Conversion Kit" or a "Downflow Economizer" is mandatory for all downflow installations.

See Accessories table for appropriate kit number(s)

		OUTDOOR AMBIENT TEMPERATURE																		115°F																	
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	600	MBh	24.1	24.5	25.2	-	23.9	24.3	25.0	-	23.3	23.6	24.4	-	22.2	22.5	23.3	-	20.9	21.2	21.9	-	19.6	20.0	20.7	-	19.6	20.0	20.7	-							
		S/T	0.53	0.45	0.31	-	0.53	0.46	0.32	-	0.56	0.48	0.34	-	1.00	0.50	0.36	-	1.00	0.52	0.38	-	1.00	0.58	0.44	-	1.00	0.58	0.44	-							
		ΔT	20.84	19.04	15.68	-	20.79	18.99	15.63	-	21.04	19.24	15.88	-	20.77	18.97	15.61	-	20.53	18.73	15.37	-	21.66	19.86	16.49	-	21.66	19.86	16.49	-							
		kW	1.61	1.61	1.60	-	1.81	1.80	1.80	-	2.03	2.02	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.84	2.84	2.84	-	2.84	2.84	2.84	-							
		Amps	6.07	6.06	6.05	-	6.93	6.92	6.91	-	7.88	7.88	7.86	-	8.92	8.91	8.90	-	10.07	10.07	10.05	-	11.43	11.42	11.41	-	11.43	11.42	11.41	-							
		Hi PR	250	251	253	-	290	291	293	-	332	333	334	-	377	378	379	-	425	426	428	-	477	478	480	-	477	478	480	-							
70	800	Lo PR	126	127	130	-	133	135	138	-	140	142	145	-	146	147	151	-	152	153	156	-	159	160	163	-	159	160	163	-							
		MBh	24.7	25.1	25.8	-	24.5	24.9	25.6	-	23.9	24.2	25.0	-	22.8	23.1	23.9	-	21.4	21.8	22.5	-	20.2	20.6	21.3	-	20.2	20.6	21.3	-							
		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	1.00	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	1.00	0.59	-	1.00	1.00	0.59	-							
		ΔT	18.38	16.58	13.22	-	18.33	16.53	13.17	-	18.58	16.78	13.42	-	18.31	16.51	13.15	-	18.07	16.27	12.91	-	19.20	17.40	14.04	-	19.20	17.40	14.04	-							
		kW	1.63	1.63	1.63	-	1.83	1.83	1.82	-	2.05	2.05	2.04	-	2.29	2.29	2.28	-	2.55	2.55	2.55	-	2.86	2.86	2.86	-	2.86	2.86	2.86	-							
		Amps	6.17	6.16	6.15	-	7.03	7.02	7.01	-	7.98	7.98	7.96	-	9.02	9.01	9.00	-	10.17	10.17	10.15	-	11.53	11.52	11.51	-	11.53	11.52	11.51	-							
1000	800	Hi PR	255	256	257	-	294	295	297	-	336	337	339	-	381	382	384	-	429	431	432	-	481	482	484	-	481	482	484	-							
		Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	150	151	154	-	155	157	160	-	162	164	167	-	162	164	167	-							
		MBh	25.6	25.9	26.7	-	25.4	25.7	26.4	-	24.7	25.1	25.8	-	23.6	24.0	24.7	-	22.3	22.6	23.4	-	21.1	21.4	22.1	-	21.1	21.4	22.1	-							
		S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.55	-	1.00	0.70	0.57	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-							
		ΔT	16.65	14.85	11.49	-	16.60	14.80	11.44	-	16.86	15.06	11.69	-	16.58	14.78	11.42	-	16.34	14.54	11.18	-	17.47	15.67	12.31	-	17.47	15.67	12.31	-							
		kW	1.65	1.65	1.64	-	1.85	1.84	1.84	-	2.07	2.06	2.06	-	2.30	2.30	2.30	-	2.57	2.57	2.56	-	2.88	2.88	2.88	-	2.88	2.88	2.88	-							
75	600	Amps	6.24	6.23	6.22	-	7.10	7.09	7.08	-	8.05	8.05	8.03	-	9.09	9.08	9.07	-	10.24	10.24	10.22	-	11.60	11.59	11.58	-	11.60	11.59	11.58	-							
		Hi PR	259	260	262	-	299	300	301	-	340	341	343	-	385	386	388	-	434	435	437	-	485	486	488	-	485	486	488	-							
		Lo PR	134	135	139	-	141	143	146	-	148	150	153	-	154	156	159	-	160	161	164	-	167	168	172	-	167	168	172	-							
		MBh	24.2	24.5	25.2	26.3	23.9	24.3	25.0	26.1	23.3	23.6	24.4	25.5	22.2	22.6	23.3	24.4	20.9	21.2	21.9	23.1	19.6	20.0	20.7	21.8	19.6	20.0	20.7	21.8							
		S/T	0.66	0.58	0.44	0.3	1.00	0.59	0.45	0.3	1.00	0.61	0.47	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.52	0.4	1.00	1.00	0.57	0.4	1.00	1.00	0.57	0.4							
		ΔT	24.80	23.00	19.63	16.2	24.75	22.95	19.59	16.1	25.00	23.20	19.84	16.4	24.73	22.93	19.57	16.1	24.49	22.69	19.33	15.8	25.62	23.81	20.45	17.0	25.62	23.81	20.45	17.0							
75	800	kW	1.61	1.61	1.60	1.6	1.80	1.80	1.8	1.80	1.80	1.8	1.8	2.02	2.02	2.02	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.52	2.5	2.84	2.84	2.84	2.9								
		Amps	6.06	6.06	6.04	6.1	6.92	6.91	6.90	7.0	7.88	7.87	7.86	7.9	8.91	8.90	8.89	9.0	10.07	10.06	10.05	10.1	11.42	11.42	11.40	11.5	11.42	11.42	11.40	11.5							
		Hi PR	250	251	253	257.5	290	291	293	297.3	332	333	335	339.1	377	378	380	384.0	425	426	428	432.5	477	478	480	484.1	477	478	480	484.1							
		Lo PR	126	127	130	135.9	133	135	138	143.7	140	142	145	150.5	146	148	151	156.2	152	153	156	161.8	159	160	163	168.9	159	160	163	168.9							
		MBh	24.8	25.1	25.8	26.9	24.5	24.9	25.6	26.7	23.9	24.2	25.0	26.1	22.8	23.1	23.9	25.0	21.5	21.8	22.5	23.6	20.2	20.6	21.3	22.4	20.2	20.6	21.3	22.4							
		S/T	0.82	0.74	0.60	0.5	1.00	0.74	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6							
75	1000	ΔT	22.34	20.54	17.18	13.7	22.29	20.49	17.13	13.6	22.54	20.74	17.38	13.9	22.27	20.47	17.11	13.6	22.03	20.23	16.87	13.4	23.16	21.36	18.00	14.5	23.16	21.36	18.00	14.5							
		kW	1.63	1.63	1.63	1.6	1.83	1.83	1.82	1.8	2.05	2.05	2.04	2.1	2.29	2.28	2.28	2.3	2.55	2.55	2.55	2.6	2.86	2.86	2.86	2.9	2.86	2.86	2.86	2.9							
		Amps	6.17	6.16	6.14	6.2	7.02	7.01	7.00	7.1	7.98	7.97	7.96	8.0	9.01	9.01	8.99	9.1	10.17	10.16	10.15	10.2	11.52	11.52	11.50	11.6	11.52	11.52	11.50	11.6							
		Hi PR	255	256	258	262.0	295	296	297	301.9	336	337	339	343.6	381	382	384	388.5	430	431	433	437.0	481	483	484	488.7	481	483	484	488.7							
		Lo PR	129	131	134	139.6	137	139	142	147.3	144	145	149	154.1	150	151	154	159.9	155	157	160	165.5	162	164	167	172.6	162	164	167	172.6							
		MBh	25.6	25.9	26.7	27.8	25.4	25.7	26.5	27.6	24.7	25.1	25.8	26.9	23.6	24.0	24.7	25.8	22.3	22.7	23.4	24.5	21.1	21.4	22.2	23.3	21.1	21.4	22.2	23.3							
75	1000	S/T	1.00	0.78	0.65	0.5	1.00	0.79	0.65	0.5	1.00	0.82	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.77	0.6							
		ΔT	20.61	18.81	15.45	12.0	20.56	18.76	15.40	11.9	20.81	19.01	15.65	12.2	20.54	18.74	15.38	11.9	20.30	18.50	15.14	11.7	21.43	19.63	16.27	12.8	21.43	19.63	16.27	12.8							
		kW	1.65	1.65	1.64	1.7	1.84	1.84	1.84	1.9	2.06	2.06	2.06	2.1	2.30	2.30	2.30	2.3	2.57	2.57	2.56	2.6	2.88	2.88	2.87	2.9	2.88	2.88	2.87	2.9							
		Amps	6.24	6.23	6.21	6.3	7.09	7.08	7.07	7.1	8.05	8.04	8.03	8.1	9.08	9.08	9.06	9.1	10.24	10.23	10.22	10.3	11.59	11.59	11.57	11.6	11.59	11.59	11.57	11.6							
		Hi PR	259	260	262	266.3	299	300	302	306.1	341	342	343	347.8	385	387	388	392.8	434	435	437	441.2	486	487	488	492.9	486	487	488	492.9							
		Lo PR																																			
DB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions.																		kW = Total system power Amps = outdoor unit amps (comp.Hfan)																	

		Outdoor Ambient Temperature																			
		65°F										75°F									
		85°F										95°F									
		Entering Indoor Wet Bulb Temperature										105°F									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	24.3	24.6	25.4	26.5	24.1	24.4	25.1	26.3	23.4	23.8	24.5	25.6	22.3	22.7	23.4	24.5	21.0	21.3	22.1	23.2
	S/T	1.00	0.71	0.57	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.60	0.5	1.00	1.00	0.62	0.5	1.00	1.00	0.65	0.5
	ΔT	28.78	26.98	23.62	20.1	28.73	26.93	23.57	20.1	28.99	27.19	23.82	20.3	28.71	26.91	23.55	20.1	28.47	26.67	23.31	19.8
	kW	1.61	1.61	1.60	1.6	1.81	1.80	1.80	1.8	2.03	2.02	2.02	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.52	2.5
	Amps	6.07	6.06	6.05	6.1	6.93	6.92	6.90	7.0	7.88	7.87	7.86	7.9	8.92	8.91	8.89	9.0	10.07	10.07	10.05	10.1
	Hi PR	251	252	254	258.0	291	292	293	297.8	332	333	335	339.5	377	378	380	384.5	426	427	429	432.9
	Lo PR	126	128	131	136.5	134	136	139	144.2	141	142	146	151.0	147	148	151	156.8	152	154	157	162.4
	MBh	24.9	25.2	26.0	27.1	24.7	25.0	25.7	26.8	24.0	24.4	25.1	26.2	22.9	23.3	24.0	25.1	21.6	21.9	22.7	23.8
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.73	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7
	ΔT	26.32	24.52	21.16	17.7	26.27	24.47	21.11	17.6	26.53	24.73	21.37	17.9	26.26	24.46	21.09	17.6	26.02	24.22	20.85	17.4
1000	kW	1.63	1.63	1.63	1.6	1.83	1.83	1.82	1.8	2.05	2.05	2.04	2.1	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6
	Amps	6.17	6.16	6.15	6.2	7.03	7.02	7.00	7.1	7.98	7.98	7.96	8.0	9.02	9.01	9.00	9.1	10.17	10.17	10.15	10.2
	Hi PR	255	256	258	262.5	295	296	298	302.3	337	338	340	344.1	382	383	385	389.0	430	431	433	437.4
	Lo PR	130	131	135	140.1	138	139	142	147.9	144	146	149	154.7	150	152	155	160.4	156	157	161	166.1
	MBh	25.7	26.1	26.8	27.9	25.5	25.9	26.6	27.7	24.9	25.2	25.9	27.1	23.8	24.1	24.8	26.0	22.4	22.8	23.5	24.6
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7
	ΔT	24.60	22.80	19.43	16.0	24.55	22.75	19.39	15.9	24.80	23.00	19.64	16.2	24.53	22.73	19.37	15.9	24.29	22.49	19.13	15.6
	kW	1.65	1.65	1.64	1.7	1.85	1.84	1.84	1.9	2.07	2.06	2.06	2.1	2.30	2.30	2.30	2.3	2.57	2.57	2.56	2.6
	Amps	6.24	6.23	6.22	6.3	7.10	7.09	7.07	7.1	8.05	8.05	8.03	8.1	9.09	9.08	9.07	9.1	10.24	10.24	10.22	10.3
	Hi PR	259	261	262	266.7	299	300	302	306.6	341	342	344	348.3	386	387	389	393.2	434	435	437	441.7
	Lo PR	134	136	139	144.6	142	144	147	152.3	149	150	154	159.1	155	156	159	164.9	160	162	165	170.5

85	MBh	24.7	25.0	25.8	26.9	24.5	24.8	25.6	26.7	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6
	S/T	1.00	0.81	0.68	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	1.00	0.6
	ΔT	32.32	30.52	27.15	23.7	32.27	30.47	27.11	23.6	32.52	30.72	27.36	23.9	32.25	30.45	27.09	23.6	32.01	30.21	26.85	23.4
	kW	1.61	1.61	1.61	1.6	1.81	1.81	1.80	1.8	2.03	2.03	2.02	2.0	2.27	2.27	2.26	2.3	2.53	2.53	2.53	2.5
	Amps	6.09	6.08	6.06	6.1	6.94	6.94	6.92	7.0	7.90	7.89	7.88	7.9	8.93	8.93	8.91	9.0	10.09	10.08	10.07	10.1
	Hi PR	252	253	255	259.2	292	293	295	299.0	333	335	336	340.7	378	379	381	385.7	427	428	430	434.1
	Lo PR	128	130	133	138.4	136	137	141	146.1	143	144	148	152.9	148	150	153	158.7	154	156	159	164.3
	MBh	25.3	25.6	26.4	27.5	25.1	25.4	26.1	27.3	24.4	24.8	25.5	26.6	23.3	23.7	24.4	25.5	22.0	22.3	23.1	24.2
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8
	ΔT	29.86	28.06	24.70	21.2	29.81	28.01	24.65	21.2	30.06	28.26	24.90	21.4	29.79	27.99	24.63	21.1	29.55	27.75	24.39	20.9
1000	kW	1.64	1.63	1.63	1.6	1.83	1.83	1.83	1.8	2.05	2.05	2.05	2.1	2.29	2.29	2.29	2.3	2.56	2.55	2.55	2.6
	Amps	6.19	6.18	6.16	6.2	7.04	7.04	7.02	7.1	8.00	7.99	7.98	8.0	9.03	9.03	9.01	9.1	10.19	10.18	10.17	10.2
	Hi PR	256	258	259	263.7	296	297	299	303.5	338	339	341	345.3	383	384	386	390.2	431	432	434	438.6
	Lo PR	132	133	137	142.1	140	141	144	149.8	146	148	151	156.6	152	154	157	162.3	158	159	163	168.0
	MBh	26.1	26.5	27.2	28.3	25.9	26.3	27.0	28.1	25.3	25.6	26.4	27.5	24.2	24.5	25.3	26.4	22.8	23.2	23.9	25.0
	S/T	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	28.13	26.33	22.97	19.5	28.08	26.28	22.92	19.4	28.33	26.53	23.17	19.7	28.06	26.26	22.90	19.4	27.82	26.02	22.66	19.2
	kW	1.65	1.65	1.65	1.7	1.85	1.85	1.84	1.9	2.07	2.07	2.06	2.1	2.31	2.31	2.30	2.3	2.57	2.57	2.57	2.6
	Amps	6.26	6.25	6.23	6.3	7.11	7.11	7.09	7.2	8.07	8.06	8.05	8.1	9.10	9.10	9.08	9.1	10.26	10.25	10.24	10.3
	Hi PR	261	262	264	267.9	300	302	303	307.7	342	343	345	349.5	387	388	390	394.4	436	437	438	442.8
	Lo PR	136	138	141	146.5	144	146	149	154.2	151	152	156	161.0	157	158	161	166.8	162	164	167	172.4

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Design Subcooling 8 ± 2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ± 2 °F @ the compressor suction access fitting connection.

Shaded area reflects AHRI conditions.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GPHM53031 (HIGH STAGE)

			OUTDOOR AMBIENT TEMPERATURE																							
			65°F				75°F				85°F				95°F				105°F				115°F			
			ENTERING INDOOR WET BULB TEMPERATURE																							
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	800	MBh	30.0	30.4	31.3	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.5	28.0	28.9	-	25.9	26.3	27.2	-	24.4	24.8	25.7	-
		S/T	0.56	0.48	0.35	-	0.57	0.49	0.36	-	0.59	0.52	0.38	-	0.61	0.54	0.40	-	1.00	0.56	0.42	-	1.00	0.61	0.47	-
		ΔT	19.11	17.40	14.19	-	19.06	17.35	14.15	-	19.31	17.59	14.39	-	19.05	17.33	14.13	-	18.82	17.10	13.90	-	19.89	18.18	14.97	-
		kW	1.97	1.97	1.97	-	2.22	2.22	2.22	-	2.50	2.50	2.49	-	2.80	2.80	2.80	-	3.14	3.14	3.13	-	3.53	3.53	3.53	-
		Amps	7.45	7.45	7.43	-	8.54	8.53	8.51	-	9.75	9.74	9.72	-	11.05	11.05	11.03	-	12.52	12.51	12.49	-	14.23	14.22	14.20	-
	980	Hi PR	255	257	258	-	296	297	299	-	338	339	341	-	384	385	387	-	433	434	436	-	486	487	489	-
		Lo PR	123	125	128	-	131	132	135	-	137	139	142	-	143	144	148	-	148	150	153	-	155	157	160	-
		MBh	30.5	30.9	31.8	-	30.2	30.7	31.6	-	29.5	29.9	30.8	-	28.1	28.5	29.4	-	26.4	26.9	27.8	-	24.9	25.4	26.3	-
		S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-
		ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-
1200	980	kW	1.99	1.99	1.99	-	2.24	2.24	2.24	-	2.52	2.52	2.51	-	2.82	2.82	2.82	-	3.16	3.16	3.15	-	3.55	3.55	3.55	-
		Amps	7.54	7.53	7.51	-	8.62	8.62	8.60	-	9.83	9.82	9.81	-	11.14	11.13	11.11	-	12.60	12.59	12.58	-	14.32	14.31	14.29	-
		Hi PR	259	260	262	-	299	300	302	-	342	343	344	-	387	388	390	-	436	438	439	-	489	490	492	-
		Lo PR	126	127	130	-	133	135	138	-	140	141	145	-	145	147	150	-	151	152	156	-	158	159	163	-
		MBh	31.4	31.9	32.8	-	31.2	31.6	32.5	-	30.4	30.8	31.7	-	29.0	29.4	30.3	-	27.4	27.8	28.7	-	25.9	26.3	27.2	-
	1200	S/T	0.70	0.63	0.49	-	0.71	0.63	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.62	-
		ΔT	16.01	14.30	11.10	-	15.96	14.25	11.05	-	16.21	14.49	11.29	-	15.95	14.23	11.03	-	15.72	14.00	10.80	-	16.79	15.08	11.88	-
		kW	2.01	2.01	2.01	-	2.26	2.26	2.25	-	2.54	2.54	2.53	-	2.84	2.84	2.83	-	3.18	3.17	3.17	-	3.57	3.57	3.56	-
		Amps	7.62	7.61	7.59	-	8.70	8.70	8.68	-	9.91	9.90	9.89	-	11.22	11.21	11.19	-	12.68	12.67	12.66	-	14.40	14.39	14.37	-
		Hi PR	263	264	265	-	303	304	306	-	345	347	348	-	391	392	394	-	440	441	443	-	493	494	496	-
Lo PR	130	131	134	-	137	139	142	-	144	145	148	-	149	151	154	-	155	156	159	-	162	163	166	-		
75	800	MBh	30.0	30.4	31.3	32.7	29.7	30.1	31.0	32.4	28.9	29.3	30.2	31.6	27.6	28.0	28.9	30.3	25.9	26.3	27.2	28.6	24.4	24.8	25.7	27.1
		S/T	0.69	0.61	0.48	0.3	0.69	0.62	0.48	0.3	1.00	0.64	0.51	0.4	1.00	0.66	0.53	0.4	1.00	0.68	0.55	0.4	1.00	1.00	0.60	0.5
		ΔT	22.88	21.17	17.96	14.6	22.83	21.12	17.92	14.6	23.08	21.36	18.16	14.8	22.82	21.10	17.90	14.6	22.59	20.87	17.67	14.4	23.66	21.95	18.74	15.4
		kW	1.97	1.97	1.97	2.0	2.22	2.22	2.21	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.79	2.8	3.14	3.13	3.13	3.1	3.53	3.53	3.52	3.5
		Amps	7.45	7.44	7.42	7.5	8.53	8.52	8.50	8.6	9.74	9.73	9.71	9.8	11.05	11.04	11.02	11.1	12.51	12.50	12.48	12.6	14.22	14.21	14.20	14.3
	980	Hi PR	256	257	259	263.0	296	297	299	303.5	339	340	341	345.9	384	385	387	391.6	433	435	436	440.8	486	487	489	493.3
		Lo PR	123	125	128	133.1	131	132	135	140.6	137	139	142	147.2	143	144	148	152.8	148	150	153	158.3	155	157	160	165.2
		MBh	30.5	31.0	31.9	33.2	30.3	30.7	31.6	33.0	29.5	29.9	30.8	32.2	28.1	28.5	29.4	30.8	26.5	26.9	27.8	29.2	25.0	25.4	26.3	27.7
		S/T	0.79	0.71	0.58	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	1.00	0.70	0.6
		ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7	22.05	20.34	17.14	13.8
1200	kW	1.99	1.99	1.99	2.0	2.24	2.24	2.23	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.81	2.8	3.16	3.15	3.15	3.2	3.55	3.55	3.54	3.6	
	Amps	7.53	7.53	7.51	7.6	8.62	8.61	8.59	8.7	9.83	9.82	9.80	9.9	11.13	11.13	11.11	11.2	12.60	12.59	12.57	12.7	14.31	14.30	14.28	14.4	
	Hi PR	259	260	262	266.3	299	301	302	306.8	342	343	345	349.2	387	389	390	394.8	437	438	440	444.1	489	490	492	496.6	
	Lo PR	126	127	130	135.7	133	135	138	143.3	140	141	145	149.9	146	147	150	155.5	151	153	156	160.9	158	159	163	167.8	
	MBh	31.4	31.9	32.8	34.1	31.2	31.6	32.5	33.9	30.4	30.8	31.7	33.1	29.0	29.5	30.4	31.7	27.4	27.8	28.7	30.1	25.9	26.3	27.2	28.6	
1200	S/T	0.83	0.75	0.62	0.5	1.00	0.76	0.63	0.5	1.00	0.79	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.6	1.00	1.00	0.74	0.6	
	ΔT	19.78	18.07	14.87	11.5	19.73	18.02	14.82	11.5	19.98	18.26	15.06	11.7	19.72	18.00	14.80	11.5	19.49	17.77	14.57	11.3	20.56	18.85	15.65	12.3	
	kW	2.01	2.01	2.00	2.0	2.26	2.26	2.25	2.3	2.54	2.54	2.53	2.6	2.84	2.84	2.83	2.9	3.17	3.17	3.17	3.2	3.57	3.57	3.56	3.6	
	Amps	7.61	7.61	7.59	7.7	8.70	8.69	8.67	8.8	9.91	9.90	9.88	10.0	11.21	11.21	11.19	11.3	12.68	12.67	12.65	12.7	14.39	14.38	14.36	14.4	
	Hi PR	263	264	266	270.1	303	304	306	310.6	346	347	349	353.0	391	392	394	398.7	441	442	443	447.9	493	494	496	500.4	
Lo PR	130	131	134	139.6	137	139	142	147.1	144	145	148	153.7	149	151	154	159.3		155	156	159	164.8	162	163	166	171.6	
DB: Entering Indoor Dry Bulb Temperature			Shaded area reflects ACCA (TVA) conditions.																kW = Total system power							
			High and low pressures are measured at the liquid and suction access fittings.																Amps = outdoor unit amps (comp.+fan)							

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
80	MBh	30.1	30.6	31.4	32.8	32.6	29.1	29.5	30.4	31.8	27.7	28.1	29.0	30.4	26.1	26.5	27.4	28.8	24.6	25.0	25.9	27.3															
	S/T	1.00	0.74	0.60	0.5		1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.73	0.6															
	ΔT	26.68	24.96	21.76	18.4		26.87	25.16	21.95	18.6	26.61	24.90	21.70	18.4	26.38	24.67	21.47	18.2	27.46	25.74	22.54	19.2															
	kW	1.97	1.97	1.97	2.0		2.22	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.79	2.8	3.14	3.14	3.13	3.2															
	Amps	7.45	7.44	7.43	7.5		8.54	8.53	8.51	8.6	9.74	9.74	9.72	9.8	11.05	11.04	11.03	11.1	12.51	12.51	12.49	12.6															
	Hi PR	256	257	259	263.5		297	298	300	304.0	339	340	342	346.4	385	386	388	392.0	434	435	437	441.3	486	488	489	493.8											
980	Lo PR	124	125	128	133.6		131	133	136	141.2	138	139	143	147.8	143	145	148	153.4	149	150	154	158.9	156	157	160	165.7											
	MBh	30.7	31.1	32.0	33.4		30.4	30.8	31.7	33.1	29.6	30.1	31.0	32.3	28.3	28.7	29.6	31.0	26.6	27.0	27.9	29.3	25.1	25.5	26.4	27.8											
	S/T	1.00	0.83	0.70	0.6		1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7											
	ΔT	25.07	23.36	20.15	16.8		25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6											
	kW	1.99	1.99	1.99	2.0		2.24	2.24	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.81	2.8	3.16	3.16	3.15	3.2	3.55	3.55	3.55	3.6											
	Amps	7.54	7.53	7.51	7.6		8.62	8.61	8.60	8.7	9.83	9.82	9.80	9.9	11.14	11.13	11.11	11.2	12.60	12.59	12.57	12.7	14.32	14.31	14.29	14.4											
1200	Hi PR	259	260	262	266.8		300	301	303	307.2	342	343	345	349.7	388	389	391	395.3	437	438	440	444.5	490	491	493	497.1											
	Lo PR	126	128	131	136.3		134	135	139	143.8	140	142	145	150.4	146	148	151	156.0	152	153	156	161.5	158	160	163	168.4											
	MBh	31.6	32.0	32.9	34.3		31.3	31.8	32.7	34.0	30.5	31.0	31.9	33.2	29.2	29.6	30.5	31.9	27.5	28.0	28.9	30.2	26.0	26.5	27.4	28.7											
	S/T	1.00	0.88	0.74	0.6		1.00	0.88	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7											
	ΔT	23.58	21.86	18.66	15.3		23.53	21.82	18.61	15.3	23.77	22.06	18.86	15.5	23.51	21.80	18.60	15.3	23.28	21.57	18.37	15.1	24.36	22.64	19.44	16.1											
	kW	2.01	2.01	2.01	2.0		2.26	2.26	2.25	2.3	2.54	2.54	2.53	2.6	2.84	2.84	2.83	2.9	3.18	3.17	3.17	3.2	3.57	3.57	3.56	3.6											
1200	Amps	7.62	7.61	7.59	7.7		8.70	8.69	8.68	8.8	9.91	9.90	9.89	10.0	11.22	11.21	11.19	11.3	12.68	12.67	12.65	12.7	14.40	14.39	14.37	14.5											
	Hi PR	263	264	266	270.6		304	305	307	311.1	346	347	349	353.5	392	393	395	399.1	441	442	444	448.4	494	495	496	500.9											
	Lo PR	130	132	135	140.1		138	139	142	147.6	144	146	149	154.3	150	151	155	159.8	155	157	160	165.3	162	164	167	172.2											

800	MBh	30.6	31.1	32.0	33.3	30.4	30.8	31.7	33.1	29.6	30.0	30.9	32.3	28.2	28.6	29.5	30.9	26.6	27.0	27.9	29.3	25.1	25.5	26.4	27.8
	S/T	1.00	0.84	0.70	0.6	1.00	0.84	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	1.00	0.7
	ΔT	30.04	28.33	25.13	21.8	30.00	28.28	25.08	21.8	30.24	28.52	25.32	22.0	29.98	28.26	25.06	21.7	29.75	28.03	24.83	21.5	30.82	29.11	25.91	22.6
	kW	1.98	1.98	1.97	2.0	2.23	2.22	2.22	2.2	2.50	2.50	2.50	2.5	2.81	2.80	2.80	2.8	3.14	3.14	3.14	3.2	3.54	3.53	3.53	3.5
	Amps	7.47	7.46	7.45	7.5	8.56	8.55	8.53	8.6	9.77	9.76	9.74	9.8	11.07	11.06	11.05	11.1	12.53	12.53	12.51	12.6	14.25	14.24	14.22	14.3
	Hi PR	257	258	260	264.7	298	299	301	305.2	340	341	343	347.6	386	387	389	393.2	435	436	438	442.5	488	489	491	495.0
85	Lo PR	126	127	130	135.5	133	135	138	143.0	140	141	144	149.6	145	147	150	155.2	151	152	155	160.7	158	159	162	167.6
	MBh	31.2	31.6	32.5	33.9	30.9	31.3	32.2	33.6	30.1	30.6	31.5	32.8	28.8	29.2	30.1	31.5	27.1	27.6	28.5	29.8	25.6	26.0	26.9	28.3
	S/T	1.00	0.93	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8
	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0
	kW	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.53	2.52	2.52	2.5	2.83	2.82	2.82	2.8	3.16	3.16	3.16	3.2	3.56	3.55	3.55	3.6
	Amps	7.56	7.55	7.53	7.6	8.64	8.63	8.62	8.7	9.85	9.84	9.83	9.9	11.16	11.15	11.13	11.2	12.62	12.61	12.60	12.7	14.34	14.33	14.31	14.4
980	Hi PR	261	262	264	268.0	301	302	304	308.5	343	345	346	350.9	389	390	392	396.5	438	439	441	445.8	491	492	494	498.3
	Lo PR	128	130	133	138.1	136	137	140	145.7	142	144	147	152.3	148	149	153	157.9	153	155	158	163.4	160	162	165	170.2
	MBh	32.1	32.5	33.4	34.8	31.8	32.3	33.2	34.5	31.1	31.5	32.4	33.8	29.7	30.1	31.0	32.4	28.0	28.5	29.4	30.7	26.5	27.0	27.9	29.2
	S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.89	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	26.94	25.23	22.03	18.7	26.90	25.18	21.98	18.7	27.14	25.42	22.22	18.9	26.88	25.16	21.96	18.6	26.65	24.94	21.73	18.4	27.72	26.01	22.81	19.5
	kW	2.02	2.01	2.01	2.0	2.27	2.26	2.26	2.3	2.54	2.54	2.54	2.6	2.84	2.84	2.84	2.9	3.18	3.18	3.17	3.2	3.57	3.57	3.57	3.6
1200	Amps	7.64	7.63	7.61	7.7	8.72	8.72	8.70	8.8	9.93	9.92	9.91	10.0	11.24	11.23	11.21	11.3	12.70	12.68	12.68	12.8	14.42	14.41	14.39	14.5
	Hi PR	264	266	267	271.8	305	306	308	312.3	347	348	350	354.7	393	394	396	400.4	442	443	445	449.6	495	496	498	502.1
	Lo PR	132	134	137	142.0	140	141	144	149.5	146	148	151	156.1	152	153	156	161.7	157	159	162	167.2	164	166	169	174.0

EXPANDED COOLING DATA — GPHM53031 (LOW STAGE)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	500	MBh	21.4	21.7	22.3	-	21.2	21.5	22.1	-	20.6	20.9	21.6	-	19.7	20.0	20.6	-	18.5	18.8	19.4	-	17.4	17.7	18.3	-	15.5	15.8	16.4	-							
		S/T	0.51	0.43	0.29	-	0.51	0.44	0.30	-	0.54	0.46	0.32	-	1.00	0.48	0.34	-	1.00	0.50	0.37	-	1.00	0.56	0.42	-	1.00	0.58	0.44	-							
		ΔT	19.32	17.67	14.58	-	19.28	17.62	14.53	-	19.51	17.86	14.77	-	19.26	17.61	14.52	-	19.04	17.39	14.30	-	20.08	18.42	15.33	-	20.08	18.42	15.33	-							
		kW	1.23	1.23	1.23	-	1.39	1.39	1.39	-	1.57	1.56	1.56	-	1.75	1.75	1.75	-	1.97	1.97	1.96	-	2.21	2.21	2.21	-	2.21	2.21	2.21	-							
		Amps	4.66	4.65	4.64	-	5.34	5.33	5.32	-	6.10	6.09	6.08	-	6.92	6.92	6.90	-	7.84	7.84	7.82	-	8.92	8.91	8.90	-	8.92	8.91	8.90	-							
		Hi PR	243	244	245	-	281	282	284	-	322	323	325	-	365	367	368	-	413	414	415	-	463	464	466	-	463	464	466	-							
70	680	Lo PR	125	127	130	-	133	135	138	-	140	142	145	-	146	147	150	-	151	153	156	-	158	160	163	-	158	160	163	-							
		MBh	21.9	22.2	22.9	-	21.7	22.0	22.7	-	21.2	21.5	22.1	-	20.2	20.5	21.2	-	19.0	19.3	20.0	-	17.9	18.2	18.9	-	15.5	15.8	16.4	-							
		S/T	0.68	0.60	0.46	-	0.68	0.60	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	1.00	0.59	-	1.00	0.75	0.61	-							
		ΔT	16.89	15.24	12.15	-	16.85	15.19	12.10	-	17.08	15.42	12.34	-	16.83	15.18	12.09	-	16.61	14.95	11.86	-	17.64	15.99	12.90	-	17.64	15.99	12.90	-							
		kW	1.25	1.25	1.25	-	1.41	1.41	1.41	-	1.59	1.58	1.58	-	1.77	1.77	1.77	-	1.99	1.98	1.98	-	2.23	2.23	2.23	-	2.23	2.23	2.23	-							
		Amps	4.74	4.74	4.73	-	5.42	5.42	5.41	-	6.18	6.18	6.17	-	7.01	7.00	6.99	-	7.93	7.92	7.91	-	9.01	9.00	8.99	-	9.01	9.00	8.99	-							
800	800	Hi PR	247	248	250	-	286	287	289	-	327	328	329	-	370	371	373	-	417	418	420	-	467	469	470	-	467	469	470	-							
		Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	150	151	154	-	155	157	160	-	162	164	167	-	155	157	160	-							
		MBh	22.4	22.7	23.4	-	22.2	22.6	23.2	-	21.7	22.0	22.6	-	20.7	21.0	21.7	-	19.5	19.8	20.5	-	18.4	18.7	19.4	-	15.5	15.8	16.4	-							
		S/T	0.72	0.64	0.50	-	0.72	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.58	-	1.00	1.00	0.63	-	1.00	0.77	0.63	-							
		ΔT	15.73	14.08	10.99	-	15.69	14.03	10.95	-	15.92	14.27	11.18	-	15.67	14.02	10.93	-	15.45	13.80	10.71	-	16.49	14.83	11.74	-	16.49	14.83	11.74	-							
		kW	1.26	1.26	1.26	-	1.42	1.42	1.42	-	1.59	1.59	1.59	-	1.78	1.78	1.78	-	2.00	1.99	1.99	-	2.24	2.24	2.24	-	2.24	2.24	2.24	-							
800	800	Amps	4.78	4.78	4.77	-	5.47	5.46	5.45	-	6.23	6.22	6.21	-	7.05	7.04	7.03	-	7.97	7.96	7.95	-	9.05	9.04	9.03	-	9.05	9.04	9.03	-							
		Hi PR	250	251	253	-	289	290	292	-	329	330	332	-	373	374	376	-	420	421	423	-	470	471	473	-	470	471	473	-							
		Lo PR	132	134	137	-	140	142	145	-	147	148	152	-	153	154	157	-	158	160	163	-	165	167	170	-	158	160	163	-							

75	MBh	21.4	21.7	22.4	23.3	21.2	21.5	22.2	23.1	20.6	20.9	21.6	22.6	19.7	20.0	20.6	21.6	18.5	18.8	19.4	20.4	17.4	17.7	18.3	19.3
	S/T	0.64	0.56	0.42	0.3	1.00	0.57	0.43	0.3	1.00	0.59	0.45	0.3	1.00	0.61	0.47	0.3	1.00	0.63	0.50	0.4	1.00	0.70	0.55	0.4
	ΔT	22.96	21.31	18.22	15.0	22.92	21.26	18.17	15.0	23.15	21.49	18.40	15.2	22.90	21.24	18.15	15.0	22.68	21.02	17.93	14.7	23.71	22.06	18.97	15.8
	kW	1.23	1.23	1.23	1.2	1.39	1.39	1.39	1.4	1.56	1.56	1.56	1.6	1.75	1.75	1.75	1.8	1.97	1.96	1.96	2.0	2.21	2.21	2.21	2.2
	Amps	4.65	4.65	4.64	4.7	5.33	5.33	5.32	5.4	6.09	6.09	6.08	6.1	6.92	6.91	6.90	7.0	7.84	7.83	7.82	7.9	8.92	8.91	8.90	9.0
	Hi PR	243	244	246	249.9	282	283	284	288.6	322	323	325	329.1	366	367	368	372.8	413	414	416	419.8	463	464	466	470.1
75	Lo PR	125	127	130	135.7	133	135	138	143.4	140	142	145	150.2	146	147	151	155.9	151	153	156	161.6	158	160	163	168.6
	MBh	21.9	22.3	22.9	23.9	21.8	22.1	22.7	23.7	21.2	21.5	22.1	23.1	20.2	20.5	21.2	22.2	19.0	19.3	20.0	21.0	17.9	18.2	18.9	19.9
	S/T	0.81	0.73	0.59	0.4	1.00	0.74	0.60	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.67	0.5	1.00	0.88	0.74	0.6
	ΔT	20.53	18.88	15.79	12.6	20.48	18.83	15.74	12.5	20.72	19.06	15.97	12.8	20.47	18.81	15.72	12.5	20.25	18.59	15.50	12.3	21.28	19.63	16.54	13.3
	kW	1.25	1.25	1.25	1.3	1.41	1.41	1.41	1.4	1.58	1.58	1.58	1.6	1.77	1.77	1.77	1.8	1.99	1.98	1.98	2.0	2.23	2.23	2.23	2.2
	Amps	4.74	4.73	4.72	4.8	5.42	5.41	5.40	5.5	6.18	6.18	6.16	6.2	7.00	7.00	6.99	7.0	7.92	7.92	7.91	8.0	9.00	9.00	8.98	9.0
800	Hi PR	248	249	250	254.6	286	287	289	293.3	327	328	330	333.8	370	371	373	377.5	417	419	420	424.5	468	469	470	474.8
	Lo PR	129	131	134	139.5	137	139	142	147.3	144	145	149	154.1	150	151	154	159.8	155	157	160	165.5	162	164	167	172.5
	MBh	22.5	22.8	23.4	24.4	22.3	22.6	23.2	24.2	21.7	22.0	22.6	23.6	20.7	21.0	21.7	22.7	19.5	19.8	20.5	21.5	18.4	18.8	19.4	20.4
	S/T	0.85	0.77	0.63	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.5	1.00	0.84	0.71	0.6	1.00	0.92	0.78	0.6
	ΔT	19.37	17.72	14.63	11.4	19.33	17.67	14.58	11.4	19.56	17.91	14.82	11.6	19.31	17.66	14.57	11.4	19.09	17.43	14.35	11.1	20.13	18.47	15.38	12.2
	kW	1.26	1.26	1.26	1.3	1.42	1.42	1.41	1.4	1.59	1.59	1.59	1.6	1.78	1.78	1.78	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.24	2.3
800	Amps	4.78	4.77	4.76	4.8	5.46	5.46	5.44	5.5	6.22	6.22	6.20	6.3	7.04	7.04	7.03	7.1	7.96	7.96	7.95	8.0	9.04	9.04	9.02	9.1
	Hi PR	250	251	253	257.4	289	290	292	296.1	330	331	332	336.7	373	374	376	380.3	420	421	423	427.4	471	472	473	477.6
	Lo PR	132	134	137	142.6	140	142	145	150.3	147	148	152	157.1	153	154	157	162.8	158	160	163	168.5	165	167	170	175.5

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
		ENTERING INDOOR WET BULB TEMPERATURE																													
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	500	MBh	21.5	21.8	22.5	23.5	21.3	21.6	22.3	23.3	20.8	21.1	21.7	22.7	19.8	20.1	20.7	21.7	18.6	18.9	19.5	20.5	17.5	17.8	18.5	19.4	17.5	17.8	18.5	19.4	
		S/T	1.00	0.69	0.55	0.4	1.00	0.69	0.56	0.4	1.00	0.72	0.58	0.4	1.00	1.00	0.60	0.5	1.00	1.00	0.62	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.68	0.5	
		ΔT	26.62	24.97	21.88	18.7	26.58	24.92	21.83	18.6	26.81	25.16	22.07	18.9	26.56	24.91	21.82	18.6	26.34	24.69	21.60	18.4	27.38	25.72	22.63	19.4	27.38	25.72	22.63	19.4	
		kW	1.23	1.23	1.23	1.2	1.39	1.39	1.39	1.4	1.57	1.56	1.56	1.6	1.75	1.75	1.75	1.8	1.97	1.96	1.96	2.0	2.21	2.21	2.21	2.2	2.21	2.21	2.21	2.2	
		Amps	4.66	4.65	4.64	4.7	5.34	5.33	5.32	5.4	6.10	6.09	6.08	6.1	6.92	6.92	6.90	7.0	7.84	7.83	7.82	7.9	8.92	8.91	8.90	9.0	8.92	8.91	8.90	9.0	
		Hi PR	243	244	246	250.3	282	283	285	289.0	323	324	325	329.6	366	367	369	373.2	413	414	416	420.3	463	465	466	470.5	463	465	466	470.5	
80	680	Lo PR	126	128	131	136.2	134	135	139	144.0	141	142	145	150.8	146	148	151	156.5	152	153	157	162.1	159	161	164	169.2	159	161	164	169.2	
		MBh	22.1	22.4	23.0	24.0	21.9	22.2	22.8	23.8	21.3	21.6	22.3	23.2	20.3	20.6	21.3	22.3	19.1	19.4	20.1	21.1	18.1	18.4	19.0	20.0	18.1	18.4	19.0	20.0	
		S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.77	0.6	
		ΔT	24.19	22.54	19.45	16.2	24.15	22.49	19.40	16.2	24.38	22.73	19.64	16.4	24.13	22.48	19.39	16.2	23.91	22.26	19.17	16.0	24.95	23.29	20.20	17.0	24.95	23.29	20.20	17.0	
		kW	1.25	1.25	1.25	1.3	1.41	1.41	1.41	1.4	1.59	1.58	1.58	1.6	1.77	1.77	1.77	1.8	1.99	1.98	1.98	2.0	2.23	2.23	2.23	2.2	2.23	2.23	2.23	2.2	
		Amps	4.74	4.74	4.73	4.8	5.42	5.42	5.41	5.5	6.18	6.18	6.17	6.2	7.01	7.00	6.99	7.0	7.93	7.92	7.91	8.0	9.00	9.00	8.99	9.0	9.00	9.00	8.99	9.0	
800	800	Hi PR	248	249	251	255.0	287	288	289	293.7	327	328	330	334.3	371	372	374	377.9	418	419	421	425.0	468	469	471	475.2	468	469	471	475.2	
		Lo PR	130	131	135	140.1	138	139	142	147.9	144	146	149	154.6	150	152	155	160.4	156	157	161	166.0	163	164	168	173.1	163	164	168	173.1	
		MBh	22.6	22.9	23.5	24.5	22.4	22.7	23.3	24.3	21.8	22.1	22.8	23.7	20.8	21.1	21.8	22.8	19.6	19.9	20.6	21.6	18.6	18.9	19.5	20.5	18.6	18.9	19.5	20.5	
		S/T	1.00	0.90	0.76	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7	
		ΔT	23.04	21.38	18.29	15.1	22.99	21.34	18.25	15.0	23.22	21.57	18.48	15.3	22.97	21.32	18.23	15.0	22.75	21.10	18.01	14.8	23.79	22.13	19.04	15.8	23.79	22.13	19.04	15.8	
		kW	1.26	1.26	1.26	1.3	1.42	1.42	1.42	1.4	1.59	1.59	1.59	1.6	1.78	1.78	1.78	1.8	2.00	1.99	1.99	2.0	2.24	2.24	2.24	2.3	2.24	2.24	2.24	2.3	
85	500	Amps	4.78	4.78	4.77	4.8	5.46	5.46	5.45	5.5	6.22	6.22	6.21	6.3	7.05	7.04	7.03	7.1	7.97	7.96	7.95	8.0	9.05	9.04	9.03	9.1	9.05	9.04	9.03	9.1	
		Hi PR	251	252	254	257.9	290	291	292	296.6	330	331	333	337.1	374	375	377	380.8	421	422	424	427.8	471	472	474	478.1	471	472	474	478.1	
		Lo PR	133	134	138	143.1	141	142	145	150.9	147	149	152	157.7	153	155	158	163.4	159	160	164	169.0	166	167	171	176.1	166	167	171	176.1	
		MBh	21.9	22.2	22.8	23.8	21.7	22.0	22.6	23.6	21.1	21.4	22.1	23.1	20.1	20.4	21.1	22.1	19.0	19.3	19.9	20.9	17.9	18.2	18.8	19.8	17.9	18.2	18.8	19.8	
		S/T	1.00	0.79	0.65	0.5	1.00	1.00	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.62	0.6	1.00	1.00	0.68	0.6	1.00	1.00	0.68	0.6	
		ΔT	29.87	28.22	25.13	21.9	29.83	28.17	25.08	21.9	30.06	28.41	25.32	22.1	29.81	28.16	25.07	21.9	29.59	27.93	24.85	21.6	30.63	28.97	25.88	22.7	30.63	28.97	25.88	22.7	
85	680	kW	1.24	1.24	1.23	1.2	1.39	1.39	1.39	1.4	1.57	1.57	1.56	1.6	1.76	1.76	1.75	1.8	1.97	1.97	1.97	2.0	2.22	2.22	2.21	2.2	2.22	2.22	2.21	2.2	
		Amps	4.67	4.66	4.65	4.7	5.35	5.35	5.33	5.4	6.11	6.11	6.09	6.1	6.93	6.93	6.92	7.0	7.85	7.85	7.84	7.9	8.93	8.93	8.91	9.0	8.93	8.93	8.91	9.0	
		Hi PR	244	245	247	251.5	283	284	286	290.2	324	325	326	330.7	367	368	370	374.4	414	415	417	421.4	465	466	467	471.7	465	466	467	471.7	
		Lo PR	128	129	133	138.1	136	137	140	145.9	142	144	147	152.7	148	150	153	158.4	154	155	159	164.1	161	162	166	171.1	161	162	166	171.1	
		MBh	22.4	22.7	23.4	24.4	22.2	22.5	23.2	24.2	21.7	22.0	22.6	23.6	20.7	21.0	21.6	22.6	19.5	19.8	20.5	21.4	18.4	18.7	19.4	20.4	18.4	18.7	19.4	20.4	
		S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.83	0.8	1.00	1.00	0.83	0.8	1.00	1.00	0.83	0.8	
800	800	ΔT	27.44	25.79	22.70	19.5	27.40	25.74	22.65	19.5	27.63	25.97	22.88	19.7	27.38	25.72	22.64	19.4	27.16	25.50	22.41	19.2	28.19	26.54	23.45	20.2	28.19	26.54	23.45	20.2	
		kW	1.26	1.26	1.25	1.3	1.41	1.41	1.41	1.4	1.59	1.59	1.58	1.6	1.78	1.78	1.77	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.23	2.2	2.24	2.24	2.23	2.2	
		Amps	4.76	4.75	4.74	4.8	5.44	5.43	5.42	5.5	6.20	6.19	6.18	6.2	7.02	7.01	7.00	7.1	7.94	7.93	7.92	8.0	9.02	9.01	9.00	9.1	9.02	9.01	9.00	9.1	
		Hi PR	249	250	252	256.2	288	289	291	294.9	328	329	331	335.4	372	373	375	379.1	419	420	422	426.1	469	470	472	476.4	469	470	472	476.4	
		Lo PR	132	133	137	142.0	140	141	144	149.8	146	148	151	156.6	152	154	157	162.3	158	159	163	167.9	165	166	170	175.0	165	166	170	175.0	
		MBh	22.9	23.2	23.9	24.9	22.7	23.0	23.7	24.7	22.2	22.5	23.1	24.1	21.2	21.5	22.1	23.1	20.0	20.3	21.0	21.9	18.9	19.2	19.9	20.9	18.9	19.2	19.9	20.9	
800	800	S/T	1.00	1.00	0.86	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8	1.00	1.00	0.83	0.8	1.00	1.00	0.83	0.8	1.00	1.00	0.83	0.8	
		ΔT	26.28	24.63	21.54	18.3	26.24	24.58	21.49	18.3	26.47	24.82	21.73	18.5	26.22	24.57	21.48	18.3	26.00	24.35	21.26	18.1	27.04	25.38	22.29	19.1	27.04	25.38	22.29	19.1	
		kW	1.27	1.26	1.26	1.3	1.42	1.42	1.42	1.4	1.60	1.60	1.59	1.6	1.79	1.79	1.78	1.8	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.25	2.25	2.24	2.3	
		Amps	4.80	4.79	4.78	4.8	5.48	5.47	5.46	5.5	6.24	6.23	6.22	6.3	7.06	7.06	7.04	7.1	7.98	7.97	7.96	8.0	9.06	9.05							

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects AHRI conditions.

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1000	MBh	36.5	37.0	38.1	-	36.2	36.7	37.8	-	35.2	35.7	36.8	-	33.6	34.1	35.2	-	31.5	32.1	33.2	-	29.7	30.2	31.3	-	29.7	30.2	31.3	-							
		S/T	0.56	0.49	0.36	-	0.57	0.50	0.36	-	0.59	0.52	0.39	-	0.61	0.54	0.41	-	0.64	0.56	0.43	-	1.00	0.61	0.48	-	1.00	0.61	0.48	-							
		ΔT	20.83	18.95	15.42	-	20.78	18.89	15.37	-	21.05	19.16	15.64	-	20.76	18.88	15.35	-	20.51	18.62	15.10	-	21.69	19.80	16.28	-	21.69	19.80	16.28	-							
		kW	2.42	2.42	2.42	-	2.72	2.72	2.71	-	3.05	3.05	3.04	-	3.41	3.41	3.40	-	3.81	3.81	3.80	-	4.28	4.28	4.27	-	4.28	4.28	4.27	-							
		Amps	9.00	8.99	8.96	-	10.28	10.27	10.25	-	11.72	11.71	11.69	-	13.28	13.27	13.25	-	15.02	15.01	14.99	-	17.06	17.05	17.03	-	17.06	17.05	17.03	-							
		Hi PR	258	259	260	-	298	299	301	-	341	342	344	-	387	388	390	-	437	438	439	-	489	491	492	-	489	491	492	-							
		Lo PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	144	147	-	149	150	153	-	149	150	153	-							
70	1200	MBh	37.1	37.6	38.7	-	36.8	37.3	38.4	-	35.8	36.3	37.4	-	34.2	34.7	35.8	-	32.2	32.7	33.8	-	30.3	30.8	31.9	-	30.3	30.8	31.9	-							
		S/T	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-							
		ΔT	19.26	17.37	13.85	-	19.20	17.32	13.80	-	19.47	17.58	14.06	-	19.18	17.30	13.78	-	18.93	17.05	13.52	-	20.11	18.23	14.71	-	20.11	18.23	14.71	-							
		kW	2.45	2.44	2.44	-	2.74	2.74	2.73	-	3.07	3.07	3.07	-	3.43	3.43	3.42	-	3.83	3.83	3.82	-	4.30	4.30	4.29	-	4.30	4.30	4.29	-							
		Amps	9.09	9.08	9.06	-	10.38	10.37	10.35	-	11.82	11.81	11.78	-	13.37	13.36	13.34	-	15.11	15.10	15.08	-	17.15	17.14	17.12	-	17.15	17.14	17.12	-							
		Hi PR	260	262	263	-	301	302	304	-	344	345	347	-	390	391	393	-	439	441	442	-	492	494	495	-	492	494	495	-							
		Lo PR	120	122	125	-	128	129	132	-	134	135	138	-	139	141	144	-	145	146	149	-	151	153	156	-	151	153	156	-							
1400		MBh	37.9	38.4	39.5	-	37.6	38.1	39.2	-	36.6	37.1	38.2	-	35.0	35.5	36.6	-	33.0	33.5	34.6	-	31.1	31.6	32.7	-	31.1	31.6	32.7	-							
		S/T	0.69	0.61	0.48	-	0.69	0.62	0.49	-	0.72	0.64	0.51	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-							
		ΔT	18.00	16.12	12.60	-	17.95	16.07	12.54	-	18.22	16.33	12.81	-	17.93	16.05	12.52	-	17.68	15.79	12.27	-	18.86	16.97	13.45	-	18.86	16.97	13.45	-							
		kW	2.46	2.46	2.45	-	2.76	2.76	2.75	-	3.09	3.09	3.08	-	3.45	3.45	3.44	-	3.85	3.85	3.84	-	4.32	4.31	4.31	-	4.32	4.31	4.31	-							
		Amps	9.16	9.15	9.13	-	10.45	10.44	10.42	-	11.89	11.88	11.86	-	13.45	13.44	13.41	-	15.19	15.18	15.15	-	17.23	17.22	17.19	-	17.23	17.22	17.19	-							
		Hi PR	263	264	266	-	304	305	307	-	347	348	350	-	393	394	396	-	442	443	445	-	495	496	498	-	495	496	498	-							
		Lo PR	123	125	128	-	130	132	135	-	137	138	141	-	142	143	146	-	147	149	152	-	154	155	158	-	154	155	158	-							
75	1000	MBh	36.5	37.0	38.1	39.8	36.2	36.7	37.8	39.5	35.2	35.7	36.8	38.5	33.6	34.1	35.2	36.9	31.6	32.1	33.2	34.8	29.7	30.2	31.3	33.0	29.7	30.2	31.3	33.0							
		S/T	0.69	0.62	0.48	0.3	0.70	0.62	0.49	0.4	0.72	0.65	0.51	0.4	1.00	0.67	0.53	0.4	1.00	0.69	0.55	0.4	1.00	0.74	0.61	0.5	1.00	0.74	0.61	0.5							
		ΔT	24.98	23.09	19.57	15.9	24.93	23.04	19.52	15.9	25.19	23.31	19.79	16.1	24.91	23.02	19.50	15.9	24.66	22.77	19.25	15.6	25.84	23.95	20.43	16.8	25.84	23.95	20.43	16.8							
		kW	2.42	2.42	2.41	2.4	2.72	2.72	2.71	2.7	3.05	3.05	3.04	3.1	3.41	3.41	3.40	3.4	3.81	3.81	3.80	3.8	4.28	4.27	4.27	4.3	4.28	4.27	4.27	4.3							
		Amps	8.99	8.98	8.96	9.1	10.28	10.27	10.24	10.3	11.72	11.70	11.68	11.8	13.27	13.26	13.24	13.3	15.01	15.00	14.98	15.1	17.05	17.04	17.02	17.1	17.05	17.04	17.02	17.1							
		Hi PR	258	259	261	265.2	299	300	301	305.9	341	342	344	348.6	387	388	390	394.6	437	438	440	444.2	490	491	493	497.1	490	491	493	497.1							
		Lo PR	118	120	123	127.7	125	127	130	134.9	132	133	136	141.2	137	138	142	146.6	142	144	147	151.8	149	150	153	158.4	149	150	153	158.4							
75	1200	MBh	37.1	37.6	38.7	40.4	36.8	37.3	38.4	40.1	35.8	36.4	37.5	39.1	34.2	34.7	35.8	37.5	32.2	32.7	33.8	35.5	30.4	30.9	32.0	33.6	30.4	30.9	32.0	33.6							
		S/T	0.77	0.70	0.57	0.4	0.78	0.71	0.57	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.82	0.69	0.6	1.00	0.82	0.69	0.6							
		ΔT	23.40	21.52	17.99	14.3	23.35	21.46	17.94	14.3	23.62	21.73	18.21	14.6	23.33	21.45	17.92	14.3	23.08	21.19	17.67	14.0	24.26	22.37	18.85	15.2	24.26	22.37	18.85	15.2							
		kW	2.44	2.44	2.44	2.5	2.74	2.74	2.73	2.8	3.07	3.07	3.06	3.1	3.43	3.43	3.42	3.4	3.83	3.83	3.82	3.8	4.30	4.30	4.29	4.3	4.30	4.30	4.29	4.3							
		Amps	9.08	9.07	9.05	9.1	10.37	10.36	10.34	10.4	11.81	11.80	11.78	11.9	13.36	13.35	13.33	13.4	15.10	15.09	15.07	15.2	17.14	17.13	17.11	17.2	17.14	17.13	17.11	17.2							
		Hi PR	261	262	264	268.2	301	303	304	308.9	344	345	347	351.6	390	391	393	397.6	440	441	443	447.2	493	494	496	500.1	493	494	496	500.1							
		Lo PR	120	122	125	130.0	128	129	132	137.2	134	135	138	143.5	139	141	144	148.9	145	146	149	154.1	151	153	156	160.7	151	153	156	160.7							
1400		MBh	37.9	38.4	39.5	41.2	37.6	38.1	39.2	40.9	36.6	37.2	38.3	39.9	35.0	35.5	36.6	38.3	33.0	33.5	34.6	36.3	31.1	31.7	32.8	34.4	31.1	31.7	32.8	34.4							
		S/T	0.81	0.74	0.61	0.5	0.82	0.75	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6							
		ΔT	22.15	20.26	16.74	13.1	22.10	20.21	16.69	13.0	22.36	20.48	16.96	13.3	22.08	20.19	16.67	13.0	21.83	19.94	16.42	12.8	23.01	21.12	17.60	14.0	23.01	21.12	17.60	14.0							
		kW	2.46	2.46	2.45	2.5	2.76	2.75	2.75	2.8	3.09	3.09	3.08	3.1	3.45	3.44	3.44	3.5	3.85	3.84	3.84	3.9	4.31	4.31	4.31	4.3	4.31	4.31	4.31	4.3							
		Amps	9.15	9.14	9.12	9.2	10.44	10.43	10.41	10.5	11.88	11.87	11.85	11.9	13.44	13.43	13.41	13.5	15.18	15.17	15.14	15.2	17.22	17.21	17.19	17.3	17.22	17.21	17.19	17.3							
		Hi PR	264	265	266	271.0	304	305	307	311.8	347	348	350	354.5	393	394	396	400.4	443	444	446	450.0	495	497	498	502.9	495	497	498	502.9							
		Lo PR	123	125	128	132.6	130	132	135	139.8	137	138	141	146.2	142	143	146	151.5	147	149	152	156.8	154	155	158	163.3	1										

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	MBh	36.7	37.2	38.3	40.0	36.4	36.9	38.0	39.6	35.4	35.9	37.0	38.7	33.8	34.3	35.4	37.0	31.8	32.3	33.4	35.0	29.9	30.4	31.5	33.2	29.9	30.4	31.5	33.2		
	S/T	0.81	0.74	0.61	0.5	1.00	0.74	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6		
	ΔT	29.15	27.27	23.75	20.1	29.10	27.22	23.70	20.0	29.37	27.48	23.96	20.3	29.08	27.20	23.68	20.0	28.83	26.95	23.42	19.8	30.01	28.13	24.61	21.0	30.01	28.13	24.61	21.0		
	kW	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7	3.05	3.05	3.04	3.1	3.41	3.41	3.40	3.4	3.81	3.81	3.80	3.8	4.28	4.28	4.27	4.3	4.28	4.28	4.27	4.3		
	Amps	8.99	8.98	8.96	9.1	10.28	10.27	10.25	10.3	11.72	11.71	11.69	11.8	13.28	13.27	13.25	13.3	15.02	15.01	14.99	15.1	17.06	17.05	17.03	17.1	17.06	17.05	17.03	17.1		
	Hi PR	258	259	261	265.7	299	300	302	306.4	342	343	345	349.1	388	389	391	395.1	437	438	440	444.7	490	491	493	497.6	490	491	493	497.6		
1200	Lo PR	119	120	123	128.2	126	127	130	135.4	132	134	137	141.7	138	139	142	147.1	143	144	147	152.3	149	151	154	158.9	149	151	154	158.9		
	MBh	37.3	37.8	38.9	40.6	37.0	37.5	38.6	40.3	36.0	36.6	37.6	39.3	34.4	34.9	36.0	37.7	32.4	32.9	34.0	35.7	30.5	31.1	32.2	33.8	30.5	31.1	32.2	33.8		
	S/T	0.90	0.82	0.69	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7		
	ΔT	27.58	25.69	22.17	18.5	27.53	25.64	22.12	18.5	27.79	25.90	22.38	18.7	27.51	25.62	22.10	18.5	27.25	25.37	21.85	18.2	28.44	26.55	23.03	19.4	28.44	26.55	23.03	19.4		
	kW	2.45	2.44	2.44	2.5	2.74	2.74	2.73	2.8	3.07	3.07	3.06	3.1	3.43	3.43	3.42	3.4	3.83	3.83	3.82	3.8	4.30	4.30	4.29	4.3	4.30	4.30	4.29	4.3		
	Amps	9.09	9.08	9.06	9.2	10.38	10.37	10.34	10.4	11.81	11.80	11.78	11.9	13.37	13.36	13.34	13.4	15.11	15.10	15.08	15.2	17.15	17.14	17.12	17.2	17.15	17.14	17.12	17.2		
1400	Hi PR	261	262	264	268.6	302	303	305	309.4	345	346	348	352.1	391	392	394	398.1	440	441	443	447.6	493	494	496	500.5	493	494	496	500.5		
	Lo PR	121	122	125	130.5	128	130	133	137.7	135	136	139	144.1	140	141	144	149.4	145	147	150	154.6	152	153	156	161.2	152	153	156	161.2		
	MBh	38.1	38.6	39.7	41.4	37.8	38.3	39.4	41.1	36.8	37.3	38.4	40.1	35.2	35.7	36.8	38.5	33.2	33.7	34.8	36.5	31.3	31.9	32.9	34.6	31.3	31.9	32.9	34.6		
	S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7		
	ΔT	26.33	24.44	20.92	17.3	26.27	24.39	20.87	17.2	26.54	24.65	21.13	17.5	26.25	24.37	20.85	17.2	26.00	24.12	20.59	16.9	27.18	25.30	21.78	18.1	27.18	25.30	21.78	18.1		
	kW	2.46	2.46	2.45	2.5	2.76	2.76	2.75	2.8	3.09	3.09	3.08	3.1	3.45	3.44	3.44	3.5	3.85	3.84	3.84	3.9	4.32	4.31	4.31	4.3	4.32	4.31	4.31	4.3		
85	Amps	9.16	9.15	9.13	9.2	10.45	10.44	10.42	10.5	11.89	11.88	11.86	12.0	13.44	13.43	13.41	13.5	15.18	15.17	15.15	15.2	17.22	17.21	17.19	17.3	17.22	17.21	17.19	17.3		
	Hi PR	264	265	267	271.5	305	306	308	312.2	347	349	350	354.9	393	395	396	400.9	443	444	446	450.5	496	497	499	503.4	496	497	499	503.4		
	Lo PR	124	125	128	133.1	131	132	135	140.4	137	139	142	146.7	142	144	147	152.0	148	149	152	157.3	154	156	159	163.8	154	156	159	163.8		
	MBh	37.3	37.8	38.9	40.6	37.0	37.5	38.6	40.3	36.0	36.6	37.6	39.3	34.4	34.9	36.0	37.7	32.4	32.9	34.0	35.7	30.5	31.1	32.2	33.8	30.5	31.1	32.2	33.8		
	S/T	1.00	0.84	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7		
	ΔT	32.86	30.97	27.45	23.8	32.81	30.92	27.40	23.8	33.07	31.19	27.66	24.0	32.79	30.90	27.38	23.7	32.54	30.65	27.13	23.5	33.72	31.83	28.31	24.7	33.72	31.83	28.31	24.7		
1000	kW	2.43	2.43	2.42	2.4	2.73	2.72	2.72	2.7	3.06	3.05	3.05	3.1	3.41	3.41	3.41	3.4	3.81	3.81	3.81	3.8	4.28	4.28	4.28	4.3	4.28	4.28	4.27	4.3		
	Amps	9.02	9.01	8.99	9.1	10.31	10.30	10.28	10.4	11.75	11.74	11.71	11.8	13.30	13.29	13.27	13.4	15.04	15.03	15.01	15.1	17.08	17.07	17.05	17.1	17.08	17.07	17.05	17.1		
	Hi PR	259	261	262	266.9	300	301	303	307.6	343	344	346	350.3	389	390	392	396.3	438	440	441	445.9	491	492	494	498.8	491	492	494	498.8		
	Lo PR	120	122	125	130.0	128	129	132	137.2	134	135	138	143.5	139	141	144	148.9	145	146	149	154.1	151	153	156	160.7	151	153	156	160.7		
	MBh	37.9	38.5	39.5	41.2	37.6	38.1	39.2	40.9	36.7	37.2	38.3	39.9	35.0	35.5	36.6	38.3	33.0	33.5	34.6	36.3	31.2	31.7	32.8	34.4	31.2	31.7	32.8	34.4		
	S/T	1.00	0.92	0.79	0.7	1.00	0.93	0.80	0.7	1.00	0.95	0.82	0.7	1.00	0.97	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.91	0.8		
1200	ΔT	31.28	29.39	25.87	22.2	31.23	29.34	25.82	22.2	31.49	29.61	26.09	22.4	31.21	29.32	25.80	22.2	30.96	29.07	25.55	21.9	32.14	30.25	26.73	23.1	32.14	30.25	26.73	23.1		
	kW	2.45	2.45	2.44	2.5	2.75	2.74	2.74	2.8	3.08	3.08	3.07	3.1	3.44	3.43	3.43	3.5	3.84	3.83	3.83	3.9	4.31	4.30	4.30	4.3	4.31	4.30	4.30	4.3		
	Amps	9.11	9.10	9.08	9.2	10.40	10.39	10.37	10.5	11.84	11.83	11.81	11.9	13.40	13.39	13.36	13.5	15.14	15.12	15.10	15.2	17.18	17.17	17.14	17.2	17.18	17.17	17.14	17.2		
	Hi PR	262	264	265	269.8	303	304	306	310.6	346	347	349	353.3	392	393	395	399.3	441	443	444	448.9	494	495	497	501.8	494	495	497	501.8		
	Lo PR	123	124	127	132.3	130	131	134	139.5	136	138	141	145.8	142	143	146	151.2	147	148	151	156.4	153	155	158	163.0	153	155	158	163.0		
	MBh	38.7	39.2	40.3	42.0	38.4	38.9	40.0	41.7	37.4	38.0	39.1	40.7	35.8	36.3	37.4	39.1	33.8	34.3	35.4	37.1	32.0	32.5	33.6	35.2	32.0	32.5	33.6	35.2		
1400	S/T	1.00	0.96	0.83	0.7	1.00	0.97	0.83	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.8	0.8	1.00	1.00	0.8	0.8		
	ΔT	30.03	28.14	24.62	21.0	29.98	28.09	24.57	20.9	30.24	28.36	24.83	21.2	29.96	28.07	24.55	20.9	29.71	27.82	24.30	20.6	30.89	29.00	25.48	21.8	30.89	29.00	25.48	21.8		
	kW	2.47	2.47	2.46	2.5	2.76	2.76	2.76	2.8	3.09	3.09	3.09	3.1	3.45	3.45	3.45	3.5	3.85	3.85	3.85	3.9	4.32	4.32	4.31	4.3	4.32	4.32	4.31	4.3		
	Amps																														

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70		MBh	26.3	26.6	27.4	-	26.0	26.4	27.2	-	25.3	25.7	26.5	-	24.2	24.5	25.3	-	22.7	23.1	23.9	-	21.4	21.8	22.6	-											
		S/T	0.59	0.51	0.38	-	0.60	0.52	0.38	-	0.62	0.55	0.41	-	0.64	0.56	0.43	-	1.00	0.59	0.45	-	1.00	0.64	0.50	-											
	700	ΔT	19.95	18.13	14.73	-	19.90	18.08	14.68	-	20.15	18.33	14.93	-	19.88	18.06	14.66	-	19.63	17.81	14.42	-	20.77	18.95	15.56	-											
		kW	1.53	1.52	1.52	-	1.71	1.71	1.71	-	1.92	1.92	1.92	-	2.15	2.14	2.14	-	2.40	2.40	2.39	-	2.69	2.69	2.69	-											
		Amps	5.66	5.66	5.64	-	6.48	6.47	6.46	-	7.38	7.37	7.36	-	8.36	8.35	8.34	-	9.45	9.45	9.43	-	10.74	10.73	10.72	-											
		Hi PR	246	248	249	-	285	286	288	-	326	327	329	-	370	371	373	-	418	419	420	-	468	469	471	-											
	Lo PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	146	148	151	-	153	155	158	-												
825		MBh	26.7	27.1	27.8	-	26.4	26.8	27.6	-	25.8	26.1	26.9	-	24.6	24.9	25.7	-	23.1	23.5	24.3	-	21.8	22.2	23.0	-											
		S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-											
		ΔT	18.58	16.76	13.36	-	18.53	16.71	13.31	-	18.79	16.97	13.57	-	18.51	16.69	13.29	-	18.27	16.45	13.05	-	19.41	17.59	14.19	-											
		kW	1.54	1.54	1.53	-	1.72	1.72	1.72	-	1.93	1.93	1.93	-	2.16	2.16	2.15	-	2.41	2.41	2.40	-	2.70	2.70	2.70	-											
		Amps	5.72	5.71	5.70	-	6.53	6.52	6.51	-	7.43	7.43	7.41	-	8.41	8.41	8.39	-	9.51	9.50	9.49	-	10.79	10.78	10.77	-											
		Hi PR	249	250	252	-	288	289	291	-	329	330	332	-	373	374	376	-	420	421	423	-	471	472	474	-											
	Lo PR	124	125	128	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-												
1000		MBh	27.4	27.8	28.6	-	27.2	27.6	28.4	-	26.5	26.9	27.7	-	25.3	25.7	26.5	-	23.9	24.3	25.0	-	22.6	22.9	23.7	-											
		S/T	0.71	0.63	0.50	-	0.72	0.64	0.50	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-											
		ΔT	17.08	15.26	11.86	-	17.03	15.21	11.81	-	17.28	15.46	12.06	-	17.01	15.19	11.79	-	16.76	14.94	11.55	-	17.90	16.08	12.68	-											
		kW	1.55	1.55	1.55	-	1.74	1.74	1.73	-	1.95	1.94	1.94	-	2.17	2.17	2.17	-	2.42	2.42	2.42	-	2.72	2.72	2.71	-											
		Amps	5.77	5.77	5.75	-	6.58	6.58	6.56	-	7.49	7.48	7.47	-	8.47	8.46	8.45	-	9.56	9.56	9.54	-	10.85	10.84	10.83	-											
		Hi PR	253	254	255	-	291	293	294	-	332	333	335	-	376	377	379	-	424	425	426	-	474	475	477	-											
	Lo PR	127	129	132	-	135	136	139	-	141	143	146	-	147	148	151	-	152	154	157	-	159	160	163	-												

700	MBh	26.3	26.7	27.4	28.6	26.0	26.4	27.2	28.4	25.4	25.7	26.5	27.7	24.2	24.5	25.3	26.5	22.7	23.1	23.9	25.1	21.4	21.8	22.6	23.8
	S/T	0.72	0.64	0.51	0.4	0.73	0.65	0.51	0.4	1.00	0.67	0.54	0.4	1.00	0.69	0.56	0.4	1.00	0.72	0.58	0.4	1.00	1.00	0.63	0.5
	ΔT	23.95	22.13	18.73	15.2	23.90	22.08	18.68	15.2	24.15	22.33	18.94	15.4	23.88	22.06	18.66	15.1	23.64	21.82	18.42	14.9	24.78	22.96	19.56	16.0
	kW	1.52	1.52	1.52	1.5	1.71	1.71	1.71	1.7	1.92	1.92	1.91	1.9	2.14	2.14	2.14	2.2	2.40	2.39	2.39	2.4	2.69	2.69	2.69	2.7
	Amps	5.66	5.65	5.64	5.7	6.47	6.46	6.45	6.5	7.37	7.37	7.35	7.4	8.35	8.35	8.33	8.4	9.45	9.44	9.43	9.5	10.73	10.73	10.71	10.8
	Hi PR	247	248	249	253.8	286	287	288	292.8	326	328	329	333.6	370	371	373	377.5	418	419	421	424.9	468	469	471	475.5
825	Lo PR	122	123	126	131.5	129	131	134	138.9	136	137	140	145.4	141	143	146	150.9	146	148	151	156.3	153	155	158	163.0
	MBh	26.7	27.1	27.9	29.1	26.5	26.8	27.6	28.8	25.8	26.1	26.9	28.1	24.6	25.0	25.7	26.9	23.1	23.5	24.3	25.5	21.8	22.2	23.0	24.2
	S/T	0.80	0.72	0.58	0.4	0.80	0.73	0.59	0.4	1.00	0.75	0.62	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6
	ΔT	22.58	20.76	17.36	13.8	22.53	20.71	17.31	13.8	22.79	20.97	17.57	14.0	22.51	20.69	17.30	13.8	22.27	20.45	17.05	13.5	23.41	21.59	18.19	14.7
	kW	1.54	1.54	1.53	1.5	1.72	1.72	1.72	1.7	1.93	1.93	1.93	1.9	2.16	2.16	2.15	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7
	Amps	5.71	5.71	5.69	5.8	6.52	6.52	6.50	6.6	7.43	7.42	7.41	7.5	8.41	8.40	8.39	8.4	9.50	9.49	9.48	9.5	10.78	10.78	10.76	10.8
1000	Hi PR	249	250	252	256.4	288	289	291	295.3	329	330	332	336.1	373	374	376	380.1	420	421	423	427.5	471	472	474	478.1
	Lo PR	124	125	128	133.6	131	133	136	141.0	138	139	142	147.5	143	145	148	153.0	149	150	153	158.4	155	157	160	165.2
	MBh	27.4	27.8	28.6	29.8	27.2	27.6	28.4	29.6	26.5	26.9	27.7	28.9	25.3	25.7	26.5	27.7	23.9	24.3	25.1	26.3	22.6	22.9	23.7	24.9
	S/T	0.84	0.76	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.80	0.66	0.5	1.00	0.81	0.68	0.5	1.00	0.84	0.70	0.6	1.00	1.00	0.75	0.6
	ΔT	21.08	19.26	15.86	12.3	21.03	19.21	15.81	12.3	21.28	19.46	16.06	12.5	21.01	19.19	15.79	12.3	20.77	18.95	15.55	12.0	21.91	20.09	16.69	13.2
	kW	1.55	1.55	1.55	1.6	1.74	1.74	1.73	1.7	1.94	1.94	1.94	2.0	2.17	2.17	2.17	2.2	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7
75	Amps	5.77	5.76	5.75	5.8	6.58	6.57	6.56	6.6	7.48	7.48	7.46	7.5	8.46	8.46	8.44	8.5	9.56	9.55	9.54	9.6	10.84	10.83	10.82	10.9
	Hi PR	253	254	256	259.8	292	293	294	298.8	333	334	335	339.6	376	378	379	383.6	424	425	427	431.0	474	476	477	481.5
	Lo PR	127	129	132	137.2	135	136	139	144.6	141	143	146	151.1	147	148	151	156.6	152	154	157	162.0	159	160	164	168.7

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	MBh	26.4	26.8	27.6	28.8	26.2	26.6	27.3	28.5	25.5	25.9	26.7	27.9	24.3	24.7	25.5	26.7	22.9	23.2	24.0	25.2	21.5	21.9	22.7	23.9	21.5	21.9	22.7	23.9		
	S/T	0.84	0.77	0.63	0.5	1.00	0.77	0.64	0.5	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.76	0.6		
	ΔT	27.98	26.16	22.76	19.2	27.93	26.11	22.71	19.2	28.18	26.36	22.96	19.4	27.91	26.09	22.69	19.2	27.67	25.85	22.45	18.9	28.80	26.98	23.59	20.1	28.80	26.98	23.59	20.1		
	kW	1.53	1.52	1.52	1.5	1.71	1.71	1.71	1.7	1.92	1.92	1.92	1.9	2.15	2.14	2.14	2.2	2.40	2.40	2.39	2.4	2.69	2.69	2.69	2.7	2.69	2.69	2.69	2.7		
	Amps	5.66	5.66	5.64	5.7	6.47	6.47	6.45	6.5	7.38	7.37	7.36	7.4	8.36	8.35	8.34	8.4	9.45	9.45	9.43	9.5	10.74	10.73	10.72	10.8	10.74	10.73	10.72	10.8		
	Hi PR	247	248	250	254.2	286	287	289	293.2	327	328	330	334.0	371	372	374	378.0	418	419	421	425.4	469	470	472	476.0	469	470	472	476.0		
	Lo PR	122	124	127	132.0	130	131	134	139.4	136	138	141	145.9	142	143	146	151.4	147	149	152	156.8	154	155	158	163.6	154	155	158	163.6		
	MBh	26.8	27.2	28.0	29.2	26.6	27.0	27.8	29.0	25.9	26.3	27.1	28.3	24.7	25.1	25.9	27.1	23.3	23.7	24.4	25.6	22.0	22.3	23.1	24.3	22.0	22.3	23.1	24.3		
	S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7		
	ΔT	26.61	24.79	21.39	17.9	26.56	24.74	21.34	17.8	26.82	25.00	21.60	18.1	26.54	24.72	21.33	17.8	26.30	24.48	21.08	17.6	27.44	25.62	22.22	18.7	27.44	25.62	22.22	18.7		
	kW	1.54	1.54	1.53	1.5	1.72	1.72	1.72	1.7	1.93	1.93	1.93	1.9	2.16	2.16	2.15	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	2.70	2.70	2.70	2.7		
	Amps	5.72	5.71	5.70	5.8	6.53	6.52	6.51	6.6	7.43	7.42	7.41	7.5	8.41	8.40	8.39	8.5	9.50	9.50	9.48	9.5	10.79	10.78	10.77	10.8	10.79	10.78	10.77	10.8		
Hi PR	250	251	253	256.8	289	290	291	295.8	329	331	332	336.6	373	375	376	380.5	421	422	424	427.9	471	472	474	478.5	471	472	474	478.5			
Lo PR	124	126	129	134.2	132	133	136	141.6	138	140	143	148.1	144	145	148	153.6	149	151	154	159.0	156	157	161	165.7	156	157	161	165.7			
1000	MBh	27.6	28.0	28.7	29.9	27.3	27.7	28.5	29.7	26.7	27.0	27.8	29.0	25.5	25.9	26.6	27.8	24.0	24.4	25.2	26.4	22.7	23.1	23.9	25.1	22.7	23.1	23.9	25.1		
	S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7		
	ΔT	25.11	23.29	19.89	16.4	25.06	23.24	19.84	16.3	25.31	23.49	20.09	16.6	25.04	23.22	19.82	16.3	24.79	22.97	19.58	16.1	25.93	24.11	20.72	17.2	25.93	24.11	20.72	17.2		
	kW	1.55	1.55	1.55	1.6	1.74	1.74	1.73	1.7	1.95	1.94	1.94	2.0	2.17	2.17	2.17	2.2	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7	2.72	2.72	2.71	2.7		
	Amps	5.77	5.77	5.75	5.8	6.58	6.58	6.56	6.6	7.49	7.48	7.47	7.5	8.47	8.46	8.45	8.5	9.56	9.56	9.54	9.6	10.85	10.84	10.83	10.9	10.85	10.84	10.83	10.9		
	Hi PR	253	254	256	260.3	292	293	295	299.3	333	334	336	340.1	377	378	380	384.0	424	425	427	431.4	475	476	478	482.0	475	476	478	482.0		
	Lo PR	128	129	132	137.7	135	137	140	145.1	142	143	146	151.6	147	149	152	157.1	153	154	157	162.5	159	161	164	169.3	159	161	164	169.3		
	85	MBh	26.9	27.2	28.0	29.2	26.6	27.0	27.8	29.0	25.9	26.3	27.1	28.3	24.8	25.1	25.9	27.1	23.3	23.7	24.5	25.7	22.0	22.4	23.1	24.3	22.0	22.4	23.1	24.3	
		S/T	1.00	0.87	0.73	0.6	1.00	0.88	0.74	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.7	
		ΔT	31.55	29.73	26.33	22.8	31.50	29.68	26.28	22.8	31.76	29.94	26.54	23.0	31.48	29.66	26.26	22.7	31.24	29.42	26.02	22.5	32.38	30.56	27.16	13.7	32.38	30.56	27.16	13.7	
		kW	1.53	1.53	1.52	1.5	1.72	1.71	1.71	1.7	1.92	1.92	1.92	1.9	2.15	2.15	2.14	2.2	2.40	2.40	2.40	2.4	2.70	2.69	2.69	3.8	2.70	2.69	2.69	3.8	
		Amps	5.68	5.67	5.66	5.7	6.49	6.48	6.47	6.5	7.39	7.39	7.37	7.4	8.37	8.37	8.35	8.4	9.47	9.46	9.45	9.5	10.75	10.74	10.73	15.0	10.75	10.74	10.73	15.0	
Hi PR		248	249	251	255.4	287	288	290	294.4	328	329	331	335.2	372	373	375	379.1	419	420	422	426.5	470	471	473	483.3	470	471	473	483.3		
Lo PR		124	126	129	133.8	131	133	136	141.3	138	139	143	147.8	143	145	148	153.2	149	150	153	158.6	156	157	160	175.0	156	157	160	175.0		
MBh		27.3	27.6	28.4	29.6	27.0	27.4	28.2	29.4	26.4	26.7	27.5	28.7	25.2	25.5	26.3	27.5	23.7	24.1	24.9	26.1	22.4	22.8	23.6	25.0	22.4	22.8	23.6	25.0		
S/T		1.00	0.95	0.81	0.7	1.00	0.95	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8		
ΔT		30.19	28.37	24.97	21.4	30.14	28.32	24.92	21.4	30.39	28.57	25.17	21.7	30.12	28.30	24.90	21.4	29.87	28.05	24.66	21.1	31.01	29.19	25.80	13.0	31.01	29.19	25.80	13.0		
kW		1.54	1.54	1.54	1.6	1.73	1.73	1.72	1.7	1.94	1.93	1.93	1.9	2.16	2.16	2.16	2.2	2.41	2.41	2.41	2.4	2.71	2.71	2.70	3.8	2.71	2.71	2.70	3.8		
Amps		5.73	5.73	5.71	5.8	6.54	6.54	6.52	6.6	7.45	7.44	7.43	7.5	8.43	8.42	8.41	8.5	9.52	9.51	9.50	9.6	10.80	10.80	10.78	15.1	10.80	10.80	10.78	15.1		
Hi PR	251	252	254	258.0	290	291	293	296.9	331	332	333	337.8	375	376	377	381.7	422	423	425	429.1	473	474	475	485.5	473	474	475	485.5			
Lo PR	126	128	131	136.0	134	135	138	143.4	140	142	145	149.9	146	147	150	155.4	151	153	156	160.8	158	159	162	176.9	158	159	162	176.9			
1000	MBh	28.0	28.4	29.2	30.4	27.8	28.2	29.0	30.2	27.1	27.5	28.3	29.5	25.9	26.3	27.1	28.3	24.5	24.8	25.6	26.8	23.2	23.5	24.3	25.7	23.2	23.5	24.3	25.7		
	S/T	1.00	0.99	0.85	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8		
	ΔT	28.68	26.86	23.46	19.9	28.63	26.81	23.41	19.9	28.89	27.07	23.67	20.1	28.61	26.79	23.39	19.9	28.37	26.55	23.15	19.6	29.51	27.69	24.29	12.5	29.51	27.69	24.29	12.5		
	kW	1.55	1.55	1.55	1.6	1.74	1.74	1.74	1.8	1.95	1.95	1.94	2.0	2.17	2.17	2.17	2.2	2.43	2.42	2.42	2.4	2.72	2.72	2.72	3.8	2.72	2.72	2.72	3.8		
	Amps	5.79	5.78	5.77	5.8	6.60	6.59	6.58	6.6	7.50	7.50	7.48	7.5	8.48	8.48	8.46	8.5	9.58	9.57	9.56	9.6	10.86	10.85	10.84	15.1	10.86	10.85	1			

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ± 2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat

EXPANDED COOLING DATA — GPHM54231 (HIGH STAGE)

		OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		ENTERING INDOOR WET BULB TEMPERATURE																																															
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
70	1000	MBh	42.4	43.0	44.3	-	42.0	42.6	43.9	-	40.9	41.5	42.8	-	39.0	39.6	40.8	-	36.6	37.2	38.5	-	34.5	35.1	36.4	-																							
		S/T	0.51	0.44	0.31	-	0.51	0.44	0.32	-	0.54	0.47	0.34	-	0.55	0.48	0.36	-	0.58	0.50	0.38	-	0.62	0.55	0.43	-																							
		ΔT	20.42	18.62	15.26	-	20.38	18.57	15.21	-	20.63	18.83	15.47	-	20.36	18.56	15.19	-	20.12	18.32	14.95	-	21.24	19.44	16.08	-																							
		kW	2.78	2.78	2.77	-	3.14	3.13	3.13	-	3.54	3.53	3.53	-	3.97	3.97	3.96	-	4.45	4.45	4.44	-	5.02	5.02	5.01	-																							
	Amps	10.60	10.59	10.56	-	12.16	12.15	12.12	-	13.90	13.89	13.86	-	15.78	15.77	15.74	-	17.88	17.87	17.84	-	20.34	20.33	20.31	-																								
	Hi PR	258	259	261	-	299	300	302	-	342	343	345	-	388	390	391	-	438	439	441	-	492	493	495	-																								
	Lo PR	113	114	117	-	120	121	124	-	126	127	130	-	131	133	135	-	136	138	141	-	143	144	147	-																								
	1275	MBh	43.3	43.9	45.2	-	42.9	43.5	44.8	-	41.8	42.4	43.7	-	39.9	40.5	41.8	-	37.5	38.1	39.4	-	35.4	36.0	37.3	-																							
		S/T	0.62	0.55	0.42	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	1.00	0.67	0.54	-																							
		ΔT	18.38	16.58	13.22	-	18.33	16.53	13.17	-	18.58	16.78	13.42	-	18.31	16.51	13.15	-	18.07	16.27	12.91	-	19.20	17.40	14.04	-																							
kW		2.81	2.81	2.80	-	3.17	3.17	3.16	-	3.57	3.57	3.56	-	4.00	4.00	4.00	-	4.49	4.48	4.48	-	5.05	5.05	5.05	-																								
Amps		10.75	10.74	10.72	-	12.31	12.30	12.27	-	14.05	14.04	14.01	-	15.93	15.92	15.89	-	18.03	18.02	17.99	-	20.50	20.48	20.46	-																								
Hi PR		262	263	265	-	303	304	306	-	346	347	349	-	392	394	395	-	442	443	445	-	496	497	499	-																								
1500	Lo PR	116	117	120	-	123	124	127	-	129	130	133	-	134	135	138	-	139	140	143	-	145	147	150	-																								
	MBh	44.3	44.9	46.2	-	43.9	44.5	45.8	-	42.8	43.4	44.7	-	40.9	41.5	42.7	-	38.5	39.1	40.4	-	36.4	37.0	38.3	-																								
	S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	0.73	0.66	0.53	-	1.00	0.71	0.58	-																								
	ΔT	17.12	15.32	11.96	-	17.07	15.27	11.91	-	17.32	15.52	12.16	-	17.05	15.25	11.89	-	16.81	15.01	11.65	-	17.94	16.14	12.78	-																								
	kW	2.84	2.83	2.83	-	3.19	3.19	3.18	-	3.59	3.59	3.58	-	4.03	4.02	4.02	-	4.51	4.51	4.50	-	5.08	5.07	5.07	-																								
	Amps	10.85	10.84	10.81	-	12.40	12.39	12.37	-	14.14	14.13	14.10	-	16.02	16.01	15.98	-	18.12	18.11	18.09	-	20.59	20.58	20.55	-																								
	Hi PR	265	266	268	-	306	307	309	-	349	350	352	-	395	397	398	-	445	446	448	-	499	500	502	-																								
	Lo PR	119	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	149	152	-																								

75	MBh	42.4	43.0	44.3	46.2	42.0	42.6	43.9	45.9	40.9	41.5	42.8	44.7	39.0	39.6	40.9	42.8	36.6	37.2	38.5	40.5	34.5	35.1	36.4	38.3
	S/T	0.63	0.56	0.43	0.3	0.63	0.56	0.44	0.3	0.66	0.59	0.46	0.3	0.68	0.60	0.48	0.3	1.00	0.62	0.50	0.4	1.00	0.67	0.55	0.4
	ΔT	24.38	22.58	19.22	15.7	24.33	22.53	19.17	15.7	24.59	22.79	19.42	15.9	24.32	22.52	19.15	15.7	24.07	22.27	18.91	15.4	25.20	23.40	20.04	16.6
	kw	2.78	2.77	2.77	2.8	3.13	3.13	3.13	3.2	3.53	3.53	3.53	3.6	3.97	3.96	3.96	4.0	4.45	4.45	4.44	4.5	5.02	5.01	5.01	5.0
	Amps	10.59	10.58	10.55	10.7	12.15	12.14	12.11	12.2	13.89	13.88	13.85	14.0	15.77	15.76	15.73	15.8	17.87	17.86	17.83	17.9	20.33	20.32	20.30	20.4
	Hi PR	258	260	261	265.9	299	301	302	306.9	342	344	345	349.9	389	390	392	396.2	439	440	442	446.1	492	493	495	499.3
	Lo PR	113	114	117	122.2	120	121	124	129.1	126	127	130	135.2	131	133	136	140.4	136	138	141	145.4	143	144	147	151.7
	MBh	43.3	43.9	45.2	47.1	42.9	43.5	44.8	46.8	41.8	42.4	43.7	45.6	39.9	40.5	41.8	43.7	37.6	38.2	39.4	41.4	35.4	36.0	37.3	39.2
	S/T	0.74	0.67	0.55	0.4	0.75	0.68	0.55	0.4	0.77	0.70	0.57	0.4	1.00	0.72	0.59	0.5	1.00	0.74	0.61	0.5	1.00	0.79	0.66	0.5
	ΔT	22.34	20.54	17.18	13.7	22.29	20.49	17.13	13.6	22.54	20.74	17.38	13.9	22.27	20.47	17.11	13.6	22.03	20.23	16.87	13.4	23.16	21.36	18.00	14.5
1500	kw	2.81	2.81	2.80	2.8	3.17	3.17	3.16	3.2	3.57	3.57	3.56	3.6	4.00	4.00	3.99	4.0	4.48	4.48	4.48	4.5	5.05	5.05	5.04	5.1
	Amps	10.74	10.73	10.71	10.8	12.30	12.29	12.26	12.4	14.04	14.03	14.00	14.1	15.92	15.91	15.88	16.0	18.02	18.01	17.98	18.1	20.49	20.47	20.45	20.6
	Hi PR	262	264	265	269.9	303	305	306	310.9	346	348	349	353.9	393	394	396	400.1	443	444	445	450.0	496	497	499	503.3
	Lo PR	116	117	120	125.0	123	124	127	132.0	129	130	133	138.1	134	135	138	143.2	139	140	143	148.3	145	147	150	154.6
	MBh	44.3	44.9	46.2	48.1	43.9	44.5	45.8	47.8	42.8	43.4	44.7	46.6	40.9	41.5	42.8	44.7	38.5	39.1	40.4	42.4	36.4	37.0	38.3	40.2
	S/T	0.78	0.71	0.58	0.5	0.79	0.72	0.59	0.5	0.81	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.83	0.70	0.6
	ΔT	21.08	19.28	15.92	12.4	21.03	19.23	15.87	12.4	21.28	19.48	16.12	12.6	21.01	19.21	15.85	12.4	20.77	18.97	15.61	12.1	21.90	20.10	16.74	13.3
	kw	2.83	2.83	2.82	2.9	3.19	3.19	3.18	3.2	3.59	3.59	3.58	3.6	4.02	4.02	4.01	4.0	4.51	4.50	4.50	4.5	5.07	5.07	5.06	5.1
	Amps	10.84	10.83	10.80	10.9	12.39	12.38	12.36	12.5	14.13	14.12	14.09	14.2	16.01	16.00	15.97	16.1	18.11	18.10	18.08	18.2	20.58	20.57	20.54	20.7
	Hi PR	265	267	268	272.9	306	308	309	313.9	349	351	352	356.9	396	397	399	403.2	446	447	449	453.1	499	500	502	506.3
	Lo PR	119	120	123	127.7	126	127	130	134.7	132	133	136	140.8	137	138	141	145.9	142	143	146	151.0	148	150	152	157.3

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power

Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	MBh	42.6	43.2	44.5	46.5	42.2	42.8	44.1	46.1	41.1	41.7	43.0	45.0	39.2	39.8	41.1	43.0	36.9	37.5	38.7	40.7	34.7	35.3	36.6	38.5	34.7	35.3	36.6	38.5	34.7	35.3	36.6	38.5				
	S/T	0.75	0.67	0.55	0.4	0.75	0.68	0.55	0.4	1.00	0.70	0.58	0.4	1.00	0.72	0.59	0.5	1.00	0.74	0.62	0.5	1.00	0.79	0.66	0.5	1.00	0.79	0.66	0.5	1.00	0.79	0.66	0.5				
	ΔT	28.37	26.57	23.21	19.7	28.32	26.52	23.16	19.7	28.57	26.77	23.41	19.9	28.30	26.50	23.14	19.7	28.06	26.26	22.90	19.4	29.19	27.39	24.03	20.5	29.19	27.39	24.03	20.5	29.19	27.39	24.03	20.5				
	kW	2.78	2.78	2.77	2.8	3.14	3.13	3.13	3.2	3.54	3.53	3.53	3.6	3.97	3.97	3.96	4.0	4.45	4.45	4.44	4.5	5.02	5.02	5.01	5.0	5.02	5.02	5.01	5.0	5.02	5.02	5.01	5.0				
	Amps	10.60	10.59	10.56	10.7	12.16	12.15	12.12	12.2	13.90	13.88	13.86	14.0	15.78	15.76	15.74	15.9	17.88	17.87	17.84	18.0	20.34	20.33	20.30	20.4	20.34	20.33	20.30	20.4	20.34	20.33	20.30	20.4				
	Hi PR	259	260	262	266.4	300	301	303	307.4	343	344	346	350.4	389	390	392	396.7	439	440	442	446.5	492	493	495	499.8	492	493	495	499.8	492	493	495	499.8				
	Lo PR	114	115	118	122.7	120	122	125	129.7	127	128	131	135.7	132	133	136	140.9	137	138	141	145.9	143	144	147	152.2	143	144	147	152.2	143	144	147	152.2				
1275	MBh	43.5	44.1	45.4	47.4	43.2	43.8	45.0	47.0	42.0	42.6	43.9	45.9	40.1	40.7	42.0	43.9	37.8	38.4	39.7	41.6	35.6	36.2	37.5	39.5	35.6	36.2	37.5	39.5	35.6	36.2	37.5	39.5				
	S/T	0.86	0.79	0.66	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.90	0.78	0.6	1.00	0.90	0.78	0.6	1.00	0.90	0.78	0.6				
	ΔT	26.32	24.52	21.16	17.7	26.27	24.47	21.11	17.6	26.53	24.73	21.37	17.9	26.26	24.46	21.09	17.6	26.02	24.22	20.85	17.4	27.14	25.34	21.98	18.5	27.14	25.34	21.98	18.5	27.14	25.34	21.98	18.5				
	kW	2.81	2.81	2.80	2.8	3.17	3.17	3.16	3.2	3.57	3.57	3.56	3.6	4.00	4.00	3.99	4.0	4.49	4.48	4.48	4.5	5.05	5.05	5.04	5.1	5.05	5.05	5.04	5.1	5.05	5.05	5.04	5.1				
	Amps	10.75	10.74	10.71	10.8	12.31	12.30	12.27	12.4	14.05	14.04	14.01	14.1	15.93	15.92	15.89	16.0	18.03	18.02	17.99	18.1	20.49	20.48	20.46	20.6	20.49	20.48	20.46	20.6	20.49	20.48	20.46	20.6				
	Hi PR	263	264	266	270.3	304	305	307	311.4	347	348	350	354.3	393	394	396	400.6	443	444	446	450.5	496	497	499	503.7	496	497	499	503.7	496	497	499	503.7				
	Lo PR	116	118	121	125.6	123	125	128	132.5	129	131	134	138.6	135	136	139	143.7	140	141	144	148.8	146	147	150	155.1	146	147	150	155.1	146	147	150	155.1				
1500	MBh	44.5	45.1	46.4	48.4	44.1	44.7	46.0	48.0	43.0	43.6	44.9	46.9	41.1	41.7	43.0	44.9	38.8	39.4	40.6	42.6	36.6	37.2	38.5	40.5	36.6	37.2	38.5	40.5	36.6	37.2	38.5	40.5				
	S/T	0.90	0.83	0.70	0.6	1.00	0.83	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.82	0.7				
	ΔT	25.06	23.26	19.90	16.4	25.02	23.21	19.85	16.4	25.27	23.47	20.11	16.6	25.00	23.20	19.83	16.4	24.76	22.96	19.59	16.1	25.88	24.08	20.72	17.2	25.88	24.08	20.72	17.2	25.88	24.08	20.72	17.2				
	kW	2.83	2.83	2.83	2.9	3.19	3.19	3.18	3.2	3.59	3.59	3.58	3.6	4.02	4.02	4.02	4.0	4.51	4.51	4.50	4.5	5.08	5.07	5.07	5.1	5.08	5.07	5.07	5.1	5.08	5.07	5.07	5.1				
	Amps	10.85	10.83	10.81	10.9	12.40	12.39	12.36	12.5	14.14	14.13	14.10	14.2	16.02	16.01	15.98	16.1	18.12	18.11	18.08	18.2	20.59	20.58	20.55	20.7	20.59	20.58	20.55	20.7	20.59	20.58	20.55	20.7				
	Hi PR	266	267	269	273.4	307	308	310	314.4	350	351	353	357.4	396	397	399	403.6	446	447	449	453.5	499	500	502	506.8	499	500	502	506.8	499	500	502	506.8				
	Lo PR	119	120	123	128.2	126	127	130	135.2	132	134	136	141.3	137	139	142	146.4	142	144	147	151.5	149	150	153	157.8	149	150	153	157.8	149	150	153	157.8				

85	MBh	43.3	43.9	45.2	47.2	43.0	43.6	44.8	46.8	41.8	42.5	43.7	45.7	39.9	40.5	41.8	43.8	37.6	38.2	39.5	41.4	35.4	36.0	37.3	39.3	35.4	36.0	37.3	39.3	35.4	36.0	37.3	39.3	35.4	36.0	37.3	39.3
	S/T	1.00	0.77	0.64	0.5	1.00	0.77	0.65	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.6	1.00	0.87	0.76	0.6	1.00	0.87	0.76	0.6	1.00	0.87	0.76	0.6	1.00	0.87	0.76	0.6
	ΔT	31.90	30.10	26.74	23.3	31.85	30.05	26.69	23.2	32.11	30.31	26.95	23.5	31.84	30.04	26.67	23.2	31.60	29.79	26.43	23.0	32.72	30.92	27.56	24.1	32.72	30.92	27.56	24.1	32.72	30.92	27.56	24.1	32.72	30.92	27.56	24.1
	kW	2.79	2.78	2.78	2.8	3.14	3.14	3.13	3.2	3.54	3.54	3.53	3.6	3.98	3.97	3.97	4.0	4.46	4.46	4.45	4.5	5.03	5.02	5.02	5.0	5.03	5.02	5.02	5.0	5.03	5.02	5.02	5.0	5.03	5.02	5.02	5.0
	Amps	10.63	10.62	10.59	10.7	12.19	12.18	12.15	12.3	13.93	13.91	13.89	14.0	15.81	15.79	15.77	15.9	17.91	17.90	17.87	18.0	20.37	20.36	20.33	20.5	20.37	20.36	20.33	20.5	20.37	20.36	20.33	20.5	20.37	20.36	20.33	20.5
	Hi PR	260	261	263	267.6	301	302	304	308.6	344	345	347	351.6	390	392	393	397.9	440	441	443	447.8	494	495	496	501.0	494	495	496	501.0	494	495	496	501.0	494	495	496	501.0
	Lo PR	115	117	120	124.4	122	124	127	131.4	128	130	133	137.4	133	135	138	142.6	138	140	143	147.6	145	146	149	154.0	145	146	149	154.0	145	146	149	154.0	145	146	149	154.0
	MBh	44.3	44.9	46.1	48.1	43.9	44.5	45.8	47.7	42.8	43.4	44.6	46.6	40.8	41.4	42.7	44.7	38.5	39.1	40.4	42.3	36.4	37.0	38.2	40.2	36.4	37.0	38.2	40.2	36.4	37.0	38.2	40.2	36.4	37.0	38.2	40.2
	S/T	1.00	0.88	0.76	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.79	0.7	1.00	0.93	0.80	0.7	1.00	0.95	0.83	0.7	1.00	0.98	0.87	0.7	1.00	0.98	0.87	0.7	1.00	0.98	0.87	0.7	1.00	0.98	0.87	0.7
	ΔT	29.86	28.06	24.70	21.2	29.81	28.01	24.65	21.2	30.06	28.26	24.90	21.4	29.79	27.99	24.63	21.1	29.55	27.75	24.39	20.9	30.68	28.88	25.52	22.0	30.68	28.88	25.52	22.0	30.68	28.88	25.52	22.0	30.68	28.88	25.52	22.0
	kW	2.82	2.82	2.81	2.8	3.18	3.18	3.17	3.2	3.58	3.58	3.57	3.6	4.01	4.01	4.00	4.0	4.49	4.49	4.48	4.5	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1
	Amps	10.78	10.77	10.74	10.9	12.34	12.33	12.30	12.4	14.08	14.07	14.04	14.2	15.96	15.95	15.92	16.0	18.06	18.05	18.02	18.1	20.52	20.51	20.49	20.6	20.52	20.51	20.49	20.6	20.52	20.51	20.49	20.6	20.52	20.51	20.49	20.6
	Hi PR	264	265	267	271.6	305	306	308	312.6	348	349	351	355.6	394	395	397	401.8	444	445	447	451.7	497	499	500	505.0	497	499	500	505.0	497	499	500	505.0	497	499	500	505.0
	Lo PR	118	119	122	127.3	125	126	129	134.2	131	133	135	140.3	136	138	141	145.4	141	143	146	150.5	148	149	152	156.8	148	149	152	156.8	148	149	152	156.8	148	149	152	156.8

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GPHM54231 (LOW STAGE)

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	800	MBh	30.5	30.9	31.9	-	30.2	30.7	31.6	-	29.4	29.9	30.8	-	28.1	28.5	29.4	-	26.4	26.8	27.7	-	24.8	25.3	26.2	-
		S/T	0.53	0.46	0.33	-	0.54	0.47	0.34	-	0.56	0.49	0.36	-	0.58	0.51	0.38	-	0.60	0.53	0.40	-	1.00	0.58	0.45	-
		ΔT	19.54	17.80	14.56	-	19.49	17.75	14.51	-	19.73	18.00	14.75	-	19.47	17.73	14.49	-	19.24	17.50	14.26	-	20.33	18.59	15.35	-
		kW	1.75	1.75	1.74	-	1.97	1.97	1.97	-	2.23	2.22	2.22	-	2.50	2.50	2.49	-	2.80	2.80	2.80	-	3.16	3.16	3.15	-
		Amps	6.68	6.67	6.65	-	7.66	7.65	7.63	-	8.75	8.74	8.73	-	9.93	9.93	9.91	-	11.25	11.25	11.23	-	12.81	12.80	12.78	-
	Hi PR	247	248	250	-	286	287	289	-	327	329	330	-	372	373	374	-	419	420	422	-	470	471	473	-	
	Lo PR	116	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	142	145	-	147	148	151	-	
	1000	MBh	31.1	31.6	32.5	-	30.9	31.3	32.2	-	30.0	30.5	31.4	-	28.7	29.1	30.0	-	27.0	27.4	28.3	-	25.4	25.9	26.8	-
		S/T	0.64	0.57	0.44	-	0.65	0.57	0.44	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.69	0.56	-
		ΔT	17.74	16.00	12.76	-	17.69	15.95	12.71	-	17.93	16.20	12.95	-	17.67	15.93	12.69	-	17.44	15.70	12.46	-	18.53	16.79	13.55	-
kW		1.77	1.77	1.76	-	2.00	1.99	1.99	-	2.25	2.24	2.24	-	2.52	2.52	2.51	-	2.82	2.82	2.82	-	3.18	3.18	3.17	-	
Amps		6.76	6.76	6.74	-	7.74	7.74	7.72	-	8.84	8.83	8.81	-	10.02	10.01	10.00	-	11.34	11.33	11.32	-	12.89	12.88	12.87	-	
Hi PR	251	252	253	-	290	291	293	-	331	332	334	-	375	376	378	-	423	424	426	-	474	475	477	-		
Lo PR	119	121	124	-	126	128	131	-	132	134	137	-	138	139	142	-	143	144	147	-	149	151	154	-		
1200	MBh	31.9	32.4	33.3	-	31.7	32.1	33.0	-	30.9	31.3	32.2	-	29.5	29.9	30.8	-	27.8	28.2	29.2	-	26.3	26.7	27.6	-	
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	0.73	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	
	ΔT	16.37	14.64	11.39	-	16.33	14.59	11.35	-	16.57	14.83	11.59	-	16.31	14.57	11.33	-	16.08	14.34	11.10	-	17.16	15.43	12.18	-	
	kW	1.78	1.78	1.78	-	2.01	2.01	2.00	-	2.26	2.26	2.26	-	2.53	2.53	2.53	-	2.84	2.84	2.83	-	3.19	3.19	3.19	-	
	Amps	6.83	6.82	6.81	-	7.81	7.80	7.79	-	8.90	8.90	8.88	-	10.09	10.08	10.06	-	11.41	11.40	11.38	-	12.96	12.95	12.93	-	
	Hi PR	254	255	257	-	293	294	296	-	334	335	337	-	378	380	381	-	426	427	429	-	477	478	480	-	
Lo PR	122	124	127	-	129	131	134	-	136	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-		

75	MBh	30.5	31.0	31.9	33.3	30.3	30.7	31.6	33.0	29.5	29.9	30.8	32.2	28.1	28.5	29.4	30.8	26.4	26.8	27.7	29.1	24.8	25.3	26.2	27.6
	S/T	0.66	0.58	0.45	0.3	0.66	0.59	0.46	0.3	0.69	0.61	0.48	0.3	1.00	0.63	0.50	0.4	1.00	0.65	0.52	0.4	1.00	0.70	0.57	0.4
	ΔT	23.36	21.62	18.38	15.0	23.31	21.57	18.33	15.0	23.55	21.82	18.57	15.2	23.29	21.55	18.31	14.9	23.06	21.32	18.08	14.7	24.15	22.41	19.17	15.8
	kW	1.75	1.75	1.74	1.8	1.97	1.97	1.97	2.0	2.22	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.80	2.8	3.16	3.16	3.15	3.2
	Amps	6.67	6.66	6.65	6.7	7.65	7.64	7.63	7.7	8.74	8.74	8.72	8.8	9.93	9.92	9.90	10.0	11.25	11.24	11.22	11.3	12.80	12.79	12.77	12.8
	Hi PR	247	248	250	254.5	287	288	289	293.7	328	329	330	334.8	372	373	375	379.0	420	421	422	426.7	470	472	473	477.6
75	Lo PR	116	118	121	125.8	124	125	128	133.0	130	131	134	139.2	135	137	140	144.5	140	142	145	149.7	147	148	151	156.2
	MBh	31.1	31.6	32.5	33.9	30.9	31.3	32.2	33.6	30.1	30.5	31.4	32.8	28.7	29.1	30.0	31.4	27.0	27.4	28.4	29.8	25.5	25.9	26.8	28.2
	S/T	0.76	0.69	0.56	0.4	0.77	0.70	0.57	0.4	0.79	0.72	0.59	0.5	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.81	0.68	0.5
	ΔT	21.56	19.82	16.58	13.2	21.51	19.77	16.53	13.2	21.75	20.02	16.77	13.4	21.49	19.75	16.51	13.1	21.26	19.52	16.28	12.9	22.35	20.61	17.37	14.0
	kW	1.77	1.77	1.76	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.82	2.8	3.18	3.18	3.17	3.2
	Amps	6.76	6.75	6.73	6.8	7.74	7.73	7.71	7.8	8.83	8.82	8.81	8.9	10.01	10.01	9.99	10.1	11.34	11.33	11.31	11.4	12.89	12.88	12.86	12.9
75	Hi PR	251	252	254	258.0	290	291	293	297.2	331	332	334	338.3	375	376	378	382.5	423	424	426	430.2	474	475	477	481.1
	Lo PR	119	121	124	128.5	126	128	131	135.7	133	134	137	141.9	138	139	142	147.2	143	144	147	152.4	149	151	154	158.9
	MBh	32.0	32.4	33.3	34.7	31.7	32.1	33.0	34.4	30.9	31.3	32.2	33.6	29.5	29.9	30.9	32.3	27.8	28.3	29.2	30.6	26.3	26.7	27.6	29.0
	S/T	0.81	0.73	0.60	0.5	0.81	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	0.85	0.72	0.6
	ΔT	20.19	18.46	15.21	11.9	20.15	18.41	15.17	11.8	20.39	18.65	15.41	12.0	20.13	18.39	15.15	11.8	19.90	18.16	14.92	11.6	20.98	19.25	16.00	12.6
	kW	1.78	1.78	1.78	1.8	2.01	2.01	2.00	2.0	2.26	2.26	2.25	2.3	2.53	2.53	2.53	2.5	2.84	2.83	2.83	2.8	3.19	3.19	3.19	3.2
75	Amps	6.82	6.82	6.80	6.9	7.80	7.80	7.78	7.9	8.90	8.89	8.87	8.9	10.08	10.07	10.05	10.1	11.40	11.39	11.38	11.5	12.95	12.94	12.93	13.0
	Hi PR	254	255	257	261.3	293	294	296	300.5	334	336	337	341.6	379	380	381	385.8	426	427	429	433.5	477	478	480	484.4
	Lo PR	122	124	127	131.7	129	131	134	138.9	136	137	140	145.1	141	142	145	150.4	146	148	151	155.6	153	154	157	162.1

Shaded area reflects ACCA (TVA) conditions.

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.
Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHR1 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.kW = Total system power
Amps = outdoor unit amps (comp + fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	800	MBh	30.7	31.1	32.0	33.4	30.4	30.8	31.8	33.2	29.6	30.0	31.0	32.4	28.2	28.7	29.6	31.0	26.5	27.0	27.9	29.3	25.0	25.4	26.4	27.8											
		S/T	0.78	0.70	0.57	0.4	1.00	0.71	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	1.00	0.69	0.6											
		ΔT	27.20	25.47	22.22	18.9	27.16	25.42	22.17	18.8	27.40	25.66	22.42	19.1	27.14	25.40	22.16	18.8	26.91	25.17	21.92	18.6	27.99	26.26	23.01	19.7											
		kW	1.75	1.75	1.74	1.8	1.97	1.97	1.97	2.0	2.23	2.22	2.22	2.2	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.80	2.8	3.16	3.16	3.15	3.2										
		Amps	6.68	6.67	6.65	6.7	7.66	7.65	7.63	7.7	8.75	8.74	8.72	8.8	9.93	9.92	9.91	10.0	11.25	11.25	11.23	11.3	12.80	12.80	12.78	12.9											
	Hi PR	248	249	251	255.0	287	288	290	294.2	328	329	331	335.3	372	373	375	379.5	420	421	423	427.2	471	472	474	478.1												
	Lo PR	117	118	121	126.4	124	126	128	133.5	130	132	135	139.7	136	137	140	145.0	141	142	145	150.2	147	149	152	156.7												
	1000	MBh	31.3	31.7	32.7	34.1	31.0	31.5	32.4	33.8	30.2	30.7	31.6	33.0	28.8	29.3	30.2	31.6	27.2	27.6	28.5	29.9	25.6	26.1	27.0	28.4											
		S/T	0.88	0.81	0.68	0.5	1.00	0.82	0.69	0.5	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.80	0.7											
		ΔT	25.40	23.67	20.42	17.1	25.36	23.62	20.37	17.0	25.60	23.86	20.62	17.3	25.34	23.60	20.36	17.0	25.11	23.37	20.12	16.8	26.19	24.46	21.21	17.9											
kW		1.77	1.77	1.76	1.8	1.99	1.99	1.99	2.0	2.25	2.24	2.24	2.3	2.52	2.52	2.52	2.5	2.82	2.82	2.82	2.8	3.18	3.18	3.17	3.2												
Amps		6.76	6.76	6.74	6.8	7.74	7.74	7.72	7.8	8.84	8.83	8.81	8.9	10.02	10.01	9.99	10.1	11.34	11.33	11.32	11.4	12.89	12.88	12.87	12.9												
1200	Hi PR	251	252	254	258.5	291	292	293	297.7	332	333	334	338.7	376	377	379	383.0	424	425	426	430.7	474	475	477	481.6												
	Lo PR	120	121	124	129.1	127	128	131	136.2	133	134	137	142.5	138	140	143	147.7	144	145	148	152.9	150	151	154	159.4												
	MBh	32.1	32.6	33.5	34.9	31.9	32.3	33.2	34.6	31.0	31.5	32.4	33.8	29.7	30.1	31.0	32.4	28.0	28.4	29.3	30.7	26.4	26.9	27.8	29.2												
	S/T	1.00	0.85	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.7												
	ΔT	24.04	22.30	19.06	15.7	23.99	22.26	19.01	15.7	24.24	22.50	19.26	15.9	23.97	22.24	18.99	15.6	23.74	22.01	18.76	15.4	24.83	23.09	19.85	16.5												
1200	kW	1.78	1.78	1.78	1.8	2.01	2.01	2.00	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.53	2.5	2.84	2.84	2.83	2.8	3.19	3.19	3.19	3.2												
	Amps	6.83	6.82	6.80	6.9	7.81	7.80	7.78	7.9	8.90	8.89	8.88	9.0	10.08	10.08	10.06	10.1	11.41	11.40	11.38	11.5	12.96	12.95	12.93	13.0												
	Hi PR	255	256	257	261.7	294	295	297	301.0	335	336	338	342.0	379	380	382	386.3	427	428	430	434.0	478	479	481	484.9												
	Lo PR	123	124	127	132.2	130	131	134	139.4	136	138	141	145.6	141	143	146	150.9	147	148	151	156.1	153	155	158	162.6												

85	800	MbH	31.2	31.6	32.6	34.0	30.9	31.4	32.3	33.7	30.1	30.6	31.5	32.9	28.7	29.2	30.1	31.5	27.1	27.5	28.4	29.8	25.5	26.0	26.9	28.3	
		S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.68	0.5	1.00	0.83	0.70	0.6	1.00	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.7
		ΔT	30.61	28.88	25.63	22.3	30.57	28.83	25.59	22.2	30.81	29.07	25.83	22.5	30.55	28.81	25.57	22.2	30.32	28.58	25.34	22.0	31.40	29.67	26.42	23.1	
		kW	1.75	1.75	1.75	1.8	1.98	1.98	1.97	2.0	2.23	2.23	2.22	2.2	2.2	2.50	2.50	2.50	2.5	2.81	2.80	2.80	2.8	3.16	3.16	3.16	3.2
		Amps	6.70	6.69	6.67	6.7	7.67	7.67	7.65	7.7	8.77	8.76	8.74	8.8	9.95	9.94	9.93	10.0	11.27	11.26	11.25	11.3	12.82	12.81	12.80	12.9	
	Hi PR	249	250	252	256.1	288	289	291	295.4	329	330	332	336.4	374	375	376	380.7	421	422	424	428.4	472	473	475	479.3		
	Lo PR	119	120	123	128.1	126	127	130	135.3	132	134	137	141.5	137	139	142	146.8	143	144	147	152.0	149	150	153	158.5		
	1000	MbH	31.8	32.3	33.2	34.6	31.5	32.0	32.9	34.3	30.7	31.2	32.1	33.5	29.4	29.8	30.7	32.1	27.7	28.1	29.0	30.4	26.1	26.6	27.5	28.9	
		S/T	1.00	0.91	0.78	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.8
		ΔT	28.81	27.08	23.83	20.5	28.77	27.03	23.78	20.4	29.01	27.27	24.03	20.7	28.75	27.01	23.77	20.4	28.52	26.78	23.53	20.2	29.60	27.87	24.62	21.3	
kW		1.77	1.77	1.77	1.8	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.52	2.52	2.52	2.5	2.83	2.82	2.82	2.8	3.18	3.18	3.18	3.2		
Amps		6.78	6.77	6.76	6.8	7.76	7.75	7.74	7.8	8.85	8.85	8.83	8.9	10.04	10.03	10.01	10.1	11.36	11.35	11.33	11.4	12.91	12.90	12.89	13.0		
Hi PR	252	254	255	259.6	292	293	295	298.8	333	334	336	339.9	377	378	380	384.2	425	426	428	431.8	476	477	478	482.7			
Lo PR	121	123	126	130.8	129	130	133	138.0	135	136	139	144.2	140	142	145	149.5	145	147	150	154.7	152	153	156	161.2			
1200	MbH	32.6	33.1	34.0	35.4	32.4	32.8	33.7	35.1	31.6	32.0	32.9	34.3	30.2	30.6	31.5	32.9	28.5	28.9	29.9	31.3	27.0	27.4	28.3	29.7		
	S/T	1.00	0.95	0.82	0.7	1.00	0.96	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.87	0.7	1.00	1.00	0.89	0.8	1.00	1.00	0.8		
	ΔT	27.45	25.71	22.47	19.1	27.40	25.67	22.42	19.1	27.65	25.91	22.67	19.3	27.39	25.65	22.40	19.0	27.15	25.42	22.17	18.8	28.24	26.50	23.26	19.9		
	kW	1.79	1.79	1.78	1.8	2.01	2.01	2.01	2.0	2.27	2.26	2.26	2.3	2.54	2.54	2.53	2.5	2.84	2.84	2.84	2.9	3.20	3.20	3.19	3.2		
	Amps	6.85	6.84	6.82	6.9	7.83	7.82	7.80	7.9	8.92	8.91	8.90	9.0	10.10	10.10	10.08	10.2	11.42	11.42	11.40	11.5	12.98	12.97	12.95	13.0		
Hi PR	256	257	259	262.9	295	296	298	302.1	336	337	339	343.2	380	381	383	387.4	428	429	431	435.1	479	480	482	486.0			
Lo PR	125	126	129	134.0	132	133	136	141.1	138	139	142	147.4	143	145	148	152.7	148	150	153	157.9	155	156	159	164.4			

DB: Entering Indoor Dry Bulb Temperature

Shaded area reflects AHRI conditions.

High and low pressures are measured at the liquid and suction access fittings.

Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	46.1	46.7	48.1	-	45.7	46.3	47.7	-	44.5	45.1	46.5	-	42.4	43.0	44.4	-	39.8	40.5	41.9	-	37.5	38.2	39.5	-
	S/T	0.57	0.50	0.36	-	0.58	0.50	0.37	-	0.61	0.53	0.39	-	0.62	0.55	0.41	-	1.00	0.57	0.44	-	1.00	0.62	0.49	-
	ΔT	19.02	17.30	14.10	-	18.97	17.26	14.06	-	19.21	17.50	14.30	-	18.95	17.24	14.04	-	18.72	17.01	13.81	-	19.80	18.08	14.88	-
	kW	3.07	3.07	3.06	-	3.44	3.44	3.43	-	3.86	3.86	3.85	-	4.31	4.30	4.30	-	4.81	4.81	4.80	-	5.40	5.40	5.39	-
	Amps	11.06	11.04	11.01	-	12.67	12.66	12.63	-	14.48	14.46	14.44	-	16.43	16.42	16.39	-	18.61	18.60	18.57	-	21.17	21.16	21.13	-
	Hi PR	265	266	268	-	307	308	310	-	351	352	354	-	398	399	401	-	449	450	452	-	503	505	506	-
	Lo PR	122	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-
	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-
	S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-
	ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-
1575	kW	3.10	3.10	3.09	-	3.47	3.47	3.46	-	3.89	3.88	3.88	-	4.34	4.33	4.33	-	4.84	4.83	4.83	-	5.43	5.42	5.42	-
	Amps	11.18	11.17	11.14	-	12.79	12.78	12.75	-	14.60	14.59	14.56	-	16.55	16.54	16.51	-	18.73	18.72	18.69	-	21.29	21.28	21.25	-
	Hi PR	268	269	271	-	310	311	313	-	354	355	357	-	401	402	404	-	452	453	455	-	507	508	510	-
	Lo PR	125	127	130	-	132	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	162	-
	MBh	48.2	48.8	50.2	-	47.8	48.4	49.8	-	46.6	47.2	48.6	-	44.5	45.1	46.5	-	41.9	42.6	44.0	-	39.6	40.3	41.7	-
	S/T	0.71	0.63	0.50	-	0.72	0.64	0.50	-	0.74	0.67	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-
	ΔT	16.12	14.41	11.21	-	16.07	14.36	11.16	-	16.32	14.60	11.40	-	16.06	14.34	11.14	-	15.83	14.11	10.91	-	16.90	15.19	11.99	-
	kW	3.13	3.12	3.12	-	3.50	3.49	3.49	-	3.91	3.91	3.90	-	4.36	4.36	4.35	-	4.86	4.86	4.85	-	5.45	5.45	5.44	-
	Amps	11.29	11.28	11.25	-	12.91	12.89	12.87	-	14.71	14.70	14.67	-	16.66	16.65	16.62	-	18.84	18.83	18.80	-	21.40	21.39	21.36	-
	Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	405	406	408	-	456	457	459	-	510	511	513	-
Lo PR	128	130	133	-	136	137	141	-	142	144	147	-	148	150	153	-	153	155	158	-	160	162	165	-	

75	MBh	46.1	46.8	48.1	50.3	45.7	46.3	47.7	49.8	44.5	45.1	46.5	48.6	42.4	43.1	44.4	46.6	39.9	40.5	41.9	44.0
	S/T	0.70	0.63	0.49	0.3	0.71	0.63	0.50	0.4	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4	1.00	0.70	0.56	0.4
	ΔT	22.79	21.07	17.87	14.6	22.74	21.03	17.83	14.5	22.98	21.27	18.07	14.7	22.72	21.01	17.81	14.5	22.49	20.78	17.58	14.3
	kW	3.07	3.07	3.06	3.1	3.44	3.44	3.43	3.5	3.86	3.85	3.85	3.9	4.31	4.30	4.30	4.3	4.81	4.80	4.80	4.8
	Amps	11.04	11.03	11.00	11.1	12.66	12.65	12.62	12.7	14.47	14.45	14.43	14.5	16.42	16.41	16.38	16.5	18.60	18.59	18.56	18.7
	Hi PR	265	266	268	272.7	307	308	310	314.6	351	352	354	358.6	398	399	401	405.9	449	450	452	456.9
	Lo PR	123	124	127	132.4	130	132	135	139.9	137	138	141	146.5	142	144	147	152.0	148	149	152	157.5
	MBh	46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8
	S/T	0.80	0.72	0.58	0.4	0.80	0.73	0.59	0.4	1.00	0.75	0.62	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5
	ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7
1575	kW	3.10	3.09	3.09	3.1	3.47	3.47	3.46	3.5	3.88	3.88	3.87	3.9	4.33	4.33	4.32	4.4	4.84	4.83	4.83	4.9
	Amps	11.17	11.15	11.13	11.3	12.78	12.77	12.74	12.9	14.59	14.58	14.55	14.7	16.54	16.53	16.50	16.6	18.72	18.71	18.68	18.8
	Hi PR	268	269	271	275.9	310	311	313	317.8	354	355	357	361.8	401	403	404	409.1	452	454	455	460.1
	Lo PR	125	127	130	134.9	133	134	137	142.4	139	141	144	149.0	145	146	149	154.5	150	152	155	160.0
	MBh	48.2	48.9	50.2	52.4	47.8	48.4	49.8	51.9	46.6	47.2	48.6	50.7	44.5	45.2	46.5	48.7	42.0	42.6	44.0	46.1
	S/T	0.84	0.76	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.70	0.6
	ΔT	19.89	18.18	14.98	11.7	19.84	18.13	14.93	11.6	20.09	18.37	15.17	11.9	19.83	18.11	14.91	11.6	19.60	17.88	14.68	11.4
	kW	3.12	3.12	3.11	3.1	3.49	3.49	3.49	3.5	3.91	3.91	3.90	3.9	4.36	4.36	4.35	4.4	4.86	4.86	4.85	4.9
	Amps	11.28	11.27	11.24	11.4	12.90	12.88	12.85	13.0	14.70	14.69	14.66	14.8	16.65	16.64	16.61	16.7	18.83	18.82	18.79	18.9
	Hi PR	272	273	275	279.5	314	315	317	321.5	358	359	361	365.4	405	406	408	412.7	456	457	459	463.7
	Lo PR	128	130	133	138.4	136	137	141	145.9	143	144	147	152.4	148	150	153	158.0	154	155	158	163.4

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																															
		65°F				75°F				85°F				95°F								105°F				115°F							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	MBh	46.3	47.0	48.4	50.5	45.9	46.6	48.0	50.1	44.7	45.4	46.8	48.9	42.6	43.3	44.7	46.8	40.1	40.8	42.1	44.2	37.8	38.4	39.8	41.9	37.8	38.4	39.8	41.9				
	S/T	1.00	0.75	0.62	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6	1.00	1.00	0.74	0.6				
	ΔT	26.58	24.87	21.67	18.4	26.54	24.82	21.62	18.3	26.78	25.06	21.86	18.5	26.52	24.80	21.60	18.3	26.29	24.58	21.37	18.1	27.36	25.65	22.45	19.1	27.36	25.65	22.45	19.1				
	kW	3.07	3.07	3.06	3.1	3.44	3.44	3.43	3.5	3.86	3.86	3.85	3.9	4.31	4.30	4.30	4.3	4.81	4.81	4.80	4.8	5.40	5.39	5.39	5.4	5.40	5.39	5.39	5.4				
	Amps	11.05	11.04	11.01	11.1	12.67	12.66	12.63	12.8	14.47	14.46	14.43	14.6	16.43	16.41	16.39	16.5	18.61	18.60	18.57	18.7	21.17	21.15	21.13	21.3	21.17	21.15	21.13	21.3				
	Hi PR	266	267	269	273.2	307	309	310	315.1	351	353	354	359.1	399	400	402	406.4	450	451	453	457.4	504	505	507	511.8	504	505	507	511.8				
1575	Lo PR	123	125	128	133.0	131	132	135	140.5	137	139	142	147.0	143	144	147	152.6	148	150	153	158.0	155	156	160	164.8	155	156	160	164.8				
	MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8				
	S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7				
	ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6	25.85	24.14	20.93	17.6				
	kW	3.10	3.10	3.09	3.1	3.47	3.47	3.46	3.5	3.89	3.88	3.88	3.9	4.34	4.33	4.33	4.4	4.84	4.83	4.83	4.9	5.43	5.42	5.42	5.4	5.43	5.42	5.42	5.4				
	Amps	11.18	11.16	11.14	11.3	12.79	12.78	12.75	12.9	14.60	14.58	14.56	14.7	16.55	16.54	16.51	16.6	18.73	18.72	18.69	18.8	21.29	21.28	21.25	21.4	21.29	21.28	21.25	21.4				
1900	Hi PR	269	270	272	276.4	311	312	314	318.3	355	356	358	362.3	402	403	405	409.6	453	454	456	460.6	507	509	510	515.0	507	509	510	515.0				
	Lo PR	126	127	130	135.5	133	135	138	143.0	140	141	144	149.5	145	147	150	155.1	151	152	155	160.5	157	159	162	167.3	157	159	162	167.3				
	MBh	48.4	49.1	50.5	52.6	48.0	48.7	50.1	52.2	46.8	47.5	48.9	51.0	44.7	45.4	46.8	48.9	42.2	42.9	44.2	46.4	39.9	40.5	41.9	44.0	39.9	40.5	41.9	44.0				
	S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7				
	ΔT	23.69	21.97	18.77	15.5	23.64	21.93	18.72	15.4	23.88	22.17	18.96	15.6	23.62	21.91	18.71	15.4	23.39	21.68	18.48	15.2	24.47	22.75	19.55	16.2	24.47	22.75	19.55	16.2				
	kW	3.13	3.12	3.12	3.1	3.50	3.49	3.49	3.5	3.91	3.91	3.90	3.9	4.36	4.36	4.35	4.4	4.86	4.86	4.85	4.9	5.45	5.45	5.44	5.5	5.45	5.45	5.44	5.5				
1900	Amps	11.29	11.27	11.25	11.4	12.90	12.89	12.86	13.0	14.71	14.70	14.67	14.8	16.66	16.65	16.62	16.7	18.84	18.83	18.80	18.9	21.40	21.39	21.36	21.5	21.40	21.39	21.36	21.5				
	Hi PR	272	274	275	280.0	314	315	317	322.0	358	359	361	365.9	406	407	409	413.2	457	458	460	464.2	511	512	514	518.7	511	512	514	518.7				
	Lo PR	129	131	134	138.9	137	138	141	146.4	143	145	148	153.0	149	150	153	158.5	154	156	159	164.0	161	162	166	170.8	161	162	166	170.8				

1300	MBh	47.1	47.8	49.2	51.3	46.7	47.4	48.7	50.9	45.5	46.2	47.5	49.7	43.4	44.1	45.5	47.6	40.9	41.5	42.9	45.0	38.6	39.2	40.6	28.0
	S/T	1.00	0.85	0.72	0.6	1.00	0.86	0.72	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	1.00	0.78
	ΔT	29.95	28.24	25.03	21.7	29.90	28.19	24.99	21.7	30.14	28.43	25.23	21.9	29.89	28.17	24.97	21.7	29.66	27.94	24.74	21.4	30.73	29.02	25.81	13.86
	kW	3.08	3.08	3.07	3.1	3.45	3.45	3.44	3.5	3.87	3.86	3.86	3.9	4.31	4.31	4.30	4.3	4.82	4.81	4.81	4.8	5.40	5.40	5.40	2.89
	Amps	11.08	11.07	11.04	11.2	12.70	12.69	12.66	12.8	14.50	14.49	14.46	14.6	16.46	16.44	16.42	16.5	18.64	18.63	18.60	18.7	21.20	21.19	21.16	11.60
	Hi PR	267	268	270	274.4	309	310	312	316.4	353	354	356	360.3	400	401	403	407.6	451	452	454	458.6	505	507	508	481
1575	Lo PR	125	126	130	134.8	132	134	137	142.3	139	140	144	148.9	145	146	149	154.4	150	151	155	159.9	157	158	161	176
	MBh	47.9	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.3	47.0	48.4	50.5	44.2	44.9	46.3	48.4	41.7	42.4	43.7	45.9	39.4	40.0	41.4	28.2
	S/T	1.00	0.95	0.81	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.80
	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	13.57
	kW	3.11	3.10	3.10	3.1	3.48	3.48	3.47	3.5	3.89	3.89	3.88	3.9	4.34	4.34	4.33	4.4	4.84	4.84	4.83	4.9	5.43	5.43	5.42	2.89
	Amps	11.21	11.19	11.17	11.3	12.82	12.81	12.78	12.9	14.63	14.61	14.59	14.7	16.58	16.57	16.54	16.7	18.76	18.75	18.72	18.8	21.32	21.31	21.28	11.62
1900	Hi PR	270	271	273	277.6	312	313	315	319.6	356	357	359	363.5	403	404	406	410.8	454	455	457	461.8	509	510	512	482
	Lo PR	127	129	132	137.3	135	136	140	144.8	141	143	146	151.4	147	149	152	156.9	152	154	157	162.4	159	161	164	177
	MBh	49.2	49.9	51.3	53.4	48.8	49.5	50.9	53.0	47.6	48.3	49.6	51.8	45.5	46.2	47.6	49.7	43.0	43.6	45.0	47.1	40.7	41.3	42.7	29.1
	S/T	1.00	0.99	0.85	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.80
	ΔT	27.05	25.34	22.14	18.8	27.01	25.29	22.09	18.8	27.25	25.53	22.33	19.0	26.99	25.27	22.07	18.8	26.76	25.05	21.84	18.5	27.83	26.12	22.92	12.65
	kW	3.13	3.13	3.12	3.2	3.50	3.50	3.49	3.5	3.92	3.92	3.91	3.9	4.37	4.37	4.36	4.4	4.87	4.87	4.86	4.9	5.46	5.46	5.45	2.90
1900	Amps	11.32	11.31	11.28	11.4	12.93	12.92	12.89	13.0	14.74	14.73	14.70	14.8	16.69	16.68	16.65	16.8	18.87	18.86	18.83	19.0	21.43	21.42	21.39	11.68
	Hi PR	274	275	277	281.3	316	317	319	323.2	360	361	363	367.2	407	408	410	414.5	458	459	461	465.5	512	513	515	486
	Lo PR	131	132	136	140.8	138	140	143	148.3	145	146	150	154.8	150	152	155	160.4	156	157	161	165.8	163	164	167	181

75	900	MBh	33.1	33.5	34.5	36.1	32.8	33.2	34.2	35.8	31.9	32.4	33.4	34.9	30.4	30.9	31.9	33.4	28.6	29.1	30.0	31.6	26.9	27.4	28.4	29.9
		S/T	0.70	0.62	0.49	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4	1.00	0.70	0.56	0.4	1.00	1.00	0.61	0.5
		ΔT	22.25	20.59	17.50	14.3	22.20	20.55	17.46	14.3	22.43	20.78	17.69	14.5	22.18	20.53	17.44	14.2	21.96	20.31	17.22	14.0	23.00	21.34	18.25	15.1
		kW	1.93	1.93	1.92	1.9	2.16	2.16	2.16	2.2	2.42	2.42	2.42	2.4	2.70	2.70	2.70	2.7	3.02	3.02	3.01	3.0	3.39	3.39	3.38	3.4
		Amps	6.93	6.93	6.91	7.0	7.95	7.94	7.92	8.0	9.09	9.08	9.06	9.1	10.31	10.31	10.29	10.4	11.69	11.68	11.66	11.7	13.30	13.29	13.27	13.3
		Hi PR	253	254	256	260.2	293	294	296	300.3	335	336	338	342.3	380	381	383	387.5	429	430	432	436.3	481	482	484	488.3
	Lo PR	126	127	130	135.8	133	135	138	143.5	140	142	145	150.2	146	147	151	155.9	151	153	156	161.5	158	160	163	168.5	
	1125	MBh	33.7	34.2	35.2	36.7	33.4	33.9	34.9	36.4	32.6	33.0	34.0	35.6	31.1	31.5	32.5	34.1	29.3	29.7	30.7	32.2	27.6	28.1	29.0	30.6
		S/T	0.82	0.74	0.60	0.5	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.73	0.6
		ΔT	20.53	18.88	15.79	12.6	20.48	18.83	15.74	12.5	20.72	19.06	15.97	12.8	20.47	18.81	15.72	12.5	20.25	18.59	15.50	12.3	21.28	19.63	16.54	13.3
		kW	1.95	1.95	1.94	2.0	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.5	2.73	2.72	2.72	2.7	3.04	3.04	3.04	3.1	3.41	3.41	3.41	3.4
		Amps	7.02	7.02	7.00	7.1	8.04	8.03	8.02	8.1	9.18	9.17	9.15	9.2	10.40	10.40	10.38	10.5	11.78	11.77	11.75	11.8	13.39	13.38	13.36	13.4
Hi PR		256	258	259	263.8	297	298	299	303.9	339	340	341	345.9	384	385	387	391.1	433	434	435	439.8	485	486	487	491.9	
Lo PR	129	130	133	138.7	136	138	141	146.4	143	145	148	153.1	149	150	153	158.9	154	156	159	164.5	161	163	166	171.5		
1400	MBh	34.9	35.3	36.3	37.8	34.6	35.0	36.0	37.6	33.7	34.2	35.2	36.7	32.2	32.7	33.7	35.2	30.4	30.8	31.8	33.4	28.7	29.2	30.2	31.7	
	S/T	0.86	0.79	0.65	0.5	1.00	0.79	0.65	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6	
	ΔT	18.97	17.32	14.23	11.0	18.93	17.27	14.18	11.0	19.16	17.51	14.42	11.2	18.91	17.26	14.17	11.0	18.69	17.04	13.95	10.7	19.73	18.07	14.98	11.8	
	kW	1.97	1.97	1.96	2.0	2.20	2.20	2.20	2.2	2.46	2.46	2.46	2.5	2.74	2.74	2.74	2.8	3.06	3.06	3.05	3.1	3.43	3.43	3.42	3.4	
	Amps	7.11	7.10	7.08	7.2	8.12	8.11	8.10	8.2	9.26	9.25	9.23	9.3	10.49	10.48	10.46	10.5	11.86	11.85	11.83	11.9	13.47	13.46	13.44	13.5	
	Hi PR	261	262	263	267.9	301	302	304	308.0	343	344	346	350.0	388	389	391	395.2	437	438	440	444.0	489	490	492	496.0	
Lo PR	133	134	138	143.0	141	142	145	150.7	147	149	152	157.4	153	155	158	163.2	159	160	163	168.7	166	167	170	175.8		

<p>Shaded area reflects ACCA (TVA) conditions.</p> <p>DB: Entering Indoor Dry Bulb Temperature</p> <p>High and low pressures are measured at the liquid and suction access fittings.</p> <p>Design Subcooling 8 ± 2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ± 2 °F @ the compressor suction access fitting connection.</p>	<p>kW = Total system power</p> <p>Amps = outdoor unit amps (comp.+fan)</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------

on.

		OUTDOOR AMBIENT TEMPERATURE																115°F							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	33.2	33.7	34.7	36.2	32.9	33.4	34.4	35.9	32.1	32.5	33.5	35.1	30.6	31.1	32.0	33.6	28.8	29.2	30.2	31.7	27.1	27.6	28.6	30.1
	S/T	1.00	0.75	0.61	0.5	1.00	0.76	0.62	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6
	ΔT	25.91	24.25	21.16	18.0	25.86	24.21	21.12	17.9	26.10	24.44	21.35	18.2	25.85	24.19	21.10	17.9	25.62	23.97	20.88	17.7	26.66	25.01	21.92	18.7
	kW	1.93	1.93	1.92	1.9	2.16	2.16	2.16	2.2	2.42	2.42	2.42	2.4	2.71	2.70	2.70	2.7	3.02	3.02	3.02	3.0	3.39	3.39	3.39	3.4
	Amps	6.94	6.93	6.91	7.0	7.96	7.95	7.93	8.0	9.09	9.08	9.07	9.1	10.32	10.31	10.29	10.4	11.69	11.68	11.67	11.7	13.30	13.29	13.28	13.4
	Hi PR	253	254	256	260.7	293	295	296	300.8	335	337	338	342.8	381	382	384	388.0	429	431	432	436.8	481	483	484	488.8
1125	Lo PR	126	128	131	136.3	134	135	139	144.0	141	142	145	150.8	146	148	151	156.5	152	153	157	162.1	159	160	164	169.1
	MBh	33.9	34.4	35.4	36.9	33.6	34.1	35.1	36.6	32.7	33.2	34.2	35.7	31.2	31.7	32.7	34.2	29.4	29.9	30.9	32.4	27.8	28.2	29.2	30.7
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.86	0.7
	ΔT	24.19	22.54	19.45	16.2	24.15	22.49	19.40	16.2	24.38	22.73	19.64	16.4	24.13	22.48	19.39	16.2	23.91	22.26	19.17	16.0	24.95	23.29	20.20	17.0
	kW	1.95	1.95	1.94	2.0	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.5	2.73	2.73	2.72	2.7	3.04	3.04	3.04	3.1	3.41	3.41	3.41	3.4
	Amps	7.03	7.02	7.00	7.1	8.05	8.04	8.02	8.1	9.18	9.17	9.16	9.2	10.41	10.40	10.38	10.5	11.78	11.77	11.76	11.8	13.39	13.38	13.37	13.4
1400	Hi PR	257	258	260	264.2	297	298	300	304.3	339	340	342	346.3	384	385	387	391.6	433	434	436	440.3	485	486	488	492.3
	Lo PR	129	131	134	139.3	137	138	142	147.0	144	145	148	153.7	149	151	154	159.4	155	156	160	165.0	162	163	167	172.0
	MBh	35.0	35.5	36.5	38.0	34.7	35.2	36.2	37.7	33.9	34.3	35.3	36.9	32.4	32.8	33.8	35.4	30.5	31.0	32.0	33.5	28.9	29.3	30.3	31.9
	S/T	1.00	0.91	0.78	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.8
	ΔT	22.64	20.98	17.89	14.7	22.59	20.94	17.85	14.6	22.82	21.17	18.08	14.9	22.57	20.92	17.83	14.6	22.35	20.70	17.61	14.4	23.39	21.74	18.65	15.4
	kW	1.97	1.97	1.96	2.0	2.20	2.20	2.20	2.2	2.46	2.46	2.46	2.5	2.75	2.74	2.74	2.8	3.06	3.06	3.06	3.1	3.43	3.43	3.43	3.4
1400	Amps	7.11	7.10	7.09	7.2	8.13	8.12	8.10	8.2	9.26	9.25	9.24	9.3	10.49	10.48	10.47	10.5	11.86	11.86	11.84	11.9	13.47	13.47	13.47	13.5
	Hi PR	261	262	264	268.4	301	302	304	308.5	343	344	346	350.5	388	389	391	395.7	437	438	440	444.5	489	490	492	496.5
	Lo PR	133	135	138	143.6	141	143	146	151.3	148	149	153	158.0	154	155	158	163.7	159	161	164	169.3	166	168	171	176.3

900	MBh	33.8	34.3	35.3	36.8	33.5	34.0	35.0	36.5	32.6	33.1	34.1	35.6	31.1	31.6	32.6	34.1	29.3	29.8	30.8	32.3	27.6	28.1	29.1	30.6
	S/T	1.00	0.86	0.72	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	1.00	0.6	1.00	1.00	1.00	0.7
	ΔT	29.16	27.50	24.41	21.2	29.11	27.46	24.37	21.2	29.34	27.69	24.60	21.4	29.09	27.44	24.35	21.1	28.87	27.22	24.13	20.9	29.91	28.25	25.17	22.0
	kW	1.93	1.93	1.93	1.9	2.17	2.17	2.16	2.2	2.43	2.43	2.42	2.4	2.71	2.71	2.70	2.7	3.03	3.02	3.02	3.0	3.40	3.39	3.39	3.4
	Amps	6.96	6.95	6.93	7.0	7.98	7.97	7.95	8.0	9.11	9.10	9.08	9.2	10.34	10.33	10.31	10.4	11.71	11.70	11.69	11.8	13.32	13.31	13.30	13.4
	Hi PR	255	256	257	261.9	295	296	298	302.0	337	338	340	344.0	382	383	385	389.2	431	432	434	438.0	483	484	486	490.0
1125	Lo PR	128	130	133	138.2	136	137	141	145.9	142	144	147	152.7	148	150	153	158.4	154	155	159	164.0	161	162	166	171.0
	MBh	34.5	34.9	35.9	37.5	34.2	34.6	35.6	37.2	33.3	33.8	34.8	36.3	31.8	32.3	33.3	34.8	30.0	30.5	31.4	33.0	28.3	28.8	29.8	31.3
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	27.44	25.79	22.70	19.5	27.40	25.74	22.65	19.5	27.63	25.97	22.88	19.7	27.38	25.72	22.64	19.4	27.16	25.50	22.41	19.2	28.19	26.54	23.45	20.2
	kW	1.95	1.95	1.95	2.0	2.19	2.19	2.18	2.2	2.45	2.45	2.44	2.5	2.73	2.73	2.73	2.7	3.05	3.05	3.04	3.1	3.42	3.42	3.41	3.4
	Amps	7.05	7.04	7.02	7.1	8.07	8.06	8.04	8.1	9.20	9.19	9.18	9.3	10.43	10.42	10.40	10.5	11.80	11.79	11.78	11.9	13.41	13.40	13.39	13.5
1400	Hi PR	258	259	261	265.4	298	299	301	305.5	340	341	343	347.5	385	387	388	392.7	434	435	437	441.5	486	487	489	493.5
	Lo PR	131	133	136	141.2	139	140	143	148.9	145	147	150	155.6	151	153	156	161.3	157	158	162	166.9	164	165	169	173.9
	MBh	35.6	36.1	37.1	38.6	35.3	35.8	36.8	38.3	34.4	34.9	35.9	37.4	32.9	33.4	34.4	35.9	31.1	31.6	32.6	34.1	29.4	29.9	30.9	32.4
	S/T	1.00	1.00	0.88	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
	ΔT	25.89	24.23	21.14	17.9	25.84	24.19	21.10	17.9	26.07	24.42	21.33	18.1	25.82	24.17	21.08	17.9	25.60	23.95	20.86	17.7	26.64	24.98	21.89	18.7
	kW	1.97	1.97	1.97	2.0	2.21	2.20	2.20	2.2	2.47	2.47	2.46	2.5	2.75	2.75	2.74	2.8	3.07	3.06	3.06	3.1	3.44	3.43	3.43	3.4
1400	Amps	7.13	7.12	7.11	7.2	8.15	8.14	8.12	8.2	9.28	9.27	9.26	9.3	10.51	10.50	10.49	10.6	11.88	11.87	11.86	11.9	13.49	13.48	13.47	13.5
	Hi PR	262	263	265	269.6	302	303	305	309.7	344	345	347	351.7	390	391	392	396.9	438	439	441	445.7	490	491	493	497.7
	Lo PR	135	137	140	145.5	143	145	148	153.2	150	151	155	159.9	155	157	160	165.6	161	163	166	171.2	168	170	173	178.2

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	60.5	61.3	63.1		-	59.9	60.8	62.6		-	58.3	59.2	61.0		-	55.6	56.4	58.3		-	52.2	53.1	54.9		-	49.2	50.0	51.9		-	49.2	50.0	51.9			
	S/T	0.54	0.46	0.3		-	0.54	0.47	0.3		-	0.57	0.49	0.4		-	1.00	0.51	0.4		-	1.00	0.53	0.4		-	1.00	0.59	0.4		-	1.00	0.59	0.4			
	ΔT	20.93	19.10	15.7		-	20.88	19.05	15.6		-	21.13	19.30	15.9		-	20.86	19.03	15.6		-	20.61	18.78	15.4		-	21.76	19.93	16.5		-	21.76	19.93	16.5			
	kW	3.56	3.55	3.5		-	3.97	3.97	4.0		-	4.44	4.44	4.4		-	4.95	4.95	4.9		-	5.52	5.51	5.5		-	6.18	6.18	6.2		-	6.18	6.18	6.2			
	Amps	12.66	12.65	12.6		-	14.49	14.47	14.4		-	16.52	16.51	16.5		-	18.72	18.71	18.7		-	21.18	21.17	21.1		-	24.07	24.06	24.0		-	24.07	24.06	24.0			
	Hi PR	259	260	262.1		-	300	301	303.3		-	343	345	346.5		-	390	391	392.9		-	440	441	443.1		-	494	495	496.6		-	494	495	496.6			
	Lo PR	124	126	129.1		-	132	134	136.8		-	139	140	143.5		-	144	146	149.1		-	150	152	154.7		-	157	158	161.7		-	157	158	161.7			
1700	MBh	61.8	62.7	64.5		-	61.3	62.2	64.0		-	59.7	60.6	62.4		-	57.0	57.8	59.6		-	53.6	54.5	56.3		-	50.6	51.4	53.2		-	50.6	51.4	53.2			
	S/T	0.68	0.60	0.5		-	0.68	0.60	0.5		-	0.71	0.63	0.5		-	1.00	0.65	0.5		-	1.00	0.67	0.5		-	1.00	0.72	0.6		-	1.00	0.72	0.6			
	ΔT	18.67	16.84	13.4		-	18.62	16.79	13.4		-	18.88	17.05	13.6		-	18.60	16.77	13.4		-	18.36	16.53	13.1		-	19.50	17.67	14.3		-	19.50	17.67	14.3			
	kW	3.60	3.60	3.6		-	4.02	4.02	4.0		-	4.49	4.48	4.5		-	4.99	4.99	5.0		-	5.56	5.56	5.5		-	6.22	6.22	6.2		-	6.22	6.22	6.2			
	Amps	12.86	12.84	12.8		-	14.68	14.67	14.6		-	16.71	16.70	16.7		-	18.92	18.90	18.9		-	21.38	21.36	21.3		-	24.26	24.25	24.2		-	24.26	24.25	24.2			
	Hi PR	263	265	266.4		-	305	306	307.6		-	348	349	350.7		-	394	395	397.2		-	444	446	447.4		-	498	499	500.8		-	498	499	500.8			
	Lo PR	128	129	132.5		-	135	137	140.1		-	142	144	146.8		-	148	149	152.5		-	153	155	158.1		-	160	162	165.0		-	160	162	165.0			
1900	MBh	64.3	65.2	67.0		-	63.8	64.6	66.4		-	62.2	63.0	64.8		-	59.4	60.3	62.1		-	56.1	56.9	58.7		-	53.0	53.9	55.7		-	53.0	53.9	55.7			
	S/T	0.72	0.64	0.5		-	0.73	0.65	0.5		-	1.00	0.68	0.5		-	1.00	0.69	0.6		-	1.00	0.72	0.6		-	1.00	1.00	0.6		-	1.00	1.00	0.6			
	ΔT	16.71	14.88	11.5		-	16.66	14.83	11.4		-	16.92	15.09	11.7		-	16.64	14.82	11.4		-	16.40	14.57	11.2		-	17.55	15.72	12.3		-	17.55	15.72	12.3			
	kW	3.64	3.63	3.6		-	4.06	4.05	4.0		-	4.53	4.52	4.5		-	5.03	5.03	5.0		-	5.60	5.59	5.6		-	6.26	6.26	6.3		-	6.26	6.26	6.3			
	Amps	13.02	13.01	13.0		-	14.85	14.83	14.8		-	16.88	16.87	16.8		-	19.08	19.07	19.0		-	21.54	21.53	21.5		-	24.43	24.42	24.4		-	24.43	24.42	24.4			
	Hi PR	268	269	271.3		-	310	311	312.5		-	353	354	355.7		-	399	400	402.2		-	449	450	452.3		-	503	504	505.8		-	503	504	505.8			
	Lo PR	133	134	137.5		-	140	142	145.1		-	147	149	151.9		-	153	154	157.5		-	158	160	163.1		-	165	167	170.1		-	165	167	170.1			

75	1500	MBh	60.5	61.4	63.2	66.0	60.0	60.8	62.6	65.4	58.4	59.2	61.0	63.8	55.6	56.5	58.3	61.1	52.3	53.1	54.9	57.7	49.2	50.1	51.9	
		S/T	0.67	0.59	0.5	0.31	0.67	0.60	0.5	0.32	1.00	0.62	0.5	0.34	1.00	0.64	0.5	0.36	1.00	0.67	0.5	0.38	1.00	1.00	0.6	
		ΔT	ΔT	24.95	23.12	19.7	16.17	24.90	23.07	19.7	16.12	25.15	23.33	19.9	16.37	24.88	23.05	19.6	16.10	24.63	22.80	19.4	15.85	25.78	23.95	20.5
		kW	3.55	3.55	3.5	3.57	3.97	3.97	4.0	3.99	4.44	4.44	4.4	4.46	4.95	4.94	4.9	4.97	5.51	5.51	5.5	5.53	6.18	6.17	6.2	
		Amps	12.65	12.64	12.6	12.75	14.47	14.46	14.4	14.57	16.51	16.49	16.5	16.60	18.71	18.70	18.7	18.81	21.17	21.16	21.1	21.27	24.06	24.04	24.0	
		Hi PR	259	260	262.3	267	301	302	303.5	308	344	345	346.7	351	390	391	393.2	398	440	441	443.3	448	494	495	496.8	
		Lo PR	124	126	129.1	134	132	134	136.8	142	139	140	143.5	149	144	146	149.2	155	150	152	154.7	160	157	158	161.7	
	1700	MBh	61.9	62.7	64.6	67.4	61.3	62.2	64.0	66.8	59.7	60.6	62.4	65.2	57.0	57.9	59.7	62.5	53.6	54.5	56.3	59.1	50.6	51.4	53.3	
		S/T	0.81	0.73	0.6	0.45	1.00	0.74	0.6	0.45	1.00	0.76	0.6	0.48	1.00	0.78	0.6	0.50	1.00	1.00	0.7	0.52	1.00	1.00	0.7	
		ΔT	ΔT	22.69	20.86	17.4	13.91	22.64	20.81	17.4	13.86	22.90	21.07	17.7	14.12	22.62	20.79	17.4	13.84	22.38	20.55	17.1	13.60	23.52	21.69	18.3
		kW	3.60	3.59	3.6	3.62	4.02	4.01	4.0	4.04	4.48	4.48	4.5	4.51	4.99	4.99	5.0	5.01	5.56	5.55	5.5	5.58	6.22	6.22	6.2	
		Amps	12.84	12.83	12.8	12.94	14.67	14.65	14.6	14.76	16.70	16.69	16.7	16.80	18.90	18.89	18.9	19.00	21.37	21.35	21.3	21.46	24.25	24.24	24.2	
		Hi PR	264	265	266.6	271	305	306	307.8	312	348	349	351.0	356	394	396	397.5	402	445	446	447.6	452	498	499	501.1	
		Lo PR	128	129	132.5	138	135	137	140.1	146	142	144	146.8	152	148	149	152.5	158	153	155	158.1	163	160	162	165.0	
1900	MBh	64.3	65.2	67.0	69.8	63.8	64.6	66.5	69.3	62.2	63.1	64.9	67.7	59.4	60.3	62.1	64.9	56.1	57.0	58.8	61.6	53.0	53.9	55.7		
	S/T	0.85	0.77	0.6	0.49	1.00	0.78	0.6	0.50	1.00	0.81	0.7	0.52	1.00	0.83	0.7	0.54	1.00	1.00	0.7	0.57	1.00	1.00	0.8		
	ΔT	ΔT	20.73	18.91	15.5	11.95	20.68	18.86	15.4	11.90	20.94	19.11	15.7	12.16	20.67	18.84	15.4	11.89	20.42	18.59	15.2	11.64	21.57	19.74	16.3	
	kW	3.64	3.63	3.6	3.66	4.05	4.05	4.0	4.08	4.52	4.52	4.5	4.54	5.03	5.03	5.0	5.05	5.60	5.59	5.6	5.62	6.26	6.26	6.2		
	Amps	13.01	13.00	13.0	13.10	14.83	14.82	14.8	14.93	16.87	16.85	16.8	16.96	19.07	19.06	19.0	19.16	21.53	21.52	21.5	21.63	24.42	24.40	24.4		
	Hi PR	269	270	271.5	276	310	311	312.7	317	353	354	355.9	360	399	400	402.4	407	450	451	452.5	457	503	504	506.0		
	Lo PR	133	134	137.5	143	140	142	145.2	151	147	149	151.9	157	153	154	157.6	163	158	160	163.1	168	165	167	170.1		

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHR 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power

Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1500	MBh	60.8	61.7	63.5	66.3	60.3	61.1	63.0	65.7	58.7	59.5	61.4	64.1	55.9	56.8	58.6	61.4	52.6	53.4	55.3	58.1	49.5	50.4	52.2	55.0
		S/T	1.00	0.72	0.58	0.4	1.00	0.72	0.59	0.4	1.00	0.75	0.61	0.5	1.00	1.00	0.63	0.5	1.00	1.00	0.65	0.5	1.00	1.00	0.71	0.6
		ΔT	28.99	27.17	23.75	20.2	28.94	27.12	23.70	20.2	29.20	27.37	23.96	20.4	28.93	27.10	23.68	20.1	28.68	26.85	23.44	19.9	29.83	28.00	24.58	21.0
		kW	3.56	3.55	3.54	3.6	3.97	3.97	3.96	4.0	4.44	4.44	4.43	4.5	4.95	4.95	4.94	5.0	5.51	5.51	5.50	5.5	6.18	6.18	6.17	6.2
		Amps	12.66	12.65	12.62	12.8	14.48	14.47	14.44	14.6	16.52	16.50	16.47	16.6	18.72	18.71	18.68	18.8	21.18	21.17	21.14	21.3	24.07	24.05	24.02	24.2
	Hi PR	260	261	263	267.3	301	302	304	308.5	344	345	347	351.7	391	392	394	398.2	441	442	444	448.3	494	495	497	501.8	
	Lo PR	125	126	130	135.1	133	134	137	142.7	139	141	144	149.4	145	147	150	155.1	151	152	155	160.7	157	159	162	167.6	
	1700	MBh	62.2	63.1	64.9	67.7	61.7	62.5	64.3	67.1	60.1	60.9	62.7	65.5	57.3	58.2	60.0	65.8	54.0	54.8	56.6	59.4	50.9	51.8	53.6	56.4
		S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.89	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.84	0.7
		ΔT	26.74	24.91	21.49	18.0	26.69	24.86	21.44	17.9	26.94	25.12	21.70	18.2	26.67	24.84	21.43	17.9	26.42	24.60	21.18	17.6	27.57	25.74	22.33	18.8
kW		3.60	3.60	3.59	3.6	4.02	4.02	4.01	4.0	4.49	4.48	4.48	4.5	4.99	4.99	4.98	5.0	5.56	5.56	5.55	5.6	6.22	6.22	6.21	6.2	
Amps		12.85	12.84	12.81	12.9	14.68	14.66	14.63	14.8	16.71	16.70	16.67	16.8	18.91	18.90	18.87	19.0	21.37	21.36	21.33	21.5	24.26	24.25	24.22	24.4	
1900	Hi PR	264	265	267	271.6	305	306	308	312.8	348	350	351	356.0	395	396	398	402.5	445	446	448	452.6	499	500	502	506.1	
	Lo PR	128	130	133	138.4	136	137	141	146.1	143	144	147	152.8	148	150	153	158.4	154	155	159	164.0	161	162	166	171.0	
	MBh	64.6	65.5	67.3	70.1	64.1	65.0	66.8	69.6	62.5	63.4	65.2	68.0	59.8	60.6	62.5	65.2	56.4	57.3	59.1	61.9	53.4	54.2	56.0	58.8	
	S/T	1.00	0.90	0.76	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7	
	ΔT	24.78	22.95	19.54	16.0	24.73	22.90	19.49	16.0	24.99	23.16	19.75	16.2	24.71	22.89	19.47	15.9	24.47	22.64	19.23	15.7	25.61	23.79	20.37	16.8	
1900	kW	3.64	3.63	3.63	3.7	4.06	4.05	4.05	4.1	4.53	4.52	4.51	4.5	5.03	5.03	5.02	5.1	5.60	5.59	5.59	5.6	6.26	6.26	6.25	6.3	
	Amps	13.02	13.01	12.98	13.1	14.84	14.83	14.80	14.9	16.88	16.86	16.83	17.0	19.08	19.07	19.04	19.2	21.54	21.53	21.50	21.6	24.43	24.41	24.38	24.5	
	Hi PR	269	270	272	276.6	310	311	313	317.8	353	355	356	361.0	400	401	403	407.4	450	451	453	457.6	504	505	507	511.1	
	Lo PR	133	135	138	143.4	141	143	146	151.1	148	149	152	157.8	153	155	158	163.5	159	160	164	169.0	166	167	171	176.0	

85	1500	MBh	61.8	62.7	64.5	67.3	61.3	62.2	64.0	66.8	59.7	60.6	62.4	65.2	57.0	57.8	59.6	62.4	53.6	54.5	56.3	59.1	50.5	51.4	53.2	56.0
		S/T	1.00	0.82	0.68	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	1.00	0.7
		ΔT	32.59	30.76	27.34	23.8	32.54	30.71	27.29	23.8	32.79	30.96	27.55	24.0	32.52	30.69	27.27	23.7	32.27	30.44	27.03	23.5	33.42	31.59	28.17	24.6
		kW	3.56	3.56	3.55	3.6	3.98	3.98	3.97	4.0	4.45	4.45	4.44	4.5	4.96	4.95	4.95	5.0	5.52	5.52	5.51	5.5	6.19	6.18	6.18	6.2
		Amps	12.70	12.68	12.65	12.8	14.52	14.50	14.47	14.6	16.55	16.54	16.51	16.6	18.76	18.74	18.71	18.8	21.22	21.20	21.17	21.3	24.10	24.09	24.06	24.2
		Hi PR	261	262	264	268.6	302	303	305	309.8	345	347	348	353.0	392	393	395	399.4	442	443	445	449.6	496	497	499	503.1
		Lo PR	127	128	132	136.9	134	136	139	144.6	141	143	146	151.3	147	148	152	157.0	152	154	157	162.5	159	161	164	169.5
	1700	MBh	63.2	64.1	65.9	68.7	62.7	63.5	65.4	68.2	61.1	61.9	63.8	66.6	58.3	59.2	61.0	63.8	55.0	55.9	57.7	60.5	51.9	52.8	54.6	57.4
		S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
		ΔT	30.33	28.50	25.08	21.5	30.28	28.45	25.03	21.5	30.53	28.71	25.29	21.8	30.26	28.43	25.02	21.5	30.01	28.19	24.77	21.2	31.16	29.33	25.92	22.4
kW		3.61	3.60	3.60	3.6	4.03	4.02	4.02	4.0	4.49	4.49	4.48	4.5	5.00	5.00	4.99	5.0	5.57	5.56	5.56	5.6	6.23	6.23	6.22	6.3	
Amps		12.89	12.87	12.84	13.0	14.71	14.70	14.67	14.8	16.75	16.73	16.70	16.8	18.95	18.93	18.90	19.0	21.41	21.40	21.36	21.5	24.30	24.28	24.25	24.4	
Hi PR		265	266	268	272.8	307	308	310	314.1	350	351	353	357.2	396	397	399	403.7	446	447	449	453.8	500	501	503	507.3	
Lo PR		130	132	135	140.3	138	139	143	147.9	145	146	149	154.6	150	152	155	160.3	156	157	161	165.9	163	164	167	172.9	
1900	MBh	65.7	66.5	68.4	71.1	65.1	66.0	67.8	70.6	63.5	64.4	66.2	69.0	60.8	61.7	63.5	66.3	57.4	58.3	60.1	62.9	54.4	55.2	57.1	59.9	
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	
	ΔT	28.37	26.54	23.13	19.6	28.32	26.49	23.08	19.5	28.58	26.75	23.34	19.8	28.30	26.48	23.06	19.5	28.06	26.23	22.82	19.3	29.20	27.38	23.96	20.4	
	kW	3.65	3.64	3.64	3.7	4.07	4.06	4.05	4.1	4.53	4.53	4.52	4.6	5.04	5.04	5.03	5.1	5.61	5.60	5.59	5.6	6.27	6.27	6.26	6.3	
	Amps	13.06	13.04	13.01	13.1	14.88	14.86	14.83	15.0	16.91	16.90	16.87	17.0	19.12	19.10	19.07	19.2	21.58	21.56	21.53	21.7	24.46	24.45	24.42	24.6	
	Hi PR	270	271	273	277.8	311	313	314	319.0	355	356	358	362.2	401	402	404	408.7	451	452	454	458.8	505	506	508	512.3	
	Lo PR	135	137	140	145.3	143	144	148	153.0	150	151	154	159.7	155	157	160	165.4	161	162	166	170.9	168	169	173	177.9	

DB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		ENTERING INDOOR WET BULB TEMPERATURE																							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	43.5	44.2	45.5	-	43.2	43.8	45.1	-	42.0	42.6	43.9	-	40.0	40.7	42.0	-	37.6	38.2	39.6	-				
	S/T	0.57	0.49	0.35	-	0.58	0.50	0.36	-	0.60	0.52	0.38	-	1.00	0.54	0.40	-	1.00	0.57	0.42	-				
	ΔT	19.96	18.20	14.90	-	19.91	18.15	14.85	-	20.16	18.40	15.10	-	19.89	18.13	14.84	-	19.66	17.89	14.60	-				
	kW	2.24	2.24	2.23	-	2.50	2.50	2.50	-	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.47	-				
	Amps	7.98	7.97	7.95	-	9.12	9.12	9.10	-	10.40	10.40	10.38	-	11.79	11.78	11.76	-	13.34	13.33	13.31	-				
	Hi PR	248	249	251	-	287	289	290	-	329	330	332	-	373	374	376	-	421	422	424	-				
	Lo PR	128	130	133	-	136	138	141	-	143	144	148	-	149	150	154	-	154	156	159	-				
	MBh	44.5	45.1	46.4	-	44.1	44.7	46.0	-	42.9	43.5	44.9	-	41.0	41.6	42.9	-	38.5	39.2	40.5	-				
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-				
	ΔT	18.02	16.25	12.96	-	17.97	16.20	12.91	-	18.22	16.45	13.16	-	17.95	16.18	12.89	-	17.71	15.95	12.65	-				
1700	kW	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-				
	Amps	8.09	8.08	8.06	-	9.23	9.22	9.20	-	10.51	10.50	10.48	-	11.90	11.89	11.87	-	13.45	13.44	13.42	-				
	Hi PR	252	253	255	-	291	292	294	-	332	334	335	-	377	378	380	-	425	426	428	-				
	Lo PR	131	133	136	-	139	141	144	-	146	148	151	-	152	153	157	-	158	159	162	-				
1900	MBh	46.5	47.1	48.4	-	46.1	46.7	48.0	-	45.0	45.6	46.9	-	43.0	43.6	44.9	-	40.6	41.2	42.5	-				
	S/T	0.74	0.66	0.52	-	1.00	0.67	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	1.00	0.59	-				
	ΔT	15.93	14.16	10.87	-	15.88	14.12	10.82	-	16.13	14.36	11.07	-	15.86	14.10	10.80	-	15.63	13.86	10.57	-				
	kW	2.29	2.29	2.28	-	2.55	2.55	2.55	-	2.85	2.85	2.84	-	3.17	3.17	3.16	-	3.52	3.52	3.52	-				
	Amps	8.20	8.19	8.17	-	9.35	9.34	9.32	-	10.63	10.62	10.60	-	12.01	12.01	11.99	-	13.56	13.55	13.53	-				
	Hi PR	257	258	260	-	297	298	299	-	338	339	341	-	382	383	385	-	430	431	433	-				
	Lo PR	137	139	142	-	145	147	150	-	152	154	157	-	158	159	163	-	163	165	168	-				

75	MBh	43.6	44.2	45.5	47.5	43.2	43.8	45.1	47.1	42.0	42.7	44.0	46.0	40.1	40.7	42.0	44.0
	S/T	0.70	0.62	0.48	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4
	ΔT	23.84	22.08	18.78	15.4	23.79	22.03	18.73	15.3	24.04	22.28	18.98	15.6	23.77	22.01	18.72	15.3
	kW	2.24	2.24	2.23	2.3	2.50	2.50	2.49	2.5	2.80	2.79	2.79	2.8	3.11	3.11	3.11	3.1
	Amps	7.97	7.96	7.94	8.0	9.12	9.11	9.09	9.2	10.40	10.39	10.37	10.5	11.78	11.77	11.75	11.8
	Hi PR	248	249	251	255.5	288	289	291	294.9	329	330	332	336.2	373	375	376	380.6
	Lo PR	128	130	133	138.6	136	138	141	146.4	143	145	148	153.3	149	150	154	159.1
	MBh	44.5	45.1	46.4	48.4	44.1	44.7	46.0	48.0	43.0	43.6	44.9	46.9	41.0	41.6	42.9	44.9
	S/T	0.83	0.75	0.61	0.5	1.00	0.76	0.61	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.66	0.5
	ΔT	21.90	20.13	16.84	13.4	21.85	20.08	16.79	13.4	22.10	20.33	17.04	13.6	21.83	20.06	16.77	13.4
1900	kW	2.26	2.26	2.26	2.3	2.53	2.52	2.52	2.5	2.82	2.82	2.81	2.8	3.14	3.13	3.13	3.2
	Amps	8.08	8.07	8.05	8.1	9.23	9.22	9.20	9.3	10.51	10.50	10.48	10.6	11.89	11.88	11.86	12.0
	Hi PR	252	253	255	259.2	291	292	294	298.6	333	334	336	339.9	377	378	380	384.3
	Lo PR	131	133	136	141.7	139	141	144	149.6	146	148	151	156.5	152	153	157	162.3
	MBh	46.5	47.1	48.4	50.5	46.1	46.7	48.1	50.1	45.0	45.6	46.9	48.9	43.0	43.6	44.9	46.9
	S/T	1.00	0.79	0.65	0.5	1.00	0.80	0.66	0.5	1.00	0.83	0.68	0.5	1.00	1.00	0.70	0.6
	ΔT	19.81	18.04	14.75	11.3	19.76	18.00	14.70	11.3	20.01	18.24	14.95	11.5	19.74	17.98	14.68	11.3
	kW	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.85	2.85	2.84	2.9	3.17	3.16	3.16	3.2
	Amps	8.19	8.19	8.17	8.3	9.34	9.33	9.31	9.4	10.62	10.61	10.59	10.7	12.01	12.00	11.98	12.1
	Hi PR	257	258	260	264.5	297	298	300	303.9	338	339	341	345.2	382	384	385	389.7
	Lo PR	137	139	142	147.6	145	147	150	155.5	152	154	157	162.4	158	159	163	168.2

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHR1 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power
 Amps = outdoor unit amps (comp+fan)

	OUTDOOR AMBIENT TEMPERATURE																																		
	65°F						75°F						85°F						95°F						105°F						115°F				
	ENTERING													INDOOR													WET BULB				TEMPERATURE				
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	59	63	67	71						
80	1500	MBh	43.8	44.4	45.7	47.7	43.4	44.0	45.3	47.3	42.3	42.9	44.2	46.2	40.3	40.9	42.2	44.2	37.9	38.5	39.8	41.8	35.7	36.3	37.6	39.6									
		S/T	1.00	0.76	0.61	0.5	1.00	0.76	0.62	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	1.00	0.6									
		ΔT	27.75	25.98	22.69	19.3	27.70	25.93	22.64	19.2	27.95	26.18	22.89	19.5	27.68	25.92	22.62	19.2	27.45	25.68	22.39	19.0	28.55	26.79	23.49	20.1									
		kW	2.24	2.24	2.23	2.3	2.50	2.50	2.50	2.5	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.1	3.47	3.47	3.47	3.5	3.89	3.89	3.88	3.9									
		Amps	7.98	7.97	7.95	8.0	9.12	9.11	9.09	9.2	10.40	10.39	10.37	10.5	11.79	11.78	11.76	11.8	13.34	13.33	13.31	13.4	15.15	15.14	15.12	15.2									
		Hi PR	249	250	252	256.0	288	289	291	295.4	329	331	332	336.6	374	375	377	381.1	422	423	425	429.0	473	474	476	480.1									
		Lo PR	129	130	134	139.1	137	138	141	147.0	143	145	148	153.9	149	151	154	159.7	155	157	160	165.4	162	164	167	172.6									
80	1700	MBh	44.7	45.3	46.7	48.7	44.3	44.9	46.3	48.3	43.2	43.8	45.1	47.1	41.2	41.8	43.1	45.1	38.8	39.4	40.7	42.7	36.6	37.2	38.5	40.5									
		S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7									
		ΔT	25.80	24.04	20.74	17.3	25.75	23.99	20.69	17.3	26.00	24.24	20.94	17.5	25.74	23.97	20.68	17.3	25.50	23.74	20.44	17.0	26.60	24.84	21.54	18.1									
		kW	2.26	2.26	2.26	2.3	2.53	2.53	2.52	2.5	2.82	2.82	2.82	2.8	3.14	3.14	3.13	3.2	3.50	3.49	3.49	3.5	3.91	3.91	3.91	3.9									
		Amps	8.09	8.08	8.06	8.1	9.23	9.22	9.20	9.3	10.51	10.50	10.48	10.6	11.90	11.89	11.87	12.0	13.44	13.44	13.42	13.5	15.26	15.25	15.23	15.3									
		Hi PR	252	254	255	259.7	292	293	295	299.1	333	334	336	340.3	378	379	380	384.8	426	427	428	432.7	477	478	479	483.8									
		Lo PR	132	133	137	142.3	140	141	145	150.1	147	148	152	157.0	152	154	157	162.9	158	160	163	168.6	165	167	170	175.8									
1900		MBh	46.7	47.4	48.7	50.7	46.4	47.0	48.3	50.3	45.2	45.8	47.1	49.1	43.2	43.9	45.2	47.2	40.8	41.4	42.8	44.8	38.6	39.2	40.6	42.6									
		S/T	1.00	0.92	0.78	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8									
		ΔT	23.71	21.95	18.66	15.2	23.67	21.90	18.61	15.2	23.91	22.15	18.86	15.4	23.65	21.88	18.59	15.2	23.41	21.65	18.35	14.9	24.52	22.75	19.46	16.0									
		kW	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.85	2.85	2.84	2.9	3.17	3.17	3.16	3.2	3.52	3.52	3.52	3.5	3.94	3.94	3.93	4.0									
		Amps	8.20	8.19	8.17	8.3	9.35	9.34	9.32	9.4	10.63	10.62	10.60	10.7	12.01	12.00	11.98	12.1	13.56	13.55	13.53	13.6	15.38	15.37	15.35	15.4									
		Hi PR	258	259	261	265.0	297	298	300	304.4	338	340	341	345.7	383	384	386	390.1	431	432	434	438.0	482	483	485	489.2									
		Lo PR	138	139	143	148.2	146	147	151	156.1	153	154	157	163.0	158	160	163	168.8	164	166	169	174.5	171	173	176	181.7									

85	1500		MBh	44.5	45.2	46.5	48.5	44.1	44.8	46.1	48.1	43.0	43.6	44.9	46.9	41.0	41.7	43.0	45.0	38.6	39.2	40.6	42.6	36.4	37.0	38.4	40.4
		S/T	1.00	0.86	0.72	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	1.00	1.00	0.6	1.00	1.00	1.00	0.7
		ΔT	31.21	29.45	26.15	22.7	31.16	29.40	26.10	22.7	31.41	29.65	26.35	22.9	31.15	29.38	26.09	22.7	30.91	29.15	25.85	22.4	32.01	30.25	26.96	23.5	
		kW	2.24	2.24	2.24	2.3	2.51	2.51	2.50	2.5	2.80	2.80	2.80	2.8	3.12	3.12	3.11	3.1	3.48	3.47	3.47	3.5	3.89	3.89	3.89	3.9	
		Amps	8.00	7.99	7.97	8.1	9.15	9.14	9.12	9.2	10.43	10.42	10.40	10.5	11.81	11.80	11.78	11.1	13.36	13.35	13.33	13.4	15.17	15.16	15.15	15.2	
		Hi PR	250	251	253	257.1	289	290	292	296.5	331	332	333	337.8	375	376	378	382.3	423	424	426	430.2	474	475	477	481.3	
		Lo PR	131	132	136	141.1	139	140	143	148.9	145	147	150	155.8	151	153	156	161.7	157	159	162	167.4	164	166	169	174.5	
85	1700		MBh	45.5	46.1	47.4	49.4	45.1	45.7	47.0	49.0	43.9	44.5	45.9	47.9	41.9	42.6	43.9	45.9	39.5	40.2	41.5	43.5	37.3	38.0	39.3	41.3
		S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	
		ΔT	29.27	27.50	24.21	20.8	29.22	27.45	24.16	20.7	29.47	27.70	24.41	21.0	29.20	27.44	24.14	20.7	28.96	27.20	23.90	20.5	30.07	28.30	25.01	21.6	
		kW	2.27	2.27	2.26	2.3	2.53	2.53	2.53	2.5	2.83	2.83	2.82	2.8	3.15	3.14	3.14	3.2	3.50	3.50	3.50	3.5	3.92	3.92	3.91	3.9	
		Amps	8.11	8.10	8.08	8.2	9.25	9.24	9.23	9.3	10.53	10.52	10.51	10.6	11.92	11.91	11.89	12.0	13.47	13.46	13.44	13.5	15.28	15.27	15.25	15.3	
		Hi PR	254	255	256	260.8	293	294	296	300.2	334	335	337	341.5	379	380	382	386.0	427	428	430	433.9	478	479	481	485.0	
		Lo PR	134	135	139	144.2	142	143	147	152.1	149	150	153	159.0	154	156	159	164.8	160	162	165	170.5	167	169	172	177.7	
1900	1900		MBh	47.5	48.1	49.4	51.4	47.1	47.7	49.0	51.0	45.9	46.6	47.9	49.9	44.0	44.6	45.9	47.9	41.6	42.2	43.5	45.5	39.4	40.0	41.3	43.3
		S/T	1.00	1.00	0.89	0.7	1.00	1.00	0.89	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	1.0	
		ΔT	27.18	25.41	22.12	18.7	27.13	25.37	22.07	18.7	27.38	25.61	22.32	18.9	27.11	25.35	22.05	18.6	26.88	25.11	21.82	18.4	27.98	26.22	22.92	19.5	
		kW	2.30	2.29	2.29	2.3	2.56	2.56	2.55	2.6	2.85	2.85	2.85	2.9	3.17	3.17	3.17	3.2	3.53	3.53	3.52	3.5	3.95	3.94	3.94	4.0	
		Amps	8.22	8.21	8.19	8.3	9.37	9.36	9.34	9.4	10.65	10.64	10.62	10.7	12.03	12.03	12.01	12.1	13.58	13.57	13.55	13.6	15.40	15.39	15.37	15.5	
		Hi PR	259	260	262	266.2	298	299	301	305.6	340	341	342	346.8	384	385	387	391.3	432	433	435	439.2	483	484	486	490.3	
		Lo PR	140	141	145	150.1	148	149	152	158.0	154	156	159	164.9	160	162	165	170.7	166	168	171	176.4	173	175	178	183.6	

DB: Entering Indoor Dry Bulb Temperature
 -High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED HEATING DATA

GPHM52431

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	29.56	27.61	25.69	23.81	22.60	21.70	19.42	17.33	15.62	14.35	13.41	12.90	12.25	10.64	9.02	7.40	5.79
T/R	32.90	31.02	29.15	27.28	26.16	25.11	22.48	20.06	18.08	16.61	15.52	14.93	14.18	12.31	10.44	8.57	6.70
KW	1.87	1.86	1.84	1.83	1.82	1.81	1.80	1.79	1.77	1.76	1.74	1.73	1.73	1.71	1.70	1.69	1.67
AMPS	6.9	6.8	6.7	6.7	6.6	6.6	6.6	6.5	6.4	6.4	6.3	6.3	6.2	6.2	6.1	6.1	6.0
COP	4.63	4.36	4.09	3.82	3.64	3.51	3.16	2.84	2.58	2.39	2.25	2.18	2.08	1.82	1.55	1.29	1.01
Hi PR	373	361	348	336	329	324	312	300	288	276	264	256	252	239	227	215	203
LO PR	138	130	121	112	107	104	95	87	78	69	61	56	52	44	35	26	18

GPHM53031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	37.04	34.68	32.35	30.07	28.60	27.53	24.78	22.25	20.17	18.64	17.51	16.90	16.12	14.17	12.22	10.27	8.32
T/R	33.66	31.81	29.97	28.13	27.02	26.01	23.42	21.02	19.06	17.61	16.54	15.97	15.23	13.39	11.55	9.70	7.86
KW	2.48	2.44	2.40	2.36	2.34	2.33	2.29	2.25	2.21	2.18	2.14	2.12	2.10	2.06	2.03	1.99	1.95
AMPS	9.2	9.0	8.9	8.7	8.6	8.6	8.4	8.2	8.1	7.9	7.7	7.6	7.6	7.4	7.3	7.1	6.9
COP	4.38	4.17	3.95	3.73	3.58	3.47	3.17	2.90	2.67	2.51	2.40	2.34	2.25	2.01	1.77	1.51	1.25
Hi PR	415	402	388	375	367	361	348	334	321	307	294	286	280	267	253	240	226
LO PR	137	129	120	112	107	103	95	86	78	69	61	55	52	43	35	26	18

GPHM53031

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	27.40	25.53	23.72	21.83	20.63	19.69	17.37	15.27	13.57	12.29	11.31	10.79	10.13	8.49	6.85	5.21	3.57
T/R	36.14	33.90	31.67	29.44	28.10	26.82	23.65	20.80	18.48	16.73	15.40	14.69	13.80	11.56	9.33	7.10	4.86
KW	1.52	1.47	1.43	1.38	1.35	1.33	1.29	1.24	1.20	1.15	1.11	1.08	1.06	1.02	0.97	0.93	0.88
AMPS	5.5	5.3	5.1	4.9	4.8	4.7	4.5	4.3	4.1	3.9	3.7	3.6	3.5	3.3	3.1	3.0	2.8
COP	5.30	5.09	4.88	4.64	4.47	4.32	3.95	3.60	3.32	3.12	2.99	2.93	2.79	2.45	2.07	1.65	1.19
Hi PR	402	389	376	363	355	350	337	324	311	298	285	277	272	258	245	232	219
LO PR	135	127	118	110	105	101	93	85	76	68	59	54	51	43	34	26	17

GPHM53631

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	44.84	42.23	39.66	37.14	35.50	34.31	31.43	28.59	26.32	24.64	23.44	22.80	21.95	19.84	17.72	15.60	13.49
T/R	33.27	31.64	30.01	28.37	27.39	26.53	24.25	22.08	20.30	19.01	18.09	17.59	16.94	15.31	13.67	12.04	10.41
KW	2.83	2.84	2.84	2.84	2.84	2.84	2.85	2.85	2.85	2.85	2.85	2.86	2.86	2.86	2.86	2.86	2.87
AMPS	10.4	10.4	10.4	10.4	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6
COP	4.64	4.36	4.09	3.83	3.66	3.54	3.24	2.94	2.71	2.53	2.41	2.34	2.25	2.03	1.82	1.60	1.38
Hi PR	406	393	380	367	359	354	340	327	314	301	288	280	274	261	248	235	221
LO PR	136	128	119	111	106	102	94	85	77	68	60	55	51	43	34	26	18

GPHM53631

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	33.53	31.31	29.13	26.98	25.61	24.58	21.98	19.60	17.66	16.21	15.14	14.56	13.82	11.98	10.14	8.29	6.45
T/R	36.19	34.12	32.05	29.99	28.74	27.59	24.67	22.00	19.82	18.20	16.99	16.34	15.51	13.44	11.37	9.31	7.24
KW	1.75	1.72	1.69	1.66	1.64	1.63	1.60	1.57	1.54	1.51	1.48	1.46	1.45	1.42	1.39	1.35	1.32
AMPS	6.3	6.2	6.0	5.9	5.8	5.8	5.6	5.5	5.4	5.2	5.1	5.0	5.0	4.8	4.7	4.6	4.4
COP	5.61	5.33	5.05	4.76	4.57	4.42	4.03	3.66	3.36	3.15	3.00	2.93	2.80	2.48	2.14	1.79	1.43
Hi PR	394	381	368	356	348	343	330	317	304	291	279	271	266	253	240	227	215
LO PR	134	125	117	109	104	100	92	84	75	67	59	54	51	42	34	26	17

GPHM54231

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	53.62	50.09	46.61	43.19	41.00	39.36	35.23	31.43	28.34	26.04	24.32	23.40	22.23	19.29	16.36	13.43	10.49
T/R	37.45	35.32	33.19	31.05	29.78	28.59	25.58	22.83	20.58	18.91	17.66	16.99	16.14	14.01	11.88	9.75	7.62
KW	3.44	3.41	3.38	3.35	3.34	3.33	3.30	3.27	3.25	3.22	3.19	3.18	3.16	3.14	3.11	3.08	3.06
AMPS	12.9	12.8	12.7	12.6	12.5	12.4	12.3	12.2	12.1	12.0	11.9	11.8	11.7	11.6	11.5	11.4	11.3
COP	4.57	4.31	4.04	3.77	3.60	3.47	3.13	2.82	2.56	2.37	2.23	2.16	2.06	1.80	1.54	1.28	1.01
Hi PR	414	400	387	373	365	360	346	333	319	306	292	284	279	266	252	239	225
LO PR	130	122	114	106	101	98	90	82	73	65	57	52	49	41	33	25	17

Notes

Amps = Outdoor unit amps (comp.+fan)

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

kW = Total system power

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

GPHM54231

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	39.29	36.60	34.15	31.35	29.58	28.17	24.71	21.61	19.09	17.18	15.72	14.94	13.96	11.52	9.08	6.64	4.20
T/R	35.52	33.26	31.00	28.74	27.39	26.08	22.88	20.00	17.67	15.91	14.56	13.83	12.93	10.67	8.41	6.15	3.89
KW	2.11	2.06	2.01	1.96	1.93	1.91	1.86	1.81	1.75	1.70	1.65	1.62	1.60	1.55	1.50	1.45	1.40
AMPS	7.6	7.4	7.2	6.9	6.8	6.7	6.5	6.3	6.0	5.8	5.6	5.5	5.4	5.2	4.9	4.7	4.5
COP	5.45	5.20	4.98	4.69	4.50	4.33	3.90	3.51	3.19	2.96	2.79	2.70	2.56	2.18	1.78	1.35	0.88
Hi PR	401	388	375	362	354	349	336	323	310	296	283	276	270	257	244	231	218
LO PR	128	120	112	104	99	96	88	80	72	64	56	51	48	40	32	24	16

GPHM54831

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	54.12	50.44	46.82	43.27	41.00	39.27	34.94	30.99	27.78	25.38	23.57	22.60	21.37	18.31	15.24	12.17	9.11
T/R	30.60	28.79	26.99	25.19	24.10	23.09	20.54	18.22	16.33	14.92	13.86	13.29	12.57	10.76	8.96	7.16	5.35
KW	3.31	3.29	3.27	3.24	3.23	3.22	3.20	3.18	3.15	3.13	3.11	3.10	3.09	3.06	3.04	3.02	3.00
AMPS	11.9	11.8	11.7	11.6	11.5	11.5	11.4	11.3	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.5
COP	4.79	4.50	4.20	3.91	3.72	3.57	3.20	2.86	2.58	2.38	2.22	2.14	2.03	1.75	1.47	1.18	0.89
Hi PR	384	372	359	347	339	334	322	309	297	284	272	264	259	247	234	222	209
LO PR	131	122	114	106	101	98	90	82	74	66	57	53	49	41	33	25	17

GPHM54831

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	39.29	36.60	34.18	31.40	29.58	28.11	24.52	21.32	18.73	16.76	15.24	14.43	13.42	10.89	8.37	5.84	3.32
T/R	31.83	29.75	27.67	25.59	24.35	23.14	20.18	17.55	15.41	13.79	12.54	11.88	11.04	8.97	6.89	4.81	2.73
KW	2.04	1.99	1.94	1.89	1.87	1.85	1.80	1.75	1.70	1.66	1.61	1.58	1.56	1.51	1.47	1.42	1.37
AMPS	7.1	6.9	6.7	6.5	6.3	6.2	6.0	5.8	5.6	5.4	5.2	5.1	5.0	4.8	4.6	4.4	4.2
COP	5.65	5.39	5.16	4.86	4.65	4.46	3.99	3.57	3.22	2.96	2.78	2.68	2.52	2.11	1.67	1.21	0.71
Hi PR	372	360	348	336	329	324	312	300	287	275	263	256	251	239	227	215	203
LO PR	128	120	112	104	100	96	88	80	72	64	56	52	48	40	32	25	17

GPHM56031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	76.34	71.48	66.71	62.01	59.00	56.80	51.18	45.97	41.71	38.56	36.24	35.00	33.40	29.40	24.00	20.33	16.53
T/R	34.86	32.96	31.06	29.16	28.02	26.97	24.30	21.83	19.81	18.31	17.21	16.62	15.86	13.96	12.06	10.16	8.26
KW	4.82	4.74	4.67	4.60	4.55	4.52	4.45	4.37	4.30	4.22	4.15	4.10	4.07	4.00	3.52	3.48	3.42
AMPS	17.9	17.5	17.2	16.9	16.7	16.6	16.2	15.9	15.6	15.3	14.9	14.7	14.6	14.3	12.5	12.0	11.7
COP	4.64	4.42	4.19	3.96	3.80	3.68	3.37	3.08	2.84	2.68	2.56	2.50	2.40	2.15	2.00	1.71	1.42
Hi PR	383	370	358	345	338	333	321	308	296	283	271	263	258	246	233	221	208
LO PR	137	128	120	111	106	103	94	86	77	69	60	55	52	43	35	26	18

GPHM56031

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	56.53	52.67	48.91	45.03	42.56	40.64	35.86	-	-	-	-	-	-	-	-	-	-
T/R	38.08	35.73	33.39	31.04	29.63	28.29	24.97	-	-	-	-	-	-	-	-	-	-
KW	2.95	2.86	2.77	2.68	2.63	2.59	2.50	-	-	-	-	-	-	-	-	-	-
AMPS	10.7	10.3	9.9	9.6	9.3	9.2	8.8	-	-	-	-	-	-	-	-	-	-
COP	5.62	5.40	5.17	4.92	4.75	4.59	4.20	-	-	-	-	-	-	-	-	-	-
Hi PR	371	359	347	335	328	323	311	-	-	-	-	-	-	-	-	-	-
LO PR	134	126	117	109	104	101	92	-	-	-	-	-	-	-	-	-	-

Notes

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

GPHM52431

SETUP	MOTOR TAP	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	726	662	576	486	415	346	284	248
				56	64	73	79	84	89	93	97
	T2 / T3	230	CFM	993	925	864	808	740	647	621	602
				161	171	178	185	193	200	205	209
	T4 / T5	230	CFM	1347	1315	1256	1194	1152	1096	1051	972
				239	256	265	271	282	286	293	297
Downshot Position	T1	230	683 Watts	683	622	542	457	390	326	267	233
				58	66	75	81	86	91	96	100
	T2/T3	230	CFM	971	905	845	791	724	633	608	589
				163	174	181	188	196	203	208	212
	T4/T5	230	CFM	1266	1236	1181	1122	1083	1030	988	914
				245	262	272	278	289	293	300	304

GPHM53031

SETUP	MOTOR TAP	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	813	748	696	573	-	-	-	-
				85	93	102	115	-	-	-	-
	T2 / T3	230	CFM	1234	1191	1147	1098	1046	988	918	854
				216	225	234	243	250	257	266	274
	T4 / T5	230	CFM	1440	1418	1364	1307	1265	1219	1168	1094
				290	306	312	321	326	332	348	353
Downshot Position	T1	230	683 Watts	745	687	623	573	-	-	-	-
				83	89	99	107	-	-	-	-
	T2/T3	230	CFM	1228	1151	1099	1088	1033	996	880	836
				229	237	248	260	268	275	288	292
	T4/T5	230	CFM	1354	1333	1282	1229	1189	1146	1098	1028
				297	314	320	329	334	340	357	362

GPHM53631

SETUP	MOTOR TAP	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	958	898	828	776	709	-	-	-
				100	110	116	127	138	-	-	-
	T2 / T3	230	CFM	1450	1400	1349	1303	1249	1199	1147	1090
				260	271	280	290	299	308	316	326
	T4 / T5	230	CFM	1604	1560	1507	1468	1415	1364	1321	1276
				396	402	408	424	426	423	444	454
Downshot Position	T1	230	683 Watts	921	857	780	714	631	-	-	-
				104	113	123	133	143	-	-	-
	T2/T3	230	CFM	1443	1382	1317	1270	1211	1155	1096	1028
				284	294	304	313	320	329	338	347
	T4/T5	230	CFM	1508	1466	1417	1380	1330	1282	1242	1199
				406	412	418	435	437	434	455	465

GPHM54231

SETUP	MOTOR TAP	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	1159	1103	1054	1004	947	897	831	732
				162	170	182	190	204	213	224	240
	T2 / T3	230	CFM	1548	1495	1453	1405	1356	1311	1266	1211
				300	310	319	332	342	353	364	372
	T4 / T5	230	CFM	1775	1718	1673	1643	1588	1532	1482	1431
				416	424	430	454	458	466	478	488
Downshot Position	T1	230	683 Watts	1198	1135	1071	1017	945	879	810	727
				162	170	183	193	211	225	239	245
	T2/T3	230	CFM	1544	1492	1440	1393	1340	1295	1255	1200
				304	317	330	344	355	365	370	378
	T4/T5	230	CFM	1669	1615	1573	1544	1493	1440	1393	1345
				426	435	441	465	469	478	490	500

GPHM54831

SETUP	MOTOR TAP	VOLTS		STATIC							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Horizontal Position	T1	230	CFM	1221	1165	1118	1063	1020	954	888	774
				179	190	197	209	219	233	243	256
	T2 / T3	230	CFM	1823	1776	1733	1687	1644	1597	1551	1505
				455	468	482	492	502	510	516	523
	T4 / T5	230	CFM	2012	1965	1912	1871	1809	1770	1741	1691
				578	593	599	606	610	627	626	634
Downshot Position	T1	230	683 Watts	1232	1170	1125	1063	1007	954	883	798
				167	178	190	201	212	225	239	251
	T2/T3	230	CFM	1850	1797	1748	1699	1649	1603	1568	1528
				440	456	468	477	490	499	501	510
	T4/T5	230	CFM	1891	1847	1797	1759	1700	1664	1637	1590
				592	608	614	621	625	643	642	650

NOTES

1. Data shown is dry coil. Wet coil pressure drop is approximately 0.02" H₂O, for three-row indoor coil; and 0.3" H₂O, for four-row indoor coil.
2. Data shown does not include filter pressure drop, approx. 0.08" H₂O.
3. Reduce airflow by 2% for 208V operation.
4. ALL MODELS SHOULD RUN NO LESS THAN 300 CFM/TON.
5. For high static applications, see blower performance table for selecting appropriate speed tap.

GPHM56031

HORIZONTAL FLOW

MOTOR TAP	EXTERNAL STATIC PRESSURE (ESP), IN W.C.	SCFM	RPM	BHP
T1	0.2	1372	665	0.20
	0.4	1259	734	0.23
	0.6	1133	813	0.25
	0.8	1016	888	0.27
T2	0.2	2176	878	0.69
	0.4	2080	939	0.74
	0.6	1973	1000	0.79
	0.8	1887	1048	0.83
T3	0.2	2176	878	0.69
	0.4	2080	939	0.74
	0.6	1973	1000	0.79
	0.8	1887	1048	0.83
T4	0.2	2234	960	0.86
	0.4	2162	1003	0.9
	0.6	2101	1042	0.83
	0.8	2053	1073	0.96
T5	0.2	2300	982	0.93
	0.4	2222	1025	0.98
	0.6	2170	1061	1.01
	0.8	2120	1095	1.04

DOWNFLOW

MOTOR TAP	EXTERNAL STATIC PRESSURE IN W.C.	SCFM	RPM	BHP
T1	0.2	1380	664	0.20
	0.4	1262	735	0.23
	0.6	1132	811	0.25
	0.8	1006	884	0.27
T2	0.2	2145	902	0.71
	0.4	2056	952	0.75
	0.6	1967	1003	0.79
	0.8	1890	1051	0.83
T3	0.2	2145	902	0.71
	0.4	2056	952	0.75
	0.6	1976	1003	0.79
	0.8	1890	1051	0.83
T4	0.2	2293	950	0.85
	0.4	2195	995	0.89
	0.6	2112	1042	0.93
	0.8	2034	1088	0.97
T5	0.2	2364	971	0.92
	0.4	2274	1019	0.97
	0.6	2190	1063	1.01
	0.8	2113	1110	1.06

NOTES


- Airflow below 1500 SCFM (300 SCFM/ton) is not recommended for High Stage cooling or heating

MODEL AND HEAT KIT USAGE	CIRCUIT #1		CIRCUIT #2		SINGLE-POINT KIT		ACTUAL kW
	MCA ¹	MOP ²	MCA ¹	MOP ²	MCA ¹	MOP ²	
GPHM52431							
HKTPD051	24.7	25	-	-	43.18	45	4.75
HKTPD081	36.5	40	-	-	54.98	60	7
HKTPD101	49.5	50	-	-	67.98	70	9.5
GPHM53031							
HKTPD051	24.7	25	-	-	46.22	50	4.75
HKTPD081	36.5	40	-	-	58.02	60	7
HKTPD101	49.5	50	-	-	71.02	80	9.5
HKTPD151	49.5	50	24.7	25	95.72	100	14.25
GPHM53631							
HKTPD051	24.7	25	-	-	54.46	60	4.75
HKTPD081	36.5	40	-	-	66.26	70	7
HKTPD101	49.5	50	-	-	79.26	80	9.5
HKTPD151	49.5	50	24.7	25	103.96	110	14.25
GPHM54231							
HKTPD051	24.7	25	-	-	60.54	70	4.75
HKTPD081	36.5	40	-	-	72.34	80	7
HKTPD101	49.5	50	-	-	85.34	90	9.5
HKTPD151	49.5	50	24.7	25	110.04	125	14.25
GPHM54831							
HKTPD051	24.7	25	-	-	61.14	70	4.75
HKTPD081	36.5	40	-	-	72.94	80	7
HKTPD101	49.5	50	-	-	85.94	90	9.5
HKTPD151	49.5	50	24.7	25	110.64	125	14.25
HKTPD191	49.5	50	49.5	50	135.44	150	19
GPHM56031							
EHXD-1S05A	-	-	-	-	70.3	90	5
EHXD-1S10A	-	-	-	-	96.3	110	10
EHXD-1S15A	-	-	-	-	122	125	15
EHXD-1S20A	-	-	-	-	148	150	20


¹ Minimum Circuit Ampacity² Maximum Overcurrent Protection Device

Heating kW Correction Factor					
Supply Voltage	240	230	220	210	208
Correction Factor	1.0	0.93	0.85	0.78	0.76


Multiply rated kW by correction factor to get actual kW

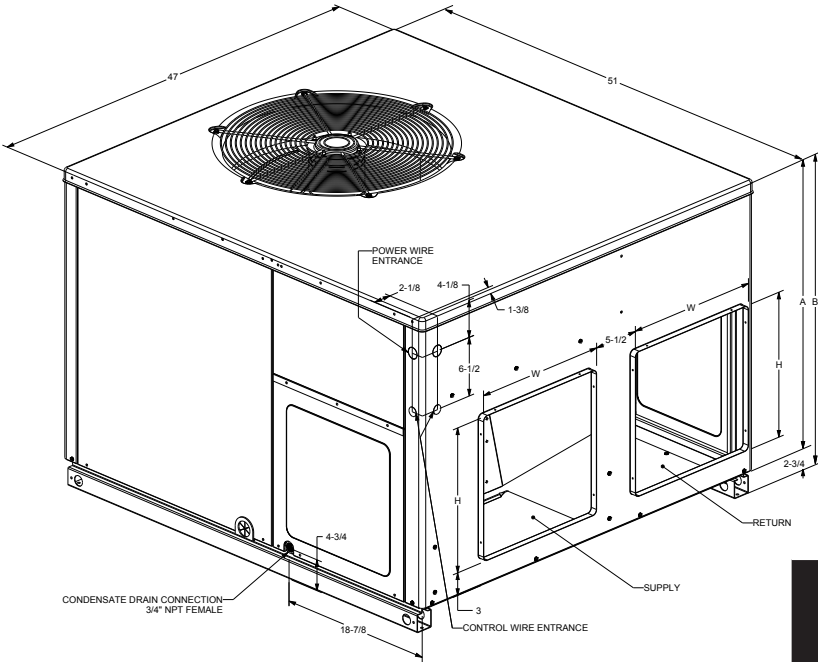



MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
GPHM52431	47	51	32	34%	Medium
GPHM53031	47	51	32	34%	Medium
GPHM53631	47	51	40	42%	Large
GPHM54231	47	51	40	42%	Large
GPHM54831	47	51	40	42%	Large
GPHM56031	73%	47%	39	43½	X-Large

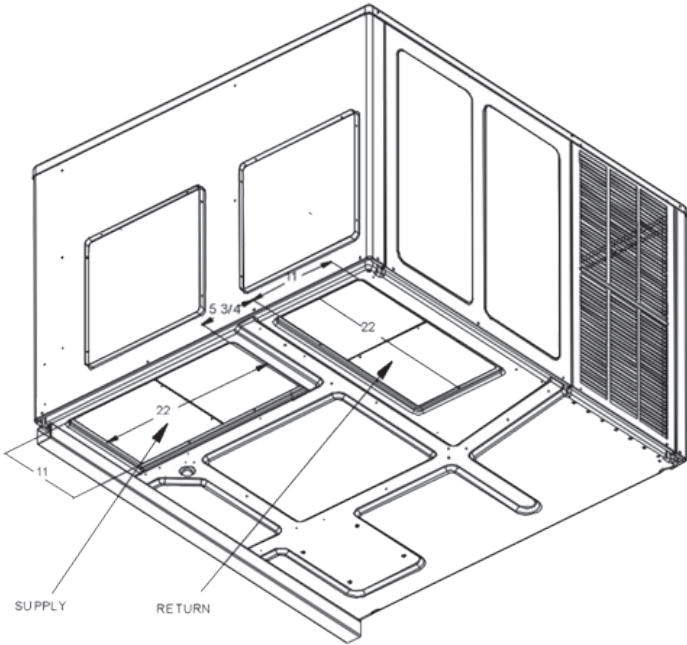

MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
GPHM52431	16	16	16	16
GPHM53031	16	16	16	16
GPHM53631	16	18	16	18
GPHM54231	16	18	16	18
GPHM54831	16	18	16	18
GPHM56031	17	12	11	25

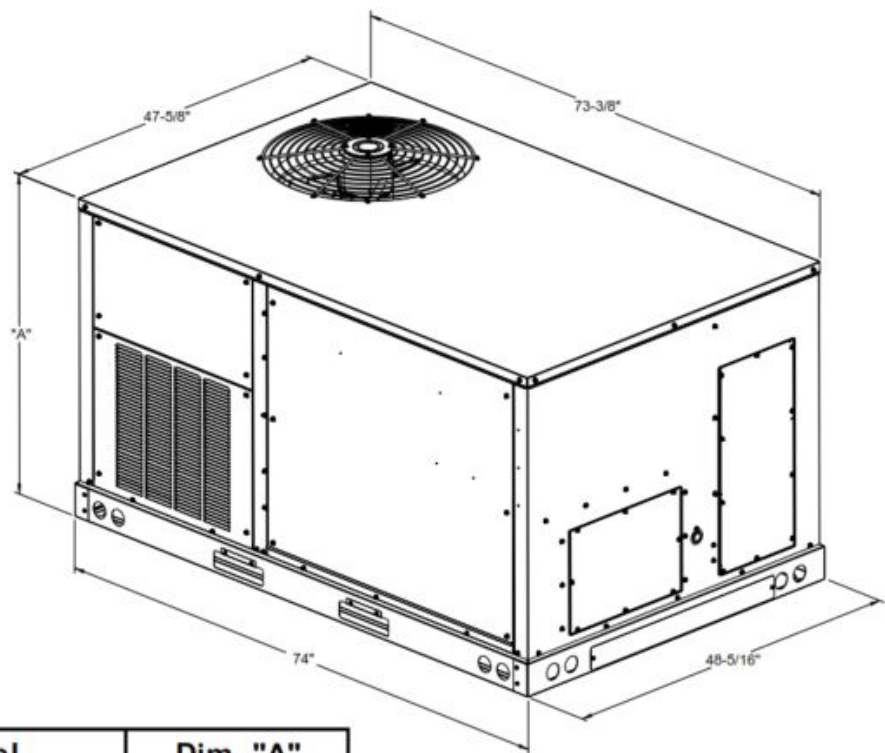

Model	Dim. "A"
5 Ton Heat Pump	43-1/2"

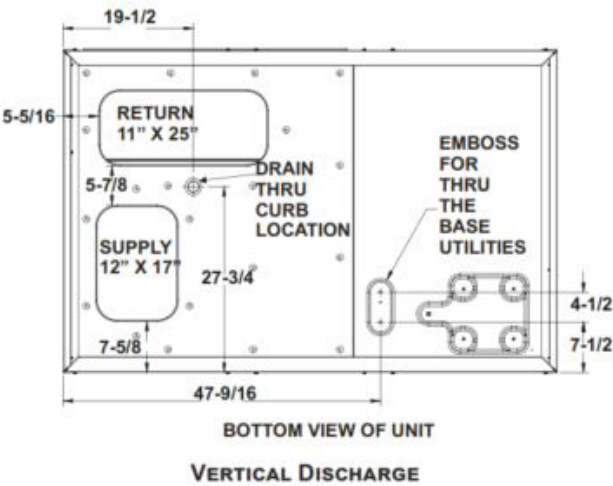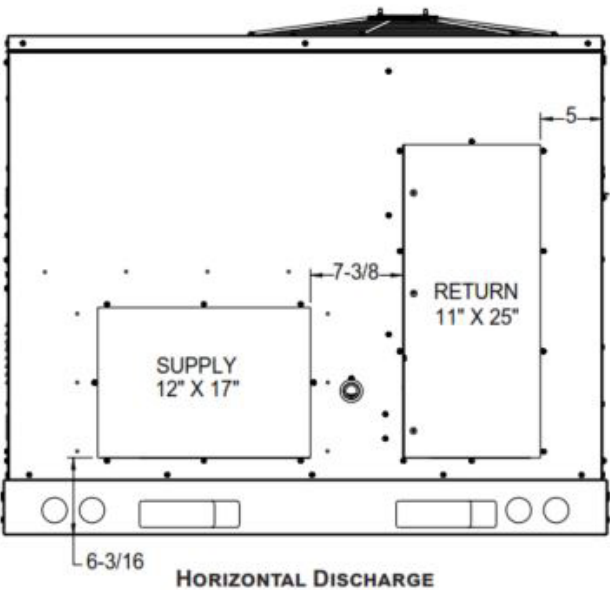

NOTE: REFER TO IOD-7082 INCLUDED IN THE LITERATURE PACK FOR INSTALLING HORIZONTAL DUCT COVERS.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- Unit must be lifted by the four lifting holes located at the base frame corners.
- Lifting cables should be attached to the unit with shackles.
- The distance between the crane hook and the top of the unit must not be less than 60".
- Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from fork lift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

Important: If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Duct-work dimensions are shown in Roof Curb Installation Instructions Manual.

Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual.

Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end.

Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct.

To assist in determining rigging requirements, unit weights are shown on the following page.

Curb installations must comply with local codes and should follow the established guidelines of the National Roofing Contractors Association.


Proper unit installation requires that the roof curb be firmly and permanently attached to the roof structure. Check for adequate fastening method prior to setting the unit on the curb.

Full perimeter roof curbs are available from the factory and are shipped unassembled. The installing contractor is responsible for field assembly, squaring, leveling, and mounting on the roof structure. All required hardware necessary for the assembly of the sheet metal curb is included in the curb accessory package.


- Determine sufficient structural support before locating and mounting the curb and package unit.
- Duct-work must be constructed using industry guidelines. The duct-work must be placed into the roof curb before mounting the package unit. Our full perimeter curbs include duct connection frames to be assembled with the curb. Cantilevered-type curbs are not available from the factory.
- Contractor furnishes curb insulation, cant strips, flashing, and general roofing material.
- Support curbs on parallel sides with roof members. To prevent damage to the unit, the roof members cannot penetrate supply and return duct openings.

Note: The unit and curb accessories are designed to allow vertical duct installation before unit placement. Duct installation after unit placement is not recommended.


See the manual shipped with the roof curb for assembly and installation instructions.

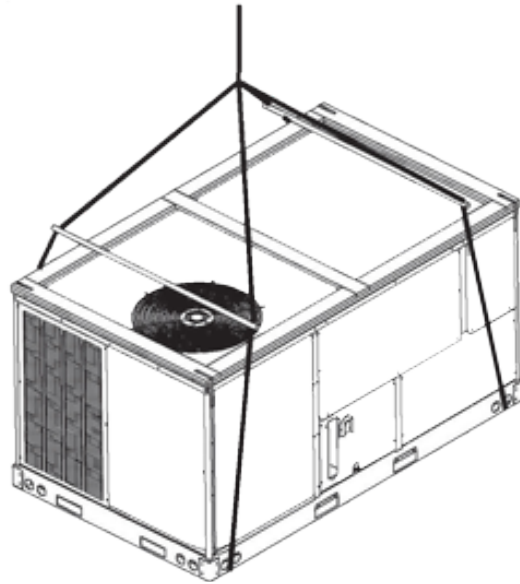


3-D VIEW

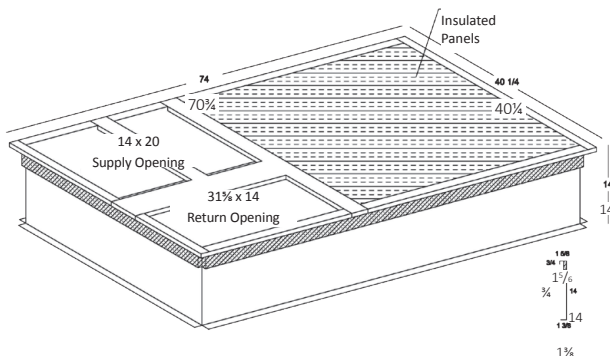

TOP VIEW

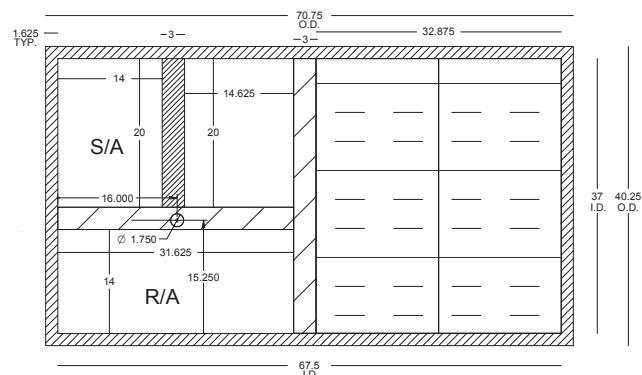


CORNER & CENTER-OF-GRAVITY LOCATIONS

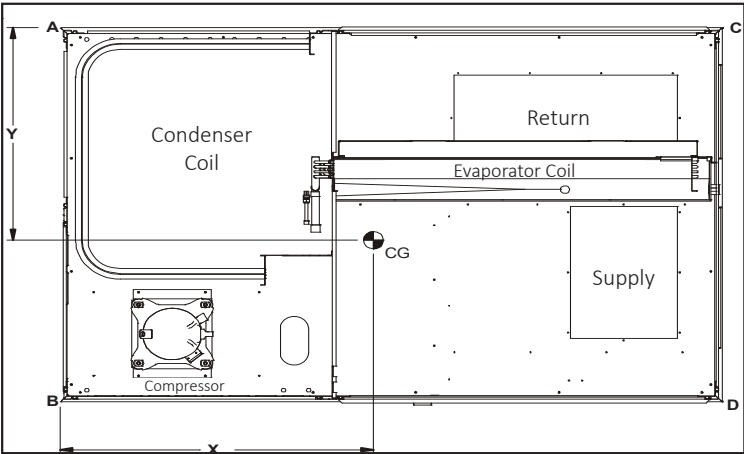


MODEL	X (IN)	Y (IN)	SHIPPING WEIGHT (LBS)	OPERATING WEIGHT (LBS)	CORNER WEIGHTS (LBS.)			
					A	B	C	D
GPHM56031	33.5	27.6	688	630	150	194	165	121

UNIT CLEARANCES

Maintain an adequate clearance around the unit for safety, service, maintenance, and proper unit operation. Leave a total clearance of 75" on the main control panel side of the unit for possible removal of fan shaft, coil, electric heat, and gas furnace. Leave a clearance of 48" on all other sides of the unit for possible compressor removal or service access, and to ensure proper ventilation and condenser airflow. Do not install the unit beneath any obstruction. Install the unit away from all building exhausts to inhibit ingestion of exhaust air into the unit's fresh-air intake.

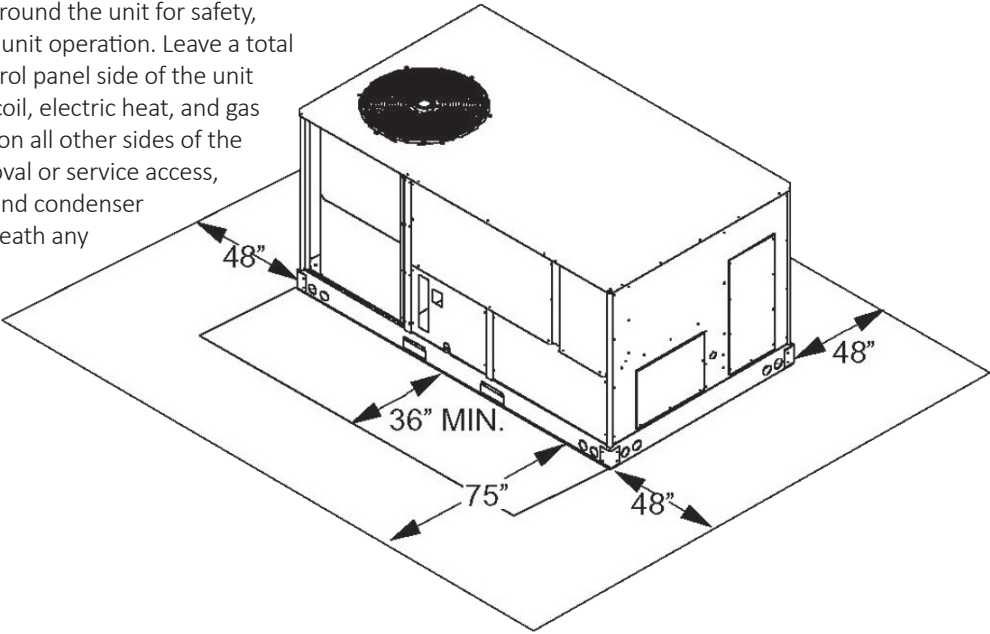


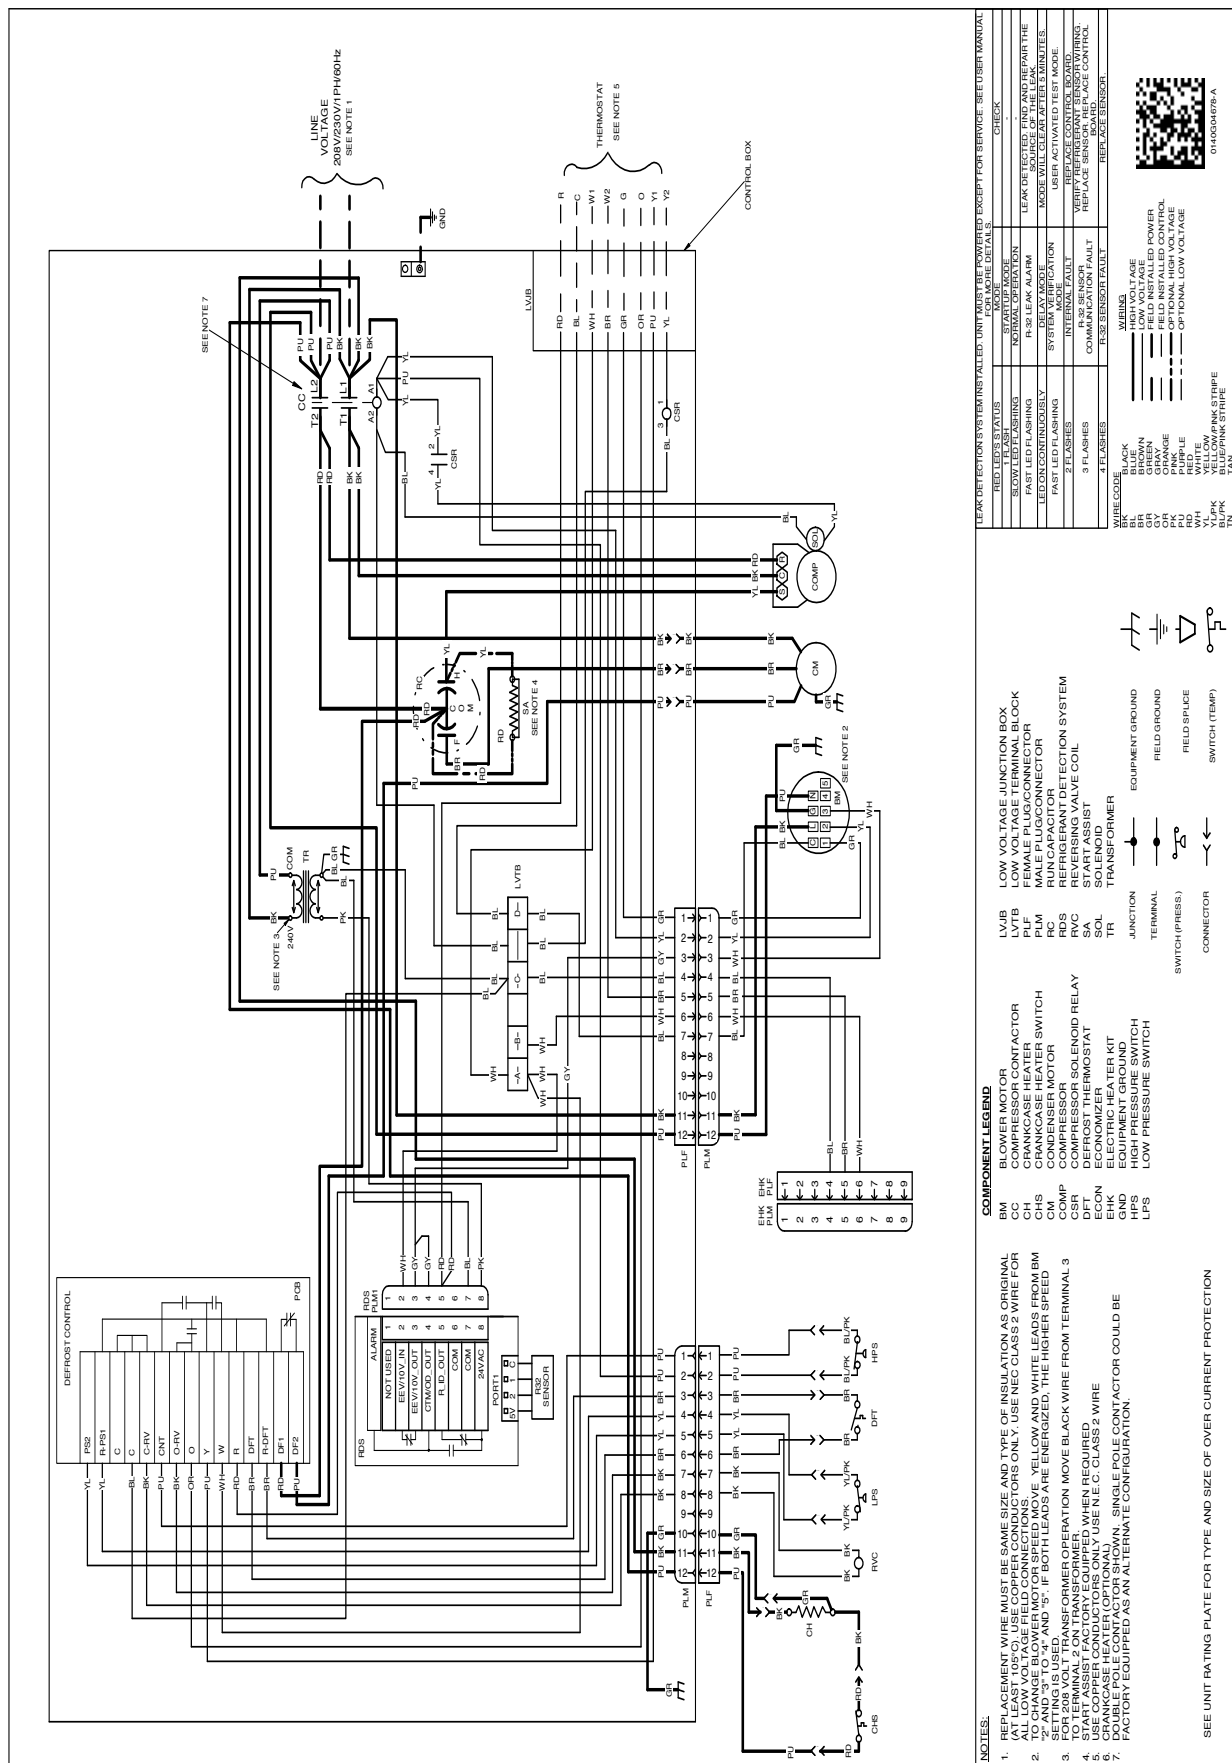

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

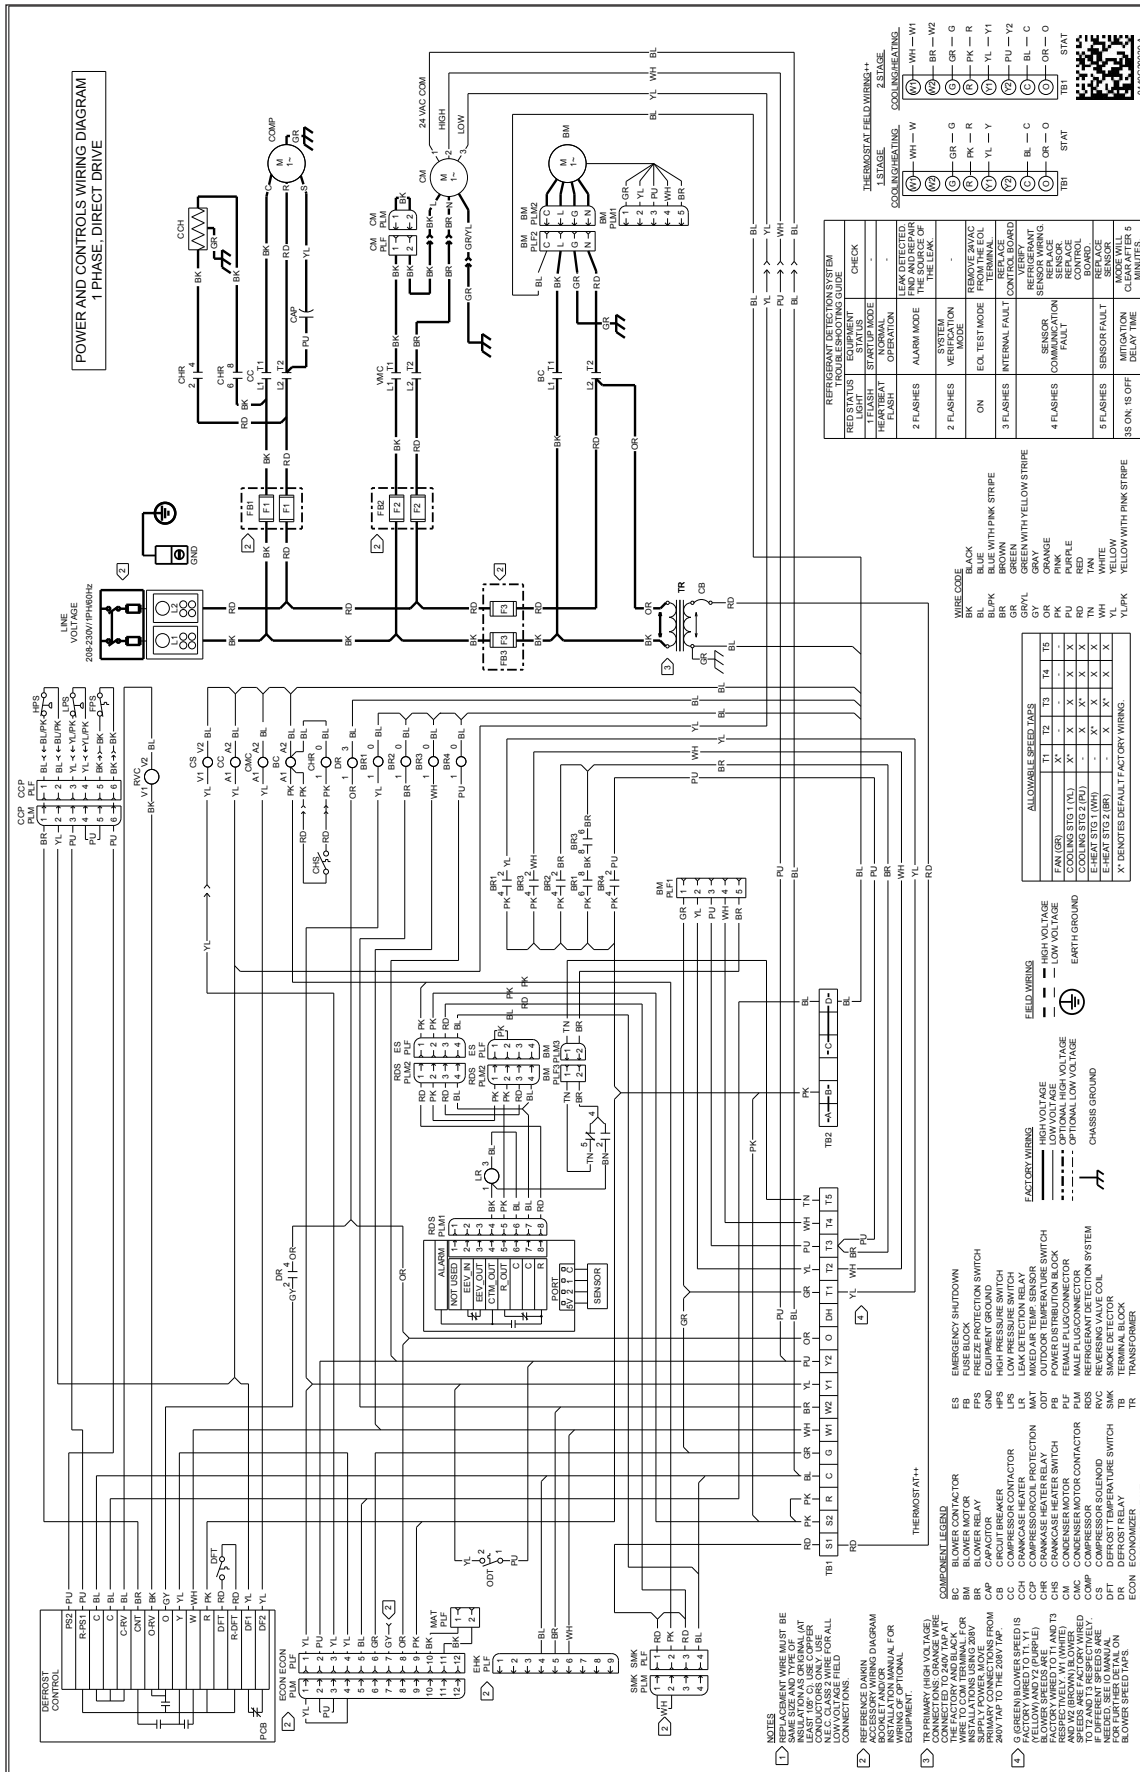

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

GPHM5(24-48)31 UNITS

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer**	GPJMED102	GPJMED103
Downflow Internal Filter Rack	DDNIFRPCHMM	DDNIFRPCHML
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRPG101/102	SQRPG103
Horizontal Duct Cover*	20464501PDGK	20464502PDGK
Downflow Conversion Kit**	DWNFLWCONV	DWNFLWCONV
Economizer Wiring Harness***	0259L00411	0259L00411
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Duct Cover	20464501PDGK	20464502PDGK
Horizontal Economizer	DHZECNJPCHM	DHZECNJPCHL
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRPGH102	SQRPGH103
Outdoor Thermostat Kit w/ Lockout Stat	OT18-60A	OT18-60A
Outdoor Thermostat Kit (Only for GPHM5(24,30)31	OTHPKG-01	-
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

*Required for all downflow installations.

**Either a "Downflow Economizer" or a "Downflow Conversion Kit" is mandatory for all downflow installations.

***Required for installation of Economizers.

FOR GPHM56031 UNIT

ITEM #	DESCRIPTION
0221L00014	14" Roof Curb
0270L01166	25% Manual Fresh Air Damper
0270L01165	25% Motorized Fresh Air Damper
0270L01338	Concentric Duct Adapter Kit 18"
0270L01753	Downflow Low-Leak Economizer Enthalpy
0270L01755	Downflow Ultra Low-Leak Economizer Enthalpy
0270L01757	Horizontal Ultra Low-Leak Economizer Enthalpy
EHXD-1S**	Electric Heat Kits
0270L01250	Hurricane Restraint Clips (for 0221L00014 Roof Curb)
0270L01261	Hurricane Restraint Clips

[illegible]

[illegible]