



The new degree of comfort.™

SUBMITTAL COVER SHEET

PROJECT NAME							
LOCATION							
ARCHITECT							
ENGINEER							
CONTRACTOR							
SUBMITTED BY	DATE						
UNIT SUMMARY							
Quantity							
Unit Designation							
Model No.							
Total Cooling							
Sensible Cooling							
Air Ent. Evaporator							
Air Lvg. Evaporator							
Heating Input							
Heating Output							
CFM/ESP							
EER/SEER							
Electrical							
Minimum Ampacity							
Min.-Max. Breaker							
Net Unit Weight							
Accessory							
Catalog Form Number							
ACCESSORIES:	NOTES:						



INTEGRATED HOME COMFORT

PRINTED IN U.S.A. 01/12 QG FORM NO. M11-1640

Endeavor™ Line Classic Series Gas Furnaces



This product meets a stringent set of our internally defined sustainability standards



R921V

92% A.F.U.E.†

EcoNet® Enabled


Heating Stages: Single Stage

Motor Type: Constant CFM

Input Rates: 40 to 115 kBTU [11.7 to 33.7 kW]

Configuration Options: 4-Way Multi-Position

Multi-Position Application

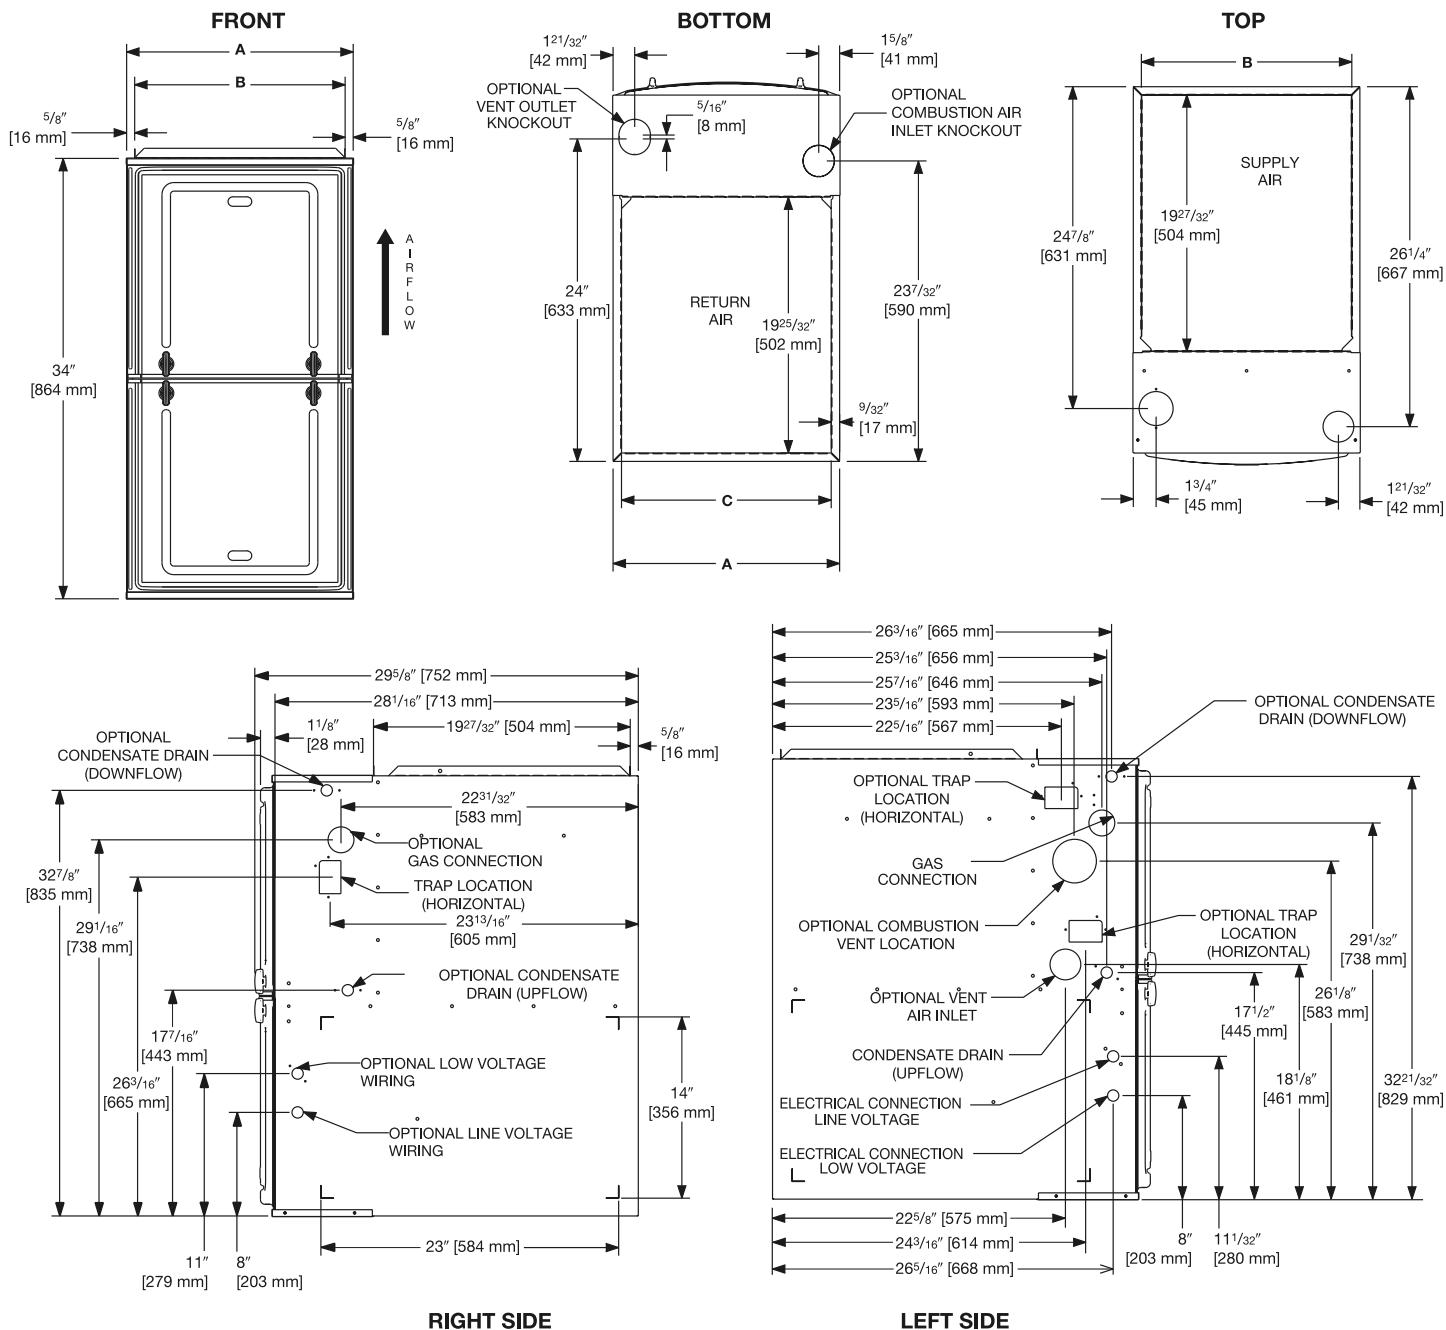

Unit Dimensions (Clearance To Combustibles)

MODEL R921V	LEFT SIDE	MINIMUM CLEARANCE (IN.) [mm]					SHIP WGTs.	FLANGE DIMENSIONS		
		RIGHT SIDE	BACK	TOP	FRONT	VENT		A	B	C
040	0	0	0	1 [25]	2 [51]	0	123.5 [56]	17 1/2 [445]	16 13/64 [413]	16 13/64 [412]
060	0	0	0	1 [25]	2 [51]	0	128 [58]	17 1/2 [445]	16 13/64 [413]	16 13/64 [412]
070	0	0	0	1 [25]	2 [51]	0	132 [60]	17 1/2 [445]	16 17/64 [413]	16 13/64 [412]
070 (wide)	0	0	0	1 [25]	2 [51]	0	147.5 [67]	21 [533]	19 49/64 [502]	19 45/64 [500]
085	0	0	0	1 [25]	2 [51]	0	147.5 [67]	21 [533]	19 49/64 [502]	19 45/64 [500]
100	0	0	0	1 [25]	2 [51]	0	152 [69]	21 [533]	19 49/64 [502]	19 45/64 [500]
115	0	0	0	1 [25]	2 [51]	0	165 [75]	24 1/2 [662]	23 17/64 [591]	23 13/64 [589]

*A service clearance of at least 24" is recommended in front of all furnaces
Supply and return depicted as upflow configuration.

Flange configuration will vary depending on installation orientation.

[] Designates Metric Conversions