


TEAM ACE PROJECT PRESENTATION

SMART DRAIN & HEATWAVE RESPONSE SYSTEM

An integrated urban climate management platform that uses real-time weather API forecasts and IoT sensor data to proactively address **heatwave droughts** (automated micro-irrigation) and **torrential rain** (smart pre-storm drainage) using a single rainwater storage tank.

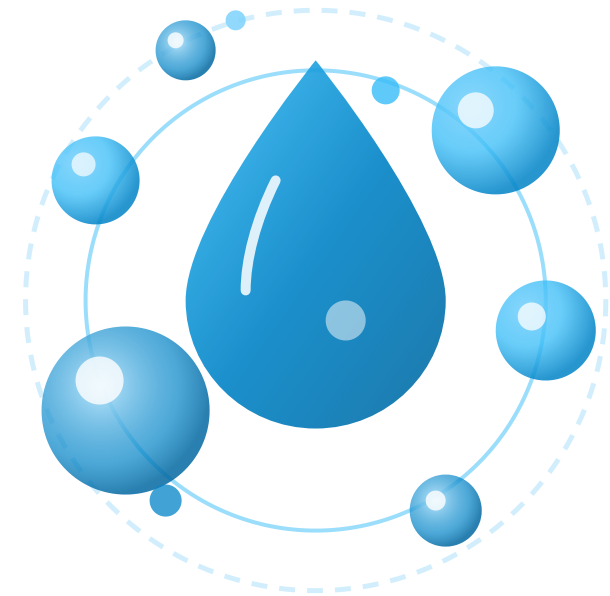

PROJECT TITLE

Smart Drain & Heatwave System

TEAM

Team ACE

Extreme Summer Climate Hazards in Urban Environments

Modern cities face compound climate hazards from alternating heatwaves and flash floods.



1. Heatwave & Drought

- Extreme summer heat dries soil below 30% moisture.
- Urban heat island effect causes plant wilting and severe pedestrian discomfort.
- Manual watering wastes valuable municipal tap water.



2. Torrential Rain & Flooding

- Sudden downpours instantly exceed local storm sewer capacity.
- Rainwater tanks fill to 100% capacity and overflow into streets.
- Lack of pre-storm drainage leads to localized urban flooding.



3. Limits of Conventional Systems

- Existing drains operate as one-way reactive systems.
- Stormwater is dumped into sewers instead of being stored.
- No integration between flood prevention and heatwave irrigation.



The Need for an Integrated Solution


Urban infrastructure requires a smart system capable of automatically switching between **storing rainwater for drought irrigation** and **pre-draining tanks before severe storms land**.

One Tank, Two Jobs: Bi-Directional Climate Management



JOB 1: Heatwave Micro-Irrigation (P1 Pump)

- **Trigger Condition:** Clear weather (no rain forecast), Soil moisture < 30%, Temp $\geq 30^{\circ}\text{C}$, and Tank storage > 20%.
- **Control Action:** Activates **P1 Irrigation Pump** to deliver a 12-second pulse (~0.34 L) to the crop box.
- **Benefit:** Recycles stored rainwater to preserve urban crops without wasting tap water.



JOB 2: Pre-Storm Flood Drainage (P2 Pump)

- **Trigger Condition:** KMA Open API receives a Heavy Rain Forecast AND Tank storage level > 20%.
- **Control Action:** Activates **P2 Pre-drain Pump** to empty the tank down to 10% before downpour hits.
- **Benefit:** Creates an empty storage buffer in advance, preventing urban sewer overload.

The Rainwater Circularity Loop

The torrential downpour that threatens street flooding is stored into the tank, becoming the exact water source that cools the city during the next heatwave.

Dumb Edge Node, Smart Hub System Architecture

1. ESP32 Edge Node

- **Sensors:** Capacitive Soil Moisture (ADC1), DHT22 Temp/Humidity, HC-SR04 Ultrasonic Tank Level.
- **Actuators:** 2-Channel 5V Relay controlling P1 & P2 Submersible Pumps.
- **Role:** Reads telemetry every 2 s, reports via MQTT, executes commands with 15 s safety watchdog.

2. Raspberry Pi Main Hub

- **Mosquitto MQTT Broker:** Handles real-time JSON messaging.
- **decision.py:** Central decision engine evaluating state logic every 5 s.
- **FastAPI & SQLite:** Serves system dashboard and records event telemetry logs.

3. KMA Forecast API

- **Open API Polling:** Fetches short-term forecast every 10 min.
- **Grid Conversion:** Converts lat/lon to Lambert conformal conic grid.
- **Fail-Safe:** API outages default to "last valid forecast" then "no rain", preventing erroneous drainage.

Telemetry Payload (ESP32 → Pi, 2 s)

```
{ "ts": 1786342072.4, "node": "ace-esp32", "soil_moisture_pct": 27.4, "ambient_temp_c": 34.2, "tank_level_pct": 43.1 }
```

Command Payload (Pi → ESP32, 5 s)

```
{ "mode": "GREENERY_IRRIGATION", "pump": true, "drain": false, "reason": "moisture 27%, 34.2C", "ttl_s": 15.0 }
```

System Decision Logic

CORE DECISION ENGINE

5-Second Real-Time Decision Algorithm

Evaluates sensor data and weather forecast every 5 seconds to automatically toggle between pre-storm flood protection and heatwave micro-irrigation.

⌚ Real-Time Sensor & Weather Polling


Polls KMA forecast API, soil moisture, ambient temp, and water tank storage level every 5-second cycle.

☔ Heavy Rain Priority Override

Heavy rain forecast triggers instant pre-drainage via P2 pump, clearing tank storage capacity before storm hits.

🌱 Smart Micro-Irrigation

Doses a 0.34 L pulse via P1 pump during hot ($\geq 30^{\circ}\text{C}$) and dry ($< 30\%$ moisture) conditions when stored water is available.

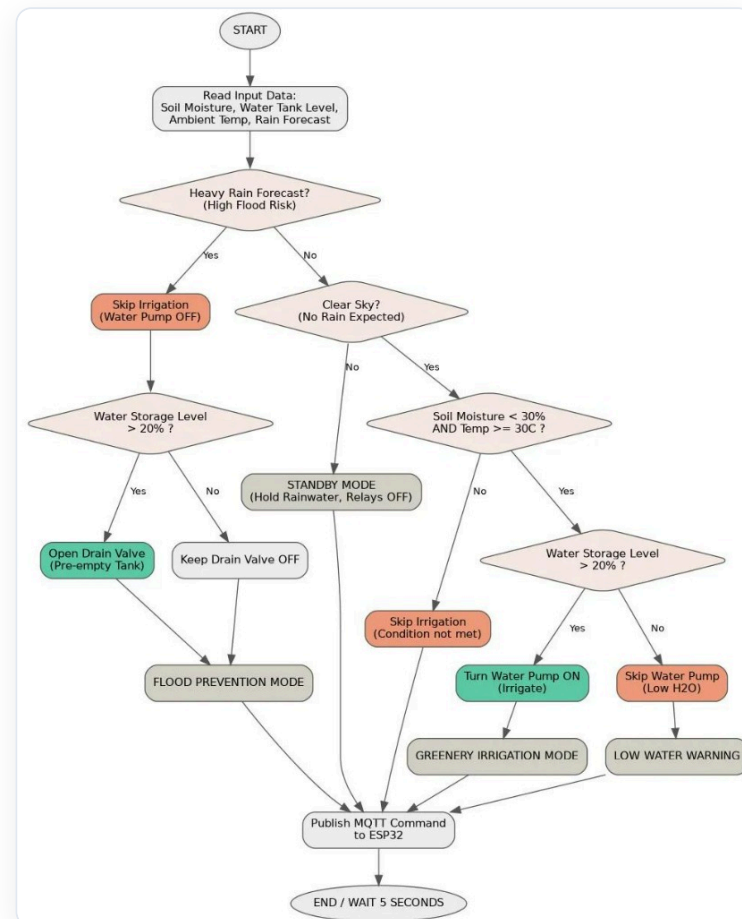

Conventional Systems vs. Team ACE SDS Smart Platform

Feature	Conventional Municipal Drainage	ACE SDS Smart Platform
Primary Goal	Flood prevention only	Flood + Heatwave + Drought integrated control
Rainwater Processing	Store then discharge into sewer (wasted)	Filtered → Stored → 100% Recycled for Irrigation & Mist
Water Flow Mechanism	One-way gravity discharge	Bi-directional smart routing (P1 Irrigation & P2 Pre-drain)
Decision Timing	Reactive response after heavy rain	Proactive 1-hour KMA forecast API poller
Application Scope	Large public civil infrastructure	Roofs, planter boxes, smart shade micro-zones

 Smart Shade Cooling Fog Integration & Innovations

 **Rainwater First**
Prioritizes stored rainwater over municipal tap water.

 **Multi-Height Spray**
Nozzle heights for children (1.2m) & adults (1.8m).

 **IoT Climate Control**
Lowers felt ambient temperature by 3~5°C.

 **3-Tier Filtration**
Topsoil, fabric filter, and gravel prevent clogging.

TEAM ACE PROJECT PRESENTATION

SMART DRAIN & HEATWAVE RESPONSE SYSTEM

Thank you for your time.

Question & Answer (Q&A)

We are ready for any questions or feedback.