

Distributed by:



**[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 618003

# OPTIONS & SELECTION GUIDES

## TN (Twisted Nematic)

### STN (Super Twisted Nematic)

- STN type offers high contrast and wide viewing angle.
- STN type is available with different background colors;
- Yellow-green w/black characters
- Silver-gray w/dark blue characters
- Dark blue w/white characters

### FSTN (Film STN)

- Black and white STN with very high contrast ratio for large graphic panels.

## TEMPERATURE RANGE

	OPERATION (°C)	STORAGE (°C)
STANDARD	0 ~ +50	-20 ~ +70
EXTENDED	-20 ~ +70	-30 ~ +80

## BACK LIGHT

### EL (Electro- luminescent)

- Power efficient

### LED with a choice of colors

- Bright and even back lighting
- Long life expectancy, more than 100,000 hours
- Simple to drive. Needs +5 volts only
- Brightness can be easily adjusted

### CCFL (Cold Cathode Florescent Light)

- Paper white, best for large graphic displays
- Less power consumption than LED's

## DISPLAY TYPE

- Positive image (Dark dots on light background)
- Negative image (Light dots on dark background)



## VIEWING ANGLE

- 12:00 (Top) Display is below eye level
- 6:00 (Bottom) Display is above eye level

## SELECTION GUIDE

DISPLAY/POLARIZER	DISPLAY DESCRIPTION	OUTDOORS	OFFICE LIGHT	SUBDUED LIGHT	VERY LOW LIGHT	COMMENTS
REFLECTIVE POSITIVE	DARK CHARACTERS ON A LIGHT GREY OR YELLOW BACKGROUND	EXCELLENT	VERY GOOD	POOR	UNUSABLE	CAN'T BE BACK LIT
TRANSFLECTIVE POSITIVE	DARK CHARACTERS ON A LIGHT GREY OR YELLOW BACKGROUND	EXCELLENT	VERY GOOD	VERY GOOD	EXCELLENT	BEST CHOICE FOR GENERAL USE
TRANSMISSIVE NEGATIVE	LIGHT CHARACTERS ON A DARK BACKGROUND	POOR	GOOD	VERY GOOD	EXCELLENT	MUST BE USED WITH A BACK-LIGHT
TRANSMISSIVE POSITIVE	DARK CHARACTERS ON A LIGHT GRAY OR YELLOW BACKGROUND	GOOD	VERY GOOD	EXCELENT	EXCELLENT	HIGH CONTRAST DISPLAY

# TEMPERATURE COMPENSATION & EL LIFE TIME

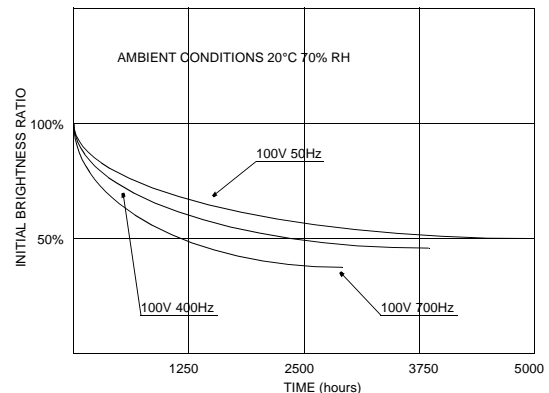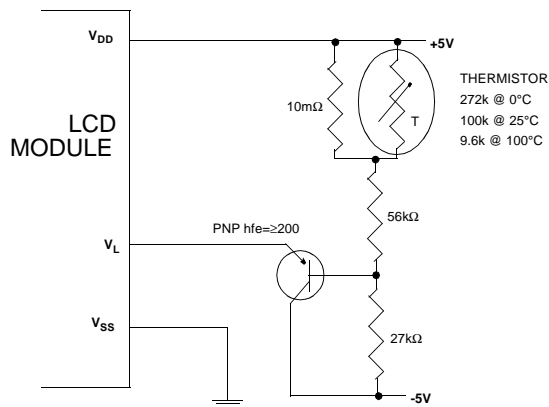

# COMMANDS FOR CHARACTER MODULES

Command	Code										Description	Execution Time
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Clears the display and returns the cursor to the home position (address 0).	82μs~1.64ms
Return Home	0	0	0	0	0	0	0	0	1	*	Returns the cursor to the home position (address 0). Also returns a shifted display to the home position. DD RAM contents remain unchanged.	40μs~1.64ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	S	Sets the cursor move direction and enables/disables the display.	40μs
Display ON/OFF Control	0	0	0	0	0	0	1	D	C	B	Turns the display ON/OFF (D), or the cursor ON/OFF (C), and blink of the character at the cursor position (B).	40μs
Cursor & Display Shift	0	0	0	0	0	1	S/C	R/L	*	*	Moves the cursor and shifts the display without changing the DD RAM contents.	40μs
Function Set	0	0	0	0	1	DL	N\$	RE	*	#	Sets the data width (DL), the number of lines in the display (L), and the character font (F).	40μs
Set CG RAM Address	0	0	0	1	A <sub>CG</sub>						Sets the CG RAM address. CG RAM data can be read or altered after making this setting.	40μs
Set DD RAM Address	0	0	1	A <sub>DD</sub>						Sets the DD RAM address. Data may be written or read after making this setting.	40μs	
Read Busy Flag & Address	0	1	BF	AC						Reads the BUSY flag (BF) indicating that an internal operation is being performed and reads the address counter contents.	1μs	
Write Data to CG or DD RAM	1	0	Write Data								Writes data into DD RAM or CG RAM.	46μs
Read Data from CG or DD RAM	1	1	Read Data								Reads data from DD RAM or CG RAM.	46μs
	I/D = 1: Increment                      I/D = 0: Decrement S = 1: Accompanies display shift. S/C= 1: Display shift                      S/C = 0: cursor move R/L= 1: Shift to the right.    R/L= 0: Shift to the left. DL = 1: 8 bits                      DL = 0: 4 bits N = 1: 2 lines                      N = 0: 1 line RE = 1: Ext. Reg. Ena.              F = 0: 5 x 7 dots BF = 1: Busy                      BF = 0: Can accept data # Set to 1 on 24x4 modules \$ With KS0072 is Address Mode.										DD RAM: Display data RAM CG RAM: Character generator RAM A <sub>CG</sub> : CG RAM Address A <sub>DD</sub> : DD RAM Address Corresponds to cursor address.  AC: Address counter Used for both DD and CG RAM address.	Execution times are typical. If transfers are timed by software and the busy flag is not used, add 10% to the above times.

# CHARACTER MODULE INITIALIZATION

## Internal Reset Circuit

The module is automatically initialized when the power is applied. The following commands are executed during initialization. The busy flag is kept in the busy state until initialization is complete. The busy state lasts for 10 ms after  $V_{DD}$  reaches 4.5 volts.


- 1) Clear Display
- 2) Function set  
DL=1.....8-bit data length for interface  
N=0.....Single-line display  
F=0.....5x7 dot matrix character font
- 3) Display ON/OFF Control  
D=0.....Display OFF  
C=0.....Cursor OFF  
B=0.....Blink function OFF
- 4) Entry Mode Set  
I/D=1.....Increment Mode  
S=0.....Display shift OFF

## NOTE:


If the following power conditions are not satisfied, the internal reset circuit does not function properly. In this case, the initialization should be executed by the series of instructions from outside the MPU (Software Initialization).

## Power Conditions for Internal Reset

ITEM	SYMBOL	MIN	TYP	MAX	UNIT
Power Supply Rise Time	$t_{rcc}$	0.1	-	10	ms
Power Supply Off Time	$t_{OFF}$	1.0	-	-	ms

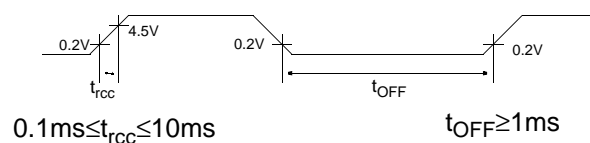

## Software Initialization

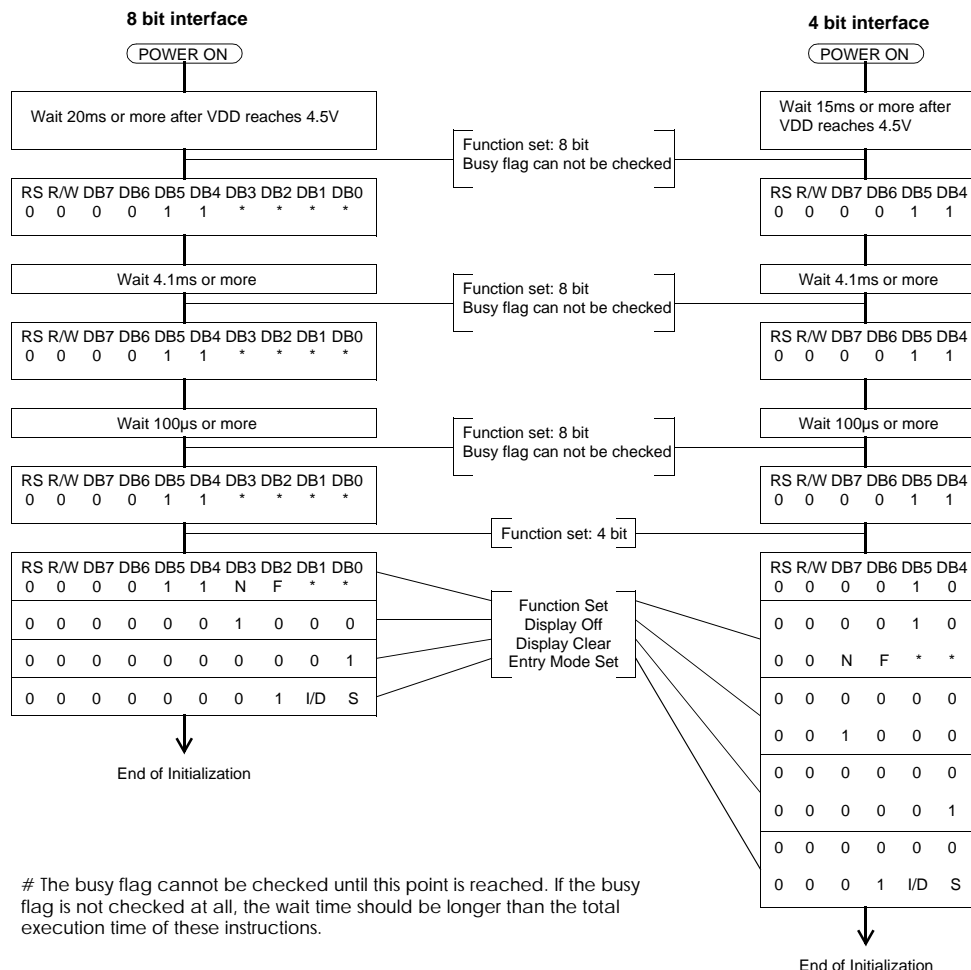

# DISPLAY CHARACTER POSITION AND CHARACTER ADDRESS

## 1) 8 x 1: HDM08111H-1

	1	2	3	4	5	6	7	8	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	DD RAM ADDRESS

## 2) 8 x 2: HDM08216H-1, HDM08216H-3, HDM08216L-3

	1	2	3	4	5	6	7	8	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	

## 3) 12 x 2: HDM12216H, HDM12216L

	1	2	3	4	5	6	7	8	9	10	11	12	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	

## 4) 16 x 1: HDM16116H-L, HDM16116L-L

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	DD RAM ADDRESS

## 5) 16 x 1: HDM16116H-2, HDM16116L, HDM16116L-7

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	40	41	42	43	44	45	46	47	DD RAM ADDRESS

## 6) 16 x 2: HDM16216H-2, HDM16216H-4, HDM16216H-5, HDM16216H-B, HDM16216H-S HDM16216L-2, HDM16216L-5, HDM16216L-6, HDM16216L-7, HDM16216L-B, HDM16216L-S

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	

## 7) 16 x 4: HDM16416H, HDM16416L

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	
THIRD LINE	10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	
FORTH LINE	50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F	

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13	← DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53	

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13	←
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53	←
THIRD LINE	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F	20	21	22	23	24	25	26	27	←
FORTH LINE	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F	60	61	62	63	64	65	66	67	←

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13	14	15	16	17	┌ DD RAM ADDRESS └
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53	54	55	56	57	



	1	2	3	4	5	6	7		21	22	23	24	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	— — — — —	14	15	16	17	← DD RAM ADDRESS
SECOND LINE	20	21	22	23	24	25	26	— — — — —	34	35	36	37	
THIRD LINE	40	41	42	43	44	45	46	— — — — —	54	55	56	57	
FORTH LINE	60	61	62	63	64	65	66	— — — — —	74	75	76	77	

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15					37	38	39	40					
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	-	-	-	-	-	-	-	-	24	25	26	27	← DISPLAY POSITION ← DD RAM ADDRESS

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15					37	38	39	40	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	-----				24	25	26	27	← DD RAM ADDRESS
SECOND LINE	40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	-----				64	65	66	67	

	1	2	3	4	5	6	7		37	38	39	40	← DISPLAY POSITION
FIRST LINE	00	01	02	03	04	05	06		24	25	26	27	←
SECOND LINE	40	41	42	43	44	45	46	— — — — —	64	65	66	67	←
THIRD LINE	00	01	02	03	04	05	06	— — — — —	24	25	26	27	←
FORTH LINE	40	41	42	43	44	45	46	— — — — —	64	65	66	67	←


# PROCESSOR INTERFACING

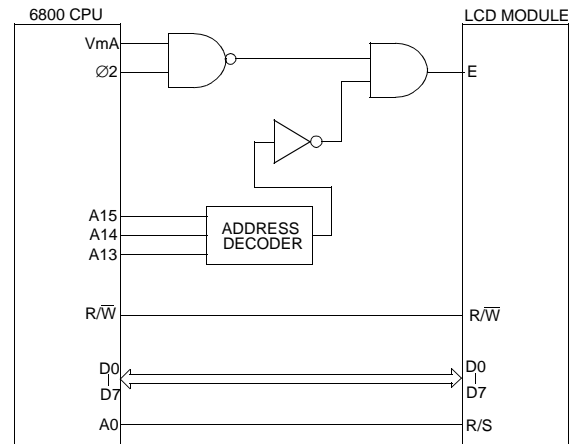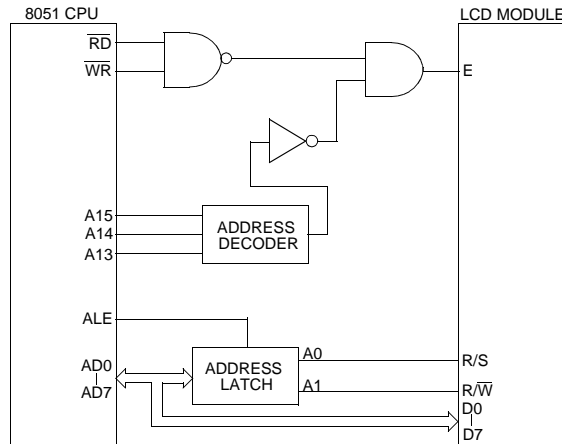


## TIMING CHARACTERISTICS

ITEM	SYMBOL	MAX.	MIN.	UNIT
ENABLE CYCLE TIME	$T_{CYC}$		500	nS
ENABLE PULSE WIDTH	$P_W$		230	nS
ENABLE RISE/FALL TIME	$T_{ER}, T_{EF}$	20		nS
RS, R/W SET UP TIME	$T_{AS}$		40	nS
DATA DELAY TIME	$T_{DDR}$	360		nS
DATA SETUP TIME	$T_{DSW}$		60	nS
HOLD TIME	$T_H$		10	nS


## POWER SUPPLY EXAMPLES

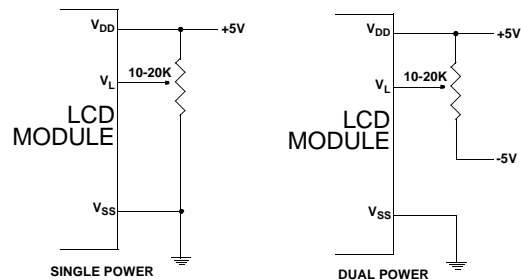

## DATA READ

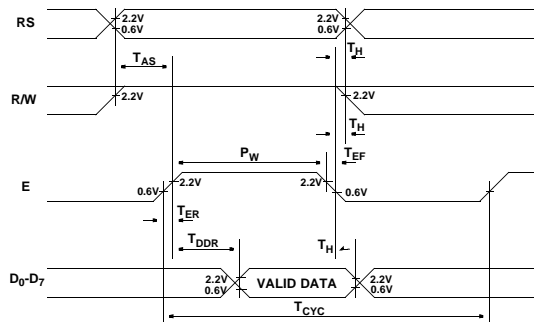

## DATA WRITE

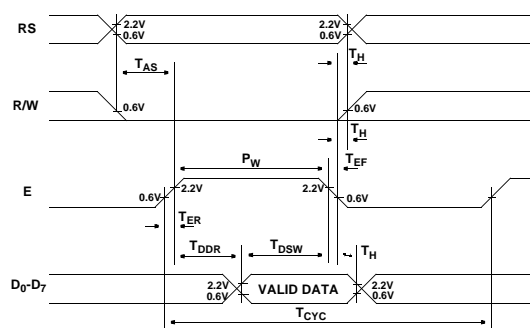

# HANDLING LCD'S & LCD MODULES

## CLEANING

- Wipe gently with cotton or soft material soaked in petroleum benzene.
- Do not use acetone, toluene, ethanol or isopropyl alcohol.
- Contact with water for a long period of time may damage the display.

## SAFETY



- The toxicity of liquid crystal fluid is very low, but wash it off immediately with soap and water if fluid touches the skin or clothing.

## HANDLING

- Do not touch display area with bare hands.
- Do not touch exposed polarizer with hard objects.
- Do not expose the CMOS IC's to static electricity.
- Avoid exposing the module to excessive shock or pressure.
- Do not allow the storage temperature to exceed the specified range.

# RELIABILITY DATA

## SUMMARY: LIFETIME AND ENVIORNMENTAL TESTS

TEST ITEMS	TEST CONDITIONS	TEST TIME	NUMBR OF UNITS TESTED	FAILURE RATE (%)
TEMPERATURE LIFETIME	60°C, 5V, 32hZ 30°C, 5V, 32hZ	7,000hr 7,000hr	50 50	0 0
HIGH TEMPERATURE	70°C 95°C 60°C	1,000hr 100hr 5,000hr	300 300 300	0 0 0
LOW TEMPERATURE	-40°C -30°C	100hr 1,000hr	300 300	0 0
HIGH TEMPERATURE AND HUMIDITY	70°C, 95%RH 40°C, 95%RH	100hr 500hr	300 300	0 0
TEMPERATURE AND HUMIDITY CYCLE		25 CYCLES	50	0
POLARIZER AND REFLECTOR RELIABILITY	70°C, DRY 90°C, DRY	1,000hr 100hr	300 300	0 0
ULTRAVIOLET LIGHT	OUTDOOR EXPOSURE	5,000hr	50	0
HEAT SHOCK		25 CYCLES	50	0
VIBRATION	10 - 50Hz, 1g, X,YX,Z DIRECTIONS 51 - 300Hz, 0.5g, X,Y,Z DIRECTIONS	1hr	50	0
MECHANICAL	50g 15ms ± X,Y,Z	3 TIMES EACH	50	0

## SUMMARY: LIFE EXPECTANCY

COMPONENT	TYPICAL LIFETIME
LCD DISPLAY (GLASS ASSEMBLY)	50,000hr (5.7yr)
LCD ELECTRONICS	100,000hr (12yr) min
EL BACK LIGHT	5,000hr (7mo) <sup>1, 2</sup>
CCFL BACK LIGHT	15,000hr (20mo) <sup>2</sup>
LED BACKLIGHT	100,000hr (12yr) min


### NOTES:

1. It is recommended that the product be designed so that the EL back light is not left on continuously. This will greatly extend the life of the back light element.

2. Usable lifetime of the back light is reached when the light output reaches 50% of the original brightness.

## POWER SUPPLY SEQUENCING (Graphics Modules Only)

The power supply voltages should be sequenced according to the following timing diagram. This will insure that the internal electronics have time to begin operation before the negative voltage is applied. The sequence of events should be as follows: Apply  $V_{DD}$  first. When  $V_{DD}$  is stable at 5v, apply the input signals and then apply  $V_L/V_{EE}$ . The shut down sequence is exactly the opposite. **Failure to follow this procedure may result in permanent damage to the LCD fluid or to the CMOS electronics on the module.**

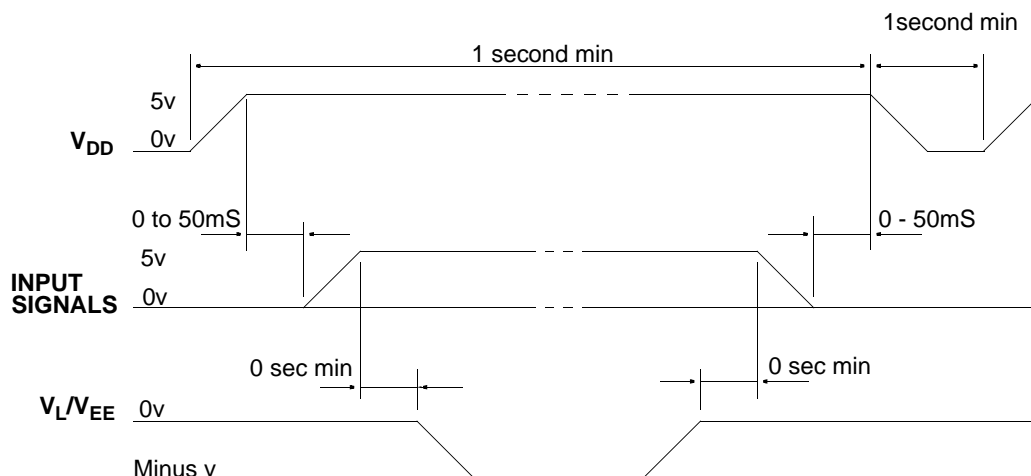

### NOTICE:

Specifications in this catalog are subject to change without notice. Some mechanical specifications may vary slightly from those listed in this catalog due to changes and improvements made to the product. The most current specifications are maintained on our Web site at: [www.hantronix.com](http://www.hantronix.com).



# CHARACTER MODULE FONT TABLE (Standard font)

Character modules with built in controllers and Character Generator (CG) ROM & RAM will display 96 ASCII and special characters in a dot matrix format. Then first 16 locations are occupied by the character generator RAM. These locations can be loaded with the user designed symbols and then displayed along with the characters stored in the CG ROM.


CHARACTER FONT TABLE

UPPER 4 BITS LOWER 4 BITS		0000	0010	0011	0100	0101	0110	0111	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)		0	@	P	`	P		—	9	E	α	p	
0001	(2)	!	1	A	Q	a	q	■	7	†	4	ä	q	
0010	(3)	"	2	B	R	b	r	「	イ	ウ	×	β	θ	
0011	(4)	#	3	C	S	c	s	」	ウ	〒	E	ε	∞	
0100	(5)	\$	4	D	T	d	t	、	I	ト	ト	μ	Ω	
0101	(6)	%	5	E	U	e	u	・	オ	ナ	1	ε	Ü	
0110	(7)	&	6	F	V	f	v	ヲ	カ	ニ	ヨ	ρ	Σ	
0111	(8)	'	7	G	W	g	w	7	†	ヌ	ウ	g	π	
1000	(1)	(	8	H	X	h	x	イ	ク	本	リ	フ	ア	
1001	(2)	)	9	I	Y	i	y	ウ	ケ	ノ	ル	リ	ユ	
1010	(3)	*	:	J	Z	j	z	エ	コ	ハ	レ	j	キ	
1011	(4)	+	;	K	[	k	(	オ	サ	ヒ	ロ	*	カ	
1100	(5)	,	<	L	¥	l	l	ト	シ	フ	ワ	¢	円	
1101	(6)	—	=	M	]	m	)	ユ	ズ	ハ	ン	ト	÷	
1110	(7)	■	>	N	^	n	→	ヨ	セ	ホ	ッ	ñ		
1111	(8)	/	?	O	_	o	←	ッ	リ	マ	■	ö	■	

# HDM16216H-5

## Dimensional Drawing

16 Character x 2 Lines, Connector on Top

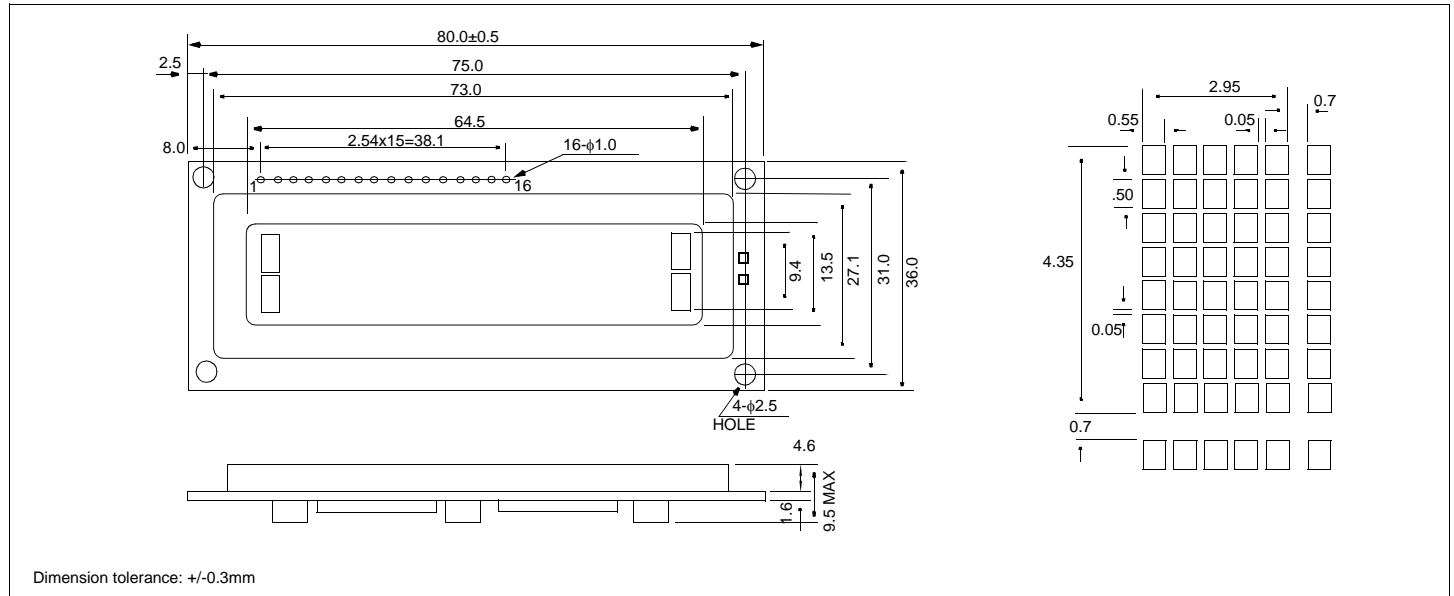


### Features

Character Format .....5x7 Dots with Cursor  
Backlight.....EL Optional  
Options....TN/Gray STN/Yellow STN, 12 o'Clock/6 o'Clock View  
Normal/Extended Temperature  
Normal/Negative Displays

### Physical Data

Module Size.....80.0W x 36.0H x 9.5T mm  
Viewing Area Size.....64.5W x 13.5H mm  
Weight.....25g

### Block Diagram

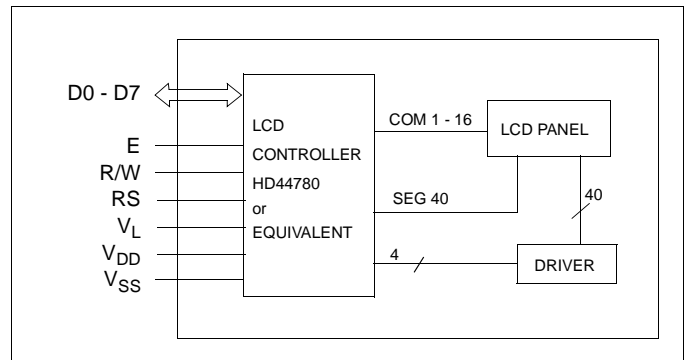

### Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	$V_{DD}-V_{SS}$	0	7.0	V
SUPPLY VOLTAGE FOR LCD	$V_{DD}-V_L$	0	13.5	V
INPUT VOLTAGE	$V_{IN}$	$V_{SS}$	$V_{DD}$	V
OPERATING TEMPERATURE	$T_{OP}$	0	50	°C
STORAGE TEMPERATURE	$T_{STG}$	-20	70	°C

### Electrical Characteristics (VDD=5.0±0.25V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT HIGH VOLTAGE	$V_{IH}$	-	2.2	-	-	V
INPUT LOW VOLTAGE	$V_{IL}$	-	-	-	.6	V
OUTPUT HIGH VOLTAGE	$V_{OH}$	$I_{OH}=0.2mA$	2.4	-	-	V
OUTPUT LOW VOLTAGE	$V_{OL}$	$I_{OL}=1.2mA$	-	-	0.4	V
POWER SUPPLY CURRENT	$I_{DD}$	$V_{DD}=5.0V$	-	1.25	-	mA
POWER SUPPLY FOR LCD	$V_{DD}-V_L$	$T_A=25^{\circ}C$	4.2	4.7	5.2	V
DRIVE METHOD	1/16 Duty					

### Pin Connections

PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V <sub>SS</sub>	-	0V	Power supply
2	V <sub>DD</sub>	-	5V	
3	V <sub>L</sub>	-	-	
4	RS	H/L	H: Data input L: Instruction data input	
5	R/W	H/L	H: Data read L: Data write	
6	E	H,H→L	Enable signal	
7	D0	H/L	Data bus	
8	D1	H/L		
9	D2	H/L		
10	D3	H/L		
11	D4	H/L		
12	D5	H/L		
13	D6	H/L		
14	D7	H/L		
15	NC	-	No Connection	
16	NC	-	No Connection	