


1 / RP2040 + FLASH + BOOT + RESET

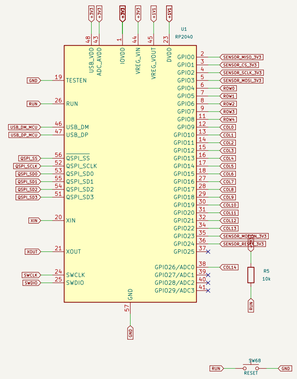





2 / USB LOGICAL INPUT + 3V3 POWER


DRAFT: USB pads are individual logical nets, not JST pin order. CC/ESD/shield on existing daughterboard unverified.





3 / CLOCK + SENSOR MCU-SIDE ONLY



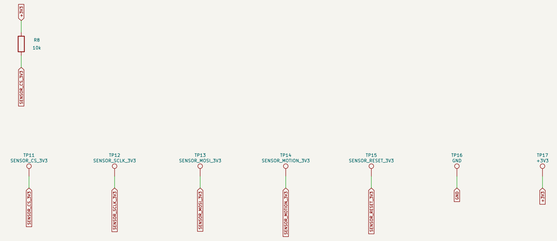

No module connector or 5V sensor connection. Verify revision and level translation before connection.


DECOUPLING: individual IOVDD / USB / ADC / DVDD pins: VREG 1uF input + output





4 / 5 ROW x 15 COLUMN MATRIX: COL -> switch -> diode ANODE -> CATHODE -> ROW (COL2ROW)

66 keys; stable references from preferred.keys. Central reservation is NOT A HOLE.

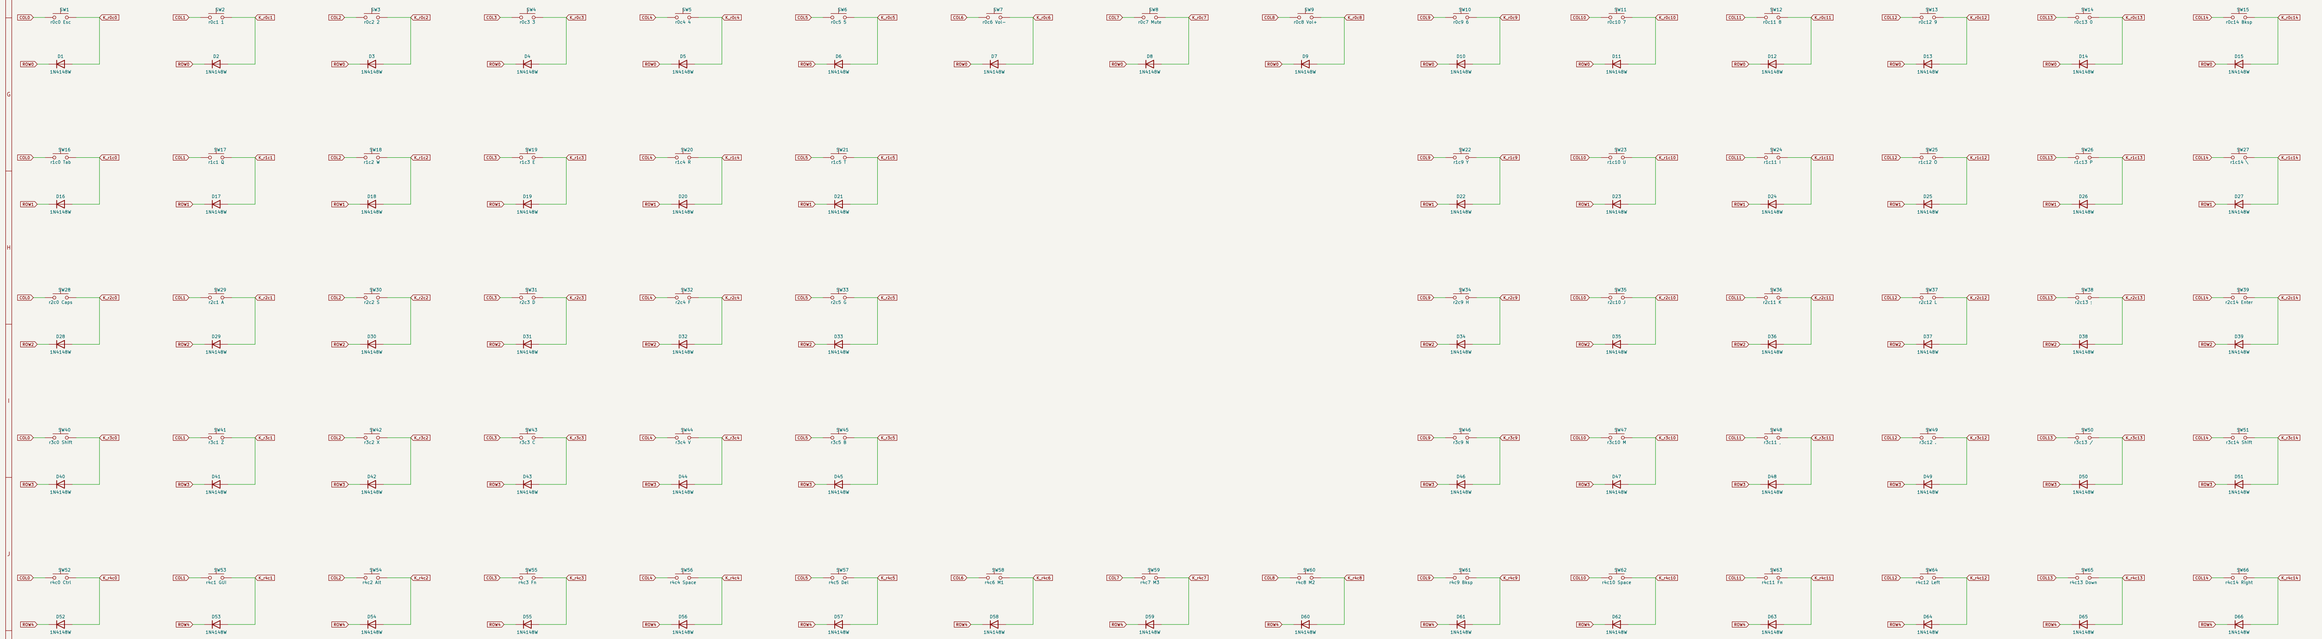

NOT FOR FABRICATION — sensor and daughterboard interfaces provisional

Sheet: /
File: keycult66.kicad_sch

Title: Keycult66 / electrical review draft

Size: A1	Date: 2026-10-29	Rev: DRAFT-B
KiCad E.D.A. 10.0.7		Id: 1/1